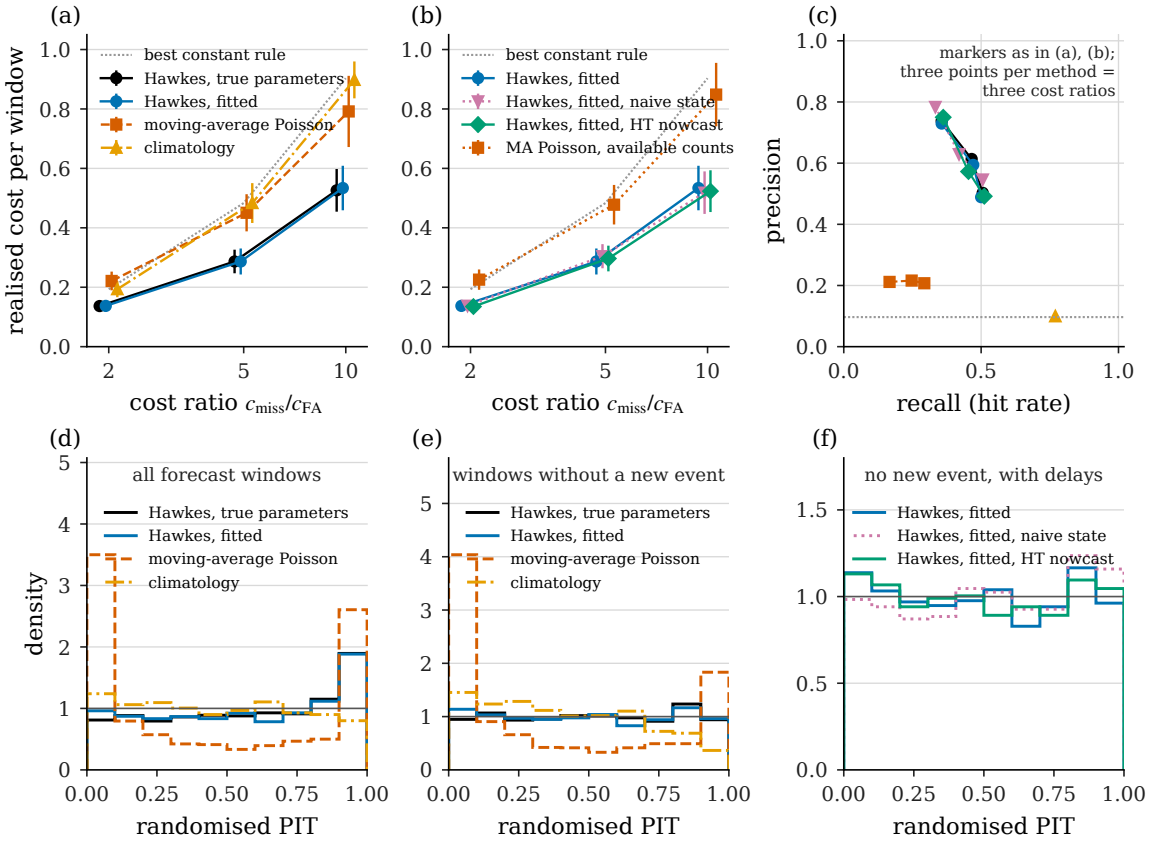
(a)
realised cost per window
best constant rule
Hawkes, true parameters
Hawkes, fitted
moving-average Poisson
climatology
cost ratio $c_{\text{miss}}/c_{\text{FA}}$
(b)
best constant rule
Hawkes, fitted
Hawkes, fitted, naive state
Hawkes, fitted, HT nowcast
MA Poisson, available counts
cost ratio $c_{\text{miss}}/c_{\text{FA}}$
(c)
markers as in (a), (b);
three points per method =
three cost ratios
precision
recall (hit rate)
(d)
all forecast windows
density
Hawkes, true parameters
Hawkes, fitted
moving-average Poisson
climatology
randomised PIT
(e)
windows without a new event
Hawkes, true parameters
Hawkes, fitted
moving-average Poisson
climatology
randomised PIT
(f)
no new event, with delays
Hawkes, fitted
Hawkes, fitted, naive state
Hawkes, fitted, HT nowcast
randomised PIT