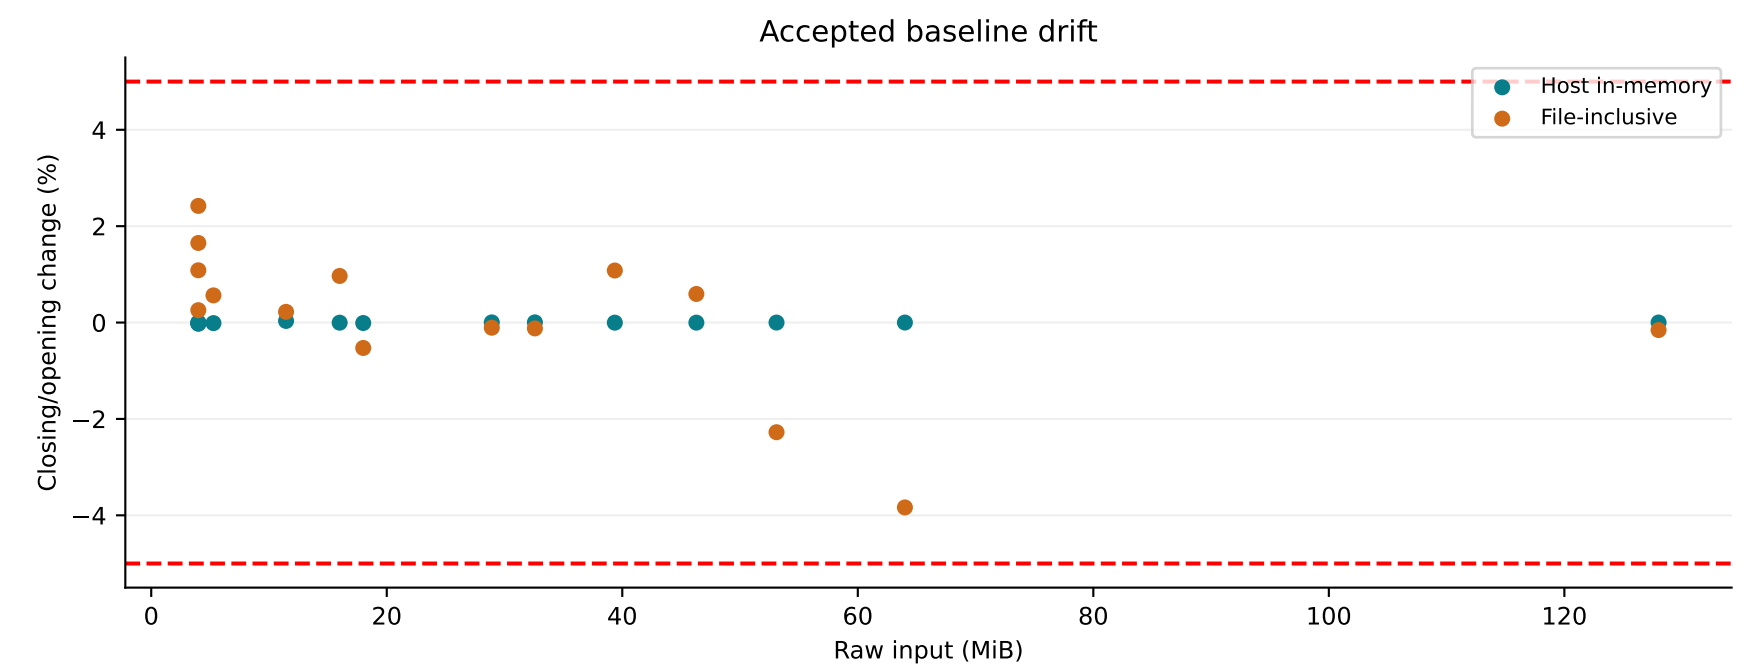
Accepted baseline drift
Host in-memory
File-inclusive
Closing/opening change (%)
4
2
0
−2
−4
0
20
40
60
80
100
120
Raw input (MiB)

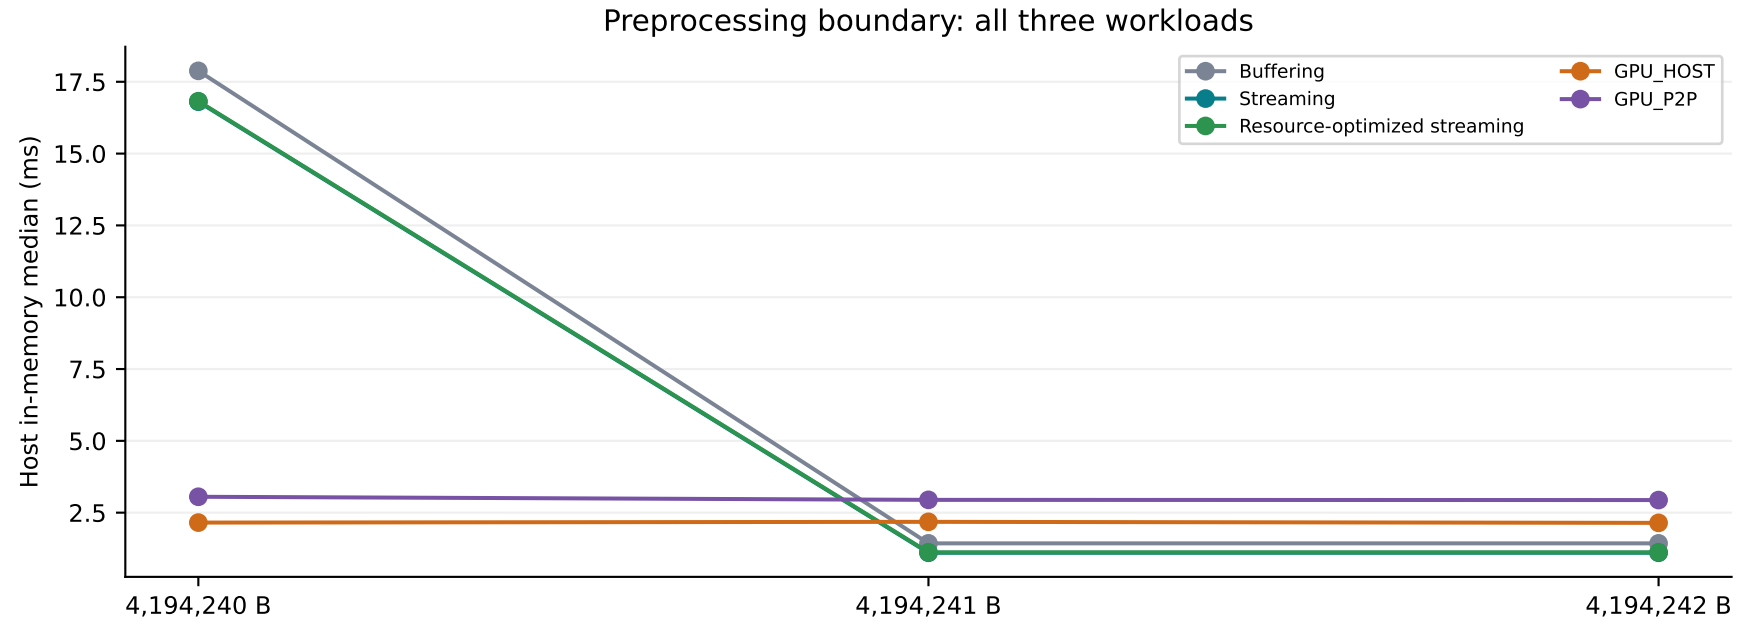
Preprocessing boundary: all three workloads
Buffering
Streaming
Resource-optimized streaming
GPU_HOST
GPU_P2P
Host in-memory median (ms)
17.5
15.0
12.5
10.0
7.5
5.0
2.5
4,194,240 B
4,194,241 B
4,194,242 B