Benchmark setup: input and classification-result paths

Shared machine: hacc-gpu-u55c-01

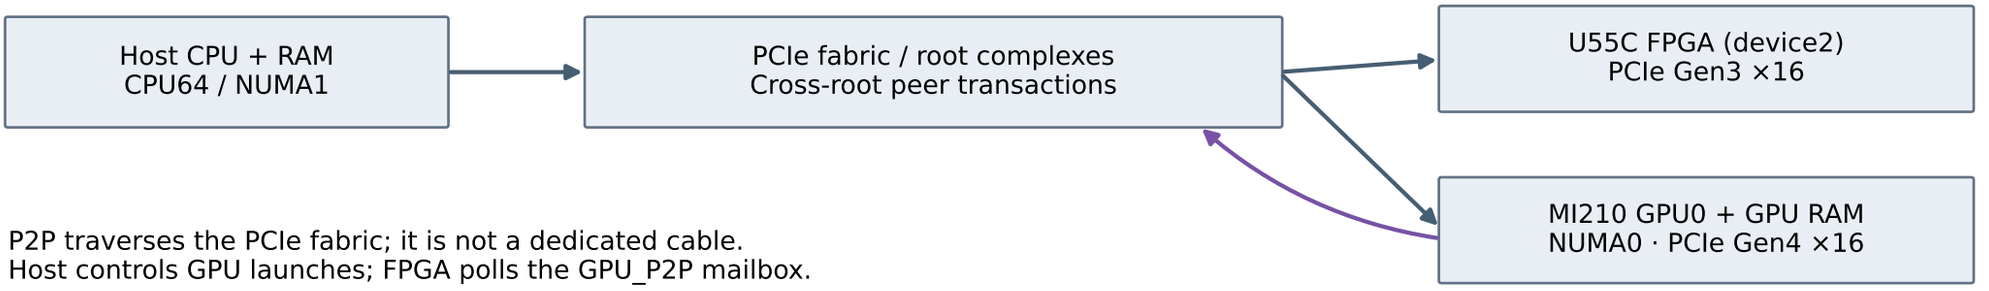

P2P traverses the PCIe fabric; it is not a dedicated cable.
Host controls GPU launches; FPGA polls the GPU_P2P mailbox.

FPGA_HLS4ML

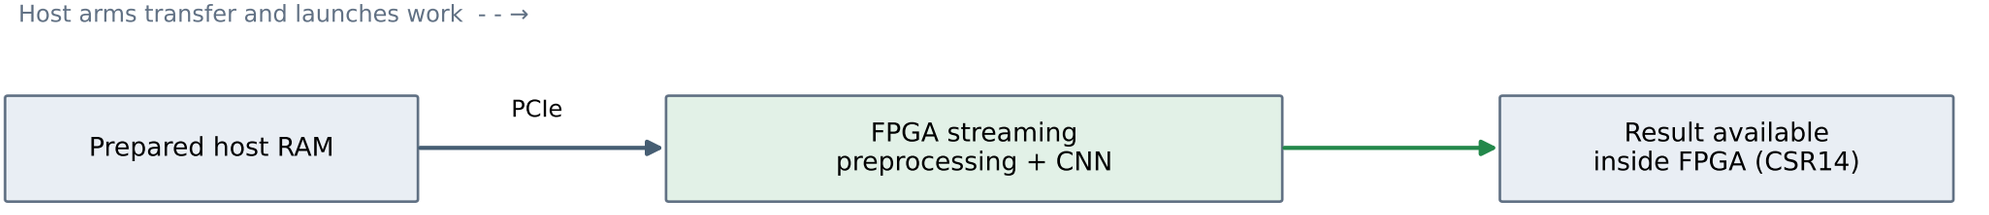

Input transfer, preprocessing, and CNN execution overlap.

GPU_HOST

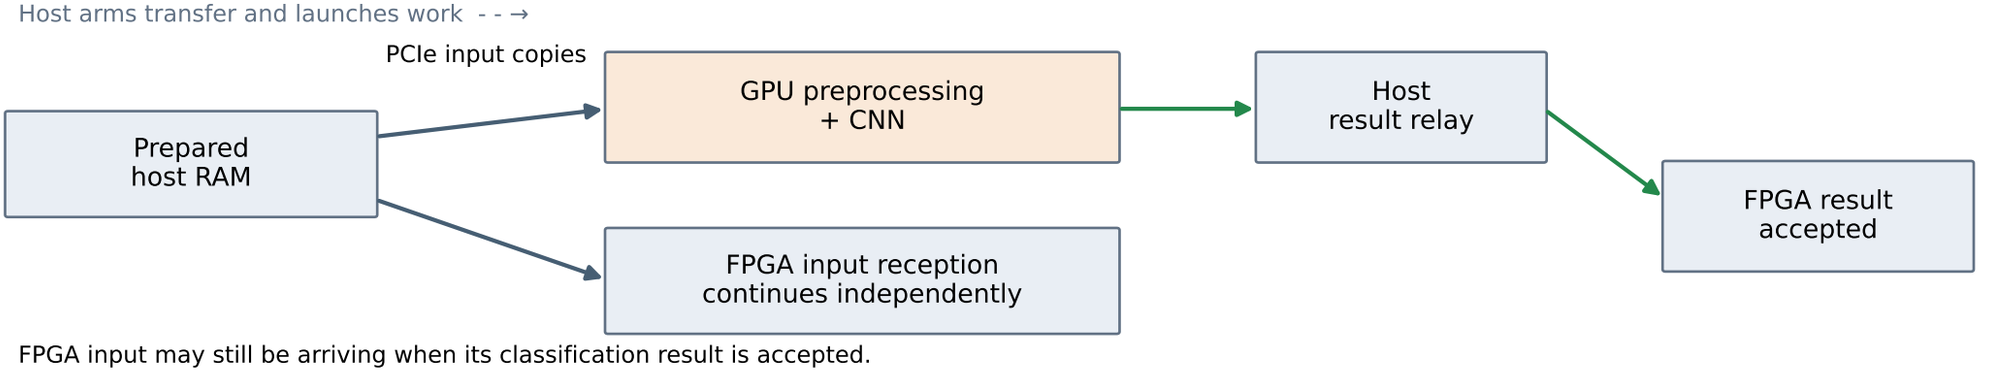

FPGA input may still be arriving when its classification result is accepted.
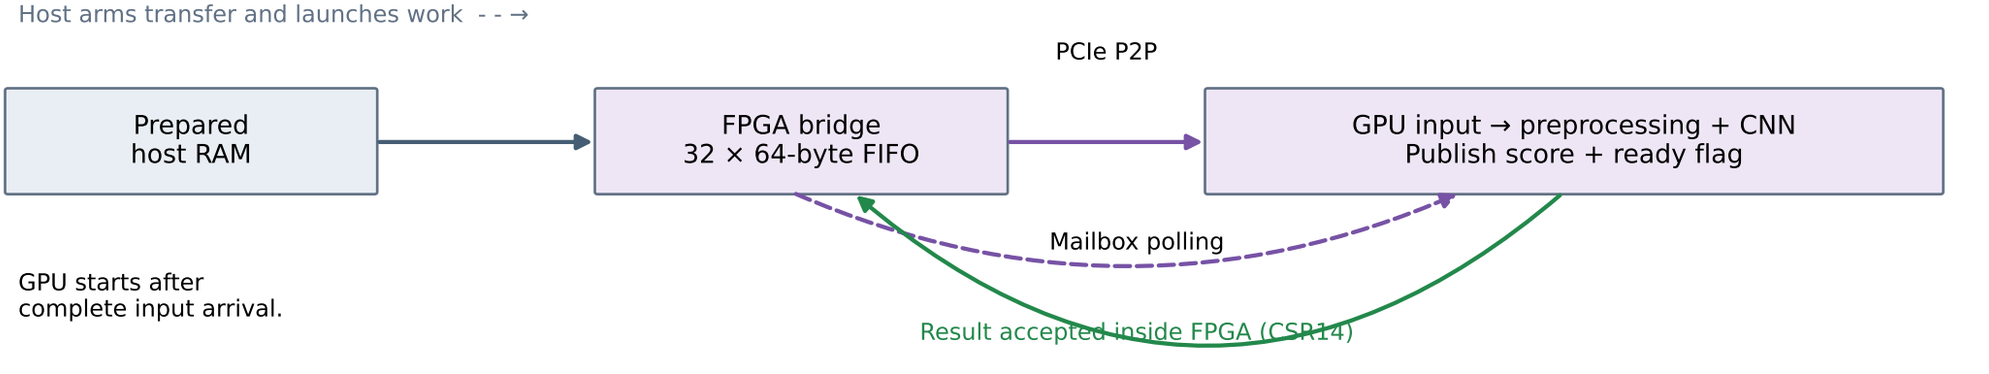
GPU_P2P