3 · HBM-resident benchmark topology

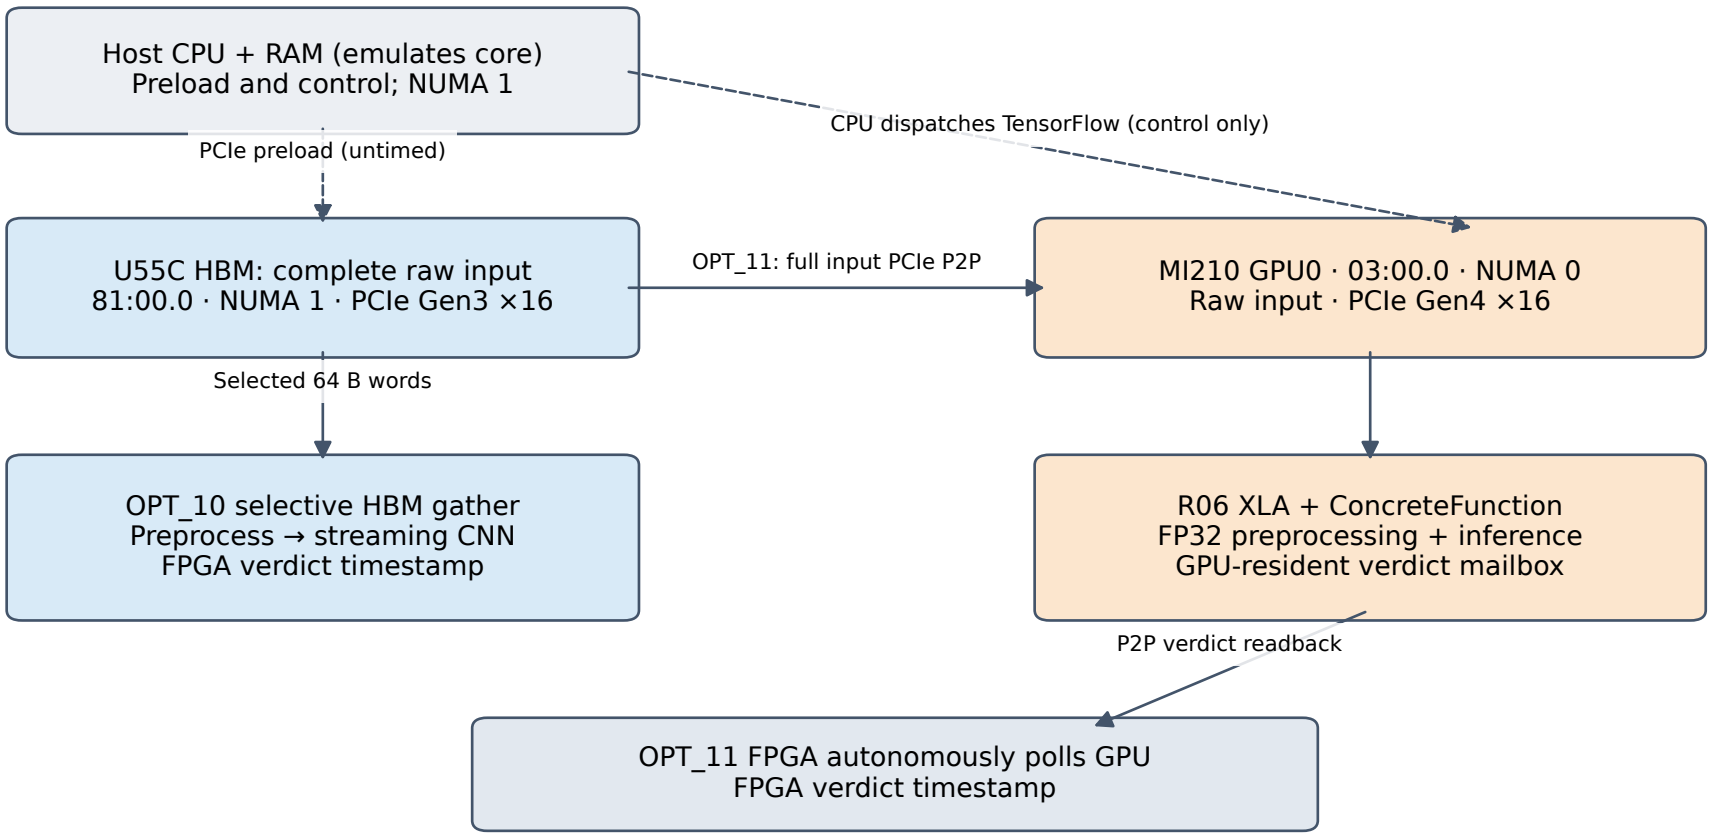

Alternatives run separately; no concurrent FPGA/GPU inference.