

Maxim Mechanical Group Inc

HEALTH AND SAFETY MANUAL

2026

INCLUDING POLICES, PROCEDURES AND PROGRAMS

HEALTH AND SAFETY MANUAL

TABLE OF CONTENTS

INTRODUCTION

SECTION 1

POLICY STATEMENTS

1 - Policy Statements Procedure

1-1 - Policy Statements

- *Change Management Policy Statement*
- *Control Policy Statement*
- *Commitment To Communication Policy Statement*
- *Emergency Preparedness Policy Statement*
- *Fitness For Duty Policy Statement*
- *Hazard Assessment and Analysis Policy Statement*
- *Internal Hazard Controls Policy Statement*
- *Investigation And Reporting Policy Statement*
- *Legislation And Other Requirements Policy Statement*
- *Maintenance Inspections Policy Statement*
- *Occupational Health and Safety (OHS) Policy Statement*
- *Personal Protective Equipment Policy Statement*
- *Preventive Maintenance Policy Statement*
- *Procurement And Subcontractor Policy Statement*
- *Rules & Progressive Discipline Policy Statement*
- *Return To Work Policy Statement*
- *Senior Management Review Policy Statement*
- *Statistics, Records Policy Statement*
- *Training And Development Policy Statement*
- *Visitor Policy Statement*
- *Workplace Inspections Policy Statement*

1-2 Form - Visitors Sign-In Log

1 – 3 Company Rules

SECTION 2

DUTIES AND RESPONSIBILITIES

2 - Duties and Responsibilities Procedure

2-1 Duries and Responsibilities Acknowledgement Sheet

SECTION 3

JOINT HEALTH AND SAFETY COMMITTEE (JHSC)

3 - Joint Health and Safety Committee Procedure

3-1 - JHSC Memorandum

3-2 - JHSC Terms of Reference

3-3 Form - JHSC Meeting Agenda

SECTION 4

EMPLOYEE ORIENTATION

4-1 - Employee Orientation Procedure

4-1-1 Form - Employee Orientation Checklist

4-2 - Employee Orientation Package Procedure

4-2-1 - Employee Orientation Package (Document)

SECTION 5

COMMUNICATION & SAFETY TALKS

5 - Toolbox Safety Talk Procedures

5-1 Form - Toolbox Safety Talk Form

SECTION 6

WORKPLACE INSPECTIONS

6-1 - Workplace Inspections Procedure

6-1-1 Form - Weekly Jobsite Inspection Checklist

TABLE OF CONTENTS

6-1-2 Form - Workplace Inspection Form

SECTION 7

INVESTIGATIONS

7 - Investigations Procedure

7-1 Form – Investigation Kit

SECTION 8

WORKPLACE VIOLENCE AND HARASSMENT

8 - Workplace Violence and Harassment Procedure

8-1-1 Form - Workplace Violence Assessment

8-1-2 Form - Workplace Violence Assessment (Construction)

8-1-3 Form - Workplace Violence Assessment (Office)

SECTION 9

FIRST-AID

9 - First-Aid Procedure

9-1 Form - First-Aid Log

9-2-1 Form - First-Aid Checklist (8-15 Workers)

SECTION 10

HAZARD REPORTING

10 - Hazard Reporting Procedure

10-1 Form - Hazard Reporting Form

SECTION 11

WORKPLACE TASK STANDARDS

11 - Workplace Task Standard Procedure

11-1 Form – Job & Task Inventory

11-2 Form - Workplace Task Standard (Template)

SECTION 12

EMERGENCY PREPAREDNESS AND RESPONSE

12 - Emergency Preparedness and Response Procedure

12-1 - Emergency Preparedness and Response Plan (Template)

SECTION 13

PROGRESSIVE DISCIPLINE

13 - Progressive Discipline Procedure

13-1 Form - Progressive Discipline Form

SECTION 14

MANAGEMENT REVIEW AND CONTINUAL IMPROVEMENT

14- Management Review and Change Control Procedure

14-1-1 Form - Management Review and Continual Improvement

14-2 Continuous Improvement Procedure

14-2-1 Form - Continuous Improvement Plan

14-2-2 Management of Change (MOC) Request Form

SECTION 15

HEALTH AND SAFETY TRAINING

15 - Health and Safety Training Procedure & Program

15-1 - Health and Safety Training Matrix

15-2 Health and Safety Training Documentation Form

15-3 Training Needs Analysis

SECTION 16

WORKPLACE HAZARDOUS MATERIALS INFORMATION SYSTEM (WHIMIS)

16 - Workplace Hazardous Materials Information System Procedure

16-1 - Workplace Hazardous Materials Information System Program

SECTION 17

RETURN TO WORK

TABLE OF CONTENTS

- 17 - Return to Work Procedure
- 17-1 - Return to Work Program
- INJURY MANAGEMENT PACKAGE
- 17-1-1 Form - Offered of Modified Work - Letter to the Employee
- 17-1-2 Form -Letter to Health and Care Provider
- 17-1-3 Form -Modified Work Description Report
- 17-1-4 Form -Worker Contact Log
- 17-1-5 Form -Worker's Progress Report
- 17-1-6 Form -Supervisor's Follow Up Report
- 17-1-7 Form -Return to Work Self Assessment Report
- 17-1-8 Form -Functional Abilities Form
- 17-1-9 DOC -WSIB Form 82
- 17-1-10 DOC - Attending to an Injured Employee
- 17-1-11 DOC - In Case of Injury Flow Chart

SECTION 18 SUBCONTRACTOR PROCUREMENT

- 18-1 - Subcontractor Procurement Procedure
- 18-1-1 Form - Subcontractor Procurement Checklist
- 18-2 - Project Safety Plan Procedure
- 18-2-1 - Project Safety Plan (Document)

SECTION 19 PRE-PROJECT REQUIREMENTS

- 19 - Pre-Project Requirements Procedure
- 19-1 Form - Pre-Project Checklist
- 19-2 Form - Pre-Project Postings Checklist

SECTION 20 WORKING AT HEIGHTS & FALL PREVENTION

- 20 - Working at Heights and Fall Prevention Procedure
- 20-1 - Fall Prevention and Rescue Plan

SECTION 21 TRAFFIC MANAGEMENT

- 22 - Traffic Management Procedure
- 21-1 Form - Traffic Management Plan

SECTION 22 PERSONAL PROTECTIVE EQUIPMENT (PPE)

- 22 - Personal Protective Equipment Procedure
- 22-1 Personal Protective Equipment Program
- 22-2 PPE Inspection Form

SECTION 23 CONFINED SPACES

- 23 - Confined Space Entry/Exit Procedure
- 23-1 Form - Confined Space Program
- 23-2 Form - Confined Space Permit

SECTION 24 PREVENTATIVE MAINTENANCE

- 24 - Preventative Maintenance Procedure
- 24-1 - Preventative Maintenance Program

TABLE OF CONTENTS

24-2 Equipment / Machinery Maintenance Checklist

24-3 Equipment / Machinery Schedule

24-4 Preventative Maintenance List

SECTION 25

DAILY JOB HAZARD ANALYSIS

25-1 - Daily Job Hazard Assessment Procedure

25-1-1 Form - Daily Job Hazard Assessment Report

SECTION 26

RECORDS AND STATISTICS

26-1 - Documents, Records and Statistics Procedure

26 – 2 Form Tracker

SECTION 27

LEGISLATION

27-1 Legislation Procedure

27-2 Legislative Document Checklist

SECTION 28

CONTROLS

28-1 Controls Procedure

28-2 Hierarchy of Controls

SECTION 29

SAFE WORK

29-1 Safe Work Practices Procedures

29-2 Lockout / Tagout Program

29-3 Hot Work

29-4 Pressure Testing & System Commissioning

29-5 Material Lifting

29-6 Electrical Hazard Awareness

29-7 Line Breaking / Tie-ins to Existing Systems

29-8 Excavation & Trenching

HEALTH AND SAFETY MANUAL

TABLE OF CONTENTS

Document Control Information Date	Version	Revision History	Approved By
Jan 2025	1.0	Original Maxim Mechanical Health & Safety Manual issued.	President, Peter Godler
Jan 28, 2026	2.0	- IHSA COR2020 updates integrated into existing manual, including OHS Policy & Duties/Roles/Responsibilities, Hazard Assessment/JHA, Contractor Management, Training & Communication, Investigations/CAPA, Management Review & MOC, (Elements 1, 2, 4, 8, 10, 13, 14; policies and procedures) - NEW Naloxone/AED/NOP provisions	

INTRODUCTION

OVERVIEW

The following Health and Safety Manual has been developed for **MAXIM MECHANICAL** and applies to all related companies and operations.

In accordance with MAXIM MECHANICAL's ***Health and Safety Policy*** and the ***Occupational Health and Safety Act and applicable regulations***, the following ***Health and Safety Manual*** has been developed to demonstrate the commitment of MAXIM MECHANICAL in the reduction accidents, injuries and all loss causing situations, all of which may potentially occur during the operation of our business.

The purpose of this manual is not to hinder or restrict our operations, but to increase our profitability through the ***"Control of Loss"***.

CONTENTS

This manual will be used by various individuals in our operations, to ensure that the health and safety of all employees and subcontractor's is protected. This will be accomplished through:

Awareness

Of standards established for the workplace by MAXIM MECHANICAL, legislative requirements, and Subcontractor policies/procedures for safe work. This awareness will be achieved through appropriate training sessions, which employees and Subcontractors will be expected to actively participate in workplace health & safety.

Monitoring

Of workplace conditions, compliance with standards, and use of the Internal Responsibility System.

Follow-up

To ensure corrective actions for identified items of non-compliance and modification of workplace health & safety policies, procedures or programs.

THE HEALTH AND SAFETY MANUAL/PROGRAM

The Health and Safety Manual is a functional reference book for Health and Safety in the workplace. It contains specific **policies, procedures, programs, documents** and **forms** - to be used by the appointed supervisory staff, Joint Health & Safety Committee members and construction site management staff.

Policies:

Where needed, state our organization's commitment and beliefs with respect to particular areas of our operations.

Procedures

Identify the **PURPOSE, RESPONSIBILITIES, PROCEDURE** (for developing, reviewing, approving, implementing, updating, and accountability of participants), **DISTRIBUTION** and **RECORDS** for each manual section.

Documents

Include reference sheets established to support and implement the above procedures.

Forms

Includes all checklists and reports developed to simplify the procedure and document completion of initiatives.

INTRODUCTION

PROJECT SPECIFIC SAFETY PLAN & SUBCONTRACTOR GUIDELINES

The Project Specific Safety Plan will act as Subcontractor Guidelines, setting the requirements and expectations of Subcontractors working on our projects. The Project Specific Safety Plan will be used to supplement the existing contract. It establishes the requirements for Subcontractors when working on our projects, to ensure that the Occupational Health & Safety Act, Regulation 213/91 and all related workplace safety regulations, are met and clarified through site policies, specifically as they may pertain to the project. This Health and Safety Manual should be maintained on the project and readily available for use and review.

MANUAL SCOPE

This manual addresses all facets of our operations and applies to all Employees, Subcontractors. Taking into consideration that no two workplaces are the same, input and modification may be required to suit site-specific circumstances.

Implementation and maintenance of the Health & Safety Manual at MAXIM MECHANICAL will be the responsibility of the Health and Safety Coordinator and Senior Management, who will work closely with the Joint Health & Safety Committee to ensure that all MAXIM MECHANICAL's workplaces are maintained in accordance with the requirements of this manual. The Health and Safety Coordinator will oversee implementation and maintenance of MAXIM MECHANICAL's Health and Safety Manual.

MANUAL OBJECTIVES

While, this manual will be workplace specific, the basic objective is to ensure "Due Diligence" through the consistent control of loss created by accidents, injury, illness, property damage and incidents. Additional objectives include compliance with increasing legislative requirements, improved Management-Labour relations and to maintain our role of leadership in all areas within our community. These objectives will be obtained through the participation and commitment of all persons involved with this manual.

MANUAL AVAILABILITY

Copies of the Health & Safety Manual will be provided to the owners, senior management, project managers, the JHSC and the Supervisor as applicable. It is imperative that management:

- ☐ **USE** the Manual to ensure the safety of the workers in the workplace and generate appropriate documentation that demonstrates all pro-active measures taken.
- ☐ **REVIEW** the Program Manual with the Joint Health & Safety Committee (JHSC) where applicable.
- ☐ **MAKE** the Program Manual available to the JHSC members (manual is not to leave the site unless permission has been granted by Senior Management).
- ☐ **MAKE** relevant portions of the manual available to workers, to ensure they are aware of their duties and responsibilities. This will be achieved through the distribution of relevant material at Employee Orientations and through the availability of relevant material at all our workplace locations.

Resource materials, instruction and assistance during the implementation period will be made available.

INTRODUCTION

DOCUMENT AND RECORD CONTROL PROCEDURE

The purpose of this Document and Record Control is to ensure that all health and safety documents and records are properly created, approved, distributed, maintained, and controlled to ensure accuracy, consistency, and compliance with legislative requirements.

This applies to all health and safety documents and records used by Maxim Mechanical Group, including but not limited to:

- Policies, procedures, and safe work practices
- Forms, checklists, meeting minutes and templates
- Training materials and attendance records
- Workplace inspection reports and incident & investigation reports
- Legislative references and standards

All new or revised health and safety documents must be drafted by the Health and Safety Representative or designated personnel. Drafts are reviewed for accuracy, compliance, and practicality by Supervisors and approved by Senior Management prior to issue.

External documents such as the Occupational Health and Safety Act, applicable regulations, TSSA codes, CSA standards, manufacturer manuals, and client health and safety specifications are included in this system and will be kept current and readily accessible.

Each controlled document will include a revision date which will be formatted: "Last Updated: MONTH YEAR"

Roles and Responsibilities

- Senior Management is responsible for approving new or revised health and safety documents prior to issue and ensuring that sufficient resources are available to maintain this procedure.
- The Health and Safety Representative (HSR) is responsible for drafting and coordinating changes to documents, maintaining the master list of controlled documents and records, and ensuring obsolete documents are removed from circulation.
- Supervisors are responsible for ensuring current versions of applicable documents and forms are available at the point of use and that completed records (e.g., Daily Job Hazard Assessments, inspections, toolbox talks) are submitted for filing.
- Workers are responsible for using current documents and completing forms and records legibly and accurately.

Document Distribution

Current documents are distributed electronically via the company server and/or printed and posted on safety boards. Obsolete versions are removed from circulation immediately upon release of updated document and destroyed. Where obsolete documents are retained for reference or legal reasons, they shall be clearly marked "OBSOLETE" to prevent unintended use. An electronic copy will be held on the company server for reference as needed.

Document Review and Revision

All health and safety documents are reviewed:

- Annually as part of the program review; or
- When legislation, organizational structure, or work processes change.
- Revisions are identified by an updated date.

INTRODUCTION

Record Management

All completed records (e.g., training, inspections, incidents) are to be submitted to the Health and Safety Representative for secure filing. Records are written in hard copy, scanned and saved into the company server.

Updated documents shall be reviewed and re-approved by Senior Management before they are re-issued, and the revision date and/or revision number shall be updated on the document and master list.

All health and safety documents and records must be maintained in a legible condition and be readily identifiable (e.g., clearly labelled with title, date and, where applicable, revision).

As a minimum, retention periods for documentation is as follows:

- Training records: minimum of 3 years
- Incident and investigation reports: minimum of 5 years
- Inspection reports: minimum of 1 year
- Meeting minutes: minimum of 1 year
- Legislative or certification records: as long as valid or active

Record Access and Confidentiality

Records will be made available to authorized personnel, auditors, and regulatory agencies upon request. Personal or sensitive information will be protected in accordance with privacy legislation.

Distribution and Record

This procedure will be distributed to all Supervisors and posted in common areas. A master copy will be maintained by the Health and Safety Representative. Revisions and updates will be logged in the Document Revision Log.

1 - POLICY STATEMENTS PROCEDURE

PURPOSE

The purpose of this procedure is to address the development and implementation of company policy statements. Maxim Mechanical Group Inc. wants to ensure the management's commitment to providing a safe and healthy work environment for the prevention of injuries and illnesses.

SCOPE

This procedure applies to those individuals responsible for the development and implementation of company policy statements.

RESPONSIBILITIES**Health and Safety Representative (HSR)**

- Act as a conduit for communication between workers and management, ensuring all health and safety concerns are addressed promptly.
- Regularly inspect the workplace to identify potential hazards and recommend corrective actions.
- Assist with the investigation of workplace incidents and accidents, ensuring that root causes are identified and corrective actions are taken.
- Promote ongoing safety education, ensuring all employees are informed about workplace hazards and safe practices.
- Collaborate with management to ensure that health and safety policies are up to date, compliant with legislation, and implemented effectively.
- Monitor the implementation of safety policies, ensuring that all staff comply with required safety practices and regulations.
- Work with management to ensure that all employees are familiar with emergency procedures and are adequately trained.

Senior Management

- Develop and regularly review policies to ensure compliance with legal requirements and best practices.
- Allocate resources to support health and safety initiatives and the effectiveness of safety programs.
- Establish clear health and safety responsibilities at all organizational levels and hold employees accountable for compliance.
- Identify hazards, assess risks, and implement control measures to prevent accidents and injuries.
- Ensure full compliance with all applicable health and safety laws, regulations, and standards.
- Regularly review health and safety performance data to evaluate and improve the safety management system.
- Oversee incident investigations and implement corrective actions to prevent recurrence.
- Provide ongoing health and safety training to ensure employees can perform their jobs safely.
- Implement and train staff on effective emergency response plans to maintain preparedness.
- Support the HSR in fulfilling their role in improving workplace safety.

Supervisor

- Ensure all workers have and properly use the required PPE.
- Conduct daily site inspections to identify hazards and verify that safety equipment and machinery are in good condition.
- Identify risks related to construction activities and ensure risk assessments are completed.
- Enforce compliance with health and safety regulations and company procedures, reporting any violations.
- Promptly report and investigate incidents, accidents, or near misses,

1 - POLICY STATEMENTS PROCEDURE

and implement corrective actions.

- Hold regular safety talks to address site-specific hazards, procedures, and best practices.
- Provide training on equipment use, emergency protocols, and hazard awareness.
- Monitor on-site safety performance and take corrective actions when necessary.
- Ensure all workers are trained in emergency procedures and know the location of emergency equipment.
- Report on safety performance, incidents, and concerns to senior management for continuous improvement.

Worker

- Adhere to all health and safety procedures, work instructions, and guidelines provided by the employer and supervisor.
- Properly wear and maintain required PPE and report any damaged or defective equipment.
- Actively identify hazards and unsafe conditions, reporting them immediately to the supervisor or safety representative.
- Attend all safety training and meetings and ask questions if unclear on safety procedures.
- Keep the work area free of hazards and properly store tools and materials.
- Familiarize themselves with emergency procedures and assist in emergencies as required.

PROCEDURE

Policy Statements as a minimum address the following criteria:

- Basic objectives or intent of the policy,
- General responsibilities of all our Workplace Parties, Subcontractors, Visitor's, and Suppliers,
- Acknowledgement that legislative standards are the minimum requirements,
- Intolerance for non-compliance with policies.

Policy statements must be regarded by all associated with the business activities of the company as minimum acceptable standards or practices.

The following Policy Statements will be implemented:

- Change Management Policy Statement
- Control Policy Statement
- Commitment To Communication Policy Statement
- Emergency Preparedness Policy Statement
- Fitness For Duty Policy Statement
- Hazard Assessment and Analysis Policy Statement
- Internal Hazard Controls Policy Statement
- Investigation And Reporting Policy Statement
- Legislation And Other Requirements Policy Statement
- Maintenance Inspections Policy Statement
- Occupational Health and Safety (OHS) Policy Statement
- Personal Protective Equipment Policy Statement
- Preventive Maintenance Policy Statement
- Procurement And Subcontractor Policy Statement
- Rules & Progressive Discipline Policy Statement

1 - POLICY STATEMENTS PROCEDURE

- Return To Work Policy Statement
- Senior Management Review Policy Statement
- Statistics, Records Policy Statement
- Training And Development Policy Statement
- Visitor Policy Statement
- Workplace Inspections Policy Statement

Policy statements will be developed by the Health and Safety Rep (HSR), in consultation with Senior Management, and the Health and Safety Worker Representative. All Policies and Procedures will comply with the OHS legislative requirements.

Policy Statements will be reviewed by the HSR, in consultation with Senior Management. Workers will provide input through open lines of communication and regular forms and reporting.

Policy Statements will be approved by Senior Management in conjunction with the HSR on an annual basis. Once approved, Policy Statements must be signed and dated by Senior Management.

DISTRIBUTION

The distribution and communication of the policy statements will be as follows:

- Posted on the health and safety bulletin board at our respective, offices, and project locations,
- Provided to our employees during their employee guideline orientation,
- Provided to subcontractors, suppliers, and visitors during either:
 1. Project specific safety plan and related subcontractor procurement processes, or
 2. When receiving Project Specific Safety Plan orientations/daily hazard assessments on-site.

The Health and Safety Policy shall be explained verbally during employee orientations and site-specific inductions. Where language or literacy barriers exist, translation or additional explanation shall be provided to ensure understanding. Understanding of the Policy shall be documented through signed Employee Orientation Checklists (4-1-1 Form) and attendance records from safety talks or meetings where the policy is reviewed.

RECORDS

A record pertaining to the communication of policy statements will be documented through forms utilized for orientations, toolbox safety talks and/or other general health and safety meetings.

The HSR will maintain records of Policy Statement communications, for employees during Employee Guideline orientations. All forms with private information will be recorded in a way that protects the privacy and confidentiality of our employees and Subcontractors.

The HSR will maintain records of Policy Statement communications for Subcontractors, and Suppliers during the Project Specific Safety Plan and related Subcontractor Procurement Process.

Contents

CHANGE MANAGEMENT POLICY STATEMENT	7
CONTROL POLICY STATEMENT	8
COMMITMENT TO COMMUNICATION POLICY STATEMENT	9
EMERGENCY PREPAREDNESS POLICY STATEMENT.....	10
FITNESS FOR DUTY POLICY STATEMENT	11
HAZARD ASSESSMENT AND ANALYSIS POLICY STATEMENT	12
INTERNAL HAZARD CONTROLS POLICY STATEMENT	13
INVESTIGATION AND REPORTING POLICY STATEMENT	14
LEGISLATION AND OTHER REQUIREMENTS POLICY STATEMENT	15
MAINTENANCE INSPECTIONS POLICY STATEMENT.....	16
OCCUPATIONAL HEALTH AND SAFETY (OHS) POLICY STATEMENT	17
PERSONAL PROTECTIVE EQUIPMENT POLICY STATEMENT.....	18
PREVENTIVE MAINTENANCE POLICY STATEMENT	19
PROCUREMENT AND SUBCONTRACTOR POLICY STATEMENT	20
RULES & PROGRESSIVE DISCIPLINE POLICY STATEMENT	21
RETURN TO WORK POLICY STATEMENT	23
SENIOR MANAGEMENT REVIEW POLICY STATEMENT	24
STATISTICS, RECORDS POLICY STATEMENT	25
TRAINING AND DEVELOPMENT POLICY STATEMENT	26
VISITOR POLICY STATEMENT	27
WORKPLACE INSPECTIONS POLICY STATEMENT	28

MAXIM MECHANICAL GROUP INC
HEALTH AND SAFETY POLICY STATEMENT

President's Message

On behalf of Maxim Mechanical Group Inc., (Maxim) I would like to take this opportunity of presenting our Health & Safety Policy as governed by the Occupational Health and Safety Act of Ontario (the act) section 25(2) j. Our commitment to health, safety and the environment demonstrates that collectively we are all working towards an accident and incident free workplace. The health and safety of every employee and subcontractor for our firm is a primary concern and is the basis of our policies and directives in this area. I recognize that workers have the right to work in a safe and healthy work environment, and it is my commitment to provide that space for all my employees. To be successful in health & safety we require the cooperation of all levels of management, employees, and our subcontractors.

Maxim recognizes that it is the responsibility of all workers to work in accordance with the practices and procedures set forth in the health and safety program, in addition to the applicable legislative requirements. Maxim also recognizes that it is the responsibility of all workers to report all hazards, unsafe acts, and unsafe conditions. Health & Safety violations, by any employee or subcontractor, will be viewed as a major breach of our company policy and will be grounds for immediate disciplinary action including immediate discharge. Working in an unsafe or unhealthy manner at any time is unacceptable.

Maxim Mechanical Group Inc. maintains a formal Health and Safety Program that clearly defines the specific roles and responsibilities of all workplace parties, including Senior Management, Supervisors, workers and subcontractors, as outlined in Section 2 – Duties and Responsibilities and related procedures in this manual.

Maxim commits to working jointly and cooperatively with all workplace parties, in the development and implementation of our Health and Safety Program. We commit to working with Senior Management to provide a safe work environment that promotes Occupational Health and Safety across all levels of employment. Additionally, our HSR along with Senior Management commit to establish continual improvement and growth within Health and Safety by setting appropriate and realistic goals and objects and conducting an annual review of all policies and procedure, to ensure constant development of our manual and our OHS performance.

I ask that you read the manual carefully, completely and raise any questions or concerns with your supervisor. To further our commitment to ensure a safe workplace, it is compulsory that all employees read the material presented in this manual and become well versed in its contents.

Through open lines of communication, objective discussions and cooperation between Workers, Supervisors, Senior Management, Managers, the Worker Health and Safety Representative and other outside parties, our objectives of a workplace free of hazards, injury and illness can and will be achieved.

I would like to take this opportunity to express my sincere appreciation to all Maxim Mechanical employees for their continuing commitment to the Health and Safety policy and procedures of our company.

President

Date

MAXIM MECHANICAL GROUP INC
CHANGE MANAGEMENT POLICY STATEMENT

The purpose of this policy is to establish a structured approach for managing changes within our organization. Effective change management ensures that modifications are well-planned, communicated, and executed while minimizing disruptions and risks.

The goal of change management is to facilitate successful adoption of new processes, technologies, or strategies while minimizing disruptions and ensuring alignment with organizational goals. Maxim Mechanical Group Inc. will ensure a smooth transition by following the actions below:

1. **Change Identification and Assessment:** All proposed changes must be identified, assessed, and aligned with our organizational goals.
2. **Roles and Responsibilities:** Senior management is accountable for overseeing and approving changes and facilitate communication and ensure successful transitions.
3. **Change Request Process:** Employees must submit formal change requests which include a clear description of the change, its purpose, and potential impacts.
4. **Change Review and Approval:** Senior Management will review requests, assess risks, and make informed decisions.
5. **Communication and Training:** Transparent communication is crucial. We will inform all affected parties about upcoming changes. Training programs will ensure employees understand new processes or systems.
6. **Monitoring and Evaluation:** Regular evaluations will identify areas for improvement.
7. **Handling Unauthorized Changes or Emergencies:** Unauthorized changes will be addressed promptly; emergency changes will follow streamlined procedures to minimize disruptions.
8. **Continuous Learning and Adaptation:** We commit to learning from each change experience. Lessons learned will inform future change management practices.

Review and Revision

This policy will undergo periodic review by senior management to ensure its relevance and effectiveness. By adhering to this policy, we aim to embrace change while safeguarding our operations and maintaining stability.

President

Date

MAXIM MECHANICAL GROUP INC CONTROL POLICY STATEMENT

At Maxim Mechanical Group Inc, we are committed to providing a safe and healthy workplace for all employees, contractors, and visitors. We recognize that hazards exist in our workplace, and we have implemented a Hazard Control Policy to identify, assess and control these hazards.

Our approach to hazard control is based on the Hierarchy of Controls, which prioritizes the most effective methods of controlling hazards. Our goal is to eliminate or minimize exposure to hazards and to prevent injuries, illnesses, or property damage.

To achieve this goal, we will:

1. **Identify Hazards:** We will identify and assess hazards in the workplace through regular inspections, hazard assessments, and incident investigations.
2. **Control Hazards:** We will control hazards through the implementation of the Hierarchy of Controls, prioritizing elimination, substitution, and engineering controls over administrative controls and personal protective equipment.
3. **Provide Training:** We will provide training to employees, contractors, and visitors on the hazards they may encounter in the workplace and the control measures in place to protect them.
4. **Continuously Improve:** We will continuously monitor and evaluate our hazard control program to ensure it is effective and efficient, and make improvements as needed.
5. **Comply with Regulations:** We will comply with all applicable health and safety regulations and standards.
6. **Promote a Culture of Safety:** We will promote a culture of safety where all employees, contractors, and visitors are encouraged to report hazards, incidents, and near-misses, and are empowered to take action to control hazards.

All employees, contractors, and visitors have a responsibility to follow safe work practices and comply with this policy. Failure to comply with this policy may result in disciplinary action.

We are committed to maintaining a safe and healthy workplace and believe that by working together, we can prevent injuries, illnesses, and property damage.

President

Date

MAXIM MECHANICAL GROUP INC COMMITMENT TO COMMUNICATION POLICY STATEMENT

Effective communication is fundamental to Maxim Mechanical Group Inc. (Maxim). Open and transparent communication fosters collaboration aligns our team, and ensures that our mission, vision, and values are understood and upheld throughout the organization. Senior management recognizes the vital role that communication plays in achieving our strategic goals and is fully committed to fostering a culture of effective communication through:

- **Clear Direction and Support:** Senior management is committed to providing clear direction and support for all employees using our safety talks. Communication is a two-way process, and we will actively engage in both sharing information and listening to feedback.
- **Alignment with Organizational Goals:** We will ensure that communication efforts are consistently aligned with our strategic objectives and that our messaging reflects our core values.
- **Transparency and Accessibility:** We pledge to maintain transparency in our communication processes. Senior management will make information accessible and readily available to employees, stakeholders, and partners when appropriate. We will use communication methods like town hall meetings, regular updates, and feedback sessions.
- **Support for Training and Development:** We recognize that effective communication requires skills and training. Senior management will support and encourage training and development opportunities for employees at all levels to enhance their communication skills.
- **Diversity and Inclusivity:** Senior management is committed to promoting communication practices that respect and celebrate our diversity, ensuring that every voice is heard and valued.
- **Feedback and Improvement:** Senior management is open to receiving feedback from employees and stakeholders. We will actively seek input on our communication efforts and use this feedback to continuously improve our practices.
- **Compliance with Regulations:** We are committed to complying with all relevant regulations and standards. Senior management will ensure that our communication practices adhere to legal requirements and industry best practices.

Effective communication is a cornerstone of our organizational culture. Senior management's commitment to communication is unwavering, we understand that it is a shared responsibility among all members of our organization. By working together to uphold these communication principles, we will continue to strengthen our organization and achieve our goals.

President_____
Date

MAXIM MECHANICAL GROUP INC
EMERGENCY PREPAREDNESS POLICY STATEMENT

Maxim Mechanical Group Inc. (Maxim) has implemented an Emergency Preparedness Procedure to establish a well-planned emergency response, which will limit suffering, losses and resume normal operations as soon as reasonably possible.

This procedure applies to all workplace parties responsible for developing and implementing Emergency Preparedness and Response Plans on behalf of the company. Documented plans will be developed for each construction project where Maxim is acting as the General Contractor. Once developed, the scope of the Emergency Preparedness and Response Plan, including location specific requirements, will be explained to all site personnel.

Maxim has prepared a plan for the following emergencies:

- Evacuation Plan & Headcount Record
- Fire and Explosions
- Medical Emergencies
- Hazardous Materials - Accidents & Spills
- Natural Gas Leaks
- Overhead Powerline Contact Power Failure
- Emergency Violence Response

Maxim always values the health and safety of their employees, and if there is any employee that feels we are missing an emergency which we should be prepared for, our HSR will update a procedure to include the new emergency, so that all our employees feel comfortable and safe working at their designated locations.

President_____
Date

MAXIM MECHANICAL GROUP INC

FITNESS FOR DUTY POLICY STATEMENT

Maxim Mechanical Group Inc. (Maxim) recognizes the legal and moral responsibility to provide a safe, productive and reliable work environment for all workers. Drug and alcohol abuse in the workplace results in incidents, injuries, lower productivity, lost profits, increased health care costs and legal strains for workers and employers. The possession, distribution, or use of drugs and alcohol in the workplace possesses serious risks to the health, safety and well-being of our workers. Therefore, we have adopted the following stipulations that will be consistently enforced:

- No workers shall possess, distribute or use alcohol or illegal drugs on company property (including parking areas and other company grounds), or while otherwise performing work duties away from company premises.
- No worker shall report to work or be at work under the influence of alcohol or drugs that may or will affect their ability to work safely.
- Strict adherence to all legal stipulations regarding drug and alcohol testing, including but not limited to; medical testing protocols, human rights, confidentiality of medical information and records, as well as worker privacy.
 - At sites where impairment could pose a serious risk to health and safety, Maxim reserves the right to require a drug or alcohol test in the following circumstances:
 - When there is reasonable cause to suspect an employee is under the influence of alcohol or drugs while at work (e.g., observed behaviour, appearance, or other indicators).
 - Post-incident or near-miss situations where substance use may have been a contributing factor.
 - Any testing will be conducted in accordance with applicable human rights legislation, privacy laws, and established medical testing standards. Where substance use is identified, the Company can engage in the duty to accommodate in compliance with the Ontario Human Rights Code.
- Worker shall use prescription or non-prescription drugs while at work as directed by the worker's physician.
 - If a worker is taking a prescription or non-prescription drug for which there is a potential unsafe side effect, he or she has an obligation to report it to the supervisor.
- Workers are responsible for reporting any situations where a violation of the company Fitness for Duty Policy has occurred.
- Supervisors are required to investigate any situation where a violation of the company Fitness for Duty Policy exists.
- Review on a regular basis the best practices regarding the management of alcohol and drug abuse related issues in the workplace.
- Communicate through toolbox talks, memos, safety meetings, etc

MAXIM MECHANICAL GROUP INC HAZARD ASSESSMENT AND ANALYSIS POLICY STATEMENT

Accidents are preventable, and Maxim Mechanical Group Inc. (Maxim) has taken the initiative of implementing a system of hazard identification and risk control, to prevent workplace injuries and diseases. Maxim tracks and monitors workplace hazards, risks, and controls, and follows the methodology of Daily Job Hazard Assessment (Daily JHA) which is a vital component of the Health & Safety Program.

The primary goal for our Hazard assessments is to assess, analyze and control any potential risks to our employees. Working with Senior Management and the HSR, Maxim will strive to ensure hazards will be:

1. **Identified:** The first step in developing the correct procedure is to analyse each task of a specific job and ensure it is examined to identify hazards and determine the safest way to do the job
2. **Assessed:** Once a hazard is identified, the risk associated with it will be evaluated to determine how best to mitigate any potential harm. A risk assessment is a systematic examination of all aspects of the work undertaken to identify what could cause injury or harm, whether the hazards could be eliminated and, if not, what prevention measures are, or should be in place, to control the hazard.
3. **Controlled:** Once the identified hazards have been assessed, the HSR in conjunction with Senior Management will look for ways to control the risks. Whenever possible the hazard should be removed, or hazard controls will be implemented to protect our employees.
4. **Communicated:** Hazards and their associated controls will be communicated with all employees and workers through board posting, email blasts and on-site in-person communications.
5. **Reviewed:** Daily JHA's are collected on a weekly basis and reviewed by Senior Management and the HSR at a yearly basis to identify and patterns and see if there is a need for change in work process or environment.

The success of our Daily JHA program is essential to provide every employee with the confidence to work in an environment free of hazards.

MAXIM MECHANICAL GROUP INC
INTERNAL HAZARD CONTROLS POLICY STATEMENT

Ensuring Maxim Mechanical Group Inc (Maxim) has an internal control policy is imperative to safeguard all workplace parties, and promote operational efficiency, to protect personnel, and to help confirm adherence to prescribed policies and ensures compliance with current regulations.

As a small organization it is important for us to ensure the necessary steps are taken to increase the health and safety of the organization. Maxim will work towards reviewing all hazards which are brought forward and creating sustainable corrective controls in place to minimize the risks. We will do that by working directly with Senior management to review all policies, procedures and forms on a yearly basis and create controls to minimize the risks.

Maxim follows the Hierarchy of Controls which identify and mitigate exposures to occupational hazards before work begins is the objective of all safety and health professionals. The hierarchy starts with the controls perceived to be most effective and moves down to those considered least effective. It flows as follows:

- **Elimination:** Physically remove the hazard
- **Substitution:** Replace the hazard
- **Engineering Controls:** Isolate people from the hazard
- **Administrative Controls:** Change the way people work
- **Personal Protective Equipment (PPE):** Protect the worker with PPE

The hierarchy of controls is a core component for Maxim to minimize occupational hazards by addressing hazards at the top of the hierarchy of controls during the earliest stages of project development.

President

Date

MAXIM MECHANICAL GROUP INC
INVESTIGATION AND REPORTING POLICY STATEMENT

Maxim Mechanical Group Inc (Maxim) as a responsible and safety-focused construction organization, is committed to maintaining a safe and healthy workplace for all employees, contractors, and visitors. Our commitment to conducting thorough and timely workplace investigations and reporting procedures to identify and address safety incidents, hazards, and non-compliance with regulatory requirements is a top priority for senior management.

It is our goal to establish clear guidelines and procedures for conducting workplace investigations and reporting incidents within all our worksites and within the workplace. This policy aims to ensure that all safety-related incidents are thoroughly investigated, corrective actions are implemented, and that lessons learned are used to continuously improve our safety practices.

An investigation team shall be formed for each reported incident. This team may include safety officers, supervisors, relevant trade professionals, and designated incident investigators. Senior Management will ensure that the team shall be trained in conducting thorough and impartial investigations.

Investigations shall be initiated promptly, and a structured process shall be followed to gather facts, interview witnesses, and collect evidence related to the incident. The root causes of the incident shall be identified, and contributing factors shall be analyzed to prevent recurrence.

We will make certain incidents that meet regulatory reporting criteria shall be reported to the relevant authorities within the required timeframe. Maxim shall cooperate fully with regulatory agencies during any investigations or inspections.

Maxim is committed to maintaining the highest standards of safety within the construction industry. Through rigorous workplace investigations and reporting procedures, we aim to identify and mitigate hazards, prevent accidents, and create a safe and healthy work environment for all stakeholders.

President

Date

MAXIM MECHANICAL GROUP INC
LEGISLATION AND OTHER REQUIREMENTS POLICY STATEMENT

Maxim Mechanical Group Inc. (Maxim) complies with all relevant legislative and regulatory requirements, standards, and other obligations. This policy is designed to promote transparency, accountability, and ethical behavior in all aspects of our operations.

This policy applies to all employees, contractors, partners, and other stakeholders associated with Maxim.

- 1. Legislative Compliance:** Maxim is committed to adhering to all applicable local, provincial, municipal, and federal laws and regulations. This includes, but is not limited to, labor laws, environmental regulations, data protection and privacy laws, and industry-specific regulations.
- 2. Regulatory Requirements:** All relevant regulatory requirements, standards, and guidelines issued by governmental and non-governmental bodies will be integrated into the organization's operational procedures. The organization will designate responsible individuals or departments to monitor, interpret, and implement these requirements effectively.
- 3. Internal Controls and Procedures:** Maxim will establish and maintain internal controls and procedures to support compliance with legislative and regulatory requirements.
- 4. Training and Awareness:** Employees and stakeholders will receive regular training on legislative and regulatory requirements relevant to their roles and responsibilities. Maxim will ensure that all individuals are aware of their obligations and understand the importance of compliance.
- 5. Reporting and Addressing Non-Compliance:** Any instances of non-compliance or potential breaches of legislation or regulations must be reported immediately to Senior Management.
- 6. Continuous Improvement:** Maxim is committed to a culture of continuous improvement and will regularly review and enhance its policies, procedures, and controls to better meet legislative and regulatory requirements. Feedback from employees, stakeholders, and external audits will be used to drive improvements in compliance practices.

The ultimate responsibility for ensuring compliance with this policy rests with Senior Management. All employees and stakeholders are expected to support and adhere to this policy. This policy will be reviewed on an annual basis or as necessary to ensure its continued relevance and effectiveness.

President

Date

MAXIM MECHANICAL GROUP INC
MAINTENANCE INSPECTIONS POLICY STATEMENT

At Maxim Mechanical Group Inc (Maxim) we are committed to ensuring the safety, functionality, and longevity of our construction projects. As part of our dedication to excellence, we have established this maintenance inspection statement which highlights the importance of following our procedures and guidelines for conducting regular maintenance inspections. These inspections are integral to preserving the quality and safety of our structures, promoting sustainability, and minimizing unforeseen maintenance costs.

It is important our workers follow the framework planned for routine maintenance inspections to:

Ensure Safety: Prioritize the safety of occupants, visitors, and workers by identifying and rectifying potential hazards promptly.

Extend Asset Lifespan: Maximize the lifespan and performance of our constructions, thereby protecting our clients' investments.

Reduce Operational Costs: Proactively address maintenance issues to minimize unexpected repairs and operational disruptions.

Enhance Sustainability: Promote sustainability by identifying opportunities for energy efficiency improvements and environmentally responsible practices.

Review and Continuous Improvement:

At Maxim we will ensure its effectiveness and relevance of our maintenance inspection policy by periodically reviewing its contents and making any necessary updates will be made to align with industry best practices and emerging technologies.

All employees and subcontractors of are expected to adhere to this maintenance inspection policy. Non-compliance may result in disciplinary action.

At Maxim we believe that regular maintenance inspections are essential for delivering high-quality construction projects that stand the test of time. By adhering to this policy, we demonstrate our commitment to safety, sustainability, and client satisfaction.

President

Date

MAXIM MECHANICAL GROUP INC
OCCUPATIONAL HEALTH AND SAFETY (OHS) POLICY STATEMENT

Maxim Mechanical Group Inc (Maxim) is committed to maintaining a safe and healthy workplace for all employees, contractors, and visitors. Our policies and procedures are written to prevent injuries and illnesses through careful consideration and care. This policy applies to all aspects of our operations and serves as a guiding framework for achieving excellence in health and safety. We commit to working in a spirit of consultation and co-operation with workers through safety talks and an open-door policy.

We recognize the importance of adhering to applicable OHS legislation and commit to:

- 1. Identify and Understand Legislation:** We will stay informed about federal, provincial, and local OHS laws and regulations that pertain to our industry. This includes but is not limited to:
 - Occupational Health and Safety Act (OHSA)
 - Regulations specific to our region
 - Any amendments or updates to existing legislation
- 2. Compliance Assurance:** We will ensure full compliance with all relevant legislative requirements. This involves:
 - Implementing necessary policies, procedures, and controls
 - Conducting regular audits and assessments to verify compliance
 - Addressing any non-compliance promptly
- 3. General Duty Clause:** We acknowledge the General Duty Clause of the OHSA to maintain a workplace free from serious recognized hazards.

Beyond legislative compliance, Maxim recognizes the importance of the following requirements:

- 1. Industry Standards and Codes:**
 - Canadian Standards Association (CSA) standards
 - American Society of Mechanical Engineers (ASME) codes
 - National Fire Protection Association (NFPA) guidelines
- 2. Manufacturer Specifications:** When using equipment, machinery, or materials, we will strictly follow the manufacturer's specifications to ensure safe installation, operation, and maintenance.
- 3. Best Practices and Guidelines:** We will proactively seek out and adopt best practices and guidelines related to health and safety. We will ensure continuous improvement which is essential for minimizing risks and enhancing workplace well-being through setting OHS objectives.

Maxim will review this policy periodically to ensure its effectiveness and relevance. We encourage feedback and suggestions for improvement from all stakeholders. By adhering to this policy, Maxim aims to create a workplace where safety is paramount, risks are minimized, and everyone returns home safely each day.

President

Date

MAXIM MECHANICAL GROUP INC
PERSONAL PROTECTIVE EQUIPMENT POLICY STATEMENT

A goal for Maxim Mechanical Group Inc. (Maxim) is to eliminate or control potential hazards to which our employees could be exposed to when working on site. Potential harmful hazards exist on all work sites; therefore, we will implement control measures to constrain the effects of these hazards. Maxim acknowledges the use of Personal Protective Equipment (PPE) is the least desired method of controlling workplace hazards, therefore, the use of PPE will only be considered after other methods have been explored. Engineering and administrative controls will be used for the most part however, there are some circumstances and job functions which require the use of PPE to control the exposure to the hazard.

Maxim implemented a program called the Personal Protective Equipment Program which will identify the need for PPE and the implementation of a program designed to protect our employees. This program will encompass the following areas:

- PPE Policy
- Selection/Use
- Maintenance
- Monitoring & Inspection
- Employee Training

Maxim will provide and make available to employees, all required specialized PPE (necessary to perform specific activities, and as identified in Workplace Task Standards). We ensure that the safety and wellbeing of our employee's is first and foremost.

President

Date

MAXIM MECHANICAL GROUP INC
PREVENTIVE MAINTENANCE POLICY STATEMENT

At Maxim Mechanical Group Inc. (Maxim) we are committed to delivering high-quality construction projects that are built to last. We recognize that the key to achieving this objective is the proper maintenance of our construction equipment, vehicles, tools, and facilities. Preventative maintenance is a fundamental component of our operations, and we are dedicated to ensuring the longevity, safety, and efficiency of our assets. We commit to delivering these objectives through:

Scheduling: Regular maintenance schedules will be established for all equipment, vehicles, tools, and facilities. These schedules will be based on manufacturer recommendations, industry best practices, and historical data.

Inspections: Routine inspections will be conducted before, during, and after equipment use. Facilities will be inspected regularly for signs of wear, damage, or safety concerns.

Documentation: Detailed maintenance records, including inspection reports, repair logs, and service histories, will be maintained for all assets.

Training: Our maintenance personnel will receive ongoing training to stay updated on the latest maintenance techniques and safety protocols.

Emergency Repairs: In the event of unexpected breakdowns or safety issues, we will have procedures in place to address these immediately, prioritizing safety and minimizing downtime.

Continuous Improvement We are committed to a culture of continuous improvement. Our maintenance processes and schedules will be reviewed regularly to ensure their effectiveness. Feedback from employees, subcontractors, and clients will be considered in refining our preventative maintenance program.

Compliance All employees are expected to adhere to this preventative maintenance policy. Failure to do so may result in disciplinary action. Compliance is essential to achieving our goals of safety, efficiency, and quality.

At Maxim, we believe that preventative maintenance is not just a routine task; it's a fundamental aspect of our commitment to excellence. By proactively preserving our assets, we ensure the success of our projects, the safety of our team, and the satisfaction of our clients.

President

Date

MAXIM MECHANICAL GROUP INC
PROCUREMENT AND SUBCONTRACTOR POLICY STATEMENT

Maxim Mechanical Group Inc. (Maxim) has developed this policy to provide a healthy and safe workplace for workers including the subcontractors we choose to hire. It is important the subcontractors and their workers work practices of do not pose a risk to health, safety and the environment, and our workplace does not pose a risk to the subcontractor or their workers. This policy outlines the rules, responsibilities and procedures for subcontractor management.

RULES

All subcontractors engaged by Maxim Inc are to adhere to the following requirements:

- Complete the Subcontractor Procurement Checklist (SPC) and provide any supporting documents
- Follow the rules of Section 18-2 Project Specific Safety Plan Procedure
- Make sure their or their workers actions do not endanger the health and safety of other workers and visitors in or near the workplace; and
- Report incidents, near misses and hazards to the officer/supervisor.

RESPONSIBILITIES

Officers and Supervisors must:

- Implement and review the procedure.
- Consult with workers and subcontractors about this procedure
- Make sure subcontractors are provided the SPC and it is completed, and any supporting documentation is provided prior to them commencing work
- Make sure all subcontractors understand Maxim policies, safety rules and their roles and responsibilities
- Make sure any subcontractor is not put at risk by the activities of other workers
- Provide a safe and healthy workplace for all

WORKERS MUST:

Work in a manner that does not endanger the health and safety of subcontractors in the workplace.

Subcontractors who do not comply with this policy will be subject to the following procedures will be reported to a Maxim HSR or Supervisor. The subcontractor will then have the opportunity within a reasonable time to explain their actions and if the subcontractor does not give reasonable cause for their actions or does not rectify the reason for the grievance/complaint, the contract will be terminated and the subcontractor removed from the workplace.

President

Date

MAXIM MECHANICAL GROUP INC
RULES & PROGRESSIVE DISCIPLINE POLICY STATEMENT

All employees, Subcontractors, or others are required to follow the Rules and Regulations outlined by Maxim Mechanical Group Inc. (Maxim) at all times while employed by the organization. Those who willfully work in violation of company rules, policies and/or legislative requirements will be subject to any of the following disciplinary actions as is appropriate:

- Verbal warning with documentation,
- Written warning, or
- Removal from site, suspension or dismissal.

Furthermore, workers or others on site are subject to immediate discharge or ejection from the site for any of the following:

Workers and Others:

- Violation of company workplace violence and harassment policies
- Theft, falsifying time records, or any other dishonest act(s)
- Sabotage or intentional damage to company property
- Reporting's or found at work under the influence of alcohol, possession and/or the use of illegal drugs, or the improper use of prescription or "over the counter" drugs, while on or about the premises of our job sites or performing work on the company's behalf
- Insubordination
- Willful violation of the Health and Safety Program or legislation creating a potential for injury, death or serious property damage.

Our Workers Only:

- Without the written permission of the company, working elsewhere while on an authorized leave of absence, WSIB Claim, or medical leave.
- Failure to return to work immediately after the expiration of a leave of absence granted by the company.

President

Date

MAXIM MECHANICAL GROUP INC
WORKPLACE VIOLENCE AND HARASSMENT POLICY STATEMENT

The terms workplace violence and harassment as defined in the Occupational Health and Safety Act are as follows:

Workplace Violence

- a. the exercise of physical force by a person against a worker, in a workplace, that causes or could cause physical injury to the worker
- b. an attempt to exercise physical force against a worker, in a workplace, that could cause physical injury to a worker
- c. a statement or behavior that is reasonable for a worker to interpret as a threat to exercise physical force against the worker, in a workplace, that could cause physical injury to the worker.

Acts of workplace violence can take the form of either physical contact or threat of physical contact. They may occur as a single incident or may involve a continuing series of incidents.

Workplace Harassment

Workplace harassment is defined in the Occupational Health and Safety Act, as "engaging in a course of vexatious comment or conduct against a worker in a workplace that is known or ought reasonably to be known to be "unwelcome". Workplace harassment can also include derogatory comments or actions regarding age, creed, colour, marital status, sexual preference, disability, political or religious affiliation, or place of national origin.

We strive to provide all employees, suppliers, contractors, customers and visitors with an environment free of workplace violence and harassment. Mutual respect must be the basis of interaction, co-operation and understanding among all staff and contractors. We will not tolerate or condone behaviour that is likely to threaten the health and safety of any of our workers. This policy applies to all business operations and personnel as well as social events that are organized by or on behalf of the company.

Any potential situation of violence or harassment shall be immediately reported to their Supervisor. These incidents will be investigated, and appropriate measures will be taken, which may include disciplinary action and contacting of relevant authorities.

Successful implementation of this policy will be ensured through effective planning, implementation, open communications and monitoring of procedures regarding the prevention of workplace violence. All workers, supervisors, managers and contractors will receive training regarding standards of workplace behaviour, their roles and obligations, and procedures for dealing with any concerns and issues raised. Retaliation against persons who bring a complaint of actual or perceived violence or harassment is strictly prohibited and will be dealt with accordingly. A complaint of workplace violence or harassment that is intentionally fraudulent, frivolous or malicious may be subject to disciplinary action.

President

Date

MAXIM MECHANICAL GROUP INC
RETURN TO WORK POLICY STATEMENT

Maxim Mechanical Group Inc. (Maxim) has developed an effective Return to Work Program (RTW) that ensures the well-being of our workers. This RTW program will facilitate a safe and early return to work in the event of a disabling workplace accident and provide every opportunity for injured workers to return to gainful employment.

The RTW Program will facilitate a safe and early return to work for workers who have sustained a workplace injury while employed with our company while providing every opportunity for injured workers to return to gainful employment in the event of a disabling workplace accident. The RTW Team, supervisor and the employee can determine if the job needs modifying and if accommodations would be required.

Once an injured worker has been placed on an RTW program, the supervisor for that worker will be expected to:

- Follow the program with the injured worker and
- Keep Management updated as required
- Ensure commitment, cooperation and communication between the employer and workers
- Work closely with the treating physician, health care providers and the Workplace Safety and Insurance Board (WSIB).

The success of our RTW program is essential to provide every opportunity for injured workers to return to gainful employment and will provide Maxim with the opportunity to accommodate an injured worker and facilitate the goal of returning a worker to his or her pre-injury duties as soon as possible.

President

Date

MAXIM MECHANICAL GROUP INC
SENIOR MANAGEMENT REVIEW POLICY STATEMENT

Maxim Mechanical Group Inc. (Maxim) has created this policy is to establish a framework for regular senior management reviews within our organization. These reviews serve as critical checkpoints to evaluate strategic goals, operational performance, risk management, and overall organizational effectiveness. This policy applies to all executives, directors, and key decision-makers within the company.

1. **Frequency of Reviews:** Senior management will conduct formal reviews annually, as determined by the nature of the subject matter.
2. **Agenda and Objectives:** Each review will have a predefined agenda and clear objectives. The agenda will cover relevant topics such as financial performance, strategic initiatives, risk assessments, compliance, and organizational culture. Objectives include assessing progress, identifying areas for improvement, and making informed decisions.
3. **Documentation and Reporting:** Senior management will document review outcomes, decisions, and action items and put it into an executive summary.
4. **Risk Assessment and Mitigation:** Reviews will include an assessment of risks related to strategic goals, operational processes, and external factors. Mitigation strategies will be discussed and implemented as necessary.
5. **Alignment with Strategic Goals:** Senior management will evaluate whether organizational activities align with the company's strategic vision and mission.
6. **Compliance and Legal Obligations:** Senior management will verify compliance with legal requirements, industry standards, and internal policies. Any non-compliance issues will be addressed promptly.
7. **Organizational Culture and Employee Engagement:** Reviews will assess the overall health of the organizational culture, employee satisfaction, and engagement. Strategies to enhance workplace well-being will be explored.
8. **Continuous Improvement:** Senior management commits to using review outcomes to drive continuous improvement. Lessons learned will inform future decision-making.

Review and Approval

This policy is subject to periodic review by senior management. Any updates or revisions will be communicated to all relevant stakeholders. By adhering to this policy, senior management ensures transparency, accountability, and effective governance.

President

Date

MAXIM MECHANICAL GROUP INC
STATISTICS, RECORDS POLICY STATEMENT

Maxim Mechanical Group Inc. (Maxim) will collect all documents and forms pertaining to the communication between workers and employers which are completed throughout the year. These documents include, but are not limited to:

- Orientations
- General safety talks
- Toolbox safety talks
- Other health and safety meetings and conversations

The goal of collecting health and safety documentation is to create a clear picture of our performance throughout the year, and document if the changes we have implemented have been successful and help identify any gaps or trends which we as the Safety Team have missed.

The Health and Safety Team will maintain records of policy statements, for employees during employee orientations. All forms with private information will be recorded in a way that protects the privacy and confidentiality of our employees and subcontractors.

All documents and processes completed throughout the year will be reviewed by Senior Management to identify the effectiveness of the Occupational Health and Safety Manual and any changes which are made to it or required to be made in the upcoming year. With this review, Maxim will be able to develop any action plans required and create an environment of continuous improvement.

Senior Management and the Health and Safety Representative will maintain records of all policy statements, procedures, and communications for subcontractors, and suppliers and will distribute all updated manuals and record where needed.

President

Date

MAXIM MECHANICAL GROUP INC
TRAINING AND DEVELOPMENT POLICY STATEMENT

Maxim Mechanical Group Inc. (Maxim) recognizes that its most important resource is its employees. It is committed to the training and development of its entire workforce so that they will gain the necessary skills to reach their full potential. This will assist in enabling Maxim to achieve its aims and objectives that are to provide specialized, high-quality work, through a well-trained and supported working team. By increasing the skills and knowledge of our staff Maxim will produce confident, highly qualified staff working as an effective and efficient team.

The individual training and development needs will be identified through:

- A Training Program/Matrix.
- An annual training review
- Requests from employees.

The training and development needs identified will be met through a variety of activities depending on the nature and extent of the requirements deemed necessary after assessment.

All internal training provided by the organization will be of no cost to the employee. External courses and professional qualifications may be fully or partly funded by the organization depending on the nature of the training.

Employees are responsible for their own development and as such may inform the organization of their development needs and take part in prescribed development activities.

As part of the Maxim's continuing commitment to training and development, employees are asked to provide feedback on the value and effectiveness of the training and development they undertake. This information will be used to assess and improve the training process.

This policy respects equal opportunities and applies to all employees.

President

Date

MAXIM MECHANICAL GROUP INC
VISITOR POLICY STATEMENT

At Maxim Mechanical Group Inc (Maxim), we believe that occupational health and safety should always be an integral aspect of our business and everyday lives. We sincerely hope and expect that all visitors will join us in our efforts to make each and every day a safe one.

We remain responsible for the well-being of our visitors.

- Visitors are required to always accompany their host.
- Visitors are asked to report concerns and unsafe conditions to their host.
- The host will inform each visitor of their safety responsibilities and ensure that the personal protective equipment appropriate for their location and activities, is always worn. At minimum, appropriate head protection, foot protection and high-visibility traffic control vests must be worn on our construction projects. Additional protective equipment must be worn as required.

To ensure that our employees and guests are working in a safe environment we kindly insist that these minimum standards be strictly observed.

All Visitors must:

- Always wear required personal protective equipment
- Obey all posted signs and warnings
- Only smoke in designated smoking areas
- Be alert and yield to vehicular traffic
- Not touch or interfere with work activities materials or equipment
- Stay with their host and keep out of restricted areas
- Never enter unguarded areas or areas that have been barricaded

In Case of Emergency:

- Call 911 and state the nature of the emergency, location and the person making the call
- Stay on the line until information is confirmed
- If you hear an emergency alarm, walk to the nearest safe exit, and proceed to the grouping area
- Stay with your host at the grouping area
- Do not leave the site, unless advised to do so. (Everyone must be accounted for)

President

Date

MAXIM MECHANICAL GROUP INC
WORKPLACE INSPECTIONS POLICY STATEMENT

Maxim Mechanical Group Inc. (Maxim) is committed to ensuring a safe and healthy working environment for all employees, contractors, and visitors. To uphold this commitment, senior management recognizes the importance of workplace inspections as a proactive measure to identify and address potential hazards, promote compliance, and continuously improve our safety culture.

Senior management has established a framework for active involvement and focus on workplace inspections, emphasizing the significance of regular assessments, feedback, and follow-up actions.

Workplace inspections shall be conducted regularly as part of an ongoing safety program. The frequency of inspections shall be determined based on the nature of the workplace, the level of risk associated with the activities performed, and legal or regulatory requirements.

All employees are required to comply with this policy and actively support the focus on workplace inspections by senior management. Non-compliance may result in disciplinary action, as outlined in Maxim's disciplinary policies and procedures.

Maxim is committed to fostering a safety-first culture where workplace inspections, led and supported by senior management, are instrumental in safeguarding the well-being of our employees, contractors, visitors, and the communities in which we operate. By working together, we can create and maintain a safer working environment for all.

President

Date

DATE (MM/DD/YYYY)	NAME	COMPANY	PERSON VISTING AND/OR PURPOSE	TIME IN	TIME OUT

RULES AND REGULATIONS

The following rules and regulations shall impose on all employees of Maxim Mechanical Group Inc. (Maxim), they include but are not limited to:

1. Every Maxim employee must follow and obey the act, guidance, policy, rules, and regulations imposed by the company authority and applicable from time to time.
2. The company expects formal and acceptable behaviors from the employees of Maxim. The prime motive of Maxim is to maintain relationships with our clients through the exemplary conduct of our employees.
3. Employees shall follow the dress code according to Occupational Health and Safety Policy. Maxim employees in office must wear business appropriate attire and all workers at site must wear appropriate Personal Protective Equipment.
4. Maxim will not permit employees to work under the influence of alcohol or drugs during working hours. No employee shall drive Maxim's vehicles or operate any official equipment under the influence.
5. Maxim strives to create a friendly working environment. Maxim has a zero-tolerance policy for harassment of our employees and will result in immediate termination.
6. Employees must inform the supervisor or manager at least one hour before starting work if they will be absent or late on that day.
7. Maxim pays attention to effective communication; therefore, every employee should maintain a productive communication process during interaction with clients, stakeholders, or colleagues.
8. Employees are liable to protect Maxim's belongings and will be responsible for breaking any official equipment.
9. Maxim pays attention to the employee's honesty, punctuality, motivation, innovation, and integration while promoting
10. Finally, If the employee does not meet Maxim's expectations through their conduct and performance, they can take corrective action.

President

Date

2 - DUTIES AND RESPONSIBILITIES PROCEDURE

PURPOSE	To address duties and responsibilities associated with establishing the internal responsibility system and successful implementation of accident prevention strategies in the workplace.
SCOPE	This procedure applies to the Health and Safety Representative responsible for defining duties and responsibilities for all workplace parties and Subcontractors to ensure that there is a clear understanding of our company's health and safety performance expectations.
RESPONSIBILITIES	Health and Safety Representative (HSR) • Represent the interests of employees in health and safety matters and communicate concerns to management. • Conduct regular inspections of the workplace, highlighting potential safety hazards and ensuring compliance. • Assist in the review of health and safety reports, including near-misses, incidents, and accident data, to identify trends and areas for improvement. • Engage with workers to encourage active participation in health and safety programs and the reporting of hazards. • Comply with all the requirements as defined under the Occupational Health and Safety Act and Regulations (OHSA) Senior Management Responsibilities • Comply with all the requirements as defined under the OHSA • Occupational Health and Safety Act and Regulations. • Ensure that the company complies with all local, provincial, and federal health and safety laws, regulations, and standards. • Develop, communicate, and implement the health and safety policy. • Allocate adequate resources (personal, time, and financial) for the effective implementation of the health and safety program. • Demonstrate a commitment to health and safety through leadership, including regular participation in safety meetings and initiatives. • Conduct an annual review of the health and safety program to ensure its effectiveness and continuous improvement. • Provide oversight and guidance during the COR audit process, ensuring compliance with COR standards. Supervisor Responsibilities • Supervise employees to ensure they follow safe work practices and comply with health and safety regulations. • Identify and report potential hazards in the workplace to the health and safety manager or coordinator. • Ensure that all team members are familiar with emergency procedures and act as role models in emergency drills. • Take immediate corrective actions in response to unsafe work practices or hazards in the work area. • Monitor the health and safety of workers in their area, ensuring that protective equipment is used and safety measures are followed. • Regularly communicate with workers regarding health and safety performance, issues, and suggestions for improvement. • Comply with all the requirements as defined under OHSA

Worker Responsibilities

- Follow all safety protocols, procedures, and instructions provided by the company to ensure personal and coworker safety.
- Immediately report any hazards, unsafe practices, or incidents to supervisors or the health and safety manager.
- Properly use, maintain, and store personal protective equipment (PPE) provided by the company.
- Participate in all health and safety training sessions and apply the knowledge in their daily work tasks.
- Cooperate with incident investigations and assist in identifying potential causes and solutions.
- Keep work areas clean and free from unnecessary hazards, ensuring a safe work environment.
- Comply with all the requirements as defined under the OHSA

PROCEDURE

The detailed description of all responsibilities for each role is written above in the section titled “Responsibilities”, please review that section before reading the rest of this procedure.

This procedure applies to all employees, contractors, subcontractors, and visitors who are engaged in activities at any of the company’s worksites, offices, or facilities. The company rules are outlined in Section 1-3 Company Rules in the manual.

Step 1:

Health and Safety Duties and Responsibilities are detailed for the following personnel:

- Senior Management
- Health and Safety Representative
- Supervisors
- Workers (Including Subcontractors)
- Consultants and other Third-Party Representatives

Step 2:

All Duties and Responsibilities will be communicated in writing and through Employee Orientation and discussed before they start their first day of work. Attendance and/or acknowledgement must be maintained by the facilitator and filed accordingly.

Once the duties and Responsibilities are explained clearly – employees are required to fill out the Duties and Responsibilities Acknowledgement Sheet (Form 2-1), to state that they understand the rules and requirements and do not have any further questions at that time.

To ensure that the rules are understood by all employees, facilitators must ask whether any accommodations are needed to support comprehension—such as translation, alternate formats, or additional time for review—and provide them as required. Employees must be encouraged to ask questions at any point, and facilitators should assess understanding through open discussion and clarification where needed.

2 - DUTIES AND RESPONSIBILITIES PROCEDURE

Duties and Responsibilities will be divided into two categories:

1. Workplace - at office or warehouse, and
2. Site - job sites not located on company property

Step 3:

Verify that health and safety Duties and Responsibilities are understood by workers being fulfilled through audits and evaluations. Any worker who does not understand their Rules and Regulations will have an opportunity to seek additional training or bring up comments, questions or concerns at this point.

Step 4:

Any employee that is found or observed willfully not complying with the Duties and Regulations required for them, Senior Management will need to enforce disciplinary action which is outlined in detail in Section 13: Progressive Discipline of this manual.


DISTRIBUTION

Duties and Responsibilities will be distributed upon hire during our Employee Orientation process and redistributed when adjusted. Duties and Responsibilities will be listed in the Health and Safety Manual and in contract addendums with Subcontractors.

Furthermore, as a minimum, Duties and Responsibilities will be reviewed on a yearly basis.

RECORDS

All records of training or meetings will be documented with records of such meetings retained on file.

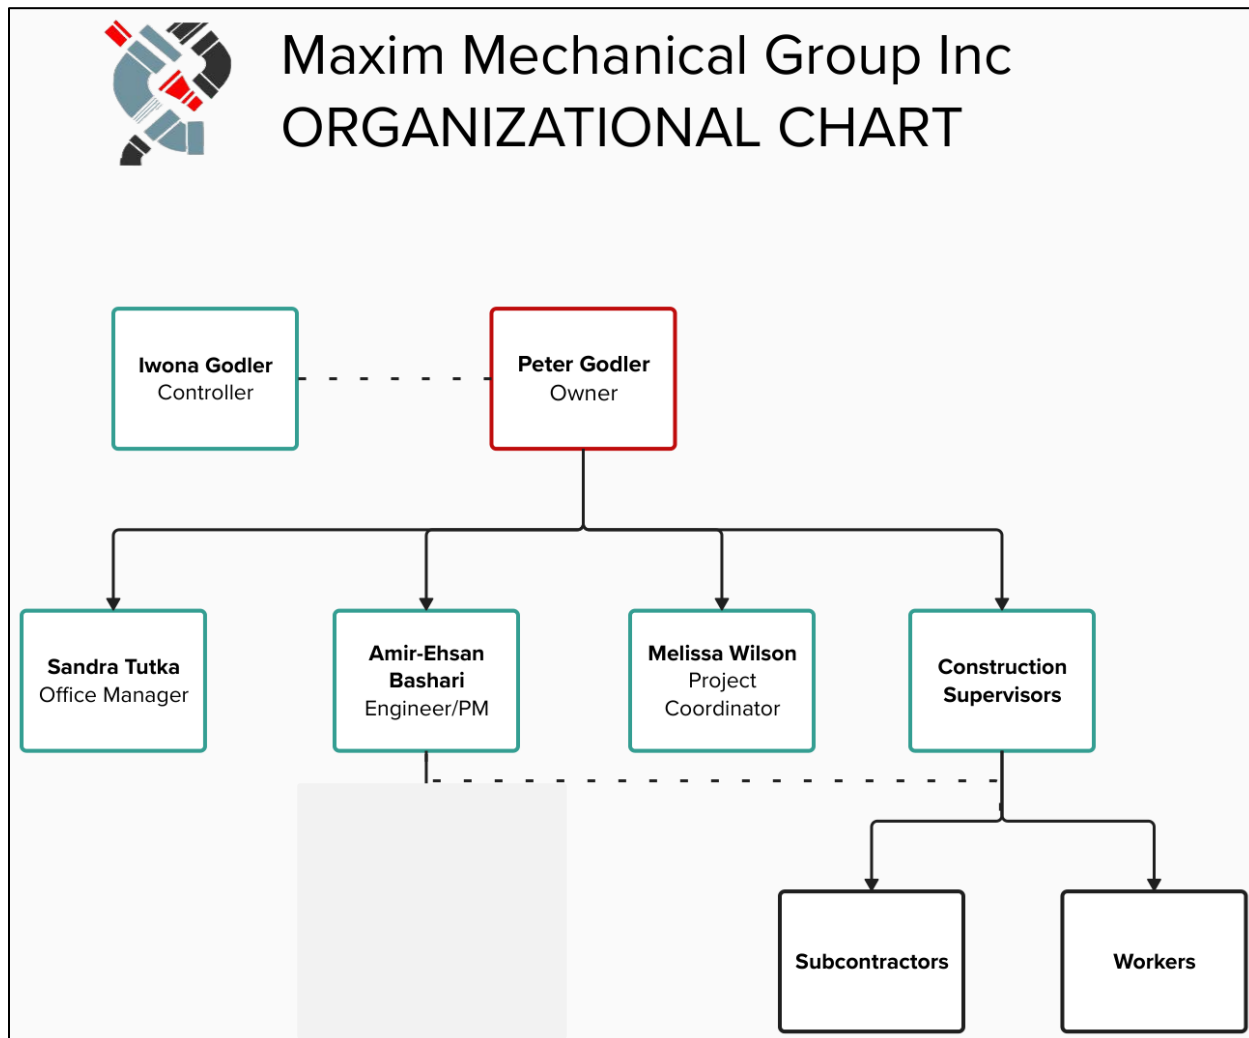

MAXIM MECHANICAL GROUP INC
HEALTH AND SAFETY RESPONSIBILITIES

Health And Safety Representative

- Ensure objectives and goals are communicated to all workplace parties.
- Hold Senior Management Meetings monthly.
- Review our company Training Matrix on an annual basis.
- Liaise with external health and safety agencies and associations (e.g. Ministry of Labour, Construction Safety Association of Ontario, etc.).
- Where necessary, assist with incident and accident investigations.
- Establish and maintain a health and safety record management system at head office.
- Review relevant policies, procedures and programs, after an incident has occurred.
- Develop and revise Employee Orientation Packages and documentation.
- Conduct Employee Orientations and collect related documentation.
- Distribute forms and documentation to the required workplace parties.
- If requested, assist Managers, Project Coordinators, and Supervisors, with situations involving violations of the company policies, procedures, and programs.
- Schedule any required re-orientations of Employee Orientations packages, based on revision or additions.

Working with Senior Management:

- Develop Health and Safety Policies, Procedures, Programs and related forms.
- Review, approve and sign, all company Health and Safety (H&S) Policy Statements on an annual basis.
- Review and approve all sections of the H&S Manual on an annual basis.
- Review past objectives, goals, and statistics and Key Performance Indicators (KPIs), on an annual basis.
- Determine needs and trends based on the review of statistics and key performance indicators, on an annual basis.
- Develop a continuous improvement plan to address findings from both our annual H&S Manual review, and statistics and key performance indicators.

Site Specific

- Conduct site level inspections, documenting items in both compliance and non-compliance, using the appropriate form.
- Ensure that regular site safety meetings are held with, staff, workers and subcontractors and that documentation of these meetings are maintained.
- Ensure Supervisors are completing their required workplace inspections, Daily Job Safety Assessment Plans, and other site documentation.
- Ensure workers are completing pre-use insertions

Senior Management

- Ensure that workplaces are adhering to the minimum requirements of Occupational Health and Safety and all applicable Regulations.
 - Review, approve and sign, all company Health and Safety Policy Statements annually
 - Review, and approve, all sections of the Health and Safety Manual annually.
 - Review past objectives, goals, and statistics and KPIs annually
 - Determine Needs and Trends based on the review of statistics and KPIs annually
 - Develop a Continuous Improvement Plan to address findings from both our annual Health and Safety Manual review, and Statistics and Key Performance Indicators.
 - Set future objectives and goals.
-

2 - DUTIES AND RESPONSIBILITIES PROCEDURE

- Ensure objectives and goals are communicated to all workplace parties.
- Provide necessary resources to implement and maintain the H&S Manual
- Hold senior management meetings (at least quarterly) with health and safety as a standing agenda item, using the Senior Management Meeting Agenda (14-1-2 Form) and maintaining minutes of decisions and assigned actions.
- Where required, implement corrective actions for the improvement of workplace health and safety
- Bind all subcontractors and suppliers contractually to our Subcontractor Guidelines and Safety Manual.
- When required take punitive actions against those subcontractors who do not adhere to company health and safety requirements, as outlined in our Subcontractor Guidelines and Safety Manual.
- Review all written notices of occurrences before they are sent to the Ministry of Labour and where required seek legal counsel.
- Ensure the HSR is consulted, and their recommendations are addressed regarding the development of our company policies, procedures, and programs.
- Arrange for workers to receive appropriate training and certifications, based on their workplace roles.
- Where required utilize the Progressive Disciplinary Policy and take progressive disciplinary actions against those who willfully disregard the company policy or legislative health and safety requirements.

Project Managers

- Ensure supervisors are completing their required workplace inspections.
- Ensure workers are completing pre-use inspections.
- Provide direction and support for health and safety initiatives.
- Provide senior management with regular updates on the workers performance and respective projects.
- Review Subcontractors past health safety performance prior to hiring.
- Bind all subcontractors and suppliers contractually to our Subcontractor Guidelines and Safety Manual.
- Allocate the necessary resources for the successful implementation of the Health and Safety Program on each project.
- Ensure that Subcontractors have a health and safety program, appropriate training and equipment/machinery documentation as is required.
- Ensure that all new workers have been oriented to the Employee Guidelines, have the appropriate training necessary to do the work and equipped with appropriate PPE
- Review all workplace inspection reports, Ministry of Labour orders, and investigation reports and provide direction and guidance as is necessary.
- Follow-up on health and safety concerns raised by workers and/or subcontractors.
- Collect and maintain "Registration of Constructors and Employers engaged in Construction" forms for all subcontracted employers
- Perform the responsibilities of the Supervisor, when acting as such.
- If requested, assist Supervisors, with situations involving violations of the company policies, procedures, and programs.
- Ensure employees under their care, receive Employee Orientations.

Site Specific

- Direct Safety Talks to be completed on all projects.
- Ensure that regular site safety meetings are held with, staff, workers and subcontractors and that documentation of these meetings are maintained.
- Provide necessary guidance to the HSR for the implementation of the H&S program.

- Verify that orientation meetings with Subcontractors are conducted by the Site Management Team.

Supervisors

- Implement the Health and Safety Manual.
- Ensure appropriate postings, warnings, locates, site communication, First Aid and washroom/wash-up facilities are in place.
- Define site specific Emergency Plans and Procedures for construction projects.
- Ensure that supplies for First Aid are available and that a person trained in First Aid is always working in the vicinity of the First Aid Station.
- Enforce applicable Health and Safety requirements with all workplace parties.
- Conduct at a minimum, weekly inspections on construction projects.
- Ensure Orientation meetings with Subcontractors are conducted prior to the commencement of work.
- Reply to recommendations relating to the improvement of workplace health and safety
- Investigate work refusals and/or complaints.
- With the assistance of the Site Management Team, conduct Accident Investigations and Follow-ups. Where applicable, ensure that the JHSC Worker Representative is included in the investigation.
- Conduct regular Toolbox Safety Talks with onsite workplace parties and maintain documentation.
- Ensure that Subcontractors have appropriate training and equipment/machinery documentation as is required.
- Maintain appropriate documentation for all health and safety activities.
- As required, ensure that a worker health and safety representative has been selected for the project and/or a Joint Health and Safety Committee has been established.
- Take every precaution reasonable in the circumstances for the protection of a worker.
- Be proactive on all health and safety issues and follow-up on health and safety concerns raised by workers and/or Subcontractors.
- Ensure that policies, procedures, and programs are executed by all workplace parties.
- Follow appropriate company procedures for workers who violate company policies procedures, and programs.
- Always liaise in a professional manner with the governing authorities.
- Gather Registration Forms from all Employers on-site – “Registration of Constructors and Employers Engaged in Construction” and maintain on site.
- Facilitate an election process for the Joint Health and Safety Committee and Worker Trades Committee on construction projects (where required).
- Involve the Joint Health and Safety Committee Worker Representative, in any incident or accident investigation.
- Involve the Joint Health and Safety Committee Worker Representative in the process of any work refusals.
- Where necessary make arrangements for injured workers to receive medical treatment and provide the appropriate Medical Treatment Forms.
- Follow-up on all workplace inspection reports, Ministry of Labour orders, investigation reports and provide copies to ALL required parties immediately.
- Encourage workers to participate in the following company Health and Safety Manual initiatives:
 - ☐ *Development of safety programs, procedures and policies.*
 - ☐ *Provide input into Job Hazard Analysis.*
 - ☐ *Report hazards, accidents/incidents immediately.*
 - ☐ *Participate in health and safety training.*

2 - DUTIES AND RESPONSIBILITIES PROCEDURE

□ *Apply the skills and knowledge obtained from health and safety training sessions when conducting work activities.*

- When requested, participate in health and safety audits, inspections, etc.
- Assist with addressing hazards and/or safety concerns in the workplace.

Duties Under the Occupational Health and Safety Act:

- Ensure that a worker:
 - Follow the measures and procedures required by this act and the regulations.
 - Wears the equipment, protective devices or clothing that the worker's employer requires to be used or worn.
- Advise a worker of the existence of any potential or actual danger to the health or safety of the worker of which the supervisor is aware.
- Where so prescribed, provide a worker with written instructions as to the measures and procedures to be taken for protection of the worker.
- Take every precaution reasonable in the circumstances for the protection of a worker.

Workers (All Workplace Parties)

Rights:

- The right to Participate in Health and Safety
- The right to Know about hazardous physical and chemical agents (WHMIS).
- The right to Refuse unsafe work.
- The right to Refuse work where workplace violence is likely to endanger themselves
- The right to Stop Work (certified committee members).

Duties:

A worker shall:

- Work in compliance with the Occupational Health and Safety Act and Regulations.
- Use or wear the protective equipment, devices or clothing required by the employer.
- Report to his/her employer or supervisor any unsafe condition the worker is aware of (e.g. protective guard is not in place).
- Report to his/her employer or supervisor any contravention of the Occupational Health and Safety Act or Regulations, or the company policies, procedures, and programs.
- When requested, participate in the development of safety programs, procedures and policies as well as Job Hazard Assessments.

No Worker Shall:

- Remove or make ineffective any protective device required by Regulations or their employer, without providing an adequate temporary protective device and when the need for removing or making ineffective the protective device has ceased, the protective device shall be replaced immediately.
- Use or operate equipment, machinery, devices or things in a manner that may endanger the safety of himself/herself or any other worker.
- Engage in any prank, contest, feat of strength, unnecessary running or rough and boisterous conduct.

Responsibilities:

- Comply with company policies, procedures and programs
- Come to work fit for duty, and perform their job responsibilities in a safe, secure, productive, and effective manner, during the entire time they are working.
- Notify supervisors if they are not fit for duty and if they are experiencing difficulties with any of their assigned tasks.

2 - DUTIES AND RESPONSIBILITIES PROCEDURE

- Participate in the election process of Joint Health and Safety Committee Worker Representatives.
 - Participate in the Employee Orientation process and complete the Employee Orientation Checklist.
 - Participate in Tool Box Safety Talks and provide input on topics where required.
-

Subcontractors

- Ensure adherence with the criteria stipulated in Maxim Project Safety Program.
 - Provide the required equipment and devices for the protection of workers and ensure that the workers are aware of the capabilities, limitations, use and care of the equipment or devices.
 - Be proactive in the prevention of accidents and injury with all workers, subcontractors and visitors under your control.
-

Consultants & Other 3rd Party Representatives

Architects, Engineers, Suppliers, Testing and Inspection Personnel, Surveyors, Visitors, etc.)

- Be familiar with Maxim Mechanical Health and Safety Manual requirements and always ensure adherence to the requirements.
- Immediately report any hazards observed on the project to the Site Management Team.

Additional duties apply to Architects and Engineers as defined in *Occupational Health and Safety Act* Section 31 as follows:

- An architect as defined in the Architects Act, and a professional engineer as defined in the Professional Engineers Act, contravenes this Act if, as a result of his or her advice that is given or his or her certification required under this Act that is made negligently or incompetently, a worker is endangered.

Notes:

Those working in or around moving equipment/vehicles or machinery must always ensure that they are seen and have established procedures for their work that includes the use of Tear-away Blaze Orange Florescent Vests and signal persons when required.

These duties will be distributed to consultants and incorporated into their agreements.

[illegible]

PURPOSE

The purpose of this procedure is to address the process of establishing and maintaining a Joint Health and Safety Committee (JHSC) in our workplaces. **Currently Maxim Mechanical is not required to have a JHSC established as there is less than 20 workers.**

SCOPE

This procedure applies to our workplaces, that meet the legislative requirements to elect, establish and maintain, either a Worker Representative or a JHSC when required.

RESPONSIBILITIES**Health and Safety Team Responsibilities**

- Facilitate an election process for worker representatives.
- Maintain all documentation related to Worker Representative inspections in conjunction with Senior Management.
- Ensure monthly workplace inspections are conducted when required.
- Review any written Worker Representative recommendations and determine the appropriate action or provide a written response to the recommendations within 21 calendar days in conjunction with Senior Management.
- Accompany the Worker Representative on their monthly workplace inspections

Senior Management Responsibilities

- Develop, review, and approve the procedure on an annual basis, as a minimum.
- Determine the application of the Worker Representative procedures.
- Facilitate an election process for worker representatives.
- Ensure monthly workplace inspections are conducted when required.
- Arrange for certification training for all required health and safety representatives and members when required.
- Provide the resources necessary to establish and maintain a Worker Representative
- Review any written Worker Representative recommendations and determine the appropriate action or provide a written response to the recommendations within 21 calendar days in conjunction with Health and Safety Team.
- Encourage the participation of the Worker Representative in the company.
- Maintain all documentation related to Worker Representative inspections in conjunction with the Health and Safety Team.

Supervisor Responsibilities

- Assist the Health and Safety Team in developing/delivering meetings and inspections
- If necessary, involve the Worker Representative in the process of addressing any hazards or safety concerns.
- Review any MOL Orders with the Worker Representative. Ensure all workers work in the manner and with the protective devices, measures and procedures required by the Occupational Health and Safety Act and Regulations.
- Involve the Worker Representative in the development of the company health and safety program, policies, procedures, etc.
- Involve the Worker Representative in any incident and/or accident investigation.

3 - JOINT HEALTH AND SAFETY COMMITTEE PROCEDURE

- Involve the Worker Representative in the process of managing a work refusal situation.
- Involve the Worker Representative in any site visits conducted by the MOL or other government agencies.

Worker Responsibilities

- Participate in the election process of the Health and Safety Worker Representative.
- Report workplace hazards and concerns to your supervisor and if applicable, your JHSC representative.
- Where necessary, assist the JHSC/Worker Representative with workplace inspections, incident/accident investigations, and work refusals, etc.

PROCEDURE

Worker Representatives are an essential part of our workplace Internal Responsibility System. They help to create a greater cooperation between management and labour in mutually achieving a safe and healthy workplace. Depending on the workplace and workforce size, various types of Committees may be required, as follows:

WORKPLACE	WORKFORCE (ALL EMPLOYEES)	REQUIREMENT
All workplaces	6 - 19 Employees	Elected worker representative (chosen by the workers).
All workplaces	Over 20 Employees	Joint Health and Safety Committee required with worker members appointed by co-workers, management members appointed by management.
Construction Projects with duration of 3 months or more.	20 - 49 Employees	Joint committee with worker members appointed by co-workers, management members appointed by management.
Construction Projects with duration of 3 months or more.	50+ Employees	Joint committee with at least 2 workers appointed by their co-workers (1 Certified). No greater (than worker) number of management members appointed by site management (1 Certified). Worker trades committee with all trades represented by workers only.

The procedure for the election, establishment, implementation and maintenance of both the Worker Representative and the Joint Health and Safety Committee, are included in the following distinct sections:

- Introduction
- Membership
- Duties and Conduct
- Meetings
- Committee Records
- Recommendations

INTRODUCTION

The powers, functions and duties of the JHSC (when applicable) include, but are not limited to the following:

- To identify hazardous situations and make recommendations to the employer on health and safety issues and to meet quarterly.
- To be provided with the results of reports and copies of written reports in respect to occupational health and safety, in the employer's possession.
- Obtain information from the employer, in respect to identification of potential or existing health and safety hazards.
- To maintain and keep minutes of its proceedings and make these available to an inspector for review.
- Assist in the investigation including critical injury or serious incidents.
- Be present during an employer's investigation of a work refusal.
- Assist in the maintenance and monitoring of programs, measures and procedures respecting the health and safety of all workers.
- Conduct monthly inspections at the applicable workplace locations.

A Joint Health and Safety Committee will be established in each of our respective workplaces, where required. Documents and forms necessary to establish, record and maintain the committee are located in subsequent sections within Section 3. These forms and documents are as follows:

- 3-1 (Document) Committee Memorandum
 - 3-2 (Document) Terms of Reference
 - 3-3 (Form) Agenda
 - 3-4 (Form) Meeting Minutes
 - 3-5 (Form) Committee Recommendation to Management
 - 3-6 (Form) Management's Response to Recommendation
-

MEMBERSHIP

Occupational health and safety legislation identifies, specifically, the minimum requirements and procedures for membership on the Health and Safety Committees. The membership of the committees may vary to meet our various workplace's requirements, providing that it meets the minimum requirements outlined in the legislation.

Construction Projects:

For construction projects a Joint Health and Safety Committee will be established within the first month of the project. Election and selection notification memos, are to be sent to all contractors to have a representative appointed by workers.

A project's Supervisor will serve as one of the management members and will choose the other management member (where required). At least 1 worker and 1 management member must be a certified member (where required). Worker members of the committee may be rotated from the Workers Trades

Committee (when established) on a regular basis, as voted on by the committee, or as required by their employer's activities.

Worker Trades Committees - This committee will be established by the Joint Committee when the site population reaches 50 workers.

3 - JOINT HEALTH AND SAFETY COMMITTEE PROCEDURE

Other Workplaces:

For our workplace locations, a joint committee will be established within the first month of operation.

At least 1 worker and 1 management member must be a certified member (where required). Worker members of the committee may be rotated from the Workers Trades Committee (when established) on a regular basis, as voted on by the committee, or as required by their employer's activities.

DISTRIBUTION

A "Committee Memorandum" (3-1) when applicable, will be posted at our workplaces, advising of:

- JHSC representative's names
- Certified Member (where required)

RECORDS

All documentation for establishing the JHSC will be maintained at all workplaces.

DUTIES AND CONDUCT

The basic duties of committee members are clearly identified by legislation. Identified members of the committee should have certain duties defined so they may be prepared and familiar with their responsibilities. The acceptable conduct and forum for meetings should also be decided upon initially to avoid concerns or confusion about committee activities.

Upon the establishment of a Joint Health and Safety Committee the first order of business will be the Definition of Duties and the establishment of Terms of Conduct (3-2). These are to include the following tasks as a minimum requirements for members

DUTIES	WORKER REP.	MANAGEMENT REP.
1. Co-chairpersons		
2. Certified members		
3. Inspections		
4. Critical Accident Investigations		
5. Work refusals		
6. Taking minutes		
7. Accompanying Governing Authorities (M.O.L)		
8. Maintaining committee records		

DISTRIBUTION

These duties as agreed upon, should be documented on this sheet and placed on the "Committee's Memorandum" (3-1 - Form). The

3 - JOINT HEALTH AND SAFETY COMMITTEE PROCEDURE

"Committee Memorandum" must be:

- Posted on site.
- Supplied to all subcontractors on construction projects.
- Maintained in the committee file.

MEETINGS

Meetings of the Joint Health and Safety Committee and Worker Trades Committee are required by legislation. These meetings are an effective method for determining unsafe conditions or acts on the project through worker input. Management/Labour co-operation at these meetings, may also increase safety awareness and limit undesired occurrences.

Frequency:	Legislation requires that Joint Health and Safety Committees meet at least quarterly
Step 1:	A schedule for meetings should be prepared during the first meeting and voted on. This should be based on the activity and number of workers on site.
Step 2:	A schedule for the Worker Trades Committee should be prepared and voted on (To be used when the site population reaches 50+ workers).

DISTRIBUTION

Item 1 – AGENDA:	An agenda (3-3 - Form) should be prepared for each meeting identifying concerns and topics to be discussed in addition to New Business.
Item 2 – MINUTES:	Accurate minutes (3-4 - Form) must be kept for both the JHSC and/or Worker Trades committee meetings.
Item 3 – RECOMMENDATIONS AND RESPONSE:	Where a committee makes a formal recommendation (3-5 - Form) to site management to improve safety or health conditions a response must be provided, in writing, within 21 days using form (3-6 – Form).
Item 4 – WORK REFUSALS:	Where a Work Refusal occurs, an investigation must be conducted by the selected committee members, documentation must be maintained (use "Accident Investigation" form).

RECORDS

All the above noted documents/forms must be:

- Posted in the workplace.
- Provided to committee members.
- Available for government inspection.

COMMITTEE RECORDS

All records and reports of the Joint Health and Safety Committee must be maintained and readily available for Government Inspection.

Although committee records are generally available to all persons in the workplace, some documents or information to which the committee has access may be considered confidential. The committee must be aware of this responsibility and act accordingly.

RECORDS

The following is a list of all documents which must be stored in a separate filing system available specifically for members of the committee:

- Meeting Agendas
- Meeting Minutes
- Committee Inspection Reports & Site Management Follow-up
- Accident Investigations
- Work Refusals & Unilateral Work Stoppage
- Recommendations to Management
- Response from Management
- Committee Memorandums
- General Information (WSIB reports, Subcontractor's accident investigations, etc.)
- Worker Trades Committee minutes

Due to the confidentiality of some of this information, committee members must be accompanied by the JHSC Management Co-chairperson when accessing the aforementioned files.

RECOMMENDATIONS

The purpose of formal JHSC recommendations, is to provide a system for the committee to identify workplace health and safety concerns and ensure that they are communicated to management personnel who may not be on the committee. Through this process, the committee places the onus on management to review the recommendations, make a decision and respond in writing.

Any committee member will be allowed to make written recommendations to site management. The forms (3-5 - Form) for making recommendation to management are provided in the JHSC binder or via email. The committee member will complete form (3-6 - Form) and present it to the Management Co-Chairperson.

Once obtained by the Management Co-chairperson, the recommendation will be reviewed with senior management. Management then has the obligation to respond to the recommendation within 21 days

DISTRIBUTION

All recommendations must be provided to the Management Co-Chairperson and Senior Management. All responses to recommendations must be returned to the committee within 21 Days.

Responses to recommendations will be provided to all committee members and posted on or made available in all workplaces.

RECORDS

All recommendations made to management, will be retained on file for a period of up to 5 years.

**YOUR JOINT HEALTH AND SAFETY COMMITTEE
MEMBERS****SITE/LOCATION:** _____**DATE:** _____**REGARDING** Elected Joint Health and Safety Committee
:
Members**TO:** All Employees (Post in Respective Workplace
Locations)**JHSC MEMBERS****FUNCTION****NAME****COMPANY**

Worker Co-Chairperson

Management Co-Chairperson

Secretary

Worker Member(s) (If Necessary)

Management Member(s) (If Necessary)

NOTE: Meetings will be held on _____ at _____ : _____ .

| CONDUCT

1. Members of the Joint Health and Safety Committee (JHSC) and other Health and Safety Representatives on site will use their position only to ensure the Health and Safety of their coworkers. If Health and Safety representatives are unable to resolve problems that are particular to their area of responsibility through the Internal Responsibility System (i.e. reporting to Supervisor and Project Manager), then these concerns should be brought before the JHSC, or Worker Trades Committee (WTC).
2. Meetings of the JHSC are to be held on ____ day @ *a.m.* every ____ per month
3. Topics for future "meeting agenda's" will be discussed by the committees and an agenda will be prepared and posted in the site trailer 3 days prior to the next meeting.
4. Minutes will be kept of each meeting by the respective co-chairpersons, these will be prepared and reviewed by the co-chairpersons and then distributed within ____ days of the meeting to all members of the committee, and additional copies will be placed on file and will also be posted in the site trailer. Copies of the Worker Trades Committee (WTC) will be submitted to the JHSC at least ____ days in advance of the meeting.
5. A workplace Health & Safety inspection will be conducted by one labour and one management member of the JHSC at least once per month and one week prior to the next upcoming meeting. Inspections will be submitted to site management immediately for follow-up and then subsequently reviewed at the next committee meeting.
6. Attendance is mandatory at all scheduled meetings by every member of the respective committees. When applicable, there must be at least two management and two worker members present to have a quorum. Failure to attend two consecutive meetings without due cause will result in dismissal from and replacement on the respective committee. Not being aware of a meeting is not due cause. Members, if not aware, must inquire as to meeting dates and times.
7. Every representative will be given an opportunity to present his/her concerns at each meeting. Only one person should hold the floor at one time as co-coordinated by the chairperson. Unmanageable arguments will be cause for discontinuing the meeting or asking the offending party(ies) to leave the meeting.
8. Unscheduled interruptions of meetings will not be accepted. If absolutely necessary, and agreed upon, breaks may be requested but must be kept to a minimum.
9. Formal recommendations for improvement of workplace conditions should contain the following information and be presented on the appropriate form to be accepted by management:
 - Reason for recommendation (identify hazard).
 - Outline for requirements (what measures, procedures or equipment are being requested).
 - Time requirements for implementation.
 - Time expectations for a response in writing (**maximum 21 days**).
10. All concerns or questions between the respective committee meetings are to be addressed immediately with the co-chairperson if it cannot be resolved through the Internal Responsibility System.

3-2 FORM - JHSC TERMS OF REFERENCE

11. Decisions are to be made as a group, with majority rule presiding. Guests do not maintain a vote. Management and labour representation should remain equal with management not to exceed labour.
12. Topics and issues presented must deal only with Occupational Health and Safety. The JHSC will not be a forum for general concerns.
13. For the purposes of maintaining good employment relations at this worksite, all members are requested not to abuse the time given for these meetings and for duties assigned by the committee outside their regular job functions.
14. Guests may be invited to meetings, from time to time, when agreed upon by the committee (e.g. Construction Safety Association Personnel, MOL Inspectors, etc...).
15. Committee structure and functions will be followed as outlined in the Occupational Health & Safety Act and/or proposed committee structure of the Site Safety Manual.
16. Pro-active participation is required by all members; therefore, leading by example is expected in the workplace.
17. Committee meetings are to be no longer than 1 hour unless absolutely necessary and agreed upon by the JHSC.
18. The Workers Trade Committee will be established when 50 or more workers are present on the site lasting more than 3 months. The Workers Trade Committee will meet on @ a.m. every week(s) for Hr. with minutes provided to JHSC.

NOTE:

Note: The fundamental intent of the Joint Health & Safety Committee is to work collectively to ensure the Safety and Health of our workers and our environment.

These Guidelines have been accepted by all JHSC members identified below and will be considered the policy for the project.

Meeting Agenda Title**Attendees:****Regrets:**

Items	Details
Agenda	•
Actions & Commitments	
Notes from Meeting	
Distribution	☐ ☐ ☐

Worker Co-Chairperson (Signature)

Management Co-Chairperson (Signature)

PURPOSE

The purpose of this procedure is to define a process for communicating legislated and Maxim Mechanical Group Inc (Maxim) health and safety expectations to our employees. When hiring employees to conduct work on behalf of the company, it is important that the employee has been made aware of legislated and Maxim specific safety requirements and policies.

SCOPE

Worker Orientation using the Maxim specific Employee Orientation Package will provide every Maxim employee with the specific health and safety work practices and expectations prior to commencing their employment obligations.

RESPONSIBILITIES Health and Safety Representative (HSR)

- Develop company health and safety orientation documentation, policies and procedures as required with Senior Management.
- Ensure that the Employee Orientation procedure complies with the requirements as defined under the Occupational Health and Safety Act and Regulations with Senior Management.
- Where a new process or practice is identified, revise the Employee Orientation Package with Senior Management.
- Conduct orientations and related documents and ensure both parties sign the documents.
- Collect completed Employee Orientation Checklists and ensure both parties sign the file.
- Maintain all documentation related to the Employee Orientation Package and Employee Orientation progress including the Employee Orientation Checklist.
- Ensure workers have received appropriate employee orientations prior to arriving on site and commencing workplace activities in conjunction with the Supervisors.
- Ensure equipment, materials and protective devices provided are provided, maintained and used as required at site and office locations

Senior Management Responsibilities

- Conduct orientations and collect orientation documents and ensure both parties sign the documents when required.
- Schedule any required re-orientation of the Employee Orientation Package based on revision or addition of required content.
- Collect completed Employee Orientation Checklists and ensure both parties sign the document when required.
- Ensure the Employee Orientation procedure complies with the requirements as defined under the Occupational Health and Safety Act and Regulations with HSR
- Where a new process or practice is identified, revise the Employee Orientation Package, in coordination with the Health and Safety Team.
- Ensure Employee Orientation procedure is reviewed and approved on an annual basis as a minimum frequency.
- Ensure equipment, materials and protective devices provided are provided, maintained and used as required at site and office locations.

Supervisor Responsibilities

- Participate in the Employee Orientation process, when needed.
- Ensure workers have received appropriate employee orientations prior to arriving on site and commencing activities
- Ensure equipment, materials and protective devices provided are provided, maintained and used as required at site and office locations

4-1 - EMPLOYEE ORIENTATION PROCEDURE

Worker Responsibilities

- Participate in the Employee Orientation process.
- Complete Employee Orientation documentation using the Employee Orientation Checklist and agree to the requirements.
- Advise Supervisor if experiencing any difficulties with assigned tasks, or if tasks are beyond perceived limitations or medically not capable of performing tasks.
- Comply with all the requirements as defined under the *Occupational Health and Safety Act and Regulations*.

PROCEDURE

Prior to commencing work activities, new employees will receive an orientation from the Health and Safety Team or the Supervisor. Orientations will also be re-conducted when there are changes/updates to the Package.

The Employee Orientation Checklist (**4-1-1 - Form**) will be completed by Workers and the Health and Safety Team as follows:

- Current copies of the Employee Orientation Package (EOP) will be provided to the workers hired.
- The EOP will be reviewed with all workers directly.
- Upon review of the EOP, the attached acknowledgement sheets must be completed and handed back to the HSR prior to the commencement of work with both parties having signed the document.
- Review all training certificates that the employee has and arrange any subsequent company required training accordingly.
- Complete the Orientation Checklist (**4-1-1 - Form**) to detail the entire process for the compliance and awareness of company expectations prescribed within the package. (Including Workplace Task Standards - Safe Work Practices, Safe Job Procedures, and Job Hazard Analyses) and obligations.

Workers must sign the checklist and acknowledge that they agree to work in adherence with the requirements set out in the Employee Orientation Package.

DISTRIBUTION

Those employees being hired will be required to complete the Orientation Checklist (**4-1-1 Form**) stipulating that they have received, read and understood the Employee Orientation Package.

Where a new process or practice is developed, Senior Management with the Health and Safety Team, will revise the Employee Orientation Package and schedule the revised Employee Orientation Packages to be delivered to all workplace parties.

RECORDS

All completed checklists and acknowledgement sheets should be maintained in the employees file indefinitely.

4-1-1 - EMPLOYEE ORIENTATION CHECKLIST

Employee Orientation

Orientation Conducted By:	Date:
---------------------------	-------

Section A - Employee Data:

Name:		Emergency Contact(s)	Phone #:
Position:			
Start Date:			
Address:			
Phone #:			

Section B – Items Reviewed During Orientation:

1. Employee Guidelines Orientation Package Including
2. Health and Safety Policies
3. Health and Safety Duties under the Act
4. Health and Safety Duties & Responsibilities
5. Job and Task Instructions
6. Early and Safe Return to Work Information
7. Emergency Preparedness & Response Plan
8. First-Aid Facilities and First-Aiders' Names

Section C - Health and Safety Training Review

Subject	Previously Trained	Requires Training	Training Arranged	Training Complete
WHMIS				
Working at Heights				
First Aid				
Worker Awareness in 4 Steps				
Supervisor Awareness in 5 Steps				
Basics of Supervision				

Section D - Employee Acknowledgment

As an employee of Maxim Mechanical Group Inc, I understand the requirement to work in compliance with the *Occupational Health and Safety Act*, the *Construction Regulations*, and the rules and guidelines included in the company health and safety program. By signing, both Employee and Supervisor state that this Orientation has been completed.

Notes/Log:

List any other training and additional items discussed

Orientation Package Includes:

- ☐ Our Company Health and Safety Policy Statements
- ☐ Health and Safety Policy Statement
- ☐ Visitors Policy Statement
- ☐ Progressive Discipline Policy Statement
- ☐ Workplace Violence and Harassment Policy Statement
- ☐ Return to Work Policy Statement
- ☐ Fitness for Duty Policy Statement
- ☐ Health and Safety Duties & Responsibilities for Each Workplace Party
- ☐ Emergency Preparedness & Response Plan
- ☐ Early and Safe Return to Work Information
- ☐ Job and Task Instructions Package
- ☐ Job Hazard Assessments
- ☐ Safe Work Practices
- ☐ Safe Job Procedures

*****These documents are for quick reference and do not substitute thoroughly reading Maxim Mechanical Group Inc's Employee Orientations Package, and relevant Policies. *****

Employee Name (printed):

Orientation Conducted By:

Signature

Signature

4-2 - EMPLOYEE ORIENTATIONS PACKAGE PROCEDURE

PURPOSE

The purpose of this procedure is to define a process for creating our Employee Orientations Package - an essential tool in initial employee orientations and subsequent review of workplace health and safety responsibilities, job hazards assessments, safe work practices, safe job procedures, company requirements, company expectations, employee obligations and employee rights.

SCOPE

The Employee Orientations Package will provide every employee with specific health and safety expectations, prior to commencing their employment obligations.

RESPONSIBILITIES **Health and Safety Representative**

- Assist in the development of corporate health and safety orientation documentation, policies and procedures.
- Coordinate the communication and confirmation of the employee orientations.
- Deliver and communicate employee orientations on the Employee Orientations Package.
- Complete and maintain all documentation related to the orientation progress.

Senior Management

- Review and approve corporate health and safety orientation documentation, policies and procedures, on an annual basis.
- Ensure all company employees receive the appropriate training and workplace specific overviews.

Supervisor

- Upon request by the Health and Safety Coordinator, assist in the development of the corporate health and safety orientation documentation.

Worker

- Advise Supervisor if experiencing any difficulties with assigned tasks, or if assigned tasks are beyond perceived limitations or medically not capable of performing tasks.
- Comply with all the requirements as defined under the *Occupational Health and Safety Act and Regulations*.

PROCEDURE

The Employee Orientations Package (EOP) (4-2-1 - Package) will be developed by the Health and Safety Representative (HSR), Project Managers, and Supervisors.

The EOP will be reviewed on an annual basis to ensure that it meets the requirements of the Health & Safety Program, workplace-specific hazards and the appropriate legislative requirements under the Occupational Health and Safety Act and Regulations.

The EOP must also be reviewed, and when needed revised, to incorporate any changes or additions to workplace activities (new tasks, processes, equipment, chemicals, materials, etc.) and legislative requirements.

The EOP, once reviewed and amended (if necessary), must be approved by Senior Management.

4-2 - EMPLOYEE ORIENTATIONS PACKAGE PROCEDURE

The EOP will include, at a minimum, the following information, documents and packages:

- A. Our Company Health and Safety Policy Statements
- B. Health and Safety Duties & Responsibilities for each Workplace Party
- C. Emergency Preparedness & Response Plan
- D. Early and Safe Return to Work Information
- E. Workplace Task Standards (Job Specific Training - Dependent on Position)
 - Job Hazard Assessments
 - Safe Work Practices
 - Safe Job Procedures

The EOP will be held as a guidance document describing the minimum health and safety expectations needed to work within the workplace.

As a minimum, Employee Orientation delivered using the EOP shall also cover (8.1.1 / 8.1.2):

- Worker rights under the Occupational Health and Safety Act (right to know, right to participate and right to refuse unsafe work);
- Reporting procedures for hazards, unsafe acts/conditions, incidents, injuries, illnesses and near misses;
- Workplace Violence and Harassment Policy and how to report concerns;
- Emergency response procedures, including fire, medical and site-specific emergencies, and the location of first aid facilities and first aiders;
- Personal Protective Equipment (PPE) requirements and instructions on proper use, care and limitations;
- WHMIS training and how to access Safety Data Sheets (SDS);
- Location of the Occupational Health and Safety Policy and the Occupational Health and Safety Act in the workplace;
- Joint Health and Safety Committee (JHSC) or Health and Safety Representative contact information;
- Site-specific hazards, traffic patterns and housekeeping expectations;
- Company safety rules and expectations, including the Progressive Discipline procedure for safety violations.

The EOP will be reviewed by all workplace parties prior to their commencement of work and re-reviewed as changes are made. This training/orientation will be documented for each employee, by completing the Employee Orientation Checklist (4-1-1 – Form) to demonstrate all the information has been received, read and understood by the employee.

New and Young Workers

In addition to the standard Employee Orientation and training requirements described above, new and young workers shall receive:

- Increased supervision during their first 30 days of employment or when assigned to new tasks;
- A gradual introduction to higher-risk tasks (e.g., working at heights, confined space entry, complex equipment) only after demonstrating

4-2 - EMPLOYEE ORIENTATIONS PACKAGE PROCEDURE

competence on lower-risk tasks;

- Support from an experienced worker or mentor, where practicable, who can provide guidance and answer questions;
- Regular check-ins by the Supervisor to verify understanding of hazards, controls and work instructions.

These requirements are applied in conjunction with the Employee Orientation Procedure (4-1) and the Health and Safety Training Procedure & Program (Section 15). Supervisors shall document any additional training, coaching or competency verification for new and young workers on the training record and/or the Employee Orientation Checklist (4-1-1 – Form).

DISTRIBUTION

The EOP will be distributed to all workplace parties. Distribution of the EOP will be completed as follows:

- Initially, during employee meetings.
- Upon Hire – during employee orientation meetings.
- Upon Changes – during Toolbox Safety Talks.
- Made available in all our workplaces.

RECORDS

Upon receiving the EOP each employee will be instructed to sign the acknowledgment portion of the EOP (4-1-1 – Form) located at the back of the package and return it to the Health and Safety Representative.

The Health and Safety Representative will record all completed Employee Orientations on the company training matrix.

Completed Employee Orientation Checklist (4-1-1 – Form), will then be filed by the Health and Safety Representative.

Maxim Mechanical Group Inc

EMPLOYEE ORIENTATION PACKAGE

Last Updated: Jan 2026

Contents

INTRODUCTION	3
1. WORKPLACE RESPONSIBILITIES	4
2. WORKPLACE HAZARDOUS MATERIALS INFORMATION SYSTEM (WHMIS).....	7
3. REPORTING REQUIREMENTS	9
4. WHEN OUTSIDE MEDICAL TREATMENT IS REQUIRED	10
5. RETURN TO WORK (RTW)	10
6. EMERGENCY PROCEDURES	11
7. GENERAL WORKPLACE SAFETY GUIDELINES	13
8. PROGRESSIVE DISCIPLINE POLICY	26
9. ACKNOWLEDGEMENT SHEET (tear-out)	27

INTRODUCTION

These Employee Health and Safety Guidelines are one component of our Health and Safety Program. These principles and guidelines apply to all employees, contractors and subcontractors who perform work on behalf of Maxim Mechanical Group Inc. Maxim)

These guidelines have been developed to help employees understand the duties and responsibilities of the employer, supervisors, and workers in maintaining a proactive, dynamic Health and Safety Program.

The Employee Health and Safety Guidelines also outline the general safe operating principles, which are a major component of our accident/incident prevention mandate. These guidelines are a vehicle for creating health and safety awareness and for assisting in recognizing potential dangers and evaluating their risk.

Once we are aware of a dangerous condition, we can then implement the proper control strategies to prevent contact or exposure to the given hazard or situation. These control principles will be reinforced through general and specific training and education sessions.

As stated in our Health and Safety Policy, we believe that sound health and safety principles, built into all aspects of our operations, will enhance the effectiveness and efficiency of Maxim. Using the concept of the Internal Responsibility System (IRS), through open lines of communication, objective discussions and cooperation between workers, supervisors, and management, the organization's objective of a workplace free of hazards and illnesses can be achieved. As a team, we must work towards controlling and eliminating hazardous situations. This is sound business practice, and it will benefit everyone in the company.

We expect all employees, contractors and subcontractors performing work on behalf of our company to work in compliance with the *Occupational Health and Safety Act* (the Act) and pertinent Regulations and follow these safe operating guidelines and procedures so that a workplace free of hazardous conditions or situations will ensure a safe and healthy working environment.

If you do not understand an issue or topic presented in these guidelines or if you have a health and safety concern, do not hesitate to ask your supervisor for assistance and clarification.

1. WORKPLACE RESPONSIBILITIES

Occupational health and safety is everyone's responsibility.

Under the *Occupational Health and Safety Act*, everyone in the workplace has specific duties to follow to ensure the workplace is healthy and safe. The duties and procedures outlined herein are not to be considered all-inclusive, these roles and responsibilities may change with the evolution of the Health and Safety Program.

1.1 Employer Responsibilities

- Ensure that the Occupational Health and Safety Policy, Program, and safe operating principles are in place and adhered to.
- Provide appropriate equipment, materials and protective devices, and training in their safe use, limitations and care.
- Inform all colleagues about any hazards in the workplace and outline the control strategies which must be implemented to prevent exposure to that danger.
- Acquaint supervisors and workers of the potential hazards associated with physical agents and with the safe storage, transport, use and disposal of physical or chemical agents.
- Ensure that written safe operating procedures outlining measures and practices to be taken or followed for worker protection are available, understood and carried out.
- Conduct training programs for workers, managers, supervisors and Joint Health and Safety Committee members as required.
- Post in the workplace a copy of the *Occupational Health and Safety Act* and pertinent Regulations and/ or information.
- Comply with the standards eliminating or reducing employee exposure to hazardous chemical, physical or biological agents.
- Ensure that emergency response procedures are developed, understood by all staff and training drills are carried out.
- Comply with any orders and requirements of inspectors, directors and other agents from the MOL.



1.2 Supervisor Responsibilities

- Advise workers of the existence of any actual or potential dangers in the workplace.
- Respond to any health and safety concern raised by a worker.
- Investigate all incidents/ accidents and initiate corrective actions to correct the situation or prevent a recurrence.
- Take every precaution reasonable in the circumstances for the protection of a worker.
- Ensure that all workers work in compliance with the Appropriate Provincial Health & Safety Legislation and the Company Health and Safety Program.
- Ensure that work is performed in a safe manner and all required Personal Protective Equipment, devices or clothing, are properly used and maintained.
- Initiate progressive disciplinary action, according to policy.

1.3 Responsibilities of the Health and Safety Representative

Workforce	Minimum Requirements
6-19	Worker representative hired by Senior Management
20-49	Joint Health and Safety Committee (JHSC) with one worker representative hired. One management member appointed by management.
50+	JHSC with at least two workers elected (by workers). At least two management members appointed by management. One management and one worker member must be Certified by the Workplace Safety and Insurance Board (Ontario).

When a project has greater than five workers, but less than twenty, a Health and Safety Representative (HSR) is required. This worker must not exercise managerial functions.

The Health and Safety Representative (or if applicable, Joint Health and Safety Committee) will be actively involved in the following activities:

- Promoting workplace health and safety.
- Conducting workplace inspections and investigations when required.
- Identifying unsafe acts, situations and conditions.
- Making recommendations to management and workers for the improvement of workplace health and safety.
- Assisting in the development, implementation and maintenance of the Health and Safety Program.
- Participating in regular committee meetings.
- Assisting supervisors and/or the Location Safety Coordinator in delivering safety awareness training sessions.

Make sure you know your HSR. Remember that health and safety concerns should first be addressed with your supervisor.

1.4 Worker's Rights and Responsibilities

- **Right to know** - of the potential or actual hazards
- **Right to participate** - in workplace health and safety
- **Right to refuse work** - which could adversely affect their health and safety **OR** where workplace violence is likely to put their physical well-being at risk



Worker's Responsibilities:

- Work in compliance with the Appropriate Provincial Health & Safety Legislation and the Company Health and Safety Program.
- Report unsafe acts and conditions, including workplace violence and/or harassment to supervisors and HSR.
- Immediately report to your supervisor all work related incidents, accidents or illnesses and any medical attention sought for a work-related injury.
- Conduct work in a safe manner, using and maintaining all required Personal Protective Equipment, devices or clothing.
- Shall not remove, modify, or make ineffective any guard or protective device or control system.

- Shall not operate any equipment, vehicle or device that they have not been trained and authorized to use.
- Shall work in a manner that will not endanger themselves or any other employee. This includes engaging in pranks, contests, feats of strength, unnecessary running or rough and boisterous conduct.

1.5 Addressing Health & Safety Concerns

- Workers are required to report their Health & Safety concerns to their supervisor to ensure that their Health & Safety concerns are addressed in a timely and suitable manner.
- Communication between workers and supervisors is imperative to establishing and maintaining a safe and healthy workplace.

1.6 Worker's Right to Refuse Unsafe Work

- A worker may refuse to work where the worker has reason to believe that:
 - a. Any equipment, machine, device or thing he/ she are to use or operate is likely to endanger themselves or another worker,
 - b. The physical condition of the workplace or the part thereof in which he or she works or is to work is likely to endanger themselves,
 - c. Workplace violence is likely to endanger themselves, or
 - d. Any equipment, machine, device or thing he or she is to use or operate or the physical condition of the workplace or the part thereof in which he or she works or is to work is in contravention of Health and Safety Legislation and such contravention is likely to endanger himself, herself or another worker.

Steps to be taken:

1. Worker refuses to work and immediately notifies supervisor of the reasons.
2. The supervisor will investigate, in the presence of the worker and the health and safety representative (or JHSC worker representative).
3. Worker remains in a safe place near workstation and be available for questioning while all attempts are made to resolve the perceived problem
4. If problem is resolved to the workers' satisfaction, he/ she returns to work.
5. If not resolved and worker continues to refuse work, another worker may be asked to perform the same task.

Note: Another worker may be asked to perform the job, only if that worker is advised of the refusal to work and circumstances, in the presence of the worker safety representative selected by the trade union that represents the worker.

6. The Governing Authority investigates the refusal in consultation with the worker, employer, supervisor and the health and safety representative (or JHSC worker representative).
7. Pending the outcome of the investigation, the worker may NOT be sent home or disciplined for his/ her actions.
8. A decision will be made in writing and provided to all parties.\
9. An investigation report must be completed and provided to all applicable parties.

2. WORKPLACE HAZARDOUS MATERIALS INFORMATION SYSTEM (WHMIS)

2.1 The Right to Know

The purpose of WHMIS is to reduce workplace illness and injury by increasing worker awareness and understanding of the hazards associated with chemical or physical agent exposure.

Each employee who handles or works in proximity to a hazardous material or has a potential for exposure will receive training regarding the potential hazards of exposure.



We will provide WHMIS training for all our workers. This training will enable everyone to work safely and prevent possible injuries.

All Safety Data Sheets (SDS) for products being used by our workers will be maintained at head office provided to the contractors (for whom we are performing work) and all supervisors will maintain copies of SDSs on site.

If you are uncertain how to work safely with a hazardous chemical or physical agent, ask your supervisor for assistance. WHMIS symbols are found on Supplier Labels. Read the label before using the material. Workplace Labels must be applied when materials are put into a secondary container.

Note:

- When dispensing hazardous materials follow safe operating procedures and use the controls (ventilation, PPE, etc.) required for the task.
- When dispensing flammable liquids, ground and bond all containers, drums, etc. with approved ground straps.
- Use “approved” containers, with proper labels, for storing, transporting or disposing of hazardous materials.
- Dispose of hazardous materials in the prescribed manner.

The WHMIS hazard symbols identify the hazards according to the criteria for 6 classes (Class A to F). One or more hazard symbols may appear on the supplier label depending upon the classes of hazard into which the controlled product falls.

2.2 WHMIS Classes

	Exploding bomb (for explosion or reactivity hazards)		Flame (for fire hazards)		Flame over circle (for oxidizing hazards)
	Gas cylinder (for gases under pressure)		Corrosion (for corrosive damage to metals, as well as skin, eyes)		Skull and Crossbones (can cause death or toxicity with short exposure to small amounts)
	Health hazard (may cause or suspected of causing serious health effects)		Exclamation mark (may cause less serious health effects or damage the ozone layer*)		Environment* (may cause damage to the aquatic environment)
	Biohazardous Infectious Materials (for organisms or toxins that can cause diseases in people or animals)				

* The GHS system also defines an Environmental hazards group. This group (and its classes) was not adopted in WHMIS 2015. However, you may see the environmental classes listed on labels and Safety Data Sheets (SDSs). Including information about environmental hazards is allowed by WHMIS 2015.

Supplier WHMIS Label/ Workplace WHMIS Label

A Supplier Label requires:

1. Appropriate Risk, Precaution and First Aid statements in English and French
2. The WHMIS Striped Border
3. The Product Name
4. The Supplier Name
5. One or more of the Eight Hazard Symbols
6. A reference to the Material Safety Data Sheet

Note: Additional information can be placed on the label, i.e. Directions for Use, if it appears outside of the striped border.

3. REPORTING REQUIREMENTS

In the event of a medical injury, fire, chemical spill or other emergency, prompt reporting of the situation is essential. Workers must follow facility and/or site-specific reporting requirements to ensure that appropriate emergency services can be notified immediately.

In the event of a medical injury, assist as you are able. In the event of a fire or spill, leave the hazard area. In any case - contacting the trained responding parties is paramount to employee health and safety.

3.1 Unsafe Acts/ Conditions

Report to your supervisor immediately any unsafe acts or conditions (i.e. defective equipment, unsafe practices or hazardous situations, etc.) that may have the potential to cause injury or damage.

3.2 Incident/ Accident

In the event of an incident (near miss)/ accident, please advise your supervisor immediately.

Workplace Violence

Acts of violence by our workers with other workers, supervisors, contractors or the public will result in the summoning of the police and permanent expulsion from our project or facility. Any adverse contact or potentially violent situations by workers, contractors or the public must be reported immediately to your supervisor.

Workplace Harassment

Acts of harassment by our workers with other workers, supervisors, contractors or the public will result in permanent expulsion from our project or facility. These situations must be reported immediately to your supervisor.

Accidents as well as incidents, including, near misses, workplace violence and harassment, will be investigated by the supervisor to determine the causes and corrective actions will be introduced to prevent a similar occurrence.

3.3 Injury/ Illnesses

Report all injuries/illnesses to your or another Supervisor **IMMEDIATELY! NO MATTER HOW SLIGHT**. Supervisors and First Aid personnel will ensure that the injured worker receives prompt and proper treatment

First aid is to be administered by trained personnel only.

3.4 First Aid

A list of all First Aid Trained personnel can be found on the Safety Bulletin Board, along with locations of all first aid kits. **Know who your First Aiders are!**



4. WHEN OUTSIDE MEDICAL TREATMENT IS REQUIRED

4.1 The Supervisor will:

- Ensure that the workers are transported promptly to the appropriate medical facility (i.e. hospital, clinic or doctor's office)
- If the situation permits, complete and give to the injured worker an "Injured Worker Treatment Package"

4.2 The Worker will:

- Take this package to the health care professional and report the outcome to their supervisor immediately following treatment or as soon as possible thereafter.
- When seeking medical attention outside of normal working hours, follow the above procedure if possible and report to your supervisor as soon as possible (at the start of your next shift).



5. RETURN TO WORK (RTW)

Maxim will make every reasonable effort to accommodate injured workers

When a workplace injury/illness prevents an employee from performing their regular job, Maxim will work closely with the employee, Health Care Professional and WSIB to develop a modified job which will allow the employee to return safely to their pre-injury job as quickly as is proper and practical.

The worker's co-operation is required

You can assist in the Return-to-Work Program by:

- Discussing the Company's program with the Health Care Professional.
- Ensuring that the Health Care Professional understands the modified jobs available and your willingness to participate
- Maintaining contact with the Company
- Assisting the Company in identifying appropriate modified work
- Extending your best effort in performing the modified work




6. EMERGENCY PROCEDURES

6.1 Evacuation Plan

When You Hear a Fire Alarm:

1. REMAIN CALM
2. Turn the power switch to your machine off (if safe to do so)
3. Leave the building by the nearest safe exit, closing doors behind you
4. Report to your grouping area immediately for roll call
5. Report your observations to your supervisor
6. Remain at the designated grouping area until further advised

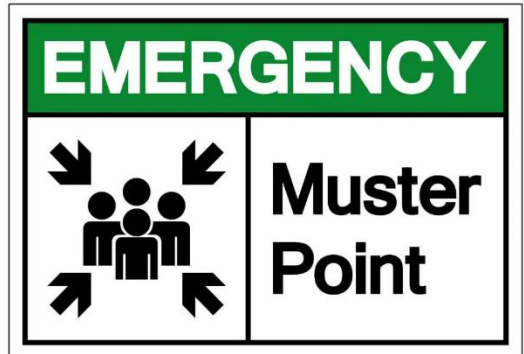

NEVER.

Re-enter a fire area or the building until given authorization

6.2 In Case of a Medical Emergency

If You Observe a Medical Emergency:

1. Assess the situation - ensure your safety
2. Get assistance - alert nearest trained first aider or the supervisor (identify the exact location and nature of the emergency)
3. If trained, administer necessary first aid
4. If not trained, assist as possible - do not leave the victim



FIRST AID WILL BE PROVIDED

EMERGENCY SERVICES WILL BE CONTACTED AND
DIRECTED TO SCENE AS REQUIRED

OTHER WORKERS MUST:

1. Assist as requested by first aid/emergency personnel
2. Stay clear of activities
3. Proceed to designated grouping area

**INJURED EMPLOYEE STATUS AND FURTHER DIRECTION WILL BE PROVIDED AS IT
BECOMES AVAILABLE**

6.3 In Case of Fire

If You Detect a Fire:

1. Back away
2. Alert co-workers to evacuate area
3. Evacuate area, closing doors behind you
4. Sound alarm
5. Evacuate building by nearest safe exit
6. Proceed to designated grouping area for roll call
7. Advise supervisor of observations, area of fire, etc.
8. Remain at designated grouping area until further advised




If You Hear an Alarm:

1. Evacuate building by nearest safe exit, closing doors behind you
2. Proceed to designated grouping area for roll call
3. Advise supervisor of observations, area of fire, etc.

REMAIN AT DESIGNATED GROUPING AREA UNTIL FURTHER ADVISED

IF YOU NEED TO USE A FIRE EXTINGUISHER follow the instructions below. Directions are also posted on the fire extinguishers if you need to be reminded.

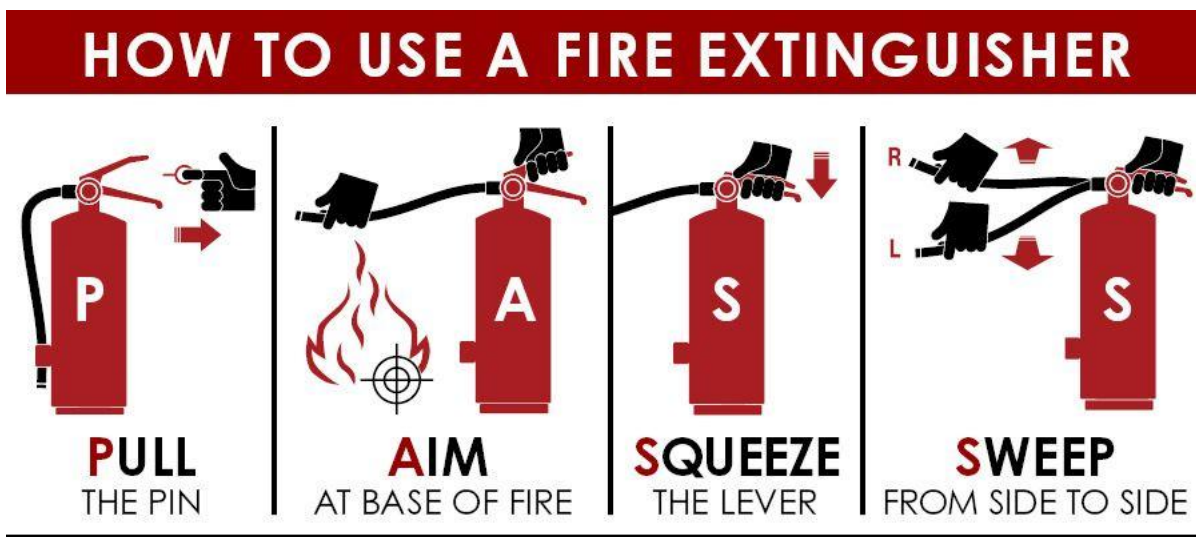

6.4 In Case of a Hazardous Spill/ Release

If You Detect a Hazardous Spill/ Release:

1. Back away
2. Alert co-workers to evacuate area
3. Assess the scene - do not enter area
4. Evacuate hazard area
5. Alert supervisor or the emergency response coordinator/team member and advise of observations, area of spill, etc.
6. Proceed to designated grouping area
7. Await further instructions

If You Are Informed of a Hazardous Spill/ Release:

1. Ensure that all workers in your area are made aware and then proceed to
2. Evacuate building by nearest or alternate exit
3. Advise supervisor of observations, area of spill, etc.
4. Proceed to designated grouping area for roll call
5. Await further instructions



7. GENERAL WORKPLACE SAFETY GUIDELINES

Every employee is responsible for workplace Health and Safety - be active and assist in making your workplace a safer place to work.

The following information pertains to safe working principles, which shall be followed by everyone in the workplace, including employees, contractors, subcontractors and visitors.

- Report any injuries or workplace hazards to your supervisors immediately.
- Work safely and always adhere to safe operating principles and procedures.
- Before carrying out any task, ensure that you are familiar with the process and that you are using the necessary controls for safe operations.
- If you are unfamiliar with the assigned task or have a health and safety concern, contact your supervisor.
- Follow all posted health and safety notices and warnings.
- Keep aisles and all work areas clean and free of debris. It is the responsibility of each employee to keep their work area clean and safe.
- All materials, equipment, and tools must be stored in such a manner that they will not tip, fall or collapse.
- Long hair must be suitably confined and jewelry or clothing that is loose or dangling shall not be worn in case of entanglement. (where applicable).
- Walk - do not run - while in or around the workplace. Use the appropriate routes provided to and from your work areas.
- Always watch for vehicular traffic and mobile equipment and communicate with the operators if necessary – “see and be seen”.

- Always Wear the appropriate Personal Protective Equipment (PPE).
- Store and eat food in designated areas only.
- Keep your attention on the task you are performing. Be alert to your surroundings.
- Do not disturb or distract your fellow workers while they are performing their job.
- Passengers are not permitted on powered equipment unless the equipment is equipped with a seat.

7.1 Personal Protective Equipment (PPE)

The following requirements apply to all employees, contractors and subcontractors. Workers will receive instruction and training regarding the limitations of the equipment or device and the proper use, fitting, care and maintenance of the equipment or device.

7.1.1 Protective Clothing

Work apparel shall consist of appropriate clothing, which will sufficiently protect the workers in their work environment. Examples of appropriate clothing in plant, yard and sites include but are not limited to:

- Trousers shall extend down to the ankles.
- No shorts are allowed.
- Shirts shall cover the complete torso and be capable of being tucked in the trousers. The sleeves should cover the arms at least three inches below the shoulders and be tight enough to protect the under arm.
- Tank tops, muscle shirts and net shirts are not acceptable. However, standard coveralls when properly done up are acceptable.
- When required wear high visibility apparel.



7.1.2 Safety Footwear

- Company approved safety footwear must be always worn in designated areas. Safety footwear must be CSA approved - Grade 1 (Green Triangular Patch and Omega sign), as a minimum.

7.1.3 Safety Eyewear

- CSA approved protective eyewear (safety glasses with plastic or hardened lenses and side shields) must be always worn when entering designated areas or performing operations that pose a hazard.
- Eye and face protection for hazards such as welding, chipping concrete or slag, vibrating concrete, handling chemicals, etc. will be required.

7.1.4 Safety Headwear

- Company approved protective headwear might be requested to be worn when entering designated areas.

7.1.5 Hearing Protection

- Wear hearing protection in designated areas and where noise levels exceed 85 dB (i.e. sawing, drilling). For instance, if you cannot hold a normal conversation (without shouting) at about 3 to 4 feet, due to noise, then hearing protection should be worn.

7.1.6 Hand Protection

- Suitable gloves should be worn when handling rough, sharp or abrasive materials.
- Persons administering First-Aid must wear disposable gloves whenever attending to an injured person.

7.1.7 Guardrails and Floor Openings

- Where there is a possibility of a worker falling from one level to another or more than 2.4 metres, guardrails must be provided (i.e. Work platforms-scaffolds, floor openings, stairs, ramps).
- If you notice guardrails are missing around any opening in your work area, you must notify your supervisor of the condition immediately.
- Guardrails must consist of a top rail, intermediate rail and toe-board.
- Guardrails removed temporarily for the purpose of doing work must be replaced immediately after work is completed and/or before you leave the area. While working with the guardrails removed you must protect yourself from falling (e.g. Fall protection/cover opening).
- If you are unsure how to re-install guard railing in a safe manner, notify your supervisor.

7.1.8 Fall Protection

- When in danger of falling 3 meters or more, into/onto a hazardous substance or object, water or another liquid and/ or into operating machinery, adequate Fall Protection System must be utilized.
- This system must include a CSA approved full body harness a shock absorbing lanyard, rope grab device, attached to a secured point and/or lifeline. This must be done in accordance with the manufacture's specifications.
- No work shall be done at heights unless training in Fall Protection has been received and you have been authorized to do the work.
- Always follow established company procedures for working at height.

**7.2 Equipment/ Machinery**


- Only trained, authorized personnel are allowed to operate machinery or equipment and perform maintenance.
- When authorized persons are cleaning, setting up or making adjustments to machinery or equipment, they must ensure that the equipment is tagged/locked out
- Before starting a machine or power tool, ensure guards and safety devices are in place, adjusted and functioning properly and it is safe to start up the equipment. No one is to make any protective guarding ineffective.
- Do not use defective equipment or machinery, inform your supervisor immediately and your supervisor will arrange for the equipment or machinery to be serviced.
- Do not attempt to clear jammed machinery without first shutting off power (according to established procedures).
- Keep machines and equipment clean and report any leaks or other noticeable defects.
- If you are not familiar with the safe use of any machinery, tools or equipment, ask your supervisor for assistance prior to starting.



- Personal vehicles should not be used in operation areas unless permission to do so has been obtained.
- Drivers must carry a valid driver's license, operating ticket, and/ or Commercial Driver's License (CDL) as required for the vehicle being operated.
- Do not drive while under the influence of drugs or alcohol.
- Drive company vehicles professionally and in accordance with traffic laws.
- Do not drive a vehicle or equipment unless you are authorized to do so.
- Seatbelts must be worn by operators in vehicles/equipment when in use.
- Passengers must have a seat and seatbelt to ride in/ on a vehicle or equipment.
- Employees must not be transported if there is no passenger seat.
- Do not ride on forks, a load, rigging, hook, bucket, shovel, and and/ or in a pickup bed.
- Refer to the owner's manual for safety and maintenance information specific to the vehicle or equipment.
- Check that personnel have moved away from the vehicle before moving.
- .
- Look to the back and to both sides before backing up.
- Back up vehicles slowly and with caution
- Look in the direction of travel when you begin to move.
- Use a spotter or signal person to direct you when moving a vehicle or piece of equipment in high traffic areas, when visibility is limited or when backing up. A spotter/ signal person shall also be used to direct you around objects/ obstacles in "tight quarters". Agree on the signals to be used before moving the vehicle.
- Regularly monitor gauges while operating the vehicle or equipment.
- Obey traffic signs and regulations when operating a motorized vehicle.
- Drive within the posted speed limits or at a safe speed based on driving conditions.
- Focus on the work you are performing.
- Maintain an awareness of vehicles/ equipment and personnel around the vehicle/ equipment you are operating.
- Stunt driving and horseplay are not permitted.
- Do not stand or pass under elevated forks (unloaded) or an elevated load.
- Maintain control of the equipment, do not coast downhill.
- Secure equipment and tolls before moving the mobile equipment.
- Do not drive over power conductors or drag loads over power conductors unless the conductors are properly bridged or otherwise protected.
- When operating mobile equipment, avoid standing water, debris on the road, spilled material, or other potential hazards.

7.4 Stopping and Parking Mobile Equipment

- Park in a legal, safe area that does not obstruct traffic, preferably on a level surface (when possible). If obstruction is unavoidable, set up traffic control to route traffic away from the parked vehicle/ equipment.
- If it is necessary to park on a slope, park with the wheels turned into a bank/ berm or block the wheels.
- Put gears into neutral or park and emergency brakes.
- If the vehicle/equipment is equipped with a transmission lock, it shall be engaged when the vehicle/equipment is parked.
- Drop hydraulic attachments to the ground.
- Dismount the equipment in a safe manner using the 3-point contact system.
- Remove the ignition keys and lock the doors before leaving the vehicle.
- Use flashers, flares or other visual warning devices when broken-down equipment is parked near or on a road and is a potential hazard.

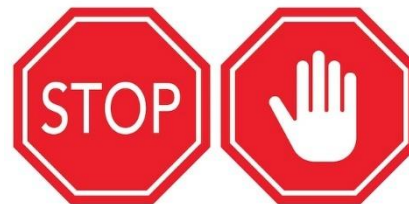

7.5 Cellular Telephone Use

- Unless exceptional circumstances exist, avoid using wireless devices while operating or working on company time.
- No cell phones on the worksite floor unless directed by your supervisor
- While driving on behalf of the company only hands-free devices are allowed.
- Turn the cellular telephones off while in potentially explosive atmospheres.



7.6 Reporting Accidents

- Stop your vehicle immediately.
- Do not leave the scene of an accident Call 911 if required.
- Do not move injured persons unnecessarily. Unskilled handling may cause minor injuries to become serious.
- Report the accident as soon as possible to your supervisor.

7.7 Compressed Air

- Check splices and connections in air hoses prior to use and report unsafe conditions.
- Never, under any condition, use compressed air to cool yourself or blow dust or other substances from clothing, body parts, equipment or the work area.
- Compressed air should never be directed towards any other person.
- Eye protection must be worn when using compressed air.

7.8 Compressed Gas Cylinders

- Do not store, transport or move cylinders in a horizontal position.
- When lifting cylinders by hoisting equipment, a basket, cradle or similar approved device shall be used. Never lift a cylinder by its cap or with hooks ropes or slings.
- Full and empty cylinders must be strapped or chained firmly in place.
- Protective caps over the valve must be secured in place when the cylinder is not in use.
- Open valves slowly and completely.
- Never force a valve with a hammer or other tool.
- When not in use all valves should be turned off.



7.9 Welding and Cutting

- Welding equipment shall be used only by authorized personnel, and all required PPE shall be used.
- Only approved equipment in good condition shall be used, and any defects must be reported immediately. Frequent inspections should be carried out.
- Oxy acetylene torches must be equipped with a flash back arrestor and check valves.
- Adequate ventilation must be provided
- Precautions must be taken prior to welding or cutting in dusty or gaseous locations.
- The area in which welding is being done should be clear of combustibles, screened off where applicable and have suitable fire extinguishers conveniently located.
- Never disconnect welder power source by means of the welding plug receptacle unless the system has been de-energized and the Lock-Out and Tag-Out Procedure has been followed.
- Cylinders should be handled with care and secured in an upright position. They should be stored neatly, with empty cylinder stored separately and clearly marked.
- Hoses and cables must be protected from any possibility of damage. In some cases, it may be necessary to suspend them.
- Special care must also be used when working in confined spaces. All entries shall be made in conformance with the legal requirements and our established procedures. Special clothing should be worn, preferably fireproofed, but wool is acceptable.
- Never feed oxygen from the cylinder into a confined space.
- Welding or cutting must not be done on containers that have held flammable or poisonous substances until they have been thoroughly cleaned and safeguarded.
- When cutting, protect cylinders, hoses, legs and feet from torch flames and any molten steel and slag.
- Put stub ends of welding rods in a suitable refuse container.
- Never allow oil or grease to come in contact with oxygen, oxy-acetylene, equipment or hoses.
- Always remove an oxy-acetylene torch from a confined space when not in use.



7.10 Power and Handheld Tools

- Keep tools, equipment and materials orderly. There should be a place for everything and everything should be kept in its place.
- Handheld tools must be inspected prior to each use. Never use tools or equipment with defective or worn parts and report all defects to your supervisor.
- Keep handheld tools free of grease and oil to ensure that they can be handled properly.
- Tools with “mushroomed” heads are dangerous and must be replaced.
- Do not carry sharp-edge or pointed tools in your pockets.
- Use tools that are of the proper size
- Pull on wrenches and do not push
- Use tools only for the purpose for which they are intended
- All portable power tools must be equipped with a 3-pronged plug, and be properly grounded, or be of an approved double-insulated type.



- Never place any tool or other loose object on stairways, catwalk tops of stepladders or any other position where they can fall and injure someone below, or cause a trip.
- Do not drop or throw tools or other materials from a ladder or other heights.

7.10.1 Circular Saws

- Ensure blade guard is in place and working
- Do not let the blade bind
- Use the correct type of blade
- Make sure blade is tight in arbour
- Use firm support for your work
- Ensure there is no obstructions



7.10.2 Chop Saws

- Use firm support for your work
- Ensure there is no obstructions
- Ensure that the saw has a working guard on the blade.
- Never hold materials in place with your hands where the blades will pass
- Maintain control by always keeping two hands on the saw when it's running.
- Avoid using the saw when you are in an awkward position or off-balance.
- Only use disks for the materials they are designed to cut.
- Do not apply excessive pressure when cutting.
- Replace damaged disks immediately.

7.11 Safe Lifting Principles and Back Care

Improper lifting and/or bending techniques can cause strains and sprains. When possible, always use material handling equipment first (i.e. cranes, lift trucks, hand pump trucks, dollies or trolleys). If you are unsure of how to lift, handle or move an object safely or it is too heavy or bulky, ask for assistance.

7.11.1 Safe Lifting Techniques

When material handling equipment cannot be used, the following shall be followed:

- Assess the load (size, shape, weight, etc.)
- Assess the route for slip, trip and fall hazards.
- Keep your feet about shoulder width apart with one foot slightly forward for better balance
- Tuck chin onto chest and keep the elbows as close to the body as possible
- Tilt the object forward to test its weight
- Get a good grip and hold the object close to your body
- Keep lower back in its normal curved position and use your legs to lift.
- Turn with your feet - do not twist at the waist
- When possible, push rather than pull
- When performing lifts with more than one worker, communicate lifting commands. Lift and lower the load in unison.



7.12 Traffic Control

- Any worker who may be endangered by vehicular traffic, must protect themselves by:
 - Using proper PPE, including a vest that is reflective fluorescent and coloured red or orange
 - Placing warning signs, barriers, lane control devices, flashing lights or flares
 - Using appropriate signs to direct traffic
- Workers required to direct traffic must be competent and shall not perform any other work while directing traffic.
- Supervisor will be required to define the system (jobs specific) to be used for vehicular traffic control.

7.13 Lift Trucks

- Circle check your mobile powered equipment at the start of each shift.
- Travel at safe speeds always.
- Operators must obey all in-plant and yard traffic rules and signs. Remember that pedestrians always have the right of way.
- When approaching blind corners, stop, sound your horn and proceed with caution.
- Always maintain a clear view of your route, when this is not possible, use a competent signal person to assist you or if the load is too high to see over - drive in reverse.
- When traveling, maintain your forks in the lowered position
- Do not exceed lifting limitations of equipment (as identified on rating plate).
- Passengers are not allowed on powered equipment.
- When the lift truck is not in use, the following must be done:
 - park the vehicle in a safe location
 - shut off power
 - apply the hand brake
 - place the forks in the lowered position
 - remove the key
- Battery charging should only be performed by trained and authorized personnel. Safety procedures must be always followed.

**7.14 Elevating Work Platforms**

- Only trained and authorized persons may operate elevating work platforms.
- Must be inspected by a competent worker prior to use each day
- Must be equipped with guardrails
- Must only be used on firm level surfaces
- Never move an elevating work platform unless all workers on the platform are using proper fall protection equipment attached to the platform
- Always ensure that the manufacture's operating manual is on the site and readily available for your reference

7.15 Material Storage, Transfer and Disposal

- All materials are to be stored in an organized manner and in their designated storage area.
- When storing materials, as appropriate, light loads are to be placed on the upper shelves and the heavier loads on the lower shelves.

- Store hazardous materials in their appropriate location.
- Materials are to be stored in such a manner that they will not tip, fall or collapse.
- Access must be maintained to all emergency equipment, fire exits, electrical disconnect panels/boxes and aisles.
- Objects or materials, including scrap, are not to be protruding into aisle-ways or overhead into work areas.

7.16 Ladders

Only use ladders approved by your supervisor

The following ladder safety rules should be remembered each time a ladder is used:

- Never use defective ladders. Check rungs, rails, feet, etc. prior to each use
- Always stand ladders on a solid base
- Secure the ladder to prevent lateral movement
- Do not overextend your balance - move the ladder as is necessary
- Do not stand on the top step of a ladder
- All ladders must have safety feet, in good repair, appropriate for the surface
- Ladders are to be stored in a secure location
- Never paint ladders as this hides cracks and other defects
- Never carry items in either hand when ascending or descending a ladder. Hoist materials separately or carry tools attached to your belt
- Always face the ladder and maintain three-point contact
- Long ladders should be carried by two people. When carrying a ladder, raise the front end to prevent striking someone in front of you or coming around a corner
- Warehouse ladders must have a proper locking device and easy rolling wheels
- Do not use boxes, chairs, shelves, etc. in place of a ladder or appropriate step stool
- For jobs that require specific “ladders”, please see your supervisor.



7.16 Housekeeping

- All floors, aisles, stairways, exits, and access to emergency equipment are to be always kept clean and free of obstructions.
- Each employee is responsible for maintaining and cleaning their work area daily (more frequently if necessary).
- Wear appropriate PPE (i.e. cut resistant gloves, eye protection)
- All housekeeping must be done according to department specific requirements.




7.17 Fire Prevention and Protection

- Do not tamper with fire extinguishers, emergency equipment and/or block emergency exits, signs in the workplace or fire routes in the parking areas.
- When conducting open flame operations, ensure that fire extinguishers are readily available.
- Obey “No Smoking” signs.
- Do not use flammable materials where there is a potential heat source. Use in a well-ventilated area.
- If a fire extinguisher or other piece of emergency equipment has been used or if this

equipment is defective this information must be reported to your supervisor immediately for corrective actions.

7.18 Cranes and Hoisting

- Only trained and certified workers shall operate cranes or hoisting devices.
- Logbooks shall be maintained.
- Never attempt to lift loads more than the load rating capacity.
- Never use the bucket, basket, load, forks, hook, or sling as a workplace.
- Suspended loads are not to be passed over workers; it is the responsibility of both the operator and the workers.
- Do not perform work under suspended loads
- Do not pass between swinging loads and fixed objects.
- Keep clear of pinch points.
- Maintain control of loads/equipment being raised/lowered, use tag lines if necessary.
- When necessary, use barricading devices to control pedestrian traffic in or near hoisting areas.
- No object including the crane boom or loads are to be brought closer to an energized overhead electrical conductor with a nominal phase-to-phase rating as set out below.

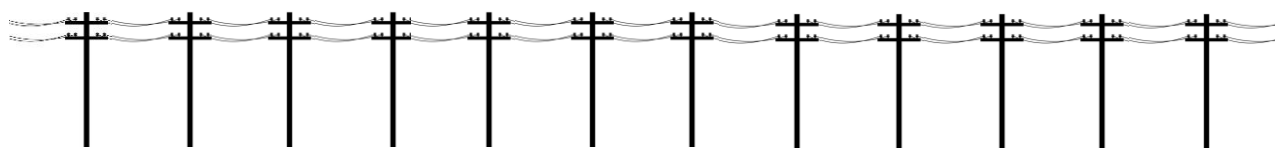

Voltage Rating	Minimum Distance
750 to 150,000 volts	3 metres (10 feet)
More than 150,000 to 250,000 volts	4.5 metres (15 feet)
More than 250,000 volts	6 metres (20 feet)

- When unsure, always assume that electrical power lines are live.
- Where required, a signal person shall maintain radio communication with the operator of the crane and/or use standard hand signals to assist the crane operator. If at any point in time, communications are lost between the crane operator and the signal person, the operator must halt the operation until communications are restored
- Signal persons must only perform signalling duties during hoisting
- Included in the appendix of these guidelines are the standard hand signals to be used by company employees

7.19 Electrical Safety

No worker shall connect, maintain or modify electrical equipment or installations unless the worker is a certified electrician under the Trades Qualification and Apprenticeship Act or the worker is otherwise permitted to connect maintain or modify electrical equipment or installations under the Trades Qualifications and Apprenticeship Act

- Electrical work may only be performed by trained and authorized personnel.
- Prior to performing any maintenance or repairs on electrical equipment, authorization must be maintained and lock-out procedures followed to ensure de-energization of actual or potential sources of energy.
- **NO LIVE WORK on or near electrical equipment installations or conductors** (Live Work may only be acceptable in **extreme cases** if written procedures are in place for the

protection of the workers and the conditions of all safety regulations pertaining to live work have been met and furthermore, permission has been granted by the Site Supervisor).

- Report defective electrical equipment to your supervisor immediately.
- Access into electrical rooms and equipment is restricted to authorized personnel.
- Electrical panels and disconnects must not be covered by an object.
- All electrical cords and equipment must be effectively grounded or double insulated.
- Extension cords must be inspected and maintained in proper working order.
- Ground Fault Circuit Interrupters (GFCI) must be used outdoors or in damp locations.
- Overhead energized electrical conductors must be identified with the appropriate signage.



7.20 Confined Space

- Only trained and authorized personnel may enter a confined space and must **follow** established procedures for entry and rescue.

7.20.1 Definition

- "Confined Space" means a space in which, because of its construction, location, contents or work activity therein, the accumulation of a hazardous gas, vapour, dust or fume or the creation of an oxygen-deficient atmosphere may occur.

7.20.2 Confined Spaces may include:

- Hoppers
- Sewers
- Silos
- Bins
- Pits/ Trenches



7.20.3 Supervisors will:


- Identify and authorize when and where work requires the entry into a confined space.
- Appoint a competent person to supervise the operation

7.21 Lock-out/ Zero Energy Requirements

- Only trained and authorized personnel are to perform lockouts.
- A specific procedure must be prepared to ensure the health and safety of all workers affected by or required to lock-out, block-out, and/ or blank-off a potential source of energy or work with live electrical components.

7.21.1 Definition:

- "Energy Control" - means to neutralize all potential sources of energy or power in the equipment/machinery worked on. No part of the equipment should be capable of inadvertent activation or movement, which may lead to personal injury. Removing a fuse, closing a valve or turning a switch is not an acceptable isolation from the energy source.

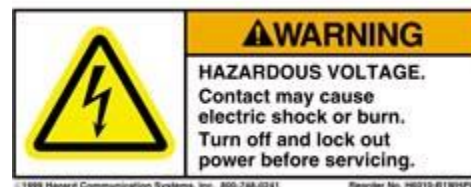

7.21.2 Be Aware of All Potential Energy Sources:

- Hydraulic
- Pneumatic
- Thermal
- Electrical
- Gravitational
- Residual Chemical
- Radiation
 - It is the responsibility of the person conducting the lock-out and their supervisor to identify when and where the work may require the de-energization and isolation of an energy source.
 - The supervisor must also identify how the sources of energy will be de-energized, brought to a zero-energy state and locked out of service.
 - Under no circumstances shall a worker remove any lock and tag other than their own.

7.22 Prescription Drugs and Non-Prescription Substances

If you are using prescription or over-the-counter drugs, which would affect your ability to work safely notify your supervisor prior to starting work and an appropriate workplan will be arranged. Preferably use “non-drowsy” over-the-counter medication.

Drugs and Alcohol

Reporting to work under the influence of drugs or alcohol and/or the consumption or use of alcohol or illegal drugs will not be permitted anywhere in the facility/project, on company property and/or while operating company owned vehicles.

Infractions may result in the termination of employment.



NO DRUGS

7.23 Temperature Extremes

Hot Weather during hot/humid weather conditions, it is important to take the following precautions:



- Wear clothing that will keep you cool
- Drink plenty of water to ensure that you remain hydrated
- When a heat alert is in effect, take frequent breaks to remain cool
- Prevent extended exposure to the sun by wearing clothing to cover the skin and utilizing sunscreen with high UV protection.
- Please contact supervisor if you feel that heat is becoming an issue.

Cold Weather during cold weather conditions, it is important to wear:

- Layered clothing
- Clothing that will keep you warm
- Clothing that provides protection from wind and water
- When wind chill exposure is a factor, ensure that skin exposure is limited to the elements (cover your ears, fingers, face, etc.) and do not stay out in the elements for prolonged periods of time.



7.24 Visitor's Policy

At Maxim Occupational Health and Safety is an integral part of our business and we expect that all visitors will join us in our efforts to make each and every day a safe one. The Company, in conjunction with the Health and Safety Rep will work hard to meet our obligations under the *Occupational Health and Safety Act* have developed the following policy to protect the health and safety of our visitors.

This policy applies to all contractors, suppliers, inspectors and visitors of Maxim Mechanical To ensure that our employees and guests health and safety is not compromised, the following minimum standards must be followed:

- Everyone that comes into the building that is not an employee must sign in.
- Wear required Personal Protective Equipment
- Stay with your host and keep out of restricted areas
- Be alert and yield to vehicular traffic
- Obey all posted signs and warnings
- There is no smoking except in specific designated locations
- Do not touch or interfere with process or plant equipment
- Watch for moving equipment/ vehicles

CONTRACTORS/ SUPPLIERS/CONSULTANTS/OTHERS:

All visitors to our site including but not limited to contractors, suppliers, or consultants are required to wear the appropriate PPE as per our Safety policy. It is the responsibility of the Maxim employee who contracts the service or purchases the material to ensure compliance.

7.25 Office Safety

- Workstations (desks, chairs, computers, etc.) should be adaptable and adjusted to suit the user. Where possible, the work area should be positioned to prevent glare on terminals and accommodate operator access and mobility.
- Do not remain in one position for extended periods. To reduce fatigue and stress take regular exercise breaks; walk around, stretch the fingers, hands, arms, neck and back and refocus your eyes.
- Use task lighting when reading or other "fine" work is being performed. Report flickering fluorescent lights.
- The distance between written documents, the screen and the operator's eyes should be the same to prevent the need for refocusing the eyes, which causes eye strain and fatigue.
- The work surface should be kept clear of excess materials.
- Waste baskets, files, boxes and other office equipment should be kept out of walkways. Broken tiles, loose rugs or carpets and extension cords are to be repaired/ secured so they do not present a tripping hazard.
- Be cautious of hot surfaces and shock potential when operating/ servicing equipment.
- Wipe up any spilled liquids, which could pose a slipping hazard.
- Filing cabinets - heavy contents are to be stored on the bottom shelves to prevent tipping. Always fill bottom shelves first.
- Desk and file drawers should be easy to open but must remain closed when not in use. Records and files should be stored in easily accessible locations where bending or overreaching are minimized.
- The most used items should be stored at about waist level. A ladder or step stool with



proper feet and locking mechanism must be used when reaching for objects or storing objects overhead.

- Use proper back care and lifting techniques when lifting supplies, files, etc. or when moving office furniture.
- All electrical cords should be in good repair with the ground plug intact and extension cords must not pose a tripping hazard. Do not overload electrical outlets. Do not run electrical cords under rugs or carpets.



8. PROGRESSIVE DISCIPLINE POLICY

Any employee who willfully works in violation of Company Policies and/ or Legislative Requirements will be subject to any of the following disciplinary actions:

1. a verbal or written warning
2. A written warning
3. Suspension or dismissal

Furthermore, all workers are subject to immediate discharge for any of the following:

- a) Violation of company workplace violence policy.
- b) Violation of company workplace harassment policy.
- c) Theft, falsifying time records, or any other dishonest act.
- d) Sabotage or intentional damage to company property.
- e) Reporting to work under the influence of drugs or alcohol and/or the consumption or use of alcohol or illegal drugs anywhere in the facility/project, on company property and/or while operating company owned vehicles/equipment.
- f) Insubordination.
- g) Failure to return to work immediately after the expiration of a leave of absence granted by the company.
- h) Without the written permission of the company, working elsewhere while on an authorized leave of absence, WSIB Claim, or medical leave.
 - i. Willful violation of Health and Safety Guidelines or legislation creating a potential for injury, death or serious property damage.

9. ACKNOWLEDGEMENT SHEET (tear-out)

Date: _____

Employee's Name: _____

Employee Number: _____

I have received a copy of our Health and Safety Guidelines Booklet as part of my Orientation. The information and principles outlined in these documents, including the company policies regarding Health and Safety, Workplace Violence, Harassment and Progressive Discipline were discussed with me at the time.

I understand that the company policies and the Health and Safety Guidelines have been provided to create an awareness of the types of conditions or situations which could pose a potential health or safety hazard, and these must be protected against to control exposure and prevent injury or illness.

I understand that I must work in a safe manner, and I will comply with the Appropriate Provincial Health & Safety Legislation and the safe operating principles and procedures in place at Maxim Mechanical Group Inc; I will not hesitate to ask my supervisor for assistance if I do not understand any of the contents of these guidelines or safe operating principles presented. I understand that my input into the Health and Safety Program is encouraged.

It was explained to me that these guidelines and safe operating procedures will be updated and reviewed as required, to improve the Health and Safety Program.

Employee Name (printed):_____
Supervisor:_____
Signature_____
Signature

PURPOSE

The purpose of this procedure is to establish a structured approach for delivering and documenting a communication method to provide specific information on current health and safety related issues to all employees. It will establish a means for workers to provide feedback, input and recommendations to our Health and Safety Program's various components.

SCOPE

This procedure applies to all employees, supervisors, and contractors working within the company. Safety Talks will be used to communicate information on health and safety hazards, safe work practices, equipment handling, emergency procedures, and any other topics relevant to the work.

RESPONSIBILITIES**Health and Safety Representative (HSR)**

- Work with supervisors and senior managers to help select appropriate topics for safety talks.
- Identifying emerging risks or safety concerns based on incident reports, audits, or safety inspections.
- Providing input on legal or regulatory requirements that need to be covered in the talks (e.g., OSHA compliance, best practices).
- Providing fact sheets, handouts, or visual aids to support the delivery of key safety messages.
- Ensuring that the most up-to-date safety guidelines, procedures, or regulations are incorporated into the talks.
- Monitor the effectiveness of communication through feedback, incident tracking, and compliance assessments and evaluate the effectiveness.
- Ensure that all employees receive the necessary safety information.
- Ensure that the communication procedure complies with relevant local, provincial, and federal safety regulations.
- Maintain documentation of all communication, ensuring that records are stored correctly for auditing purposes.
- Regularly reviewing and updating the procedure to align with new regulations or changes in company policy.

Senior Management

- Ensure that company communication procedures are developed, reviewed, and implemented.
- Lead by example in attending and participating in safety talks.
- Provide project specific topics where required based on site operations, hazard awareness or incident follow-up in consultation with the Health and Safety Team.
- Communicate with Supervisors any changes with work-place parties, including changes to sub-contractors
- Ensure that communication efforts are consistently aligned with strategic objectives and that our messaging reflects our core values.

Supervisor

- Lead the work-site discussions, making sure the topic is clearly explained and understood by all employees.
- Provide real-life examples to enhance understanding and relevance.
- Foster an open environment where employees feel comfortable asking questions and discussing safety concerns.
- Maintain accurate attendance records to ensure that no employee is left out of the safety communication process.
- Keep the talk focused, engaging, and interactive and encourage

participation from all workers, especially when discussing safety concerns or asking for suggestions for improvement.

- Encourage employees to share their experiences and thoughts on the topic.

Worker

- Attend all scheduled Health and Safety Talks relevant to their roles and responsibilities.
- Arrive on time and be fully engaged in the discussion.
- Actively listen to the information presented and ask questions if there is anything unclear.
- Share their experiences and any safety concerns they may have about the work environment.
- Offer suggestions to improve safety practices or report on any unsafe work conditions they observe.
- Following the safe work practices discussed.
- Use the appropriate Personal Protective Equipment (PPE), tools, and equipment as outlined during the talk.
- Report any hazards or safety issues they encounter while working and follow proper channels for reporting.

PROCEDURE

The detailed description of all responsibilities for each role is written above in the section titled “Responsibilities”, please review that section before reading the rest of this procedure.

The following methods are used to share health and safety information:

- **Safety Talks:** Conducted weekly (or before high-risk work), led by Supervisors or HSR, focused on relevant topics (e.g., seasonal hazards, incident trends, specific tasks).
- **Bulletin Board:** Used to post policies, procedures, incident alerts, and safety updates.
- **Team Meetings:** Health and safety are a standing agenda item at all staff and project meetings.
- **Email Distribution:** Safety alerts, training opportunities, and updates are shared through internal communications.
- **One-on-One Communication:** Used when individualized coaching or clarification is needed.

The Health and Safety Rep (HSR), in consultation with Senior Management, will provide guidance in determining Regular Safety Talk subjects. Majority of our safety talks will be completed through weekly toolbox talks completed by the site supervisor.

Delivery of Safety Talks

The HSR or designated safety personnel will facilitate the safety talks. They are responsible for ensuring the topic is communicated clearly and effectively.

- Safety talks will be conducted:
 - Bi-weekly as a minimum standard.
-

- Before starting high-risk tasks or projects.
- After an incident or near-miss to review causes and prevention.
- When introducing new equipment, procedures, or work environments.
- As needed based on observations, seasonal hazards, or employee concerns.

Supervisors are responsible for scheduling talks at a time when all relevant employees can attend, typically at the start of a shift or before the commencement of new work.

At the beginning of each meeting an attendance log will be kept ensuring all employees are accounted for and have participated in the communication session. At this moment **form 5-1** is used to ensure the content of safety talks complies with safety regulations and industry standards and maintains consistency among all employees. The log includes:

- Date and time of the talk
- Name of the facilitator
- List of attendees
- Topic discussed. Topics are chosen based on:
 - Current worksite conditions or activities.
 - Past incident and near-miss reports.
 - Seasonal or environmental hazards (e.g., heat stress, winter driving).
 - Safety alerts or bulletins from regulatory bodies.
 - Worker suggestions or observed unsafe behaviors.

Where applicable, visual aids such as posters, diagrams, or videos will be used to enhance the talk and support the message being conveyed. The facilitator is also required to use simple, non-technical language that is easy for all employees to understand.

During the meeting(s) the facilitator will encourage employee interaction, allowing time for questions and open discussion. This can help clarify concepts and improve understanding. Some of the engaging questions the facilitator may ask include:

- Are the safety protocols clear?
- Do employees feel confident in applying the safety procedures?
- Are there any concerns or suggestions for future talks?

Any safety concerns or issues raised during the talk that require further action will be tracked on form 5-1. Employees will also be able to provide feedback if a thought, suggestion or any other relevant information arises later. Any additional information will be printed and attached to Form 5-1. Supervisors and Senior Managers will work together to assign responsibilities for addressing these issues and ensure that corrective actions are completed in a timely manner.

Receiving and Responding to Communications

- Workers are encouraged to raise health and safety concerns through verbal communication, written reports, suggestion boxes, or during safety talks.
- Supervisors and/or the HSR will acknowledge receipt of the concern within 48 hours and initiate follow-up action or investigation as appropriate.
- All reported concerns, suggestions, or issues are documented and reviewed to determine if further action, training, or hazard controls are required.
- Feedback and resolution actions are communicated back to the worker or group that raised the issue, ensuring transparency and continuous improvement.

After the talk, key takeaways and any follow-up actions should be communicated to employees. This helps reinforce the message and ensures that safety practices are applied across the workforce. Any updates or changes to safety protocols will be shared with the team via email and safety boards.

Toolbox Talks

Tool-Box Talks will be held weekly by the site supervisor. Emergency situations or new risks may require ad-hoc talks. The talks are scheduled first thing in the morning before the work starts and are mandatory for all employees involved to be present. The Toolbox Talks are to remain brief and focused, lasting no longer than 15 minutes to maintain engagement and attention. The **form 5-1** is to be used during every meeting to ensure consistency and maintain documentation of attendees and topics discussed.

Annual Safety Meeting

In addition to regular toolbox / safety talks, Senior Management will hold at least one annual, organization-wide health and safety meeting with all employees. The HSR will coordinate with Senior Management to plan and schedule this meeting so that workers, supervisors, office staff and senior management are all included.

The annual safety meeting will be used to:

- Review the Health and Safety Policy and current OHS objectives and company-wide safety goals;
- Communicate key changes to the OHS program, including new procedures, initiatives or legislative updates;
- Review safety performance, including incident statistics, trends and progress on corrective and preventive actions;
- Discuss broader OHS topics relevant to the organization and upcoming projects; and
- Provide an opportunity for workers to ask questions, raise concerns and provide feedback (two-way communication).

Attendance and key discussion points, including any decisions and action items, shall be documented in meeting minutes and retained as part of the company's communication and management review records.

DISTRIBUTION

The Supervisor will be required to provide the documentation related to Toolboxes Safety Talks to the Health and Safety Team and Senior Management.

RECORDS

Records of Health & Safety Talks will be retained on site by the Supervisor; copies will be provided to the Senior Management and/or Health and Safety Team on a weekly basis. After a project is completed, all records of Toolbox Safety Talks will be filed by the Health and Safety Team and Senior Management (on a project specific basis).

All records, including attendance logs and notes on the talk, are stored in a safe, accessible location in the main office. Access to the room is locked, but easily accessible if needed.

Date of Discussion:

Title of the Topic:

Presented By:

Control Measures / Action to be Taken / Safety Tips / Notes from Workers

Attendance Record

Name

Signature

Name

Signature

Approved by

Job Title

Signature

Updated: January 2026

PURPOSE

The purpose of this procedure is to establish workplace inspections as a process for identifying, monitoring, follow-up and control or elimination of all hazards.

SCOPE

This procedure applies to workplace parties responsible for conducting workplace inspections in order to determine compliance with applicable legislation and site safety policies.

RESPONSIBILITIES**Health and Safety Representative**

- Develop and implement in consultation with Senior Management and the Health and Safety Representative, a company Workplace Inspection Program.
- Review the company Workplace Inspection Program annually and/or after an incident/accident has occurred. Changes will be implemented as necessary.
- Distribute workplace inspection forms to Workers, Supervisors and the Worker Representative.
- Set required schedules for all required workplace inspections.
- Ensure Supervisors are completing the required documentation/forms (Daily Hazard Assessments, Weekly Workplace Inspections, etc.).
- Ensure workers complete pre-use inspections and workplace inspections are conducted as required.
- Accompany the Supervisor and/or Worker Representative during a workplace inspection at minimum on an annual basis.

Senior Management

- Working with the Health and Safety Rep, ensure that a Workplace Inspection Program is developed and implemented.
- Ensure that the company Workplace Inspection Program is reviewed and approved annually.
- Ensure that the Workplace Inspection Procedures comply with legislative requirements.
- Substandard Workplace Inspection practices identified will warrant immediate rectification by the responsible parties.
- In consultation with the HSR and Supervisors, review the company Workplace Inspection Program annually and/or after an incident/accident has occurred. Make changes as necessary.
- Schedule and ensure workplace inspections are completed by the HSR at office/shop locations.
- Ensure Supervisors are completing the required documentation/forms (Daily Hazard Assessments, Weekly Workplace Inspections, etc.).
- Ensure that Worker Representative is consulted and that their recommendations are addressed regarding company Workplace Inspection policies.
- Distribute and communicate information to the appropriate parties regarding any non-conformance or deficiencies reported.
- Direct Workplace Inspections to be completed on all construction projects according to the schedule and site-specific needs.

Supervisor

- Conduct the Weekly Project Inspections or direct a competent designate to conduct the inspection to the appropriate site locations as required.
- Record the findings, observations and follow-up activities on the Weekly Project Inspection form to demonstrate compliance.
- Record all observations that demonstrate compliance and non-compliance as found during the inspections process.
- Allow for follow-up questions and clarification of identified hazards as observed.
- If necessary, participate in the monthly workplace inspection conducted by the Worker Representative.
- Conduct site level inspections and ensure all items of non-compliance are corrected prior to leaving the site.
- Distribute and communicate information to the appropriate parties regarding any non- conformance or deficiencies reported.

Worker

- Participate in the workplace inspections as required.
- Advise Supervisor if experiencing any difficulties with assigned tasks, or if assigned tasks are beyond perceived limitations or medically not capable of performing tasks.
- Comply with all the requirements as defined under the *Occupational Health and Safety Act and Regulations*.

PROCEDURE

The detailed description of all responsibilities for each role is written above in the section titled “Responsibilities”, please review that section before reading the rest of this procedure.

Workplace inspections will be conducted on a quarterly basis or as necessary, depending on the type of work, the risks involved, and any changes to work processes or environments. Maxim is committed to ensure systematic workplace inspections are used to identify hazards, assess risks, and maintain compliance with legal and manufacturer standards. This procedure covers inspections of tools, equipment, vehicles, personal protective equipment (PPE), and facilities/sites. Inspections will also be conducted:

- Following any significant workplace incident or near miss
- Whenever new equipment or processes are introduced
- As per manufacturer, legal or regulatory requirements

Frequency/Schedule:

To maintain a safe and compliant workplace, inspections must be conducted at regular intervals based on the type of equipment, work environment, and associated risks. The frequency of inspections ensures that hazards are identified and addressed promptly, reducing the likelihood of incidents and maintaining compliance. The following schedule outlines the required inspection timelines:

Inspection Type	Frequency	Responsibility
Tools & Equipment	Weekly	Site Supervisor / HSR
Vehicles	Before each use/ Monthly	Vehicle Operators
PPE	Before each use	All employees
Facilities & Sites	Monthly / Before work starts	Site Supervisor
High-Risk Areas	As needed	Management/HSR/ Supervisors

All workplace inspections must be conducted systematically and documented to ensure compliance with safety regulations and requirements. Inspection records must include identified hazards, potential non-conformities, and corrective actions taken to prevent recurrence. The organization is responsible for maintaining these records for a minimum of one year, ensuring they are accessible for audits and reviews. Additionally, inspections should focus on proactive hazard identification and prevention, with all non-conformities addressed through documented corrective and preventive actions to maintain a safe and compliant workplace.

Inspection Process

1. Preparation:

- The Health and Safety Team, in consultation with Senior Management, will review legislation, regulations, operator's manuals and manufacturer's requirements to determine company specific/owned machinery and equipment that requires pre-use inspections. (see section 24 for a detailed list of items)
- Review past inspection reports and corrective actions.
- Gather necessary inspection tools (clipboard, checklist, flashlight, etc.).
- Notify relevant personnel about the inspection schedule.
- Ensure all workers and supervisors as well as subcontractors, as applicable participate in the inspection process.

2. Conducting the Inspection:

- All commercial vehicles, machinery, equipment, PPE and tools will be visually inspected before each use. The Health and Safety Representative will obtain inspection checklists from Section 24 for various machinery and equipment. Inspections required to be written/recorded will be conducted for the following applications, documented using the following checklists:
 - Vehicles with a total gross weight or registered gross

weight of more than 4,500 kg (those that require pre-use inspections under the Highway Traffic Act (199/07), shall use (Ontario Trucking Association Vehicle Inspection Report)

- Other Company Vehicles (not exceeding 4500kg) will have pre-use inspections recorded using inspection form (6-2-1– Form).
- Heavy Equipment (excavators, skid steers, graders, rollers) will have pre-use inspections recorded using inspection form (6-2-2 – Form).
- Power Elevating Work Platforms
- Using **forms 6-1-1, 6-1-2** to complete the inspections, unless otherwise specified by manufacturer.
- Identify hazards, unsafe conditions, and non-compliance issues.
- Take photos or document deficiencies for clarity.
- 3. Reporting & Documentation:**
 - Reported defects or other deficiencies on hazard reports and inspection forms. Substandard or otherwise unsafe conditions must be rectified and made safe.
 - Complete the inspection report, noting any findings.
 - Categorize hazards by risk level (low, medium, high).
 - Assign corrective actions and deadlines.
- 4. Corrective Actions & Follow-Up:**
 - If a hazardous condition is identified, the equipment/machinery must not be used, rather taken out of service (locked out), and tagged – until repairs or adjustments have been made by an authorized person. The supervisor must be made aware of the circumstances immediately and given a copy of the inspection report. This will be completed in coordination with our Preventative Maintenance Program (Section 25).
 - Ensure corrective actions are implemented by the responsible party.
 - Follow up on high-risk hazards immediately.
 - Review and update inspection checklists as needed.
 - Substandard or otherwise unsafe conditions must be rectified where possible and reported to management to be scheduled for repair or made safe.

Documentation & Recordkeeping

- Maintain inspection checklists and reports for at least one year to track safety performance.
- Keep corrective action logs to document identified issues, responsible persons, and completion dates.
- Ensure documentation is available for audits.

Training & Continuous Improvement

- Train employees and supervisors regularly on inspection procedures and hazard recognition.
- Conduct monthly safety meetings to discuss inspection findings, lessons learned, and improvements.
- Review and update inspection procedures at minimum yearly based on trends and regulatory updates.

Communication

All workplace inspection findings, including identified hazards, non-conformities, and corrective actions, must be communicated to senior management and other relevant individuals affected by the inspection. This ensures that necessary resources are allocated for corrective actions and that all responsible parties are informed of safety concerns. Inspection reports should be shared through regular safety meetings, email notifications, or documented reports, ensuring transparency and accountability in maintaining workplace safety and compliance

DISTRIBUTION**Weekly Project Inspection Reports will be distributed as follows;**

- Copy maintained by the Supervisor.
- Supervisor to copy subcontractors noted on the report, as required.

Workplace Inspection Forms will be distributed as follows:

- Copy to the Health and Safety Team and Senior Management.

RECORDS

Through the duration of the project or facility location, all Workplace Inspection reports must remain in the safety binders for review by authorized personnel, Health and Safety Member(s) and/or authorities having jurisdiction. Copies of weekly inspection reports will be provided to the office by Supervisors on a weekly basis.

Completed copies for equipment/machinery/vehicles used on projects, must be returned at the end of projects. Completed copies for equipment/machinery/vehicles used outside of projects must be returned on a weekly basis to the Health and Safety Team.

When a defect or a hazardous condition is observed, equipment/machinery/vehicle must be taken out of use, tagged as defective/hazardous and an inspection report provided to a Supervisor immediately.

The Pre-use inspection report forms and any subsequent follow-up must be maintained on file for the duration of the project or facility and subsequently retained on file indefinitely by the Health and Safety Team and Senior Management.

Inspected By:

PRINT / INITIAL

Reviewed By: PRINT / INITIAL

Date _____

Time

#	General Site Conditions / PPE	#	Materials / Chemicals / Storage	#	Equipment / Lifting Devices	#	Emergency / Response		Site Required Documents		Industrial And Posting
	☐ Housekeeping		☐ Gas Canisters Closed		☐ Vehicle Storage / Condition		☐ Fire Extinguishers		☐ Site Required Postings		☐ Lunchroom / Lockers
	☐ Guardrails Secured		☐ Items Stored / Stacked		☐ Electrical Cords		☐ Emergency Eyewash		☐ Job Work Order		☐ First Aid Training
	☐ Access / Egress Areas		☐ Chemicals Labelled		☐ Lifting Equipment Condition		☐ First Aid Kit		☐ Safety Talks		☐ Visitors Sign-In Area
	☐ Stairs / Ramps		☐ Proper Storage Location		☐ Scaffolding Components		☐ Fall Prevention Plan		☐ Daily JHA Completed		☐ Desks / Tables / Chairs
	☐ Dust Control		☐ Compressed Gas Use And Storage		☐ Signal Person Where Required Conditions		☐ Emergency Contact Numbers Postings		☐ Safe Work Practices and Procedures		☐ Policy Statements (Safety, Violence and Harassment)
	☐ Head Protections		☐ Flammables Fuel Storage		☐ Hoists / Cranes		☐ Hospital Map / Directions		☐ Current MSDS		☐ Form 82 (1234 Poster)
	☐ Foot Protection		☐ Ventilation Where Required		☐ Rappelling Devices		☐ Electrical Panels Secured		☐ Training Records Available		☐ Workplace Inspections
	☐ Eye/Face Protection		☐ Asphalt Material		☐ Welding / Cutting Equipment		☐ GFCI's (Ground Fault)		☐ Operators Manuals		☐ MOL Orders (Copies)
	☐ Hearing Protection		☐ Protective Coverings		☐ Ladders Condition and Setup		☐ Locates (Underground)		☐ Weekly Inspections		☐ Required Regulations
	☐ Gloves / Protective Clothing		☐ Staging and Unloading Areas Identified		☐ Power Tools – Cords and Body		☐ Washrooms / Water Stations		☐ Site Hazard Assessment Documents Sheets		☐ Emergency Contact Numbers Postings
	☐ Respiratory Protection		☐ Spill Kits Available		☐ Hand Tool Condition		☐ Alert System		☐ Progressive Discipline Form		☐ Regulation 1101
	☐ Reflective Traffic Vests		☐ Guarding In Place		☐ Fuel Powered Tools		☐ Overhead Conductors		☐ Reporting Forms		☐ Orientation Guidelines
	☐ Fall Protection Harness		☐ Lockout / Tag Equipment		☐ Working Platforms		☐ Spill Kits		☐ Investigation Package		☐ Snow Removal

A = High likelihood of personal injury or facility, material or equipment damage **B** = Moderate likelihood of personal injury or facility, material or equipment damage **C** = Minor likelihood of personal injury or facility, material or equipment damage

[illegible]

Comments / Follow-Up / Site Incidents or Near Misses Reported

Management Initials: _____

Item #	Area	Hazard Rating	Observations & Actions Taken

Comments:

Weather Conditions _____ & Temperature _____

Conducted By [Signature(s)]**Distribution:**

- ☐ Supervisor
- ☐ Project Manager
- ☐ Health and Safety Coordinator
- ☐ Other Health and Safety Committee Members
- ☐ Subcontractors identified on report
- ☐ Senior Management

Form Updated: July 2024

Item #	Area	Hazard Rating	Observations & Actions Taken

Comments:

Weather Conditions _____ & Temperature _____

Conducted By [Signature(s)]

Distribution:

- ☐ Supervisor
- ☐ Project Manager
- ☐ Health and Safety Coordinator
- ☐ Other Health and Safety Committee Members
- ☐ Subcontractors identified on report
- ☐ Senior Management

Management Initials: _____

Form Updated: July 2024

PURPOSE

The purpose of this procedure is to establish an investigation and follow-up process. This process will ensure that a written report is prepared detailing the entire situation, to determine appropriate conclusions and follow-up actions needed to prevent reoccurrence.

SCOPE

This procedure applies to all workplace incidents, investigations and follow-ups. Which are conducted to determine the causes, contributing factors and subsequently implement corrective actions to prevent a reoccurrence.

RESPONSIBILITIES**Health and Safety Representative (HSR)**

- Review of the company's Investigation Procedure after an incident/accident has occurred.
- Changes will be implemented as necessary.
- Distribute investigation reports (Investigation Kit) to all Supervisors and workplace parties as required. Assist Supervisors and Project Managers in the investigation process and follow-up as required.
- Review all injury reports and follow-up with Supervisors and Senior Management as required.
- Ensure that training related to conducting investigations is provided to Supervisor or designated personnel responsible for conducting investigations.
- Document and determine the causes and contributing factors. Implement corrective actions to prevent a recurrence of the incident.

Senior Management Responsibilities

- Develop and implement, in consultation with the Worker Representative, a company 'Investigation Procedure'.
- Review of the company's Investigation Procedure after an incident/accident has occurred.
- Changes will be implemented as necessary.
- Ensure Investigation Procedure complies with legislative requirements.
- Ensure that training related to conducting investigations is provided to Supervisor or designated personnel responsible for conducting investigations.
- Ensure that the Investigation Procedure is reviewed annually.
- Review all injury reports and follow-up with Supervisors and HSR as required.
- Ensure all required incidents are investigated and appropriate follow-up actions are completed.
- Participate in the investigation process and follow-up as required.
- Participate in training related to conducting investigations as required

Supervisor Responsibilities

- Immediately report all incidents that require an investigation to the Project Manager and the HSR.
- Manage the accident scene and identify witnesses. Investigate the incident (using the Investigation Kit) and complete all required reports required by the situation.
- Ensure all required incidents are investigated and appropriate follow-up actions are completed. Retain all investigation reports and follow-up actions as required.
- Ensure that the Worker Representative is consulted and that their recommendations are addressed regarding company investigation policies.
- Ensure that the Health and Safety HSR is informed of the accident and participates in the investigation.
- Document and determine the causes, contributing factors. Ensure to implement corrective actions to prevent a reoccurrence of the incident on a timely manner.
- Ensure workers are made aware of incidents and corrective actions.
- Ensure each recommendation on the Incident Report is completed within the established timelines.
- Participate in training related to conducting investigations as required.

Worker Responsibilities

- Assist or participate in the incident investigation when required.
- Provide witness statements and incident summaries as requested by the supervisor.
- Do not disturb the accident/incident scene once it has been secured by the supervisor.
- Report to Supervisors about any injuries, incidents, or contravention of the Occupational Health and Safety Act and Regulations or the absence and/or defect in any equipment or protective devices.

PROCEDURE

The detailed description of all responsibilities for each role is written above in the section titled “Responsibilities”, please review that section before reading the rest of this procedure.

All employees and/or subcontractors must be instructed to report all incidents to a supervisor immediately. A formal investigation will be conducted into the following incidents:

- Outside Medical Aid Required,
- Critical Injury Accidents,
- Property Damage,
- Dangerous Situations Not Resulting in an Injury,
- Work Refusals,
- Notices Required by Governing Authorities,
- Hazardous Material Spills, Leaks or Exposures,
- Fires, and
- Workplace Violence and Harassment.

Incident reporting should include detailed information about the event, the individuals involved, and any potential hazards or contributing factors. Supervisors will conduct investigations and shall take immediate action to ensure the safety of individuals involved and secure the scene.

For each reported incident, an investigation team shall be formed. When needed, investigations will be conducted with the assistance of Senior Management, the HSR and/or a Safety Consultant. The team shall receive training in conducting thorough and impartial investigations.

All employees must receive training on legislative construction-specific reporting requirements and investigation procedures. Supervisors must ensure employees understand their reporting responsibilities and are equipped to document incidents properly. Ongoing refresher training sessions should be conducted to ensure compliance and continuous improvement.

Training shall cover topics such as hazard identification, incident reporting, emergency response, and regulatory compliance. Training programs shall be developed, implemented, and regularly updated to ensure that employees have the knowledge and skills necessary to work safely.

Determine the causes of the incident, including immediate, basic and root causes. Root cause analysis shall use a structured approach, such as Five-Why analysis or a Fishbone (Ishikawa) diagram, to identify underlying system issues (e.g., policies, training, supervision, equipment, work environment, human factors) and not just the direct cause (10.1).

Investigations shall follow a structured process to gather facts, interview witnesses and collect relevant evidence. Once the sequence of events is understood, the investigation team shall carry out the root cause analysis to identify why the incident occurred and what contributing factors led to it. The purpose of this analysis is to ensure that corrective and preventive actions address fundamental issues rather than only treating symptoms. All identified root causes and contributing factors shall be documented on the investigation report.

The investigation will be completed using the Investigation Kit (**7-1 Form**), which outlines all company specific investigation techniques. Investigations must detail all related information required to complete the forms within this kit.

It is the responsibility of the Supervisor to make conclusions, identify contributing factors and conduct follow-up actions. The key element is the swift and decisive action to mitigate additional consequences. To do this. The supervisor must take steps to prevent the situation from worsening. Actions may include:

- Providing immediate medical care to injured individuals.
 - Isolating or containing hazardous materials to prevent environmental contamination.
 - Evacuating affected areas to ensure the safety of personnel.
-

- Shutting down malfunctioning equipment to prevent further damage.
- Implementing cybersecurity measures to stop data breach from spreading.
- Initiating communication and notification processes to inform stakeholders and authorities about the incident.

A detailed list and guidelines can be found in the Investigation Kits.

Supervisors will be required to immediately forward all Investigation Kits (7-1 Form) to Senior Management and the HSR for review.

Comprehensive documentation of the investigation, including findings, evidence, interviews, and root cause analysis, shall be maintained in accordance with regulatory requirements. Investigation reports shall be treated with confidentiality while sharing relevant information with appropriate parties.

Based on the investigation findings, a corrective action plan shall be developed and implemented promptly to address identified hazards or unsafe practices. Corrective actions shall be tracked to completion, and their effectiveness shall be monitored.

All corrective and preventive actions (CAPA) shall be recorded on a CAPA log or equivalent tracking tool, including a description of the action, the person responsible, target completion date and status (open, in progress, complete).

To measure the effectiveness of corrective and preventive actions (CAPA), Maxim Mechanical will implement a structured process that includes tracking, follow-up and performance analysis. All CAPA shall be recorded in a corrective action tracking system (CAPA log) to monitor implementation, assign responsibility and track adherence to deadlines.

Following implementation, corrective and preventive actions shall be verified for effectiveness through methods such as follow-up inspections, observation of work practices, review of incident and near miss trends, and audits of compliance with the revised requirements. The verification details (date, method and outcome) shall be documented on the CAPA log. If an action is found to be ineffective or only partially effective, additional or revised actions shall be developed, implemented and tracked.

In addition, key performance indicators (KPIs), such as incident recurrence rates, near-miss trends and safety compliance data, shall be analyzed periodically to assess the overall impact of corrective measures on the health and safety performance of the organization.

Employee feedback will be gathered to determine whether implemented safety improvements are practical and effective. Training programs will be updated based on findings to reinforce best practices and prevent similar incidents. Senior management will periodically review

investigation reports and effectiveness data, making necessary adjustments to policies and procedures to enhance workplace safety. This continuous improvement process ensures that Maxim maintains a proactive approach to hazard prevention and regulatory compliance.

Results & Corrective/Preventative Actions

Internal Communication:

- Investigation findings and corrective actions must be shared with affected employees, supervisors, and relevant departments.
- A summary of key findings and safety improvements are expected to be discussed during safety meetings and toolbox talks by the supervisor.
- Lessons learned will be incorporated into training sessions to prevent future incidents.

Reporting to Management:

- Investigation reports and recommended corrective actions must be reviewed by the Health and Safety Representative.
- Senior Management must ensure corrective measures are documented and tracked for completion by assigning responsibilities, setting deadlines, and monitoring progress through a corrective action tracking system.

Regulatory Reporting:

- If required by OHSA, investigation results must be submitted to the Ministry of Labour and WSIB.
- Any significant trends or systemic hazards identified through multiple investigations must be addressed through company-wide policy updates and risk mitigation strategies.

Follow-Up Verification:

- Supervisors and safety officers must ensure that all corrective and preventative actions are implemented effectively.
 - Periodic audits and inspections should be conducted to confirm the sustainability of safety improvements.
-

DISTRIBUTION

Incidents that meet regulatory reporting criteria shall be reported to the relevant authorities within the required timeframe. Maxim shall cooperate fully with regulatory agencies during any investigations or inspections.

Investigation documents will be kept on file at project locations for the duration of projects. Investigation documents will be provided to the HSR at the end of projects.

For other workplace locations, investigation documents will be maintained at the workplace locations, with copies provided to the HSR and Senior Management once the investigation is completed.

During the contract stage and through orientation meetings, subcontractors will be advised of the site investigation procedures and requirements.

RECORDS

All records for investigations will be maintained by the HSR and Senior Management.

These records are to be reviewed to determine the need for ongoing file retention (i.e. 3rd party liability, pending charges, etc.). All investigation reports will be maintained indefinitely. A review of the incident will happen at the yearly meeting where Senior Management will discuss if corrective processes have been successful.

INVESTIGATION KIT**REGARDING:****INCIDENT DATE:****PERFORMED BY****PROVIDED TO****DATE PROVIDED**

This kit was updated: July 2024

BASIC INVESTIGATION PROCEDURES

Note: The following are procedures to be followed in the event of a workplace incident/accident/ work-refusal or notification of an unsafe condition.

1. When required, arrange for injured workers to be taken to the Medical Clinic or the Hospital depending on the severity.
2. Follow the appropriate steps listed for:
 - Incidents/Accidents involving our employees
 - Incidents/Accidents involving Subcontractors
3. Secure the accident scene and ensure that it is not disturbed.
4. Do not allow similar work to continue the site unless steps to prevent a recurrence are in place and authorization has been given by Senior Management and/or the Ministry of Labour (where applicable).
5. Notify Senior Management and the HSR immediately.
6. Begin the Investigation (if authorized by the Management Team and when required by the Ministry of Labour) using the enclosed Investigation Report Forms & Investigation Statement Forms.
7. Provide all the Investigation & Reporting Forms and/or other information to the HSR for review and distribution.
8. Yearly review of the incident where Senior Management will discuss if corrective processes have been successful.

**NEVER DISTRIBUTE INFORMATION TO OTHERS WITHOUT PERMISSION FROM
MANAGEMENT TEAM**

The following information has been provided:

- Ministry Of Labour – Reportable Incidents/ Accidents
- Procedure For Accident/Incident Involving Our Employees
- Procedure For Accident/Incident Involving Subcontractor Employees
- Work Refusal Procedure

The following forms have been included:

- (1) Investigation Report Form
 - (3) Investigation - Voluntary Statement Form
 - (1) Ministry Of Labour – Notice of Incident/Accident (Must be reviewed by the Management Team prior to being sent)
-

MINISTRY OF LABOUR REPORTABLE INCIDENTS/ACCIDENTS

The following reporting requirements are only a summary of reporting requirements from the Occupational Health and Safety Act (OHSA) and Regulations for Construction Projects (Reg. 213/91). For a complete listing of the reporting requirements refer to the OHSA & Reg. 213/91.

Section 51 of the Occupational Health and Safety Act requires the **Constructor** and the **Employer** immediately (at a minimum within 48 hours) report "Critical Injuries" immediately to the Ministry Of Labour.

"CRITICAL INJURY" (Regulation 834)

For the purposes of the Act and Regulations, "critical Injury" means an injury of a serious nature that:

- a) places life in jeopardy
- b) produces unconsciousness
- c) results in substantial loss of blood
- d) involves the fracture of a leg or arm but not a finger or toe:
- e) involves the amputation of a leg, arm, hand or foot but not a finger or toe:
- f) consists of burns to major portion of the body, or
- g) causes loss of sight in an eye

*Note: The fracture or amputation of more than one finger/toe constitutes a critical injury.

Section 52 of the Occupational Health and Safety Act requires the **employer** provide notice within 4 Days of an accident, explosion, fire, or incident of workplace violence which does not result in a critical injury to the worker, however, disables the worker from performing regular duties or requires medical attention. This also includes the onset of an Occupational Illness.

Section 53 of the Occupational Health and Safety Act requires that if an accident, premature or unexpected explosion, fire, flood or inrush of water, failure of any equipment, machine, device, article or thing, cave-in, subsidence, rock burst, or other prescribed incident occurs at a project site, mine, mining plant or other prescribed location, the person determined under subsection (2) shall, within two days after the occurrence, give notice in writing with the prescribed information and particulars

Section 53 (2) - Person required to notify

- (2) The person required to give notice under subsection (1) is,
- a) if the incident takes place at a project site, the constructor of the project.
 - b) if the incident occurs at a mine or a mining plant, the employer of a worker who works in the mine or plant; or
 - c) if the incident occurs at a prescribed location, the person prescribed for that location.

Section 53.1 - Additional notices

In addition to the notice requirements set out in sections 51, 52 and 53, the regulations may specify additional notice requirements that must be met in the circumstances described in those sections, including specifying who is required to provide the notice, the timeframe in which it shall be provided and the information and particulars it must contain.

Prescribed reportable incidents - Construction Regulation (O.Reg. 213/91) Section 11:

1. A worker falling a vertical distance of three metres or more
2. A worker who falls and whose fall is arrested by a fall arrest system
3. A worker becoming unconscious for any reason
4. Accidental contact by a worker or by a worker's tool or equipment with energized
5. electrical equipment, installations or conductors.
6. Accidental contact by a crane, similar hoisting device, backhoe, power shovel or other vehicle or equipment or its load with an energized electrical conductor rated at more than 750 volts.
7. Structural failure of all or part of falsework designed by, or required by the regulation to be designed by, a professional engineer
8. Structural failure of a principal supporting member, including a column, beam, wall or truss, of a structure
9. Failure of all or part of the structural supports of a scaffold
10. Structural failure of all or part of an earth or water retaining structure, including a failure of the temporary or permanent supports for a shaft, tunnel, caisson, cofferdam or trench
11. Failure of a wall of an excavation or of similar earthwork with respect to which a professional engineer has given a written opinion that the stability of the wall is such that no worker will be endangered by it
12. Overturning or the structural failure of all or part of a crane or similar hoisting device

For a more concise listing refer to the most current edition of Occupational Health and Safety Act and Regulations for Construction Projects (O.Reg.213/91)

PROCEDURE FOR ACCIDENTS/INCIDENTS INVOLVING OUR EMPLOYEES

When one of our employees sustains a workplace injury, follow the procedures listed below:

Supervisor must:

- Ensure first aid is administered if required/possible and it is safe to do so
- Plan for transportation to a medical clinic or hospital (whichever is appropriate)
- Secure the accident scene (based on the circumstance take the necessary precautions for the safety of the injured worker and/or others)
- Immediately notify the health and safety team
- Take names and phone numbers of all persons who witnessed or may have knowledge of the accident (statements will need to be taken during the investigation)
- Investigate (when granted permission from the Senior Management and the Ministry of Labour where applicable)
- Ensure corrective measures are implemented prior to allowing work to continue
- Maintain contact with the injured worker and assist in the early safe return to work program for the injured worker when applicable

Critical Injury Accidents:

- Take all steps listed above and furthermore ensure the following:
- Notification to Ministry of Labour (MOL) and the union immediately when approved from senior management.
- Prepare written notices to the mol with the assistance of a safety consultant and/or legal counsel where required and review with the management team prior to delivery
- Cooperate with the Ministry of Labour (MOL) during their investigation

The Senior Management Will Ensure:

- The HSR has been informed of the accident
- In the event of a Critical Injury, aid with the investigation, seek Legal Counsel (if required) and communicate with the Ministry of Labour (MOL) (if required)
- Review the accident investigation report(s) and any Notices to be sent to the Ministry of Labour
- Take appropriate measures to implement corrective measures
- Investigation reports are received by the Health and Safety Rep and reports are sent to WSIB as required. Where required plan and assist in the Early, Safe Return to Work

PROCEDURE FOR ACCIDENTS/INCIDENTS INVOLVING SUBCONTRACTORS

In the event of an incident/accident caused by a subcontractor or accident causing an injury to a sub-contractor's worker, follow the procedures below as a minimum:

Supervisor must:

- Ensure first aid is administered if required/possible and it is safe to do so
- Plan for transportation to a medical facility if necessary
- Secure the incident or accident scene (based on the circumstance take the necessary precautions for the safety of the injured worker and/or others)
- Immediately notify the health and safety team, HSR and senior management
- Take names and phone numbers of all persons who witnessed or may have knowledge of the accident (statements will need to be taken during the investigation)
- Investigate when granted permission from HSR (and the Ministry of Labour where applicable)
- Furthermore, when applicable insist that the subcontractor provides appropriate notification to the governing authorities such as the Ministry of Labour (MOL) and the workplace safety and insurance board (WSIB) and provide our company copies of notices.
- Request that the contractor investigates the matter and provides a copy of the investigation report, photographs and statements to our company
- Only allow the subcontractor to continue with the work if acceptable measures have been taken to prevent a recurrence

Critical Injury Accidents:

- Follow all steps as above and furthermore ensure the following:
- Notification to Ministry of Labour (MOL) and the union immediately
- Prepare written notices to the MOL with the assistance of the HSR and/or legal counsel where required and review with the management team prior to sending
- Cooperate with the Ministry of Labour (MOL) during their investigation

The Senior Management will ensure:

- The HSR has been informed of the accident
- In the event of a Critical Injury, aid with the investigation, seek Legal Counsel (if required) and communicate with the Ministry of Labour
- Assist the Supervisor in the event of a MOL reportable incident/accident and obtain copies of any orders or charges given to the subcontractor(s) and/or the Constructor
- Review the accident investigation report(s) and any Notices to be sent to the Ministry of Labour
- Review the accident investigation report(s) and take appropriate measures to implement corrective measures
- Ensure updates and reports are provided to the worker health and safety representative

WORK REFUSAL PROCEDURE

DEFINITION:

A worker may refuse to work or do particular work where he or she has reason to believe that:

- a) any equipment, machine, device or thing the worker is to use or operate is likely to endanger himself, herself or another worker:
- b) the physical condition of the workplace or the part thereof in which he or she works or is to work is likely to endanger himself or herself:
- c) workplace violence is likely to endanger himself or herself: or
- d) any equipment, machine, device or thing he or she is to use or operate or the physical condition of the workplace or the part thereof in which he or she works or is to work is in contravention of this Act or the regulations and such contravention is likely to endanger himself, herself or another worker. R.S.O. 1990, c. O.1, s. 43 (3): 2009, c. 23, s. 4 (2).

*** That person may refuse to use or operate the machine device or other thing, or to work in that place.

STEPS TO BE TAKEN:

1. Worker refuses to work and immediately notifies employer or supervisor of the reasons.
2. Supervisor investigates, in the presence of the worker and Health and Safety worker representative. Involve the Supervisor in the investigation stage of the Work Refusal. Notify the Management Team.
3. Worker remains in a safe place near workstation and be available for questioning, all attempts are made to resolve the perceived problem to the satisfaction of all parties.
4. If problem is resolved to the workers' satisfaction, he/she returns to work.
5. If not resolved and worker continues to refuse work, NOTIFY THE MINISTRY OF LABOUR.

NOTE: Another worker may be asked to perform the job, only if that worker is advised of the refusal to work and the surrounding circumstances, in the presence of the Worker Health & Safety Representative.

6. A Ministry of Labour Inspector investigates the refusal in consultation with the worker, employer and HSR.
7. Pending the outcome of the investigation, the worker may stand by or be assigned other work. The worker may NOT be sent home or disciplined for his/her actions.
8. A decision will be made in writing and provided to all parties. This decision must be adhered to whether in favour of the worker or employer.
9. An Investigation report must be completed by the supervisor or contractor employing the worker refusing work and HSR present during the investigation. This report must be provided to the Management Team and the HS Worker Representative.
10. Reports will be kept electronically as well as a hard copy in the head office.

NOTE: All attempts should be made to resolve the problem internally before it requires Ministry of Labour involvement.

INVESTIGATION REPORT FORM (PAGE 1 OF 2)

Project: _____	Location: _____
Date of Occurrence: _____ Time of Occurrence: _____	

Contractor/Employer: _____ Worker's Name: _____		
Address:	Supervisor:	Office Tel.: Fax: _____ Site: _____
Individual Investigating Incident:		

Occurrence Type: ☐ Critical ☐ Lost Time ☐ Medical Aid ☐ First Aid ☐ Incident ☐Material Damage	
Injured Worker's Name: _____ _____ Date of Birth: _____ Yrs Exp. _____	Address: _____ _____ Telephone #: _____
Witness: _____ Employer: _____ Telephone: _____	Address: _____ _____
Witness: _____ Employer: _____ Telephone: _____	Address: _____ _____

Attending Physician _____ Telephone: _____	Address: _____ _____
--	--------------------------------

Governing Authorities: _____ Name: _____ I.D. # _____	Branch: _____
---	---------------

Circumstances of Occurrence	Location of Occurrence: _____ Time/Date of Occurrence: _____
Injuries:	Reported To: _____ Reported By: _____ Time/Date Reported: _____
Description:	

INVESTIGATION REPORT FORM (PAGE 2 OF 2)**Basic Causes of Occurrence:**Equipment, Machinery or Materials (describe)

Work Habits, Procedures or Direction (describe)

Conditions (describe)

Prevention Of Recurrence (actions taken): By: _____ Date: _____List Actions:

Corrective Follow- up Actions: By: _____ Date: _____List Actions:

COPIES TO:

- ☐ SENIOR MANAGEMENT
- ☐ HEALTH AND SAFETY WORKER REPRESENTATIVE
- ☐ OTHER(S) (NAME)

Re:

Date & Time Reported:

Phone:

Statement

Re:

Date & Time Reported:

Phone:

Statement

Re:

Date & Time Reported:

Phone:

Statement

NOTICE OF OCCURRENCE (PAGE 1 OF 2)

____ Health & Safety Officer Construction Health & Safety Branch
Ministry of Labour

Address: _____

"Notice Of Occurrence" as required under The Occupational Health & Safety Act and Construction Projects Regulations.

COMPANY ADDRESS _____

The nature and the circumstances of the occurrence:

Body Injuries Sustained:

Description of Equipment/Machinery Involved in the incident/accident:

Date, Time & Place of Occurrence:

Date: _____ Time: _____

Location: _____

NOTICE OF OCCURRENCE (PAGE 2 OF 2)**Injured Worker's Name & Address**

Name: _____ Address: _____ Telephone: _____

Names and addresses of Witnesses or "Persons Having Knowledge":

Name: _____

Address: _____

Telephone: _____

Name: _____

Address: _____

Telephone: _____

Name: _____

Address: _____

Telephone: _____

Address & name of Attending Physician

Attending Physician: _____ Address: _____

Telephone: _____

Steps taken to prevent recurrence

Information Provided by: _____

PURPOSE

The Workplace Violence and Harassment Prevention Policies and Programs have been developed to communicate the accepted corporate health and safety principles. It establishes the right to a workplace free of violence and harassment and requires employers to take positive action to prevent any form of these issues in the workplace.

SCOPE

The Workplace Violence and Harassment Prevention Policies are to be regarded by all workplace parties as directives for compliance with the Health and Safety Manual.

RESPONSIBILITIES**Health and Safety Representative (HSR)**

- Review, update and provide corporate violence and harassment policy statements to Senior Management annually.
- Implement the corporate Workplace Violence and Harassment Prevention Policy statements in conjunction with Senior Management.
- Distribute and post corporate Workplace Violence and Harassment Prevention Policy statements.
- Ensure that workplace violence assessments as it relates to all workplace office and site locations, are conducted.
- Enforce the Workplace Violence and Harassment Prevention Policy statements, programs and corporate expectations.

Senior Management Responsibilities

- Endorse and implement the corporate Workplace Violence and Harassment Prevention Policy statements.
- Develop a corporate Workplace Violence and Harassment Prevention Policy statement.
- Review the respective corporate Workplace Violence and Harassment Prevention Programs, on an annual basis and ensure compliancy with respective Legislation and/or Acts.
- Ensure equipment, materials and protective devices are provided, maintained and used as required at site and office locations.
- Enforce the Workplace Violence and Harassment Prevention Policy statements, programs and corporate expectations.

Supervisor Responsibilities

- Enforce the Workplace Violence and Harassment Prevention Policy statements, programs and corporate expectations.
- Conduct or direct a competent designate to conduct a workplace violence assessment as it relates to all construction workplaces and other workplace locations.
- Conduct incident investigations where reports of workplace violence and or harassment have been identified.

Worker Responsibilities

- Advise Supervisor if experiencing any difficulties with assigned tasks, or if assigned tasks are beyond perceived limitations or medically not capable of performing tasks.
 - Comply with all the requirements as defined under the Occupational Health and Safety Act and Regulations.
 - Enforce the Workplace Violence and Harassment Prevention Policy statements, programs and corporate expectations.
-

PROCEDURE

Required programs, policies or procedures associated with the prevention of workplace violence and/or harassment have been developed and reviewed to ensure compliance with the *Occupational Health and Safety Act and Regulations*.

A specific corporate Workplace Violence and Harassment Prevention Policy is contained within Section 1. (**Section 1-1 - Policy Statements**).

An annual review will be conducted for said policy. After being reviewed and approved of Senior Management, the policy is to be signed and dated by Senior Management, distributed and posted by the HSR & Supervisors and implemented by all workplace parties.

Specific 'Workplace Violence Assessments will be developed for all workplace office locations by the HSR and/or Supervisors. Specific 'Workplace Violence Assessments will be completed for construction sites by the Supervisor during the daily hazard assessment.

Annual review of assessments will be conducted to ensure all programs, policies and employee training programs are accurate and maintained.

The Supervisor will investigate (**7-1 Investigation Kit**) to determine contributing factors, root cause and follow-up actions required where situations of potential workplace violence and/or harassment have been reported.

If Progressive Discipline is deemed necessary, the Supervisor or Senior Management will ensure that the appropriate people are assembled, and the documentation is recorded.

Retaliation against persons who bring a complaint of actual or perceived violence or harassment is strictly prohibited and will be dealt with accordingly. A complaint of workplace violence or harassment that is intentionally fraudulent, frivolous or malicious may be subject to disciplinary action.

All related documents must be forwarded to HSR & Senior Management immediately for review and filing.

VIOLENCE PROTECTION PROCEDURE:**1. RISK ASSESSMENT**

Supervisors will ensure a violence risk assessment is conducted (Refer to Workplace Violence Assessment Forms). Specific workplace violence assessments will be developed for all workplace office locations by the Supervisors. Specific workplace violence assessments will be completed on construction sites by the Supervisors during the daily hazard assessment.

Any risks identified through this process will result in the development and implementation of a specific violence prevention plan to address

8 - WORKPLACE VIOLENCE & HARASSMENT PREVENTION PROCEDURE

this risk. A review of the risk assessment and violence prevention plan will be conducted by the **Supervisors** on an annual basis. These documents will also be reviewed, and changes will be made if the following occur:

- Change in nature of the workplace, type of work or work conditions.
- Worker or HSR indicates that procedures or programs in place to address workplace violence are inadequate.
- A violent incident has occurred.

As part of the violence risk assessment process, the following issues will be considered:

- Past occurrences of violence at that workplace.
- Violent incidents that have occurred in similar workplaces.
- Potential circumstances and interactions that occur while performing work.
- Geographic location and layout of the workplace.
- Domestic Violence.

A violence prevention plan will be developed that will include the following elements:

- A written Workplace Violence Prevention Policy Statement.
- Strategies to minimize and to the extent possible, eliminate the risk of violence in the workplace.
- Training requirements regarding workplace violence for employees, supervisors and contractors.
- Procedures for reporting, documenting and investigating incidents of violence.

Note: If domestic violence is deemed to be a potential threat to a specific worker, Senior Management will undertake the appropriate measures to ensure the dissemination of relevant information to select/affected personnel. Company protocol regarding confidentiality of information will be followed.

2. INCIDENT REPORTING, INVESTIGATION AND FOLLOW-UP

All workers are required to report any act or threatening statement of violence arising out of their employment, to their respective Supervisor.

Senior Management and/or HSR will ensure that all violent incidents are investigated by appropriate competent designated personnel. Any actions or incidents deemed to be of risk to worker's health or well-being will be dealt with following progressive disciplinary measures. In addition, local authorities will be summoned where required. This process will be documented and kept in file and will be used in future risk assessments.

3. TRAINING

General

All employee orientations and if necessary, during safety talks, the following items will be reviewed:

8 - WORKPLACE VIOLENCE & HARASSMENT PREVENTION PROCEDURE

- Company Workplace Violence Prevention Policy.
- Our expectations of conduct while engaging in work activities.
- Violence prevention procedures and corrective response procedures.
- Workplace emergency procedures and incident reporting procedures.

All contractors will be advised of our company policies regarding Workplace Violence Prevention during site orientations and/or safety meetings.

Specific

Specific training regarding potential workplace violence will be provided to those employees or contractors who are required to work in “high risk” locations as identified through the violence risk assessment process. This will be reviewed on construction projects, by the Supervisor, during daily hazard assessments.

4. ROLES AND RESPONSIBILITIES

Health and Safety Team

- In conjunction with Senior Management, ensure that Workplace Violence Prevention Policy statement is prepared, and reviewed on an annual basis with all staff.
- Conduct a ‘Workplace Violence Assessment’ for office
- Ensure procedures for the reporting, investigating and documenting of incidents of workplace violence are established and in place.
- Ensure regular evaluation of the Workplace Violence Prevention Policy are conducted (Annually, after an incident or if circumstances change).
- Facilitate ongoing discussion on workplace violence issues with workers and contractors, as required.

Senior Management

Ensure that Workplace Violence Prevention Policy statement is prepared and reviewed on an annual basis with all staff.

- Ensure that appropriate training and education in violence prevention procedures and response procedures are provided to workers and/or contractor.
- Report incident to the Ministry of Labour when required.

Supervisor

- Ensure that the Workplace Violence Prevention Policy is communicated to all contractors at the workplace.
 - Conduct a site-specific workplace violence assessment and if necessary, prepare a violence prevention plan.
 - Inform staff of the nature and extent of the risk of violence.
 - Report incident to Senior Management.
 - Take corrective actions and monitor their effectiveness.
 - Ensure regular evaluation of the Workplace Violence Prevention Program (Annually, after an incident or if circumstances change).
 - Ensure that the HSR is consulted as part of the violence risk
-

assessment process and during the development of the Violence Prevention Plan

- When on construction projects, ensure that a site-specific violence risk assessment is conducted and if necessary, a violence prevention plan is developed and implemented.
- Conduct reporting, investigation and documentation of incidents of violence are established and are in place.
- Report incident to Police, Ministry of Labour, Manager, Senior Management and the Health and Safety Team.
- Comply with reporting, investigation and documenting procedures.
- Facilitate ongoing discussion on workplace violence issues with workers and contractors, as required.
- Assist in development and updating of the Workplace Violence Prevention Program.
- Review procedures for prevention of workplace violence.
- Promote and encourage reporting of violent incidents.

Worker Responsibility

- Provide input into violence risk assessment.
- Attend education and training sessions regarding violence.
- Provide input into development of the violence prevention plan.
- Follow established procedures for the prevention and reporting of incidents of violence.
- Report incidents of violence to your immediate Supervisor and/or Manager, Senior Management and the Health and Safety Team.
- Provide input into incident investigations.

5. PROGRAM REVIEW

The Workplace Violence Prevention Program will be monitored and information from investigations, feedback from Workers, Supervisors and Senior Management, will be used to evaluate its effectiveness. Any weaknesses or opportunities for improvement that are identified through this process will be addressed.

Evaluating the program on a regular basis is part of our company's commitment to ensuring a safe and healthy workplace.

HARRASMENT PREVENTION PROCEDURE:

1.TRAINING

General

During employee orientations and safety talks the following items will be reviewed:

- Company Workplace Harassment Prevention Policy.
- Our expectations of conduct while engaging in work activities.
- Workplace Harassment Prevention Procedures and corrective response procedures.

All contractors will be advised of our company policies regarding Workplace Harassment Prevention during, procurement processes, site orientations and/or safety meetings.

2. INCIDENT REPORTING, INVESTIGATION AND FOLLOW-UP

Workers are required to report harassment arising out of their employment, to their respective Supervisor, Senior Management or the Health and Safety Coordinator.

Senior management will ensure that all harassment incidents are investigated by the appropriate parties. Any actions or incidents deemed to be harassment will be dealt with following progressive disciplinary measures. This process will be documented and kept on file. In addition, local authorities will be summoned as required.

3. ROLES AND RESPONSIBILITIES

Health and Safety Coordinator

- Ensure procedures for the reporting, investigating and documenting of incidents of workplace harassment are established and in place.
- Take corrective actions when necessary and monitor their effectiveness.
- Ensure regular evaluation of the Workplace Harassment Prevention Policy (Annually, after an incident or if circumstances change).
- Facilitate ongoing discussion on workplace harassment issues with workers and contractors
- Ensure all workplace parties fulfill their roles and responsibilities, as it relates to the prevention of workplace harassment.

Senior Management

- Ensure that the Workplace Harassment Prevention Policy Statement is prepared and reviewed on an annual basis with all staff.
- Ensure appropriate training and education in harassment prevention procedures and response procedures are provided to workers and/or contractors.
- Ensure regular evaluation of the Workplace Harassment Prevention Policy (Annually, after an incident or if circumstances change).

Supervisor

- Ensure that the Workplace Harassment Prevention Policy is communicated to all contractors.
 - Inform staff of the nature and extent of workplace harassment.
 - Facilitate ongoing discussion on workplace harassment issues with workers and contractors.
 - Provide input into the Workplace Violence and Harassment Prevention Policy.
 - Review procedures for prevention of workplace harassment.
 - Promote and encourage reporting of incidents of harassment.
 - Comply with reporting, investigation and documenting procedures.
-

8 - WORKPLACE VIOLENCE & HARASSMENT PREVENTION PROCEDURE

Worker Responsibility

- Provide input into Workplace Violence and Harassment Policy.
- Attend education and training sessions regarding workplace harassment.
- Follow established procedures for the prevention and reporting of incidents of workplace harassment.
- Report incidents of harassment to your immediate supervisor or senior management.
- Provide input into harassment investigations.

4. PROGRAM REVIEW

The Workplace Harassment Prevention Program will be monitored and information from investigations, feedback from Workers, Supervisors and Senior Management, will be used to evaluate its effectiveness. Any weaknesses or opportunities for improvement that are identified through this process will be addressed.

Evaluating the program on a regular basis (at a minimum on an annual basis) is part of our company's commitment to ensuring a safe and healthy workplace.

DISTRIBUTION

Distribution of the Workplace Violence and Harassment Prevention Programs, Policies will be as follows:

1. Reviewed with new employees during the Orientation Process.
2. Posted on all Health and Safety Bulletin Board, included within Safety Binders, and posted in other locations deemed appropriate

RECORDS

All documentation and records associated with workplace violence and harassment prevention will be maintained on file indefinitely.

8-1-1 - WORKPLACE VIOLENCE ASSESSMENT

Workplace Location: _____ Date: _____

Name of Person Conducting Assessment _____

If you answer "YES" to any of the following questions, continue with Part 2A, B, and or C of the assessment. If you answer "NO" to all the questions, no further action is required.

Is there a history of incidents or threats of violence in the workplace? ☐ YES
☐ NO

Corrective Actions: _____

Is the workplace near a high crime area? ☐ YES
☐ NO

Corrective Actions: _____

Have workers or the JHSC raised concerns respecting potential or actual violence in the workplace? ☐ YES
☐ NO

Corrective Actions: _____

Is there a need for workers to work alone or in isolation in the workplace? ☐ YES
☐ NO

Corrective Actions: _____

Is there a need for workers to work during late evening or early morning hours by themselves? ☐ YES
☐ NO

Corrective Actions: _____

Do workers have contact with the public? ☐ YES
☐ NO

Corrective Actions: _____

8-1-2 - WORKPLACE VIOLENCE ASSESSMENT (CONSTRUCTION)

"NO" responses to any of the following questions, indicate potential areas that need to be examined closely to ensure that processes are in place to address workplace violence.

Are hours of operation clearly posted at entrances?

☐ YES
☐ NO

Comments:

Have the violence & harassment policies been posted/explained to all workers?

☐ YES
☐ NO

Comments:

Is the emergency response plan posted? (e.g. emergency contacts, map to hospital)

☐ YES
☐ NO

Comments:

Is there sufficient lighting inside or outside of workplace?

☐ YES
☐ NO

Comments:

Is there security system in place and is it maintained during and after hours(e.g. monitoring, guards, etc.)?

☐ YES
☐ NO

Comments:

Are locks used and are they fully functional?

☐ YES
☐ NO

Comments:

Are barriers used to prevent access to the workplace(e.g. perimeter fencing, etc.)?

☐ YES
☐ NO

Comments:

8-1-3 - WORKPLACE VIOLENCE ASSESSMENT (OFFICE)

"NO" responses to any of the following questions, indicate potential areas that need to be examined closely to ensure that processes are in place to address workplace violence.

Is access to the workplace controlled by reception, coded cards, or keys? ☐ YES ☐ NO

Corrective Actions:

Is there a means of summoning immediate assistance in work areas should workplace violence occur? ☐ YES ☐ NO

Corrective Actions:

Is the reception area staffed at all times? ☐ YES ☐ NO

Corrective Actions:

Is the receptionist located in an area that can be viewed by the public or employees? ☐ YES ☐ NO

Corrective Actions:

Is there an emergency call button at the receptionist area? ☐ YES ☐ NO

Corrective Actions:

Is there security system in place and is it maintained (e.g. monitoring, guards, etc.)? ☐ YES ☐ NO

Corrective Actions:

Are there posted floor plans showing exits, entrances, location of emergency equipment? ☐ YES ☐ NO

Corrective Actions:

Is the workplace designed in a manner that eliminates places to hide, enhances visual surveillance, and/ or lighting? ☐ YES ☐ NO

Corrective Actions:

PURPOSE

The purpose of this procedure is to establish a process that ensures injured workers are cared for in both an appropriate and timely manner by trained First-Aid personnel, thereby reducing the injured workers' pain and suffering.

SCOPE

This procedure applies to all workplace parties responsible for establishing First-Aid provisions in the workplace as well as to individuals responsible for administering First-Aid. Posting requirements will be completed by **Maxim Mechanical** when the General Contractor does not provide or does not meet legislative requirements on job sites.

RESPONSIBILITIES**Health and Safety Representative (HSR)**

- Develop and implement in consultation with Senior Management a company First-Aid Program.
- Review, in consultation with Senior Management, the company First-Aid Program annually and/or after an incident/accident has occurred. Changes will be implemented as necessary.
- When required, coordinate First-Aid Training for employees.
- Coordinate with Supervisors to ensure that adequate First-Aid kits and supplies are available in the workplace.
- Collect First-Aid Logs (with the expectation of construction projects) on a quarterly basis.
- Provide required protective devices, measures and procedures required by the *Occupational Health and Safety Act and Regulations*.

Senior Management Responsibilities

- Develop and implement a company First-Aid Program in consultation with the HSR.
- Ensure that competent First-Aid responders are readily available during working hours for the number of workers within the workplace.
- Ensure that the company First-Aid Program is reviewed annually.
- Ensure that HSR is consulted and that their recommendations are addressed regarding company First-Aid policies.
- Collect First-Aid Logs (with the expectation of construction projects) on a quarterly basis.

Supervisor Responsibilities

- Ensure worksites meet the Regulatory and Legislative requirements as a minimum.
- During jobsite and workplace inspections, ensure compliance with the company's First-Aid Program, taking corrective actions when necessary.
- Ensure there is an effective means of communication between First-Aid attendants and workers.
- Ensure there is an effective communication to summon outside assistance.
- Provide an effective means of communication between First-Aid attendants, and workers.
- Provide and maintain a First-Aid kit in the workplace are readily available during working hours.
- Post where the nearest medical facility and equipment is located.

- Make sure there is a record of the First-Aid treatment/advice (Using First-Aid Log) given to the worker.
- On construction projects, post the Names of the First Aiders
- In our office the Names of the First Aiders on the H&S Board and available in supervisor safety binders.
- Inspect First-Aid stations and related record keeping during workplace inspections.
- Instruct employees regarding First-Aiders available and locations of First-Aid stations.

Worker Responsibilities

- Seek First-Aid right away from a trained First-Aid responder, if needed.
- If trained and authorized, provide First-Aid treatment to workers.
- If trained and authorized, complete the appropriate documentation – First-Aid log, etc. upon providing treatment to injured worker.
- If First-Aid station supplies are depleted, report immediately to the Supervisor.
- Do not use any medical supplies from the First-Aid station without consent from the First Aider. Only the First Aider is authorized to administer medical supplies from the First-Aid station.

PROCEDURE

Risk Assessment: Supervisors are responsible to assess the risks specific to their worksite before the job starts to determine any first-aid needs. See section 6: *Workplace Inspection Procedure*

Design and Implementation: The aim is to minimize the outcome of accidents or exposures, comply with OSHA requirements, and include enough appropriate first-aid supplies and equipment (such as bandages and automated external defibrillators).

First-Aid Providers: Assign and train first-aid providers to remain on site who receive suitable training and periodic refresher courses on first-aid skills and knowledge. Section 14 of this manual describes the procedure for managing and reviewing training.

Procedure: Establish clear policies and procedures for first aid, including what workers should do if a coworker is injured or ill. The following is a list of potential first-aid situations and how they should be addressed:

1. **CPR (Cardiopulmonary Resuscitation):** CPR is a life-saving procedure used when a person's heart has stopped beating. It aims to restore blood circulation and oxygen supply to vital organs.
 - a. **Check Responsiveness:** If someone is unresponsive, check for signs of breathing and a pulse.
 - b. **Airway:** Open the person's airway by tilting their head back.
 - c. **Breathing:** If the person is not breathing, provide rescue breaths (mouth-to-mouth or mouth-to-mask).
 - d. **Chest Compressions:** Perform chest compressions to circulate blood.
 - e. **Use an AED (Automated External Defibrillator):** If available, follow AED instructions to shock the heart and restore normal rhythm

2. Treating Cuts and Scrapes:

- a. Apply gentle pressure to stop bleeding.
- b. Clean the wound with mild soap and water.
- c. Apply an antiseptic or disinfectant.
- d. Cover the wound with a sterile bandage or dressing

3. Treating Sprains:

- a. Rest the injured limb.
- b. Apply ice to reduce swelling.
- c. Use compression (such as an elastic bandage).
- d. Elevate the limb to minimize swelling

4. Heat Exhaustion:

- a. Move the person to a cooler area.
- b. Provide cool fluids (water or sports drinks).
- c. Apply cool cloths to the skin.
- d. Keep the person in the shade

5. Hypothermia:

- a. Move the person to a warm environment.
- b. Provide warm fluids (avoid alcohol or caffeine).
- c. Cover the person with warm clothing or blankets

6. Burns:

- a. Determine the burn type (thermal, chemical, electrical).
- b. Assess the severity (first-degree, second-degree, third-degree).
- c. For minor burns, cool the area with cold water.
- d. Cover with a sterile dressing.
- e. Seek medical attention for severe burns

Reporting: The First Aiders will document the treatment provided and along with the injured worker, notify the Supervisor and/or HSR immediately. All First-Aid Kits will be equipped with a First-Aid Kit Inspection Checklist (**9-2-1 – Form, 9- 2-2 – Form, 9-2-3 – Form, 9-2-4 – Form**) based on the number of employees it is serving. All First-Aid Kits will also be equipped with a *First-Aid Manual/Guide* and a First-Aid Log (**9- 1 - Form**). First-Aid Kits will be inspected monthly.

Program Evaluation: Maxim Mechanical Group will regularly evaluate and update the first-aid program to address emerging risks in the workplace.

On construction projects, where there are less than 5 workers and we are not required to provide direct supervision, subcontractors will be responsible for ensuring a First-Aid kit and a trained First Aider are available on-site.

DISTRIBUTION The following First-Aid documents will be posted near and/or in the First-Aid Kits as required:

- Certificates of First Aid Trained Personnel.
- Regulation 1101.
- Form 82.
- First-Aid Kit Inspection Checklist.
- First-Aid Log.

Emergency Phone Numbers & Directions to the Nearest Clinic and/or Hospital.

RECORDS

Regulation 1101 of the Workplace Safety Insurance Act (WSIA) requires a log be kept and maintained each time a worker is administered First-Aid

First-Aid kits will be equipped with Injury Log Sheets and First-Aiders will be required to complete the log entries each time they administer First-Aid.

On construction projects, First-Aid Logs must be provided to the **Health and Safety Team** and/or **Senior Management**, at the end of a project.

In our other workplaces, First-Aid logs will be collected by the **HSR** and **Senior Management** on a quarterly basis and filed accordingly.

Kit#: _____

Month _____ Year _____

Page ____ of ____

Date & Time of Report	Injured Person's Name	Date & Time of Injury	First Aid Rendered/ Advice Given/ Description of Injury	First Aider Name

At the end of each month, First Aid Logs should be forwarded to the Head Office and a new log utilized.

Any injury of a "serious" nature (or when outside medical care is necessary) must be fully investigated by the worker's supervisor, using an Investigation Report Form 7-1.

9-2-1 - FIRST-AID INSPECTION CHECKLIST (8-15 WORKERS)

Kit # _____

Year _____

REQUIREMENTS (1-5 KIT)	MONTH											
	J	F	M	A	M	J	J	A	S	O	N	D
Current edition of a standard St. John Ambulance First Aid Manual												
one card safety pins												
Dressings consisting of:												
12 adhesive dressings, individually wrapped												
4 sterile gauze pads, 3 inches square												
2 rolls of 2-inch gauze bandage												
2 rolls of 4-inch gauze bandage												
1 triangular bandage												
Current First Aid Certificates posted												
First Aid Logbook maintained up to date												
Latex Gloves (at least 2 pairs)												
1 way valve (mouth to mouth unit) – optional												
Inspector - Please Initial												

9-2-1 - FIRST-AID INSPECTION CHECKLIST (8-15 WORKERS)

Kit # _____

Year _____

REQUIREMENTS (6-15 KIT)	MONTH											
	J	F	M	A	M	J	J	A	S	O	N	D
Current edition of a standard St. John Ambulance First Aid Manual												
1 card of safety pins												
Dressings consisting of:												
24 adhesive dressings, individually wrapped												
12 sterile gauze pads, 3 inches square												
4 rolls of 2-inch gauze bandage												
4 rolls of 4-inch gauze bandage												
4 sterile surgical pads suitable for pressure dressing, individually wrapped												
6 triangular bandages												
2 rolls of splint padding												
1 roll-up splint												
Current First Aid Certificates posted												
First Aid Log Book maintained up-to-date												
Disposable Gloves (at least 2 pairs)												
Inspector - Please Initial												

9-2-1 - FIRST-AID INSPECTION CHECKLIST (8-15 WORKERS)

Kit # _____

Year _____

REQUIREMENTS (16-200 KIT)	MONTH											
	J	F	M	A	M	J	J	A	S	O	N	D
Current edition of a standard St. John Ambulance First Aid Manual												
24 safety pins												
1 Basin, preferably stainless steel												
Dressings consisting of:												
48 adhesive dressings, individually wrapped												
2 rolls of 1-inch adhesive tape												
12 rolls of 1-inch gauze bandage												
48 sterile gauze pads, 3 inches square												
8 rolls of 2-inch gauze bandage												
8 rolls of 4-inch gauze bandage												
6 sterile surgical pads suitable for pressure dressing, individually wrapped												
12 triangular bandages												
splints of assorted sizes												
2 rolls of splint padding												
Current First Aid Certificates posted												
First Aid Logbook maintained up-to-date												
Stretcher												
Two Blankets												
Disposable Gloves (at least 2 pairs)												
1 way valve (mouth to mouth unit)												
Inspector - Please Initial												

PURPOSE

The purpose of this procedure is to establish a Hazard Reporting process. This process will be used as a recording and follow-up method to provide specific documentation on current health and safety related issues for all workplace parties and at all locations.

SCOPE

This procedure applies to all workers, supervisors, the Health and Safety Team, Senior Management and Subcontractors (including their workers).

RESPONSIBILITIES**Health and Safety Team Responsibilities**

- Develop and implement in consultation with Senior Management, a company Hazard Reporting Program.
- Review, in consultation with Senior Management, the company Hazard Reporting Program annually and/or after an incident/ accident has occurred. Changes will be implemented as necessary.
- Retain all Hazard Reports and follow-up actions as required.
- Ensure corrective actions are taken, and that they are effective and compliant.
- Ensure hazard assessments are conducted for all operations, including routine and non-routine and human factors
- Immediately respond to all hazards reported and record the findings on the Hazard Report Form.
- Ensure that Worker Representative is consulted and that their recommendations are addressed regarding company Hazard Reporting policies jointly with the Senior Management and Supervisors.
- Document and determine the causes, contributing factors and subsequently implement corrective actions to prevent a reoccurrence from the hazard(s) reported jointly with Senior Management and Supervisors.

Senior Management Responsibilities

- Ensure, develop, review and approve on an annual basis a company Hazard Reporting Program is developed and implemented.
- Hazard Reporting Program is to be reviewed and approved annually.
- Ensure all company workers receive the appropriate training and workplace specific overviews related to hazard reporting.
- Ensure that Worker Representative is consulted and that their recommendations are addressed regarding company Hazard Reporting policies.
- Ensure all company workers receive the appropriate training and workplace specific overviews related to hazard reporting.
- Follow-up with workplace parties to ensure corrective actions are taken, and that they are effective and compliant jointly with the Health and Safety Team.
- Immediately respond to all hazards reported and record the findings on the Hazard Report Form.
- Ensure all required hazards are reported and appropriate follow-up actions are completed jointly with the Health and Safety Team.
- Ensure that Worker Representative is consulted and that their recommendations are addressed regarding company Hazard Reporting policies jointly with the Health and Safety Team and

Supervisors.

- Ensure each recommendation on the Hazard Report is completed within the established timelines.
- Document and determine the causes, contributing factors and subsequently implement corrective actions to prevent a reoccurrence from the hazard(s) reported jointly with Supervisors and the Health and Safety Team.

Supervisor Responsibilities

- Document and determine the causes, contributing factors and subsequently implement corrective actions to prevent a reoccurrence from the hazard(s) reported jointly with Senior Management and the Health and Safety Team.
- Encourage all workers to report hazards in the workplace to their respective Supervisor.
- When required, keep the Worker Representative informed of any hazards that have been identified and addressed.
- Advise a worker of the existence of any potential or actual danger to the health or safety of the worker, of which the Supervisor is aware of.
- Participate in applicable Hazard Reports and follow-up as required, jointly with the Health and Safety Team and Senior Management.

Worker Responsibilities

- Immediately advise the Supervisor of any injury, hazardous acts/conditions, occupational illness, contravention of the Occupational Health and Safety Act and Regulations or the absence and/or defect in any equipment or protective device
- If required, assist the Supervisor with addressing the hazardous situation and/or with completion of an incident investigation (7-1 Form).
- If further medical attention is needed, the employee will attend the selected practitioner, and will return to the workplace following treatment.
- Advise Supervisor if experiencing any difficulties with assigned tasks, or if assigned tasks are beyond perceived limitations or medically not capable of performing tasks.

PROCEDURE

CONSTRUCTION PROJECTS

- Conduct Risk Assessments before the job is started, when new tools/equipment is added or when changes are made to OHSMS to identify any potential hazards
 - All Hazardous Acts/Conditions, Incidents/Accidents, Near Misses and Injuries/ Illnesses MUST be reported to the Supervisor.
 - Workers must report hazards immediately via verbal communication
 - In all cases of injury - Report to Trained First-Aid Personnel or Supervisor and obtain treatment or medical care as needed.
 - The Supervisor (if trained) is to provide first-aid assistance to injured or ill workers (if necessary). If not trained, immediately arrange assistance from a trained first aider.
 - The Supervisor, in cooperation with the first aider and injured worker, will complete a first aid report log noting all requested details of the illness or injury.
 - If medical aid is necessary, the Supervisor will arrange transportation
-

to the selected medical facility, as appropriate. Injured/ill workers are not to drive themselves to a hospital or doctor. Follow policy for transportation of injured workers (Section 7)

- The Supervisor will complete the Hazard Reporting Form (10-1 Form), with the involvement of all applicable workers as required for assistance.
- The Hazard Reporting form should be filled out if there is a potential hazard observed, consideration of design and layout of work area, ergonomics, machinery and process should be considered when filling out the form.
- The Supervisor and Senior Management will ensure that any worker who may require medical attention away from the workplace will receive full pay of the regularly scheduled shift for the day of injury, including any premium or shift bonuses that would normally be paid.
- The Senior Management in conjunction with the Supervisor and Health and Safety Team will determine if the injury or illness that occurred has the potential to reoccur and take the appropriate steps to prevent reoccurrence.
- The Supervisor must record all events on Hazard Reporting Form.
- The Health and Safety Team and Senior Management must investigate the reported hazard and take any corrective action(s) necessary to resolve the issue.
- The Hazard Reporting Form will be used to record Incidents/Accidents that do not extend beyond basic first aid.
- Incidents/Accidents that extend beyond basic first aid, or that require outside medical attention, must have an investigation completed (following procedures detailed in Section – 7 Investigations).
- Report any off-shift visits for medical attention regarding work related injuries.
- Maintain a copy of the completed Hazard Report, in the onsite project safety files.

Provide the completed original form to Senior Management for filing at the end of the project.

OTHER WORKPLACES

- All Hazardous Acts/Conditions, Incidents/Accidents, Near Misses and Injuries/ Illnesses MUST be reported.
 - All Hazardous Acts/Conditions, Incidents/Accidents, Near Misses and Injuries/Illnesses reported by workers, must be communicated to their Supervisor, and the Health and Safety Team.
 - Near misses (unplanned events that did not result in injury or damage but could have under slightly different circumstances) shall be reported immediately to the supervisor and documented using Hazard Reporting Form 10-1. Near misses with high potential for serious injury or significant damage shall be investigated using the same Investigation Procedure as actual incidents and any resulting corrective and preventive actions shall be tracked and verified as per Section 7.
 - Workers must report hazards immediately via verbal communication
-

- Workers must not send text messages or emails, when reporting hazards.
- In all cases of injury - Report to Trained First-Aid Personnel or Supervisor and obtain the necessary treatment or outside medical care as needed.
- Their Supervisor, with the HSR, (if trained) will provide first aid assistance to injured or ill workers (if necessary). If not trained, immediately arrange assistance from a trained first aider.
- Their Supervisor, with the first aider and injured worker, complete a first aid report log noting all requested details of the illness or injury.
- If medical aid is necessary, the Supervisor, with the HSR, will arrange transportation to the selected medical facility, as appropriate. Injured/ill workers are not to drive themselves to a hospital or doctor. Follow policy for transportation of injured workers (Section 7).
- Their Supervisor, with the HSR, will complete the Hazard Reporting Form (10-1 Form), with the involvement of all applicable workers as required for assistance.
- Their Supervisor, with the HSR, will ensure that any worker who may require medical attention away from the workplace will receive full pay for the balance of the regularly scheduled shift for the day of injury, including any premium or shift bonuses that would normally be paid.
- The Supervisor, with the HSR and Senior Management, will determine if the injury that occurred has the potential to reoccur and take the appropriate steps to prevent reoccurrence.
- Their Supervisor, with the HSR, must record all events on Hazard Reporting Form.
- Their Supervisor, with the HSR and Senior Management, must investigate the reported hazard, and take any corrective actions necessary to resolve the issue.
- The Hazard Reporting Form will be used to record Incidents/Accidents that do not extend beyond basic first aid.
- Incidents/Accidents that extend beyond basic first aid, or that require outside medical attention, must have an investigation completed (following procedures detailed in Section – 7 Investigations).
- Report on any off-shift visits for medical attention regarding work related injuries.
- Provide the completed form to the HSR for filing.

DISTRIBUTION

Distribution of the Hazard Reporting Program requirements will be as follows:

- The Hazard Reporting procedure will be posted on the health and safety bulletin board and/or the site supervisor's binder(s).

Provided and reviewed to Workers, Subcontractors, Suppliers and Visitors during orientation.

RECORDS

Records of Hazard Reports on our Construction projects will be maintained in the site's safety records, until the completion of the project, at which time they will be provided to the Senior Management and the Health and Safety Team for filing.

All Hazard Report records from our other workplaces, will be maintained by

the Senior Management and Health and Safety Team.

These records are to be reviewed to determine the need for ongoing file maintenance (i.e. 3rd party liability, pending charges, etc.). All investigations will be maintained indefinitely.

Date of Assessment:		Job/position:		Date Reviewed:	
Assessment performed by:		Supervisor:		Date Implemented:	

		Inherent Risk Before Controls				Residual Risk After Controls		
Task	Hazards Present	Likelihood	Severity	Risk Level	Hierarchy of Control in Place	Likelihood	Severity	Risk Level

PURPOSE

The purpose of this procedure is to define a system for developing, reviewing, approving and implementing Workplace Task Standards. The Purpose of Workplace Task Standards are to define our organizations expectation's using Job Hazard Analyses (JHA), Safe Work Practices (SWP) and Safe Job Procedures (SJP).

The JHA, SWP and SJP, will be combined into a 'Workplace Task Standard' document, for each respective task. Workplace Task Standards will be developed to inform workers of legislative, regulatory and company specific compliance requirements.

SCOPE

Workplace Task Standards are to be used as an orientation and reference document, providing company specific health and safety awareness information to all workplace parties.

RESPONSIBILITIES**Health and Safety Representative (HSR)**

- Develop, in conjunction with Senior Management and Supervisors, a company-wide Job Task Inventory, where related jobs can be broken into tasks and critical tasks can be identified.
- Develop Workplace Task Standards, relating to jobs and tasks that require additional direction and company specific expectations in conjunction with the Supervisors and Senior Management.
- Assist in developing corporate health and safety documentation, policies and procedures where required.
- Distribute and communicate information to the appropriate parties regarding any nonconformance or deficiencies reported.
- Provide a Workplace Task Standards package to all new employees, as part of their orientation process.
- Provide a Workplace Task Standards package to existing employees, when changes are made.
- In conjunction with the Supervisors and Senior Management, develop project specific Workplace Task Standards - as part of the Project Specific Safety Plan.
- Ensure the Workplace Task Standards package is followed by all Subcontractors and Workers on site in conjunction with Senior Management and the Supervisors.

Senior Management Responsibilities

- Ensure all company employees receive the appropriate training, Workplace Task Standards reviews and workplace specific overviews.
- Develop, in conjunction with the HSR and Supervisors, a company-wide Job Task Inventory, where related jobs can be broken into tasks and critical tasks can be identified.
- Develop Workplace Task Standards, relating to jobs and tasks that require additional direction and company specific expectations in conjunction with the Supervisors and HSR.
- Ensure that the Workplace Task Standards comply with all the requirements as defined under the Occupational Health and Safety Act *and Regulations*.
- Review and approve Workplace Task Standards on an annual basis.
- In conjunction with the HSR and Supervisors, develop project specific

Workplace Task Standards - as part of the Project Specific Safety Plan.

- Provide a Workplace Task Standards package to all new employees, as part of their orientation process.
- Provide a Workplace Task Standards package to existing employees, when changes to the Workplace Task Standards are made.
- Ensure the Workplace Task Standards package is followed by all Subcontractors and Workers on site in conjunction with Supervisors and the HSR.

Supervisor Responsibilities

- Ensure the Workplace Task Standards package is followed by all Subcontractors and Workers on site in conjunction with Senior Management and the Health and Safety Coordinator.
- Develop, in conjunction with Senior Management and HSR, a company-wide Job Task Inventory, where related jobs can be broken into tasks and critical tasks can be identified.
- Develop Workplace Task Standards, relating to jobs and tasks that require additional direction and company specific expectations in conjunction with the HSR and Senior Management.
- In conjunction with the HSR and Senior Management, develop project specific Workplace Task Standards - as part of the Project Specific Safety Plan.
- Ensure, where reasonably possible, that every Subcontractor, worker and visitor at the workplace complies with all Occupational Health and Safety Act and Regulations.

Worker Responsibilities

- Follow the requirements of Workplace Task Standards as directed by your Supervisor/Foremen.
- Advise Supervisor/Foremen if experiencing any difficulties with assigned tasks, or if assigned tasks are beyond perceived limitations or medically not capable of performing tasks.
- Participate in the development of safe job procedures and hazard assessments.
- Works in the manner and with the protective devices, measures and procedures required by the Occupational Health and Safety Act and Regulations.
- Report to his or her Supervisor/Foremen any contravention of the Occupational Health and Safety Act and Regulations or the absence/defect in any equipment or protective device.

PROCEDURE The scope of each Workplace Task Standards component is as follows:

JOB HAZARD ASSESSMENTS

JHAs will be conducted for all workplace tasks. JHAs will “break down” each task’s hazards and their respective controls. In doing so, JHAs will identify minimum requirements necessary to perform the task.

SAFE WORK PRACTICES

SWPs will provide all company employees, with the specific health and safety expectations prior to commencing their employment. SWP will detail all facets of our workplace activities, and specific company

expectations. SWPs will identify minimum health and safety expectations needed to work within our workplaces.

SAFE JOB PROCEDURES(SJP)

SJP will be developed for all Critical Tasks. SJPs are to be used by site management as a means of providing basic health and safety awareness information to Workers and Subcontractors.

*Note: The **Maxim Mechanical** Site Management Team (Supervisor and/or Senior Management) must ensure SJPs are provided to Subcontractors as part of a Project Specific Safety Plan. Subsequently, the **Maxim Mechanical** Site Management Team must ensure Subcontractors provide (or supplement) their own project specific procedures for high-risk activities.*

Senior Management, the HSR and/or Supervisor, must ensure company specific Job Hazard Assessments (JHA), Safe Work Practices (SWP) and Safe Job Procedures (SJP) are documented for and provided to each workplace location (Offices, Facilities and Projects). All (3) (JHA, SWP, SJP), will be combined into a 'Workplace Task Standard' document, for each respective task. A package of Workplace Task Standards will be included within both our Project Specific Safety Plans and our Employee Guidelines Package - which is at a minimum communicated during Employee Orientations.

For Project Specific Safety Plans, it will be the responsibility of the HSR to develop and provide Workplace Task Standards to Supervisor. It will be the responsibility of Supervisor to oversee expectations set out within Workplace Task Standards, and to ensure our Workers and/or Subcontractors adhere to them.

Workplace Task Standards will be built upon company expectations and requirements that meet or exceed legal and/or legislative requirements. All applicable Workplace Task Standards are to be communicated and documented as part of our daily hazard assessment process.

Procedures for completing Workplace Task Standards, are broken down into the following parts:

Part 1: Job & Task Inventory

Part 2: Job Hazard Assessment

Part 3: Safe Work Practices

Part 4: Identified Critical Hazards

Part 5: Safe Job Procedures

Completed Workplace Task Standards will be used as part of both Employee Orientations and site level reference documents (Project Specific Safety Plans, daily hazard assessments, or when required by workers for clarity).

Each Workplace Task Standard will be regarded as our company's minimum expectations. Workplace Task Standards will be held as established guidelines for the completion of work activities.

DISTRIBUTION The distribution of Workplace Task Standards is the responsibility of the **Health and Safety Coordinator** and the **Supervisor/Foremen** to provide specific information to their workers with the direction. The **Subcontractor** must submit any required additional procedures relating to their project specific activities as they relate to potentially hazardous work.

RECORDS Supervisors, Senior Management and the Health and Safety Coordinator to ensure that copies of the Workplace Task Standards procedures and Workplace Task Standards package are made available on work sites at all times within containers in vans. Copies of all procedures or specifications will be maintained on file by the **Supervisor** and forwarded to the **Health and Safety Coordinator** upon completion of the project.

Records of changes made to Workplace Task Standards following annual reviews or incidents/accidents, will be recorded on the Revision Tracking Sheet (**14-1-1 – Form**).

PART 1 - JOB & TASK INVENTORY

For the purposes of this procedure:

A job: A function consisting of one or more tasks that results in the completion of the function. Jobs that are performed as a component of other jobs, will be considered tasks as well. Thus all jobs are tasks, but not all tasks are jobs.

A task: A specific component of a job.

Examples: Installing drywall - is a job. The tasks involved in this job might include – storing/handling material, using hand tools, mudding/taping joints, sanding, disposing of excess material, and housekeeping. Tasks involved in the completion of a job can be numerous and may be dependent on an assortment of skills, senses and abilities.

The Task Inventory must initially be conducted -- in cooperation with the Health and Safety Coordinator, Supervisor/Foremen and Senior Management -- to identify all jobs and tasks performed within our workplaces. As jobs can be a components of other jobs, all references to tasks, include jobs as well.

The inventory will based current and potential activities within all company workplace locations. Identified tasks, must be recorded on the 'Task Inventory Form' (11-1 – Form). The analyses of this information takes place at a later stage (Job Hazard Analysis).

Individuals conducting the Task Inventory must be responsible for and familiar with the entire workplace (plus its activities) including projects, facilities, offices and other workplace locations.

Once the Task Inventory is completed, it will an undergo a review by the team. During this review, the team will rate the preliminary risk (prior to developing controls) of each task. A task's risk will be rated using our 'Risk Rating Process' included herein.

The Task Inventory Form (11-1 – Form) must include the following information:

Job and/or Task:	The name assigned to a given job or task.
Application:	Where the job or task is performed (construction projects, offices, storage facilities, maintenance shops, etc.).
Department	Primary department responsible for performing job or task (if applicable).
Internal or Subcontracted:	Whether the job or task, is performed by our company, or by subcontractors in our workplace locations.
Known Hazards:	These are potential or actual hazards that have been associated with the tasks involved (determined by prior incidents, accidents, or injuries, etc.).
Equipment:	Any type of tools, machinery, equipment, mechanisms or devices used in the performance of the jobs or tasks.
Chemicals:	Any chemicals, agents, or material used/encountered, during the performance of the jobs or tasks.
Risk Rating:	The potential risk of the jobs or tasks (determined using the Risk Rating Process included herein).

PART 2 - JOB HAZARD ANALYSIS

Following the completion of the Task Inventory, a Job Hazard Assessment (JHA) will be conducted for each task identified.

Each will be broken down into the following categories:

- Breakdown the job or task into logical, sequential steps. This can be performed during the Job and Task Inventory process.
- Identify potential hazards or potential energies, associated with each task or step.
- Determine preventive measures, to eliminate or control the hazards or potential energies, associated with each task or step.
- Using the Risk Rating Process, rate the potential risk of the task. Identify which tasks are above the 'Risk Threshold Limit' and are therefore classified as 'Critical Tasks'.


All identified hazards, their respective controls, and their respective risk rating, must be recorded on the applicable Workplace Task Standards.

Risk Rating Process:

Our Risk Rating Process is based on the following charts. To determine the overall risk rating both the frequency and severity of potential injuries related to the task must be considered.

As both the frequency and severity increase, so too does the risk rating (indicating the likelihood of personal injury or accidents).

Our Risk Rating Threshold will be A – tasks with a high likelihood of personal injury of accidents.

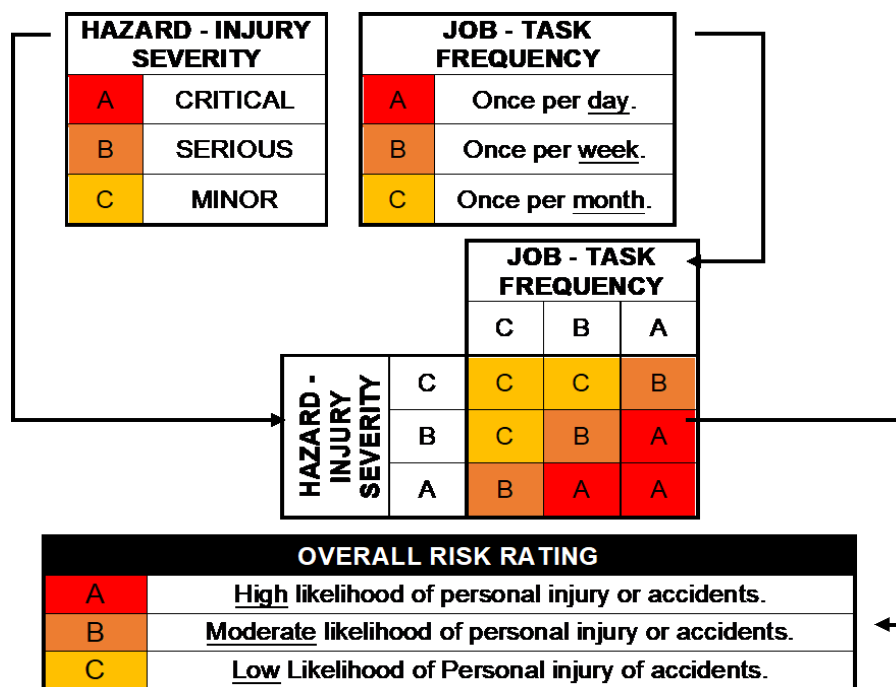

PART 3 - SAFE WORK PRACTICES

Additional company specific Safe Work Practices (SWP) will be developed based on existing company specific knowledge of tasks, as well as reference material from equipment manuals, industry standards and other professional associations (such as the IHSA or WSIB). All completed Workplace Task Standards will have a company specific SWP that applies to legal and company exceptions.

Safe Work Practices will address, at a minimum, the follow topics:

General Safe Work Practices:	Safe Work Practices that apply to the all task topics.
Specific Safe Work Practices:	Safe Work Practices that relate to distinct sub-topics, related to the task (e.g. Task: Working at Heights, Sub-Topics: Guardrails, Anchor Points, Rescue, etc.).
Personal Protective Equipment Requirements:	Safe Work Practices related to PPE requirements. Lists required PPE based on task.
Training Requirements:	Safe Work Practices related to training requirements. Lists required training needs based on task.
Inspection Requirements:	Safe Work Practices related to inspection requirements. Lists required inspections related to task.

PART 4 – IDENTIFIED CRITICAL TASKS

Some typical hazards which can occur if proper controls are not in place and followed include:

- Pain or injury from physical exertion, repetitive manual tasks or working in awkward positions
- Exposure to mould and fungi
- Exposure to lead, wood dust, asbestos, paints, solvents, and other toxic materials
- Working in extremely hot or cold temperatures
- Working with heavy powered equipment
- Excess vibrations caused by power tools and other equipment
- Working in confined spaces
- Working in loud conditions
- Slips, trips, and falls
- Working alone or at extreme heights

Controls/tasks must be put into place when one of these hazards are identified at a workplace. These tasks are to be marked using for 11-2.

These hazards are reviewed and updated yearly when identifying trends and statistics.

PART 5 - SAFE JOB PROCEDURES

Safe Job Procedures (SJPs) will be developed for Workplace Task Standards identified as critical tasks (tasks whose risk rating exceeds our Risk Rating Threshold of A).

SJPs will also be developed for tasks required by legislative or regulatory requirements, to have written procedures.

SJPs will list, in a logical order, controls listed in the JHA and practices listed in the SWP. In doing so, SJPs will provide company specific expectations, oversight and direction.

Safe Job Procedures will address, at a minimum, the follow topics:

Pre-Task Requirements	Procedures related to steps that must be completed prior to commencing work activities. This can include, planning (daily hazard assessments), inspections (equipment, PPE, etc.), notifications.
During Task Requirements:	Procedures related to steps that must be completed while completing the task.
Task Completion Requirements:	Procedures related to steps that must be completed after the task has been completed. This can include, housekeeping, material storage, and close out documents.
Specific Sub-Topic Requirements:	Procedures related to distinct sub-topics referenced in the (3) aforementioned procedures. This could include, Fall Rescue Procedures, Guardrail Installation Procedures, or Protective Cover Removal Procedures.

Note: The **Maxim Mechanical** Site Management Team (Project Managers, Supervisor/Foremen, and/or Senior Management) must ensure SJPs provided to Subcontractors as part of Project Specific Safety Plans, must ensure Subcontractors provide (or supplement) their own project specific procedures Subcontractors must submit to the **Maxim Mechanical** Site Management Team, their project specific procedures as they relate to their potentially hazardous work. The responsibility of the Subcontractor is to provide additional information to their workers, including direction on our procedures.

Where Subcontractor specifications cannot be provided until equipment or material arrives on-site, the job should not commence until appropriate procedures have been provided by the Subcontractor and reviewed by the Health and Safety Coordinator and/or Supervisor.

Prepared by:

Date:

JOB/TASKS	RISK RATING	OUR WORK, SUBCONTRACTED OR BOTH	KNOWN HAZARDS	EQUIPMENT & CHEMICALS USED

Part 2: JOB HAZARD ASSESSMENT**Overall Task
Risk Rating:**

Description:						
Application:	☐ Construction Projects	☐ Industrial (Maintenance Shop, Storage Areas)	☐ Office Areas	Performed By:	☐ Our organization	☐ Subcontractors
Applicable Legislation:	☐ OHSA	☐ Construction Regs.	☐ Industrial Regs.	☐ Designated Substances	☐ Confined Spaces	☐ Asbestos on Constr.
	☐ WHMIS	☐ Bio and Chem. Agents	☐ Highway Traffic Act	☐ First Aid	☐ Compulsory Trades	☐ Employment Standards
	☐ Other:					
Approved By:		Position:		Date:		

JOB HAZARD AND RISK ANALYSIS**RISK RATING
SYSTEM**

A	High likelihood of personal injury or facility, material or equipment damage.
B	Moderate likelihood of personal injury or facility, material or equipment damage.
C	Minor likelihood of personal injury or facility, material or equipment damage.

TASK HAZARDS	TASK CONTROLS	RISK RATING

CONTROLS

- | | | |
|---|------------------------------|-----------------------------|
| - Have all the hazards been identified? | ☐ Yes | ☐ No |
| - Have the controls been implemented? | ☐ Yes | ☐ No |

PERSONAL PROTECTIVE EQUIPMENT (CSA APPROVED)

										ADDITIONAL PROTECTION LISTED IN CONTROLS
HEAD PROTECTION	FOOT PROTECTION	EYE PROTECTION	SKIN PROTECTION	FALL PROTECTION	RESPIRATORY PROTECTION	HEARING PROTECTION	HIGH-VIS PROTECTION	HAND PROTECTION	FACE PROTECTION	
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

ADDITIONAL PPE CONSIDERATIONS

- Workers on construction projects must wear, at a minimum, head and foot protection.
- Ensure workers wear CSA approved eye protection when completing tasks that may cause objects to fly, dislodge or the like.
- Seat belts must be worn at all times.

PART 3: SAFE WORK PRACTICES (SWP)

-

TRAINING

- Employee Orientations must include a review of these Workplace Task Standards.
- Workers exposed to, or required to work with WHMIS controlled products/material, must be trained in WHMIS accordingly.
- All equipment operators must be competent, and hold valid training certifications for specific pieces of equipment where required by applicable legislation.
- Workers required to handle propane must be a holder of a certificate or ROT (record of training) for that purpose.
- Any repairs to equipment shall be completed only by qualified people.

INSPECTIONS

- All equipment operators must conduct and record pre-use inspections where required for specific pieces of equipment.
- Supervisors must conduct weekly inspections (at a minimum) of construction project workplaces.
- Joint Health and Safety Committee/Worker Representatives must conduct monthly inspections, of workplaces.

PART 4: IDENTIFIED CRITICAL TASKS

-
-
-
-

PART 5: SAFE JOB PROCEDURES (SJP)**PRE-TASK COMMENCEMENT**

1. Complete a daily hazard assessment, in conjunction with all subcontractors, and review with all workers. Ensure all workers understand the daily hazard assessment contents and sign off in acknowledgement.
2. Determine what equipment, machinery, tools and/or material, are required for the completion of the task.
3. Ensure preventative maintenance activities have been completed where required, prior to using equipment, machinery and/or tools.
4. Inspect all] equipment, machinery and/or tools. Also inspect the intended area of use. Complete appropriate inspections. Document inspections on appropriate forms when required.
5. If equipment, machinery and/or tools are observed to be damaged: document deficiencies, tag equipment, and remove from use. Notify supervisor of damage immediately.
6. Do not operate equipment, machinery and/or tools, if the intended area of use, is unsafe.
7. Eye protection shall be worn where equipment does not provide appropriate protection to worker's eyes.
8. Workers must wear appropriate hearing protection, suitable for the sound levels to, when exposed to 85db or more, over an 8-hour period. Hearing protection is also required when exposed to higher decibels over a shorter period of time. Hearing protection must reduce exposure levels below allowable limits.

DURING TASK

1. Once equipment, machinery and/or tools is no longer in operation, implement appropriate storage procedures, turn off the equipment, machinery and/or tools and remove any keys or starting devices.

TASK COMPLETION

1. Upon completion store tools, equipment, and supplies in the appropriate designated location.
2. Implement any housekeeping or maintenance on equipment, machinery and/or tools as required.

RELATED WORKPLACE STANDARD REFERENCES

-
-
-
-

PURPOSE

The purpose of this procedure is to establish a well-planned emergency response, which will limit suffering, losses and resume normal operations as soon as reasonably possible.

SCOPE

This procedure applies to all workplace parties responsible for developing and implementing Emergency Preparedness and Response Plans (EPRP) on behalf of the company. Documented plans will be developed for each construction project that Maxim Mechanical is acting as the General Contractor. Once developed, the scope of the EPRP, including location specific requirements, will be explained to all site personnel.

RESPONSIBILITIES**Health and Safety Team Responsibilities**

- Develop and implement in consultation with Senior Management and Worker Representative a company Emergency Preparedness and Response Procedure, which will be used to prepare Emergency Preparedness and Response Plans in the workplace.
- Review the company Emergency Preparedness and Response Procedure (including related template documents, annually and/or after an incident/accident has occurred. Changes will be implemented as necessary.
- Coordinate with management personnel to ensure emergency drills are conducted where required.
- Arrange training for workers regarding Emergency Preparedness and Response.
- Ensure emergency drills are conducted where required.
- Arrange training for workers regarding Emergency Preparedness and Response. Develop, in conjunction with the Supervisor, a location specific Emergency Preparedness and Response Plan as required.

Senior Management Responsibilities

- Develop and implement in consultation with Senior Management and Worker Representative a company Emergency Preparedness and Response Procedure, which will be used to prepare Emergency Preparedness and Response Plans in the workplace.
- Review the company Emergency Preparedness and Response Procedure (including related template documents, annually and/or after an incident/accident has occurred during management meetings. Changes will be implemented as necessary.
- Ensure that Worker Representative is consulted and their recommendations are addressed regarding company emergency policies.
- Ensure emergency equipment, materials and protective devices provided are provided, maintained and used as required at site and office locations.

Supervisor Responsibilities

- Assist in the development process for the location specific Emergency Preparedness and Response Plan.
- Communicate to all site level personnel the location specific

Emergency Preparedness and Response Plan.

- Ensure specific Emergency Preparedness and Response Plan posted in high traffic area/trailer or is available in appropriate site safety binder(s).
- Conduct emergency drills where required.

Worker Responsibilities

- Follow the Emergency Preparedness and Response Plan established for the workplace at all times.
 - Advise Supervisor if experiencing any difficulties with assigned tasks, or if assigned tasks are beyond perceived limitations or medically not capable of performing tasks.

Comply with all the requirements as defined under the *Occupational Health and Safety Act and Regulations*.

PROCEDURE

The detailed description of all responsibilities for each role is written above in the section titled “Responsibilities”, please review that section before reading the rest of this procedure.

Maxim conducts regular hazard assessments to identify and evaluate workplace risks. These assessments form the foundation of our emergency preparedness planning by determining potential emergency situations that could arise. The following emergency scenarios have been identified based on completed hazard assessments:

- Emergency Evacuation
- Fire and Explosions
- Medical Emergencies
- Hazardous Materials - Accidents & Spills
- Natural Gas/Propane Leaks
- Overhead Powerline Contact Power Failure
- Emergency Violence Response

These emergency situations are reviewed and updated regularly based on hazard assessments, incident reports, and operational changes to ensure a proactive and effective emergency preparedness plan. Please see Section 10 for our Hazard Reporting Procedure for a detailed description.

The purpose of this procedure is to establish a framework for effective emergency preparedness and response and to plan for the outcome within Maxim offices and sites and create a building framework for future use. It aims to prevent or minimize injury or occupational illness through:

1. Prioritizing the safety and health of all individuals involved in our operations.
 2. Safeguard company assets, equipment, and infrastructure.
 3. Establish provisions for hazard identification, risk assessment, emergency response procedures, and communication strategies.
 4. Ensure the continuity of critical construction projects and services.
-

5. Comply with the Ontario Health and Safety Act, Emergency Management and Civil Protection Act, and other relevant regulations and standards governing emergency management in Ontario.

An Emergency Preparedness and Response Plan (EPRP) has been developed (**Form 12-1**) for each workplace location where Maxim is the General Contractor, so that in the event of an undesired event, all workplace parties are able to respond in an effective manner.

The Emergency Management Team (EMT) is responsible for making sure emergency response plans are created, up to date, and available to everyone who needs them. The process includes:

1. **Identify Risks**
 - Look at possible emergencies that could happen.
2. **Write the Plans**
 - Write a step-by-step plan which includes:
 - What triggers the emergency plan
 - What actions to take
 - Who is responsible
 - Communication steps
 - Maps, exits, and emergency contacts
3. **Assign Roles**
 - Assigned roles to key people like:
 - Emergency Coordinator
 - First Aid Responders
 - Fire Wardens
 - Supervisors
 - Communications Lead
4. **Store and Share the Plans**
 - Keep the plans in both digital and paper form.
 - Place copies in easy-to-find locations (e.g., safety boards, control rooms).
5. **Review and Update**
 - Check the plans at least once a year.
 - Update them when:
 - There's a drill or real emergency
 - Something changes in the workplace (like layout or staff)
 - Laws or rules change

Who Does What During an Emergency	
Role	What They Do
Emergency Management Team	Coordinates the overall response, communicates with leadership and emergency services
Emergency Coordinator	Leads the emergency response at the scene

Supervisors / Managers	Help workers follow the plan, check that everyone is safe
First Aid Responders	Give first aid and support injured workers
Fire Wardens / Marshals	Guide evacuations, check areas are clear
Health & Safety Officer	Ensures the response is safe and helps with follow-up
Employees	Follow instructions, evacuate safely, and go to the assembly area

For more information about the ERPR please see section 12-1 for a detailed description of the response plans during an emergency.

Emergency Equipment Management

All emergency equipment must be properly located, identified, and maintained. Maxim follows a consistent process to ensure all required emergency equipment is in place, clearly marked, and regularly inspected for compliance and functionality.

Process for Managing Emergency Equipment

1. Designated Storage and Identification

- Emergency equipment (e.g., fire extinguishers, first aid kits, AEDs, spill kits) is stored in pre-approved, designated areas.
- Locations are clearly marked with visible signage and included on facility maps and emergency plans.
- Equipment placement is reviewed during safety inspections and updated as needed based on operational changes or risk assessments.

2. Inspection and Maintenance

- Each type of emergency equipment is assigned an inspection schedule based on regulatory, manufacturer, or internal standards.
- Designated personnel perform checks confirming:
 - Equipment is present and undamaged
 - Signage is visible and legible
 - Expiry dates or service intervals are within limits
 - Accessibility is not blocked

3. Corrective Action

- Any equipment found to be missing, damaged, expired, or non-functional is:
 - Reported immediately to Health and Safety
 - Tagged “out of service” if unsafe to use
 - Repaired or replaced as soon as possible

4. Documentation and Recordkeeping

- All inspections and maintenance activities are logged, including:
 - Date of inspection

12 - EMERGENCY PREPAREDNESS & RESPONSE PROCEDURE

- Equipment condition
- Actions taken (e.g., replacement, servicing)
- Inspector's name or initials
- Logs are maintained electronically or in physical binders and are available for audit or review.

Maxim designates key personnel responsible for initiating and coordinating emergency communications. These individuals ensure that emergency procedures are followed, required documentation is completed, and critical information is communicated promptly and clearly. They are also responsible for gathering input from relevant stakeholders, such as workers, supervisors, first aid responders, and fire wardens, by conducting debriefs after drills or actual emergencies, reviewing incident reports, and facilitating feedback sessions. This input is reviewed and used to update the emergency response plan to address any gaps or areas for improvement. Their role is essential in supporting a comprehensive and continuously improving emergency preparedness and response strategy.

To effectively implement emergency response plans, it is essential to identify and maintain the appropriate resources needed for a safe and coordinated response. This includes ensuring the right personnel are assigned and trained, equipment and supplies are available and functional, and communication systems are in place. Maxim follows a structured process to review each emergency scenario, determine resource needs, and assign responsibility for maintaining readiness. Regular reviews and updates ensure that resources align with current risks, workplace changes, and emergency requirements.

To effectively implement the Emergency Response Plan, Maxim will require the following resources:

1. **Training and awareness programs** will be provided to ensure that all personnel are familiar with their roles and responsibilities. Regular training and emergency drills shall be conducted to ensure that employees, site supervisors, and emergency response teams are prepared to respond effectively to various types of emergencies, including construction-specific hazards.

Process:

The Emergency Management Team will assess each role to determine specific training needs and ensure appropriate emergency response training is delivered. Training will be provided during onboarding, refreshed annually, and after any changes to the emergency response plan. Attendance and completion will be documented and tracked.

2. **Lessons learned from drills** and exercises shall be used to improve emergency plans and procedures. Training will include:
 - Attending required emergency preparedness
-

training and drills.

- Familiarize themselves with the ERP and emergency procedures.
 - A yearly review of the procedure and response plan and revision as needed.
3. **Communication Tools** will be used during an emergency to ensure a swift and coordinated response. These tools relay information efficiently between workers, emergency responders, and management. The following communication tools will be used during an emergency:
- Two-Way Radios (when applicable)
 - Emergency Alarm & Notification System
 - Cell Phones
 - Regular drills and system tests to ensure employees understand communication protocols

Process:

Emergency communication systems will be reviewed and tested regularly to confirm they are functional, accessible, and understood by all personnel. The Emergency Management Team is responsible for assigning tools, training users, and updating communication procedures as needed. Any malfunctions must be reported immediately and resolved before the system is relied upon in an actual emergency.

- 4. **Emergency Infrastructure** including Clearly marked and accessible emergency exits, designated assembly points
- 5. **External Support** & coordination agreements with emergency services (fire, ambulance, hazardous materials response) and coordination plans with neighboring businesses or community resources

Identifying Resources for Emergency Plan Implementation

When we are acting as a Subcontractor, we will follow the Emergency Preparedness and Response Plan developed by the Constructor/General Contractor. We will develop our own Emergency Preparedness and Response Plan, should the Constructor's plan not address appropriate emergencies based on our work activities.

All Subcontractors will receive an explanation and copy of the Emergency Preparedness and Response Plan during orientation meetings.

To ensure an effective and organized response to emergencies, all Emergency Preparedness and Response Plans must include, at a minimum, the following elements:

- Procedures for Emergencies: Step-by-step response protocols for various emergency scenarios, such as fire, medical incidents, hazardous material spills, severe weather, and workplace violence.
 - Emergency Phone Numbers: Clear guidelines on who is
-

responsible for making emergency calls and initiating emergency response actions.

- Maps and/or directions to the nearest medical facility: Site-specific evacuation maps that include marked emergency exits, muster points, and fire extinguisher locations and directions to medical facilities.
- First aid requirements which include:
 - Designated First Aid Stations & Facilities: Clearly marked and easily accessible first aid stations equipped with necessary supplies.
 - Qualified First Aiders: A sufficient number of trained first aid responders available on-site at all times, in accordance with regulatory requirements.
 - First Aid Supplies & Maintenance: First aid kits stocked with essential medical supplies, regularly inspected, and replenished as needed.
 - Transportation Provisions: A process for safely transporting injured workers to a medical facility, including the use of designated vehicles or emergency transport arrangements.

Periodic testing will be conducted through emergency drills and system checks. Given the small office setting, testing procedures will be practical, efficient, and designed to reinforce preparedness without disrupting daily operations.

1. Emergency Drills

- a. Emergency response drills will be conducted at least once per year and will focus on key emergency scenarios relevant to the office environment, such as fire evacuation, medical emergencies, and communication procedures. All employees present at the time of the drill will be required to participate, ensuring they are familiar with evacuation routes, muster points, and emergency contacts.

2. Testing of Emergency Equipment & Communication Systems.

- a. Fire alarms and emergency notification systems will be tested at the time of the drill to confirm functionality.
- b. First aid kits and emergency supplies will be inspected quarterly to ensure all required items are available and in good condition.

3. Record-Keeping & Corrective Actions

- a. A record of all emergency drills and system tests will be maintained which provide the date and time of the test/drill, communication effectiveness, and employee participation
-

- b. Corrective actions taken including any gaps identified during testing will be addressed promptly, and emergency procedures will be updated as needed to improve response effectiveness

If an emergency occurs, once the situation is handled and all personnel are safe, the Emergency Management Team will review the plan and the Workplace Inspection Procedure and update it accordingly to ensure prevention or minimization of injury or occupational illness can occur.

Emergency Communication Protocols

Effective communication is essential for an efficient response to emergencies. The Emergency Management Team will implement and maintain clear communication protocols to ensure consistency, accuracy, and the timely sharing of information with workers, visitors, contractors, emergency services, government authorities, and the surrounding community.

To ensure relevant information is communicated properly during emergencies, the following processes and measures will be in place:

a. Standardized Emergency Codes and Signals

- Specific codes and signals will be assigned to different types of emergencies (e.g., fire, medical, chemical spill).
- These codes will be clearly posted in common areas and reviewed during employee training.
- The Emergency Management Team will ensure all personnel understand the meaning of each code and the appropriate response actions.

b. Defined Communication Channels

- Emergency communication channels will be pre-assigned and clearly outlined in the ERPs.
- Regular testing and drills will ensure all parties know which channels to use in each scenario.

c. Designation of Assembly Points

- Muster points and evacuation routes will be clearly marked and communicated to all workers, visitors, and contractors.
- Information about these locations will be included in site orientations, posted signage, and emergency drills.
- Supervisors are responsible for confirming headcounts at these points and relaying that information to the Emergency Coordinator.

d. External Notification Procedures

- For emergencies requiring external assistance or impacting the broader community, the Emergency Management Team will:
 - Contact emergency services (fire, EMS, police)
 - Notify applicable government and regulatory bodies
 - Communicate with neighboring businesses or
-

organizations if there is a potential impact

- Contact details and call trees will be maintained and reviewed regularly for accuracy.

Communication Process Summary:

Initiate: Emergency identified; communication protocols triggered by designated personnel

Notify: Relevant internal and external parties informed using assigned tools and channels

Instruct: Clear directions given to employees, visitors, and responders (e.g., evacuate, shelter-in-place)

Confirm: Critical information (e.g., headcounts, hazard updates) is verified and relayed to the Emergency Coordinator

Document: All communication actions during the emergency are recorded for follow-up and review

Reviewing Emergency Procedures and Response Plans

Management will review the Emergency Preparedness and Response Program (EPRP) at least once per year to ensure it remains effective, compliant with regulatory requirements, and reflective of current workplace conditions.

Review Process:

1. Annual Review

- Conducted by the Emergency Management Team and Health & Safety personnel.
 - Evaluating emergency drill outcomes
 - Reviewing incident and near-miss reports
 - Assessing feedback from employees, supervisors, and emergency responders
 - Verifying emergency equipment inspection records and communication system test logs
 - Confirming completion of corrective actions from previous events

2. Trigger-Based Reviews

- A review will also be conducted immediately following:
 - Changes to the workplace (e.g., layout modifications, staffing, or work processes)
 - Identification of new hazards
 - Changes in emergency contact information or resources
 - Updates to relevant safety legislation, standards, or best practices

3. Update and Communication

- Necessary updates to the EPRP or related procedures will be documented and approved by management.
 - All changes will be communicated to employees through safety meetings, toolbox talks, or training sessions.
-

4. Recordkeeping

- A formal record of each review, including findings, decisions, and actions taken, will be maintained for internal tracking and regulatory compliance.
-

DISTRIBUTION

The Emergency Preparedness and Response Plan distribution must be as follows:

- Reviewed with all our workers and Subcontractors.
 - Made available in locations where applicable.
-

RECORDS

All Emergency Drills will be documented with the results of the drills provided to the Health and Safety Worker Representative, the Health and Safety Team, and Senior Management.

1. EMERGENCY RESPONSE TEAM

IN CASE OF EMERGENCY: PLEASE CONTACT THE FIRST PERSON ON THE LIST BELOW. IF YOU ARE UNABLE TO REACH THAT PERSON, LEAVE A MESSAGE AND CONTACT THE NEXT PERSON ON THE LIST BELOW. DO SO UNTIL YOU HAVE SPOKEN TO SOMEONE AND INFORMED THEM OF THE EMERGENCY SITUATION.

Name	Position	Contact #

Muster Point (see Emergency Plan Site Map)

Area 1:

Area 2:

Types of Emergencies

The following is a list of potential emergencies, based on our workplace activities and environments. The appropriate responses and measures to the specified emergencies are detailed in the following pages.

Evacuation Plan & Headcount Record	pg. 2
Fire and	
Explosions	pg. 4
Medical Emergencies	pg. 5
Hazardous Materials - Accidents & Spills	pg. 6
Natural Gas Leaks	pg. 7
Overhead Powerline Contact Power Failure	pg. 8
Emergency Violence Response	pg. 9

Forms to Collect:

The following is a list of forms which may be helpful with documenting and reviewing the emergency.

Tool-Box Safety Form
Equipment Inspection
Form
Health and Safety
Walkthrough Form

2. RESPONSE ORGANIZATION

Management of an Emergency

It is important to develop an organized approach to manage the overall plan. The response team must:

- be able to handle likely situations, but not be so detailed and complex that it becomes rigid and ineffective; and
- supplement internal resources, where appropriate, with external service providers.

Emergency Response Functions

There are three distinct functions in the management of an emergency response:

1. The administration function to manage the response plan;
2. The operations function to control the incident; and
3. The recovery function to resume the operation to normal.

Persons within the response team shall be designated and trained to fulfill different roles. The key functions within the emergency management organization are determined from an assessment of the needs and complexity of likely emergency scenarios that could occur. It is important to understand that many skill sets are required.

When developing your specific response plans:

PROVIDE clear guidelines to follow.

DETERMINE how the emergency response will be initiated.

IDENTIFY the circumstances in which a command centre will be necessary.

OUTLINE how supervisors and other employees are expected to respond to emergencies.

IDENTIFY specific scenarios where you would call for emergency services.

IDENTIFY who is responsible for contacting outside emergency services.

ESTABLISH procedures to alert first responders and the fire department, police, or ambulance.

IDENTIFY scenarios where you would shut down or evacuate the organization.

OUTLINE safety procedures for all personnel.

INCLUDE adequate procedures to control emergencies that may occur outside of normal business hours.

Emergency Response Organizations

Canada

Federal

Public Safety Canada

Web Site: www.publicsafety.gc.ca/

Ontario

Emergency Management Ontario

Ministry of the Solicitor General

Web Site: www.emergencymanagementontario.ca/

RESPONSE PROCEDURES

Response Procedure:

Action Required:

Person(s) Responsible:

Location:

Method:

Degree of Priority:

Response Procedure:

Action Required:

Person(s) Responsible:

Location:

Method:

Degree of Priority:

Response Procedure:

Action Required:

Person(s) Responsible:

Location:

Method:

Degree of Priority

COPIES TO:

- ☐ SENIOR MANAGEMENT
- ☐ HEALTH AND SAFETY WORKER REPRESENTATIVE
- ☐ OTHER(S) (NAME): _____,

_____, _____

12-1 - EMERGENCY PREPAREDNESS & RESPONSE PLAN

EVACUATION PLAN

In the event of an emergency situation, we require all employees to respond quickly and calmly and evacuate the building/worksite to prevent any injuries.

If You Hear the Emergency Alarm:

- Remain calm.
- Turn off the power to your workspace or equipment if safe to do so.
- Leave the area/building/worksite by the nearest, safe exit.
- Close all doors behind as you leave.
- Proceed directly to designated grouping area.
- Subsequently, move to central muster point, for a headcount.
- Advise your ERC/ERT member at the muster point, of any observations or status of other employees.
- Remain calm at the muster point and await further instructions from your ERC/ERT member.

Worker Responsibilities:

- If for any reason the facility must be evacuated, the employees will be advised verbally by their supervisor or foreman, to evacuate.
- All employees must promptly leave the facility by the nearest safe exit as soon as reasonably practicable.
- All employees will meet at the central muster point for a head count.
- Once at the muster point, all workers must remain there and not re-enter the building/worksite for any reason.
- Workers will only be allowed to re-enter the building/worksite when it has been deemed safe by the emergency responders.
- Follow directions of the ERC/ERT.

Supervisor Responsibilities:

- Ensure all workers under your supervision are aware of the requirement to evacuate the building/worksite.
- Exit the building/worksite through the nearest, safe exit point and proceed directly to the central muster point, for a headcount.
- Assist in a head count and let the ERC/ERT members know that your workers are accounted for or advise of any missing personnel.
- Provide first aid to injured workers, if trained.
- Follow the directions of the ERC/ERT members or emergency responders.

NOTE: Under no circumstances should anyone go looking for missing workers in the building/worksite. Emergency Response Coordinator/Team Members (ERC/ERT)

- Call emergency responding personnel (9-1-1). The phone numbers are posted on Health and Safety Board or in your Emergency
- Evacuation Package.
- Exit the building/worksite through the nearest safe exit point and go directly to the designated grouping area you are responsible for.
- Take a headcount and record all names under the Headcount Recording Form. Communicate with all ERT members and other employees to gather information and confirm head counts.
- ERC/ERT will greet the emergency responding personnel when they arrive.
- Provide the emergency responding personnel with specific event information including, if any workers are missing or advise the emergency personnel that all are accounted for.
- Take direction from the emergency responding personnel.
- Allow employees to re-enter the building/worksite when given the 'all clear' from emergency responding personnel.
- Communicate with other Management personnel to update the status of the Emergency situation.

12-1 - EMERGENCY PREPAREDNESS & RESPONSE PLAN

HEADCOUNT RECORD

ERC/ERT will take a head count and record each workers name on the list below:

#	EMPLOYEE NAME	#	EMPLOYEE NAME
1		2	
3		4	
5		6	
7		8	
9		10	
11		12	
13		14	
15		16	
17		18	
19		20	
21		22	
23		24	
25		26	
27		28	
29		30	
31		32	
33		34	
35		36	
37		38	
39		40	
41		42	
43		44	
45		46	
47		48	
49		50	

FIRE AND EXPLOSIONS

When you hear the emergency alarm, proceed and follow below:

Workers

- Initiate evacuation procedure.
- Exit your area through the nearest or alternate emergency exit.
- Close doors behind you.
- Notify the ERC/ERT when you have arrived at the designated grouping area.

Supervisors

- Initiate evacuation procedure.
- Notify ERC/ERT in the designated grouping area.
- Assist ERC/ERT member in writing a list of evacuated workers at the designated grouping area.
- Await further instruction from ERC or emergency responding personnel.

ERC and ERT

- Initiate evacuation procedure.
- Call 9-1-1 (or appropriate number for fire) and report fire.
- Give your name, the company name, address, major intersections, entrance to site, area of site or advice that persons will be available outside for direction. Remain on phone until 9-1-1 operator terminates the call, and remain near phone.
- Communicate with ERT members to gather emergency information and determine who may have been in the building/worksite.
- Establish phone calls to those may be unaccounted for.
- Communicate with emergency responding personnel throughout the emergency situation.

ADDITIONAL LOCATION SPECIFIC NOTES

- -
 -
 -
 -
-

MEDICAL EMERGENCIES

Workers

- Notify facility First Aid trained personnel and Supervisor.
- Initiate evacuation procedure if required.
- Assist, if possible and safe to do so.

First Aider

- Assess the scene to determine personal risks or hazards.
- Assess the victim and wear any Personal Protective Equipment (PPE) for personal protection (gloves, mask, etc.).
- Take control of the situation and maintain a calm environment.
- Have someone call 9-1-1 if the situation dictates.
- Administer first aid if safe to do so.
- Do not move ill or injured person(s), unless it is essential for their safety.
- Try to make them comfortable.
- Send a worker to notify Facility Management and ERC.
- Instruct a worker or the ERC to direct ambulance where the medical emergency is occurring.

For Serious Injury/Illness:

- Notify ERC or facility management as soon as possible.
- ERC or facility management to call 9-1-1 as soon as possible.
- Give your name, the company name, address, major intersections, entrance to site, area of site or advise that persons will be available outside for direction. Remain on phone until 9-1-1 operator terminates the call, and remain near phone.
- ERC/ERT member to clear immediate area and direct coworkers to safe place and maintain a calm environment.
- ERC to direct ambulance and other emergency responding personnel to location of emergency situation.
- Secure scene for investigation.

ADDITIONAL LOCATION SPECIFIC NOTES

- -
 -
 -
 -
-

HAZARDOUS MATERIALS ACCIDENTS AND SPILLS

Any chemical spill or leak, must be treated as being a potential hazardous material incident, until the chemical can be identified. If the magnitude of the incident is determined to be of serious concern, initiate the evacuation procedures and call 9-1-1.

Workers and Supervisors

- Initiate evacuation procedure if required.
- If evacuation procedures are not required, notify ERC or facility management as soon as possible.
- Determine the name of the spilled or leaking chemical or material from the label on the container or from the shipping manifest or invoice.
- Initiate cleanup of material if safe to do so.
- If during the cleanup of the hazardous material, any worker shows signs or symptoms of distress, immediately remove the individual to a safe location and call 9-1-1 for further assistance.

ERC/ERT Members

- ERC/ERT to assess hazards at the scene and establish the magnitude of the incident.
- ERC/ERT to identify hazard (review MSDS, containers, etc.).
- ERC/ERT to initiate evacuation procedures and call Emergency Services (9-1-1).

ADDITIONAL LOCATION SPECIFIC NOTES

•

•

•

•

•

NATURAL GAS LEAKS

Natural gas is highly flammable, toxic and tends to pool because it is heavier than air. Extreme caution must be exercised to eliminate all potential ignition sources. Natural gas will cause frostbite upon contact with exposed skin. To make it easy to detect leaks, gas utilities add odorizing chemicals that give the natural gas a pronounced disagreeable odour. Gas utilities treat all reported "gas leaks" or "unknown odour" calls as potential hazards. They actively encourage the public to call anytime regarding an unfamiliar odour which might be natural gas.

Workers

- Report all gas leaks immediately.
- If possible ensure good natural ventilation.
- Evacuate hazardous area by nearest or alternate exit and proceed to designated grouping area.
- If safe to do so, shut down all sources of ignition or spark.
- Evacuate area immediately and notify others.

Supervisor

- Assess scene to determine hazards.
- Evacuate hazard zone (workers should evacuate by nearest or alternate exit and proceed to designated grouping area).
- Notify the site management and ERC.
- Shut down open flame equipment.

ERC and ERT

- Contact gas utility and identify problem - arrange shut down and lock/block off of gas service, if recommended by gas utility.
- Follow other recommendations.
- Arrange complete evacuation and notification of adjacent business (depending on risk).

ADDITIONAL LOCATION SPECIFIC NOTES

- -
 -
 -
 -
-

OVERHEAD POWERLINE CONTACT**Workers**

- In the event of power line contact:
 - Stay in the equipment. DO NOT GET OUT TO INSPECT.
 - Verbally warn others to keep others away.
 - Break contact if possible.
 - Call the Supervisor.
 - As a last resort (fire) “jump clear”. Do not make contact with the machine and the ground at the same time; land only on your feet, not feet and hands, land feet together if possible, slow shuffle away from the machine. Do not take large steps. THIS IS DANGEROUS AND IS A LAST RESORT ONLY.
 - Stay away from a downed power lines and inform the local service provider.
- Do not touch an overhead wire with a pole, stick or other object. Electricity could travel down that object and cause a shock that could kill you.
- Don't throw anything at wires or electrical equipment, and don't fasten things to utility poles. Damaged equipment can be very dangerous.
- Do not construct any building beneath supply lines.
- Do not climb electricity pylons, electricity poles or trees near power lines.

Supervisor

- Assess scene to determine hazards.
- Evacuate hazard zone (workers should evacuate by nearest or alternate exit and proceed to designated grouping area).
- Supervisor to call the local utility.
- Notify the site management and ERC.

ADDITIONAL LOCATION SPECIFIC NOTES

- -
 -
 -
 -
-

POWER FAILURE**Workers**

- Remain Calm and do not attempt to leave the area unless adequate natural lighting exists and you are able to move safely.

Supervisor/ERT/ERC

- Supervisors and ERT should obtain flashlights, gather workers and accompany to grouping area (if natural light is not adequate e.g. Night shift-after hours).
- ERC should initiate investigation to determine extent and cause of power failure.
- ERC to update and advise workers of power failure and procedures for powering up (i.e. turning disconnects for major equipment on and/or off).

ADDITIONAL LOCATION SPECIFIC NOTES

- -
 -
 -
 -
-

EMERGENCY VIOLENCE RESPONSE

If you observe or are notified of a person(s) in possession of a weapon, forcing entry into the building/worksite, or appearing to be acting in an extremely aggressive manner, the following steps should be followed:

Workers and Supervisors

- Do not confront the individual.
- Initiate evacuation procedure immediately.
- Call 9-1-1 immediately.
- Contact the ERC as soon as possible.

ERC/ERT Members

- Do not confront the individual.
- Initiate evacuation procedure immediately.
- Call 9-1-1 immediately.
- Inform arriving emergency responding personnel of details known up to this point.

ADDITIONAL LOCATION SPECIFIC NOTES

- -
 -
 -
 -
-

IN CASE OF EMERGENCY

INSERT LOCATION

IN CASE OF EMERGENCY CALL: **9-1-1**

THIS SITE ADDRESS IS: _____

SITE PHONE NUMBER: _____

LOCAL NON-EMERGENCY PHONE NUMBERS:

POLICE DEPARTMENT: _____

FIRE DEPARTMENT: _____

MINISTRY OF LABOUR: _____

(OTHER): _____

OTHER EMERGENCY CONTACT PHONE NUMBERS:

HEAD OFFICE: _____

EMERGENCY RESPONSE COORDINATOR: _____

ALTERNATE ERC: _____

UTILITIES PHONE NUMBER:

GAS: _____

WATER: _____

HYDRO _____

(OTHER) _____

(OTHER): _____

☐ DIRECTIONS TO NEAREST HOSPITAL ATTACHED

DIRECTIONS TO THE NEAREST HOSPITAL

SITE MAP

PURPOSE

The purpose of this procedure is to establish a Progressive Discipline procedure. This procedure will be used as a deterrent to prevent all employees from working in an unsafe manner. This procedure will become a "last resort" management tool in the prevention of workplace accidents and/or unsafe acts or conditions.

SCOPE

This procedure applies to Supervisors, Managers and Health and Safety Team as well as situations where disciplinary measures are required to be carried out.

RESPONSIBILITIES**Health and Safety Team Responsibilities**

- Review the company Progressive Discipline Program annually and/or after an incident/accident has occurred. Changes will be made as necessary.
- Define and set acceptable standards in the workplace for safe work practices and procedures where legislative requirements are set as minimum standards in conjunction with Senior Management.
- Distribute applicable disciplinary policies and forms as needed.
- Enforce standards set for the workplace, including safe work practices and procedures.

Senior Management Responsibilities

- Develop and implement in consultation with JHSC/Worker Representative a company Progressive Discipline Program.
- Define and set acceptable standards in the workplace for safe work practices and procedures where legislative requirements are set as minimum standards in conjunction with the Health and Safety Team.
- Ensure all company employees receive the appropriate training and workplace specific overviews.
- Ensure that a Progressive Discipline Program is developed and implemented, reviewed and approved annually.
- Ensure that Worker Representative is consulted and their recommendations are addressed appropriately.
- Ensure this policy is applied objectively, promptly and consistently to all Subcontractors and worker.

Supervisor Responsibilities

- Regularly communicate performance expectations with Subcontractors and workers to confirm expected consequences of non-compliance.
- Ensure this policy is applied objectively, promptly and consistently to all Subcontractors and worker.
- Take prompt and appropriate action when any workplace party is working in an unsafe or ineffective manner.
- Take progressive disciplinary actions for Senior Management's consideration.
- Document all verbal disciplinary activities on the appropriate form. Engage the assistance of the Health and Safety Team if necessary, when progressive disciplinary measures are required.

Worker Responsibilities

- Work in a manner that is consistent to all corporate policies, procedures and training objectives.
- Advise Supervisor if experiencing any difficulties with assigned tasks, or if assigned tasks are beyond perceived limitations or medically not capable of performing tasks.
- Comply with all the requirements as defined under the *Occupational Health and Safety Act and Regulations*.

PROCEDURE

If any worker or Subcontractors choose(s) to work in an unsafe manner or is not following corporate policies, procedures or training objectives, the Supervisors must take every reasonable precaution for the protection of that worker who may be affected by unsafe work practices.

Should workers or Subcontractors willfully or repeatedly disregard any policy, procedure, or workplace specific requirement, the **Supervisor** must take appropriate Progressive Disciplinary Actions.

Workers, Subcontractors or others will be subject to any of the following disciplinary actions as is appropriate in the circumstance:

1. Verbal warning.
2. Written warning.
3. Suspension or Discharge.
4. Immediate Discharge.

The Progressive Disciplinary Policy will be posted and included in orientation packages and communicated to all new hires. All disciplinary actions must be taken in a fair and progressive manner. If disciplinary actions must be taken, the following steps must be followed as a minimum:

1. On construction projects, the worker or Subcontractor must be asked to stop work and report to either the site trailer or the work vans and/or in the office if requested by the President. In other workplaces to a safe area when in our other workplaces.
 2. Supervisors must take appropriate progressive disciplinary actions.
 3. Senior Management will be notified of the incident, and will determine if further progressive disciplinary actions are warranted.
 4. If the progressive disciplinary actions requires a written warning or more severe actions, the worker or Subcontractor must be notified in writing of the reason for the disciplinary action(s).
 5. The worker or Subcontractor must be given a chance to defend themselves.
 6. Documentation of all disciplinary action(s) (including verbal warnings) must be recorded using the Progressive Disciplinary Action Report (13-1 Form).
 7. Documentation must be forwarded to Senior Management, the Health **and Safety Team** and also the Worker/Subcontractor.
-

Note: Termination of a worker's employment can only be done with the consent of the President.

If there is reason to believe that the worker may potentially become aggressive then do not put your safety at risk. Dial 9-1-1 immediately and request police services.

DISTRIBUTION The distribution of the Progressive Discipline Policy will be performed by each **Supervisor** using the following steps:

1. Orientation with all workers to explain the Progressive Discipline Policy.
 2. Project Specific Safety Plan Orientations for Subcontractor awareness.
-

RECORDS If Progressive Discipline is used, documentation must be forwarded to Senior Management, the Health and Safety Team and also the Worker/Subcontractor. Records will be maintained in the main office by Senior Management and Health and Safety Team.

PURPOSE

The purpose of this procedure is to establish a review process for the company health and safety program. The company health and safety program must be reviewed on a regular basis and at least annually, to ensure that it is in compliance with current regulations and that it meets the needs of the company.

SCOPE

This procedure applies to workplace parties responsible for reviewing and maintain the company health and safety program. Where changes are necessary a system must be in place to ensure that changes are reviewed by approved personnel and distributed appropriately.

RESPONSIBILITIES**Health and Safety Team Responsibilities**

- Distribute revisions and updates to the appropriate parties as required.
- Assist in revisions to the Health and Safety Programs, Procedures, Policies and Guidelines to account for changes in legislations, regulations, company activities, and continuous improvement initiatives with Senior Management.
- Hold Senior Management Meetings and document the review/approval process through the use of Meeting Minutes.
- Ensure that updates are inserted into the company health and safety program or safety binders kept on projects with Senior Management.
- Provide feedback for provided recommendations for the Health and Safety Programs, Procedures, Policies and Guidelines.
- Advise workers and subcontractors of any project specific safety updates, Health and Safety Programs, Procedures, Policies and/or Guidelines where necessary.

Senior Management Responsibilities

- In consultation with the Worker Representative, direct and conduct the annual review of performance for the Health and Safety Programs, Procedures, Policies and Guidelines.
- Provide feedback for provided recommendations for the Health and Safety Programs, Procedures, Policies and Guidelines, and ensure they comply with legislation
- Revise the Health and Safety Programs, Procedures, Policies and Guidelines to account for changes in legislations, regulations, company activities, and continuous improvement initiatives.
- Annually sign and authorize the updates as required, including legal and technological
- Advise workers and subcontractors of any project specific safety updates, Health and Safety Programs, Procedures, Policies and/or Guidelines where necessary.
- Evaluate the effectiveness of all elements of the OHSMS, and ensure they have been met
- Review previous years status under **form 14-2-1**, as well as the status of all other Health and Safety forms and corrective actions taken
- Review communication channels and identify any barriers
- Make and review recommendations with the Health and Safety team

Supervisor Responsibilities

- Consult with the Health and Safety Team and Managers, to ensure that you are working with the most recent version of the company health and safety program.
- Advise workers and subcontractors of any project specific safety updates where necessary.
- Provide feedback and recommendations and apply revisions, as needed, for the continuous improvement of Health and Safety Programs, Procedures, Policies and Guidelines.

Worker Responsibilities

- Provide feedback and recommendations for the continuous improvement of Health and Safety Programs, Procedures, Policies and Guidelines.

PROCEDURE

The detailed description of all responsibilities for each role is written above in the section titled “Responsibilities”, please review that section before reading the rest of this procedure.

Requests for revisions to any policies, procedures or forms can be made in writing or verbally to the **Health and Safety Team** and/or **Senior Management**. Revisions to the Health and Safety Manual shall be made by the **Senior Management** in consultation with the Worker Representative.

All such requests will be documented and reviewed in a timely manner and will include:

- Input from employees through meetings or email. The HSR will facilitate communication between workers and management to ensure their concerns and suggestions are clearly represented.
- The HSR and Senior Management will review all feedback to assess its impact on existing policies and procedures.
- Any revisions will be shared with the employee for further input before any changes are finalized.
- Final revisions will be approved by Senior Management. Once approved, the updated documents will be communicated to all staff and integrated into the Health and Safety Manual.
- All revisions, including the rationale and evidence of consultation and participation, will be recorded and maintained in the health and safety records.

Management Meetings will be held at least quarterly, with health and safety as a standing agenda item. Each section of the Health and Safety Manual shall be reviewed at least once during the annual review process. The team will use the Senior Management Meeting Agenda (14-1-2 Form) to ensure consistency in the meetings and to record health and safety topics discussed, decisions made, assigned actions, target completion dates and any identified barriers to worker participation. During these meetings the team will conduct the following actions:

Preparation and Planning:

- Establish a clear agenda for the review.
- Identify key topics to be discussed, such as process performance, corrective actions, and customer feedback.

Management Review Session:

During the management review session, Senior Management shall conduct a structured meeting to review the performance of the Occupational Health and Safety Management System (OHSMS) and other relevant management systems, using the defined inputs and generating the required outputs.

The management review session shall include, at a minimum, the following activities:

- **Conduct the Review Meeting**
 - Confirm the agenda, attendees and purpose of the meeting.
 - Ensure that all relevant input information has been prepared and circulated in advance, where practicable.
 - **Review Relevant Inputs:** Senior Management shall review and discuss relevant inputs, including:
 - Results of past management audits (e.g., internal audits, external audits, COR audits);
 - Status of actions from previous management review meetings and other action plans (ensure there are no overdue or outstanding tasks without justification);
 - Results of evaluations of compliance with legal and other requirements;
 - Employee and JHSC feedback, requests, concerns and suggestions;
 - Process and element performance data, including key performance indicators and the effectiveness of COR elements;
 - Progress on corrective and preventive actions (CAPA), including any outstanding items from incident investigations, inspections and hazard reports;
 - Communication from external parties such as clients, regulators, subcontractors, engineers and other relevant stakeholders;
 - Any significant occupational health and safety incidents, near misses, hazards or concerns since the last review;
 - OHS objectives and their current status, including progress toward targets and reasons for any shortfalls;
 - Trends identified from statistics and records (e.g., incident rates, types of incidents, recurring deficiencies) and a discussion of corrective and preventive actions implemented to address those trends.
 -
-

- **Evaluate Effectiveness and Compliance**
 - Evaluate the effectiveness of the current OHSMS and related systems in achieving their intended objectives.
 - Confirm that the OHSMS remains compliant with current legislation, standards and client requirements.
 - Address any concerns or issues raised during the past and current review period.
- **Identify Barriers and Risks**
 - Identify any barriers or obstacles that have arisen or may arise which could affect the effectiveness of the OHSMS or worker participation, by reviewing, for example:
 - Employee engagement and participation;
 - Resource limitations (budget, staffing, equipment, tools, time);
 - Training and competency;
 - Regulatory compliance and anticipated changes;
 - Cultural or organizational resistance to change.
 - Evaluate risks related to processes, compliance and strategic decisions and determine if additional actions are required.
- **Confirm Objectives and Alignment**
 - Review and, where necessary, revise OHS objectives and targets to ensure they remain relevant and aligned with Maxim Mechanical's overall goals, values and strategic direction.
 - Ensure that health and safety considerations are integrated into business planning and decision-making.
- **Determine Actions and Communication**
 - Agree on required changes or improvements to policies, procedures, programs or controls and assign responsibilities and timelines.
 - Confirm how management review decisions, updated policies, objectives and action items will be communicated to workers and other interested parties (e.g., safety meetings, postings, emails, toolbox talks).

The discussions and decisions from the management review session shall be documented in meeting minutes. Resulting actions shall be entered into the OHS Action Plan Tracking Log / Continuous Improvement Plan and tracked to completion, including verification of effectiveness.

Monitoring and Follow-Up:

- Document the discussions, evaluations, and outcomes from the review.
- Identify areas for improvement and set action plans.
- Ensure that follow-up actions are tracked and implemented.

The Health and Safety Team and/or Senior Management will use the Revision Tracking Form (**14-1-1 Form**) to document the approved changes and to communicate changes to the workforce.

This process will be conducted in conjunction with **Section 14-2 Continuous Improvement Procedure**, to ensure our Health and Safety Manual contains relevant, applicable, and updated content. All revisions will take into account applicable legal and other requirements.

Management Review Outputs

The goal of the Management Review is to systematically evaluate the performance of Maxim Mechanical's management systems and to ensure that they remain suitable, adequate and effective.

The key outputs from each management review meeting shall include, at a minimum, the following:

1. Assessment of Effectiveness

Management shall review and determine whether the Occupational Health and Safety Management System (OHSMS) and related systems (e.g., quality, environmental, as applicable) are achieving their intended purpose and goals. This includes confirming that the elements of the COR program are functioning as designed.

2. Continual Improvement

The review shall identify opportunities for continual improvement by examining trends, lessons learned from incidents and near misses, audit findings and worker feedback. Decisions and actions related to improving the OHSMS shall be agreed upon and documented.

3. OHS Objectives, Targets and Action Plans

Updated OHS objectives, targets and performance indicators shall be established or confirmed. For each objective, an action plan shall be documented, including timelines, assigned responsibilities and the means of measuring progress.

4. Resource Requirements

Management shall identify and approve any additional resources required to achieve objectives and implement actions (e.g., budget, personnel, equipment, tools, training, external support) and record these decisions in the meeting minutes.

5. Risk Evaluation and Compliance

Risks related to processes, compliance and strategic decisions shall be evaluated. Any significant deviations from expected outcomes, emerging risks or changes in legal and other requirements shall be discussed and

appropriate actions agreed to.

6. Alignment with Organizational Goals

Management shall confirm that the OHSMS remains aligned with Maxim Mechanical's overall business objectives, values and strategic direction, and adjust priorities or objectives where necessary.

7. Transparency, Accountability and Worker Participation

The management review shall provide a structured forum for senior management to review performance data, customer/client feedback and progress on corrective and preventive actions. Actions to remove or reduce barriers to worker participation (e.g., language, communication methods, access to information) shall be identified and recorded.

8. Recommended Changes to the OHSMS

Decisions on revisions or updates to OHS policies, procedures, programs and any of the 14 COR elements shall be documented, including who is responsible for implementing the changes and by when.

9. Communication of Results

A communication plan shall be established to ensure that key decisions, updated policies, objectives and action items resulting from the management review are effectively communicated to workers and other relevant parties, using appropriate methods (e.g., safety meetings, postings, emails, toolbox talks).

All management review outputs shall be documented in meeting minutes and related action plans. Actions arising from management review shall be entered into the Continuous Improvement / OHS Action Plan Tracking Log and tracked to closure, including verification of completion and effectiveness.

OHS Objectives and Targets

Senior Management shall establish annual Occupational Health and Safety (OHS) objectives and targets that are:

- Specific – clearly define what is to be achieved;
- Measurable – include quantifiable targets and metrics;
- Achievable – realistic given available resources;
- Relevant – aligned with the Health and Safety Policy, identified hazards and risks and legal requirements;
- Time-bound – include target completion dates.

OHS objectives and targets may address, for example:

- Reductions in incident and injury rates;
 - Improvement in hazard reporting and near miss reporting;
 - Completion of planned training, inspections and audits;
 - Hazard assessment coverage (e.g., percentage of tasks formally assessed);
-

14-1- MANAGEMENT REVIEW AND CONTINUAL IMPROVEMENT

- CAPA closure rates and timeliness;
- Worker participation measures (e.g., attendance at safety meetings, suggestions submitted).

Each objective shall identify the responsible person, required resources and key performance indicators. Progress against objectives shall be reviewed at least quarterly and discussed during management review and company-wide safety meetings.

OHS Action Plan Tracking

All action items arising from management reviews, audits, inspections, incident investigations, JHSC recommendations and worker feedback shall be tracked using an OHS Action Plan Tracking Log.

The Action Plan Tracking Log shall include:

- Action item description;
- Source of the action (e.g., management review, audit finding, incident, inspection, JHSC recommendation);
- Priority level;
- Responsible person or position;
- Target completion date;
- Actual completion date;
- Status (open, in progress, complete, overdue);
- Notes or comments (including verification of completion and effectiveness).

The Action Plan Tracking Log shall be reviewed at each management meeting. Overdue items shall be escalated to Senior Management and shall remain open until completion has been verified and documented.

Management Review

Once per year, Senior Management will host a company-wide Occupational Health and Safety (OHS) meeting involving all employees. The purpose of this update meeting is to review, communicate, and align the organization on any updates in health and safety practices, policies, and compliance.

During the meeting, Senior Management will address the following:

- **Health and Safety Manual Updates:** A detailed summary of any changes made to the health and safety manual, including new or revised policies, procedures, and forms.
 - **Hazards and Controls:** Updates on identified workplace hazards, changes to risk controls, and the effectiveness of implemented safety measures.
 - **Legislative and Regulatory Changes:** An overview of any new or amended federal, provincial, or municipal occupational health and safety legislation or standards that impact the organization's operations, and an explanation of how the company is addressing these changes.
-

- New Technologies and Systems: Information on the introduction or planned implementation of new equipment, technologies, or systems that affect health and safety in the workplace.
- Industry Trends and Best Practices: Updates on relevant industry trends, innovations, and best practices that contribute to improved hazard prevention and risk management.
- Employee Feedback and Engagement: Employees at all levels will have the opportunity to provide feedback, raise concerns, and ask questions directly to Senior Management. **Forms 3-4 (Employee OHS Feedback Form) and 3-5 (OHS Communication Log)** will be used to document and manage this communication process.

The meetings will include meeting minutes and attendance records of the meeting content, discussions, and attendees for record-keeping and compliance purposes. The HSR will distribute of any revised policies, procedures, or forms to all employees, with acknowledgment of receipt and understanding.

A follow-up action plan addressing employee feedback, identified concerns, or required improvements, with designated responsibilities and timelines.

Completed Forms 3-4 and 3-5 filed and stored for future reference and inspection readiness as well as form 14-1-1 Form, meeting minutes and any other document found necessary for the management review.

Management of Change (MOC) Procedure

The Management of Change (MOC) process shall be applied when significant changes are proposed that may impact health and safety, including changes to:

- Legislative or regulatory requirements;
- Industry standards or client requirements;
- Work processes, equipment, materials or control measures;
- Organizational structure, staffing or responsibilities;
- Technology or introduction of new products or services.

The MOC process includes the following steps:

1. Change Identification and Request

The proposed change shall be described on the Management of Change Request Form (14-2-2), including rationale, scope and potential impacts.

2. Impact Assessment

Management, in consultation with the Health and Safety Representative and other affected parties, shall assess the potential impact of the change on health and safety, including operations, hazards, controls and legal compliance.

3. Hazard and Risk Assessment

14-1- MANAGEMENT REVIEW AND CONTINUAL IMPROVEMENT

Where the change may introduce new hazards or alter existing risks, a hazard and risk assessment shall be conducted in accordance with Section 25 – Daily Job Hazard Assessment Procedure and related hazard assessment processes.

4. Approval

The proposed change and associated controls shall be reviewed and approved by the appropriate level of management before implementation.

5. Communication and Training

Approved changes and new or revised controls shall be communicated to all affected workers, supervisors and contractors through safety talks, meetings, memos and/or training, as appropriate.

Training materials, procedures and documentation shall be updated to reflect the change.

6. Implementation and Follow-Up

The change shall be implemented as approved and monitored to ensure controls are effective.

The effectiveness of the change and associated controls shall be reviewed during management review and updated as necessary. All completed MOC Request Forms and associated records shall be retained as part of the Continuous Improvement and Management Review documentation.

DISTRIBUTION

All revisions will be distributed to any member of the company who has a copy of the Health and Safety Manual, including:

- Supervisors
- Senior Management

All control measures will be communicated directly to the affected workplace parties to ensure full compliance. Via Tool Box/site meetings. They will be made readily available for all workplace parties when they require additional information.

RECORDS

All revisions made to the health and safety program will be documented using Change Control Forms (Form 3-6) and retained on file at head office indefinitely. These records will be maintained both in hard copy and in a secure digital format within the company's centralized document management system.

Each entry will include the date of the change, a summary of the revision, the individual(s) responsible for the update, and any related approvals.

Access to these records will be limited to authorized personnel and made available upon request for audits, inspections, or internal reviews. An annual audit of the change log will be conducted to ensure completeness and accuracy.

*Element 14.1 -***Meeting Information**

Company Name:	
Date of Review:	
Location:	
Attendees:	

1. Roles and Responsibilities (14.1.2a)

Confirm the roles and responsibilities of participants in the management review process.

Tip: Review Element 1.1 (Duties, Roles and Responsibilities) section of your COR Manual to ensure alignment.

Senior Management:	
HSR:	
Supervisors:	
Workers:	

2. Inputs to Senior Management Review (14.1.2b)

Document or attach evidence for each input considered during the review.

i. Evaluation of the effectiveness of all elements of the OHSMS (14.1.2b.i)

Assess the suitability, adequacy, and effectiveness of each element of the OHS management system.

Tip: Review each element's policies, procedures, and records from your COR Manual. Consider: Are procedures being followed? Are records up to date? Have there been any gaps or non-conformances?

Element	Element Title	Evaluation Notes
1.1	Health and Safety Policy	
1.2	Documentation and Record Control	
2	Hazard Recognition, Assessment and Control	
3	Legislation and Related Requirements	
4	OHS Program and Plans	
5	Training and Competency	
6.1	Communication	
6.2	Worker Participation	
7	Workplace Inspections	
8	Incident Investigations	
9	Emergency Preparedness	
10	Procurement and Contractors	
11	Medical Support	
12	Fit for Duty Programs	
13	Internal Audits	
14.1	Management Review and Continual Improvement	
14.2	Management of Change	

ii. Status of actions from previous management reviews (14.1.2b.ii)

Note: If this is your first management review, mark this section as 'N/A - First Management Review'

--

iii. Results of internal audits, including COR™ Audits (14.1.2b.iii)

Tip: Review Element 13.0 (Internal Audits) records. Include completed internal audit results, COR audit scores, and any identified non-conformances or areas for improvement.

--

iv. Evaluations of compliance with legal requirements (14.1.2b. iv)

*Tip: Review the completed **Compliance Evaluation Checklist/Audit** (Element 13.4) to assess compliance with current OHSA regulations and other applicable legislation. Use this section to confirm compliance and document any corrections required post-evaluation or legislative changes that impact your operations.*

Compliance Confirmed:	☐ Yes ☐ No
Date of Evaluation:	
Summary of Gaps/Corrections Required:	

v. Results of participation and consultation with workers/HSR/JHSC (14.1.2b.v)

Tip: Review Element 6.2 (Worker Participation) and Element 8.2 (Communication) records. Include JHSC/HSR meeting minutes, worker feedback, safety suggestions, and participation in safety initiatives.

--

vi. Communication from external parties (14.1.2b.vi)

Tip: Include correspondence from WSIB, Ministry of Labour inspectors, client safety requirements, insurance providers, or industry associations that impact your OHS management system.

--

vii. OHS performance of the organization (14.1.2b.vii)

Tip: Review Element 12.0 (Statistics and Records) including your annual, quarterly, or monthly safety statistics. Include incident rates, near misses, lost time injuries, WSIB claims, first aid cases, and any other tracked KPIs.

Total Incidents/Near Misses:	
Lost Time Injuries:	
Medical Aids/First Aid Cases:	
WSIB Claims:	
Safety Training Hours Completed:	
Workplace Inspections Completed:	
Other Performance Indicators:	

viii. Evaluation of the extent to which OHS objectives have been met (14.1.2b. viii)

Tip 1: Review the OHS objectives set in your previous management review or Element 1.1 (Health and Safety Policy). If this is your first review, document that objectives will be established as an output of this meeting.

Tip 2: Use Element 12.0 (Statistics and Records) data to inform your objective evaluation and set new objectives. For example: If you notice an increase in lost time incidents, consider setting an objective to achieve zero LTIs. If daily FLRA submissions are below expected levels (fewer submissions than working days), set an objective to achieve 100% daily FLRA compliance. If workplace inspections are being missed, set an objective to complete all scheduled monthly inspections. Let your data drive meaningful, targeted objectives.

--

ix. Status of incident investigations, trends, corrective/preventative actions (14.1.2b. ix)

Tip: Review Element 10.0 (Incident Investigation and Reporting) records. Identify trends in incident types, root causes, and effectiveness of corrective actions. Document any preventative measures implemented.

x. Changing circumstances related to OHS (legal requirements/technology) (14.1.2b.x)

Tip: Review Element 13.0 (Legislation) for regulatory changes and Element 14.2 (Management of Change) for any operational changes. Consider: new equipment, processes, technology, facilities, or regulatory updates that impact safety.

xi. Identified barriers to worker participation in OHSMS (14.1.2b. xi)

Tip: Consider barriers such as language/literacy challenges, shift schedules that limit meeting attendance, fear of reprisal, lack of awareness about safety processes, or insufficient training on how to participate effectively.

xii. Recommendations for improvement (14.1.2b.xii)

Tip: Include suggestions from workers, JHSC/HSR, supervisors, management, or external parties (e.g., consultants, auditors) for improving the OHS management system.

3. Outputs from Management Review (14.1.2c)

Document the outcomes and decisions from the review.

i. OHS policy updates (14.1.2c.i)

Tip: Document any required updates to Element 1.1 (Health and Safety Policy) or other policy statements throughout your COR Manual. Include date changes, organizational changes, or policy content revisions.

Policy updates required:

ii. Measurable OHS objectives (14.1.2c. ii)

Tip: Objectives should be SMART (Specific, Measurable, Achievable, Relevant, Time-bound) and data-driven based on Element 12.0 (Statistics and Records). Examples based on your performance data: 'Reduce lost time incidents from 4 to 0 by December 2025', 'Achieve 100% daily FLRA submission rate (260 FLRAs for 260 working days)', 'Complete all 12 monthly workplace inspections by year-end', 'Increase safety training hours by 25% to address identified gaps', 'Reduce near-miss incidents by 30% through enhanced hazard reporting'.

Objective 1:	
Objective 2:	
Objective 3:	

iii. Action plan to achieve objectives (14.1.2c.iii)

Tip: Assign specific action items with clear ownership and realistic target dates. Track status regularly to ensure implementation and closure.

Action Item	Responsible Person	Target Date	Status

iv. Required resources (14.1.2c. iv)

Tip: Identify resources needed to implement action plans and achieve objectives. Consider: budget for equipment/PPE, training costs, consultant support, additional staffing, or technology/software.

--

vi. Revisions to any other elements of the OHSMS as appropriate (14.1.2c.v)

Tip: Document which element policies/procedures need revision (e.g., update Element 2.0 Hazard Assessment procedures, revise Element 5.0 Company Rules, update Element 8.1 Training matrix).

--

vi. Removed barriers to worker participation in the OHSMS (14.1.2c.vi)

Tip: Document specific actions to remove identified barriers. Examples: provide translation services, schedule meetings at different shift times, implement anonymous reporting system, or enhance safety training.

--

vii. Communication of the objectives and action plan(s) to all employees (14.1.2c.vii)

Tip: Per Element 8.2 (Communication), document how objectives and action plans will be shared. Methods may include safety meetings, bulletin boards, email distribution, toolbox talks, or worker handbook updates.

Communication method:	
Date communicated:	

4. Method for Maintaining Records (14.1.2e)

This form serves as the specified record for the Management Review (14.1.2d). Retain as per Document and Record Control Procedure (Element 1.2). Additional attachments may be included.

Tip: Per Element 1.2 (Document and Record Control), retain this completed form with your COR Manual records. Attach supporting documents such as audit reports, statistics summaries, or JHSC meeting minutes as referenced in the inputs section.

Additional attachments or supporting documents:

5. Approval and Verification

Approved By (Senior Management): _____ Name & Signature	Date Approved: _____
Review Verified By: _____ Name & Signature	Date Verified: _____

PURPOSE

Our health and safety manual must have defined and achievable goals set on an annual basis, to ensure that it is in compliance with current legislation and regulations. This must also be completed to ensure that our manual meets the current needs of the company.

SCOPE

Where improvements can be made, a Continuous Improvement Plan (CIP) must be in place to ensure that these initiatives are organized, identified and completed by approved personnel.

RESPONSIBILITIES**Health and Safety Team Responsibilities**

- During the annual review of all the Health and Safety Programs, Procedures, Policies and Guidelines.
- Document the identified corrective actions, targets and goals. Document each items'
- respective responsibilities and implementation timeline on the CIP.
- Communicate and post results and information from the Health and Safety CIP, when required.
- Apply Hazard Assessment, Analysis and Controls to any identified changes
- Facilitate the MOC process, including hazard assessments and implementation of controls.
- Ensure all required documentation is completed and retained.
- Communicate changes to all affected parties.
- Monitor effectiveness of implemented changes post-implementation.

Senior Management Responsibilities

- Approve all proposed changes that require MOC review.
- Ensure resources are available for implementation, training, and monitoring.
- Oversee compliance with applicable regulations and internal procedures.
- Direct the development of the annual Health and Safety CIP.
- Identify appropriate targets and goals to be completed annually.
- Document the identified work processes, corrective actions, controls, targets and goals.
- Document each items' respective responsibilities and timeline on the CIP with the Health and Safety Team.
- Annually sign and authorize the Health and Safety CIP.
- Ensure the communication of the results and information contained within the Health and Safety CIP.
- Monitor and Update where legal changes are made and required
- Introduce any new developments from the review to supervisors
- Provide additional Training where appropriate

Supervisor Responsibilities

- Upon request of Senior Management and the Health and Safety Team distributed documentation when applicable.

PROCEDURE

The detailed description of all responsibilities for each role is written above in the section titled “Responsibilities”, please review that section before reading the rest of this procedure.

The Management of Change procedure applies to all permanent, temporary, or emergency changes within the organization that may impact health and safety, including:

- Processes and operational procedures
- Organizational structure
- Equipment, tools, and technology
- Facilities or physical layout
- Materials, substances, or chemicals
- Legislation and regulatory requirements
- Roles, responsibilities, or job functions
- Work practices, PPE, or control measures

Changes can significantly impact company operations, health and safety practices, training needs, and organizational compliance. It is essential that any such change is identified promptly and incorporated into the Management of Change process.

The HSR and Senior Management will work together to administer the MOC procedure and shall be implemented when any of the following changes occur:

- Changes to operational procedures or safe work practices including changes in legislation, standards, and codes applicable to the organization’s operations.
- Implementation of new processes that may impact work. Including but not limited to:
 - Facility expansions, renovations, or layout changes
 - Modifications in organizational structure or job roles
 - New software systems
 - New materials or substances (e.g., hazardous chemicals) introduced
 - Introduction of new equipment, machinery, or tools
 - Modification or relocation of existing equipment or workstations
 - New Control Measures
- Changes following an incident investigation or audit recommendations which include any new OHS knowledge or technologies

Process Steps**1. Initiation**

- Submit a **MOC Request Form 14-2-2** outlining the proposed change.
 - Assign an MOC Coordinator (typically the HSR).
-

2. Preliminary Review

- Evaluate if the proposed change falls under the MOC criteria.
- Classify the change as temporary, permanent, or emergency.

3. Hazard Identification and Risk Assessment

- Apply the Hazard Assessment Procedure (Section 10) to evaluate potential hazards introduced by the change.
- Identify all existing and new risks associated with the change.
- Include input from the Health and Safety Representative where applicable.

4. Control Measures

- Apply the Controls Procedure (Section 28) to determine and implement appropriate risk controls (e.g., engineering, administrative, PPE).
- Ensure controls are in place before implementing the change.

5. Approval

- Submit documentation to senior management for review and final approval.

6. Implementation

- Implement the change, including all required controls and mitigation measures.
- Schedule any required downtime, installations, or transitions.

7. Training and Communication

- Conduct training for all affected workers (see Section 15).
- Distribute updated procedures, signage, or documentation.

8. Verification and Monitoring

- Monitor the change to ensure no unforeseen risks develop.
- Conduct follow-up inspections or audits.
- Record lessons learned and update procedures if needed.

9. Documentation and Recordkeeping

- Maintain all MOC records, including hazard assessments, approvals, and training logs in a secure location in the main office.

Training

Training must be provided prior to implementation of any change and must include:

- Description of the change and reason for it
- Associated hazards and risks
- Updated procedures and safe work practices
- New or modified PPE requirements
- Emergency procedures if applicable

Training should be documented and tracked in accordance with the organization's

Training Procedure. The Individuals who require training include: :

- All workers directly or indirectly affected by the change
- Supervisors overseeing the work
- Maintenance or technical staff interacting with modified systems
- Contractors or temporary workers, if applicable

Communication Strategies

- Pre-job briefings or toolbox talks
- Safety bulletin boards and digital signage
- Safety meetings and JHSC discussions
- Email bulletins or newsletters for large-scale organizational changes

DISTRIBUTION

All CIP and revisions made will be distributed to all applicable members of the company who has a copy of the Health and Safety Manual, including:

- Senior Management
- The Health and Safety Team and Health and Safety Team
- Supervisors
- Workers on site

Maintained and filed accordingly.

RECORDS

All revisions made to the health and safety program will be documented through change control forms and retained on file at head office indefinitely.

PHILOSOPHY

The health, safety and well-being of our employees is essential to the success of our business. With a healthy workforce and a safe working environment, we as a team, will provide our customers with the best product available in a cost effective manner.

Incidents and accidents in our workplace have an impact on all of us. They impact us directly through personal injury, pain and suffering. They also impact us financially through decreases in productivity, morale, service delivery, downtime and charges or penalties.

We take a proactive approach to health and safety issues. We will be increasing our attention to health and safety standards and implementing many initiatives to recognize, evaluate and control all potential downgrading incidents.

STATISTICS AND RECORDS

Needs, Trends, Corrective Actions		Target For Completion	Responsibility	Status
1	Need & Trend:			
	Goal:			
	Corrective Action(s):			
	a)			
	b)			
	c)			

HAZARD ASSESSMENT

	Needs, Trends, Corrective Actions	Target For Completion	Responsibility	Status
1	Need & Trend:			
	Goal:			
	Corrective Action(s):			
a)				
b)				
c)				

HEALTH AND SAFETY MANUAL

	Needs, Trends, Corrective Actions	Target For Completion	Responsibility	Status
2	Need & Trend:			
	Goal:			
	Corrective Action(s):			
	a)			
	b)			
	c)			

FUTURE GOALS AND OBJECTIVES

	Training Needs, Trends, Corrective Actions	Target For Completion	Responsibility	Status
3				
4				
5				
6				
7				
8				

REVIEW AND APPROVAL OF CONTINUOUS IMPROVEMENT PLAN

Position	Name	Signature	Date

Additional Notes:

PURPOSE

The purpose is to establish a procedure for facilitating company health and safety training and education. Ongoing training and education will be used to ensure that all management staff and workers receive the appropriate training to supervise and/or perform their jobs safely.

SCOPE

This procedure applies to the Health and Safety Team, responsible for ensuring that all company staff, workers, etc. have the necessary knowledge required to implement sound accident prevention strategies. Training will be provided to our workers before they begin the relevant task.

RESPONSIBILITIES**Health and Safety Team Responsibilities**

- Develop and implement in consultation with Senior Management and Worker Representative a company Training Program/Matrix.
- In conjunction with Senior Management review the company Training Program/Matrix annually and/or after an incident/accident has occurred. Changes will be implemented as necessary.
- Ensure Workers and Supervisors are available for training.
- Schedule all required training with applicable Workers and Supervisors.
- Maintain records of all completed training programs and record completion dates on the Training Matrix Tracking Sheet.

Senior Management Responsibilities

- Develop and implement Training Program/Matrix.
- Ensure that the company Training Program/Matrix is reviewed annually.
- Ensure that Worker Representative is consulted and that their recommendations are addressed regarding company training.
- Ensure Workers and Supervisors are available for training.

Supervisor Responsibilities

- Ensure site level training records are maintained and up-to-date.
- Request workers and Subcontractors provide proof of training, prior to commencing work activities on construction projects.

Worker Responsibilities

- Advise Supervisor if experiencing any difficulties with assigned tasks, or if assigned tasks are beyond perceived limitations or medically not capable of performing tasks.
- Comply with all the requirements as defined under the Occupational Health and Safety Act and Regulations.

PROCEDURE

The detailed description of all responsibilities for each role is written above in the section titled “Responsibilities”, please review that section before reading the rest of this procedure.

A training needs review will be conducted by the Health and Safety Representative (HSR) and Senior Management, to determine if new or revised training certifications need to be added to the company **Training Matrix (15-1 – Form)**. This will be completed on an annual basis.

The training needs review will also require the HSR and Senior

Management to conduct a training needs analysis, which will be done by completing a review the Training Matrix Tracking Sheet (a document used to track training records for individual workers). This will be completed to ensure new and existing workers have all the required legislative and other training updates. The analysis will identify:

- i. **Training Needs:** Regularly assess the skills and knowledge required for different job roles within the organization.
- ii. **Skills Gap Analysis:** Compare current employee competencies with the skills and knowledge required for their roles. Identify gaps that necessitate training.
- iii. **Employee Input:** Encourage employees to provide input regarding their training needs, as they may have valuable insight into the specific risks and challenges in their work areas.
- iv. **Incident Analysis:** Analyze incident reports and near-miss incidents to identify areas where additional training could prevent future incidents.
- v. **Language and Literacy Needs:** Identify and address language and literacy accommodation needs through orientation assessments, employee self-disclosure, task-specific observations, individual consultations, review of job requirements, tailored accommodation plans, ongoing monitoring, and continuous improvement to ensure accessibility, safety, and inclusion in the workplace.

The HSR and/or Senior Management will arrange appropriate training courses in a reasonable time to meet the legislative minimums and our minimum training requirements. They will also keep up to date on industry-specific safety standards and best practices and ensure that training aligns with these standards.

The HSR will ensure that any in-house trainers are competent. In this procedure, competent in-house trainers will possess a combination of subject matter expertise, instructional skills, adaptability, effective communication, and a commitment to continuous improvement.

To ensure that in-house trainers are competent involves the following steps:

1. **Assessment of Expertise:** HSR will evaluate the subject matter expertise of potential trainers. Trainers must demonstrate a thorough understanding of the topics they will teach, including safety protocols, equipment usage, and regulatory compliance.
 2. **Evaluation of Instructional Skills:** Trainers must be able to effectively communicate, adapt to different learning styles, and engage participants to deliver interactive and practical training sessions.
 3. **Continuous Improvement:** Trainers must show a commitment to ongoing professional development by staying updated on safety standards, best practices, and legislative changes.
 4. **Certification and Qualifications:** Trainers must possess relevant certifications or qualifications that align with the training topics they will deliver.
-

5. **Observation and Feedback:** HSR will observe training sessions conducted by in-house trainers and collect feedback from participants to ensure their quality and effectiveness.
6. **Periodic Reviews:** Trainers will be reviewed periodically to ensure they continue to meet the required standards.

By following these steps, the company ensures that in-house trainers are equipped to deliver high-quality, effective training programs.

Senior Management and the Health and Safety Representative (HSR) will ensure that all Workers and Supervisors receive the necessary training *before* they are assigned or permitted to perform their tasks. The process includes the following steps:

- i. **Individual Assessments:** Prior to task assignment, each employee's training needs will be evaluated on a case-by-case basis. This assessment will consider the individual's level of responsibility, prior experience, physical and cognitive abilities, language proficiency, and literacy skills to determine what specific training is required.
- ii. **Customized Training:** Based on the assessment results, tailored training programs will be developed to address the identified needs. This includes targeted instruction for specialized skills (e.g., TIG welding for welders seeking to advance) and adaptations for language or literacy challenges where applicable.

No worker will begin work until it is confirmed that they have completed the required training and demonstrated an understanding of the procedures and safety protocols relevant to their role.

All training will be documented and tracked using a centralized training log or system. Supervisors and HSR are responsible for ensuring training is completed prior to task assignment, verifying competency, and scheduling refreshers or additional support as needed. The HSR will utilize a variety of training methods, such as:

- **In-Person Training:**
 - **Workshops or Classroom Training:** For more formal instruction, such as safety protocols, equipment usage, and regulatory compliance. This will be led by qualified instructors or subject matter experts.
 - **On-the-Job Training (OJT):** Hands-on training where employees learn tasks directly on the equipment they will be operating or maintaining, guided by an experienced technician or supervisor.
 - **Online Training:**
 - **E-learning Modules:** For standardized training content, such as safety procedures or equipment manuals, online courses will be offered. These modules can be self-paced and include quizzes or tests to assess comprehension.
-

- Webinars: Live virtual sessions for real-time interaction and training, especially useful for remote teams or larger groups across different locations.

The HSR will review documentation received from recent training courses, and will update the **Training Matrix Tracking Sheet** accordingly. The training content will include information on:

- a. **Purpose and Scope:** Explain the objectives and boundaries of the OHSMS.
- b. **Roles, Responsibilities, and Rights:** Outline the duties and rights of employees, supervisors, and management regarding OHS.
- c. **Importance of Conformity:** Emphasize the significance of adhering to OHSMS procedures and policies.
- d. **Potential Consequences:** Explain the potential consequences of deviations or noncompliance with OHSMS requirements.
- e. **Importance of Workers' Participation:** Highlight the importance of active participation and reporting of safety concerns within the OHSMS.
- f. **Interactive Training:** Ensure that the training is engaging and interactive, allowing employees to ask questions and discuss how they can apply OHSMS principles in their daily work.

An orientation package is provided for all new workers, returning workers and those who have changed their roles in the company. A more detailed description of the package can be found in Section 4 – Employee Orientation Procedure of this manual. It is mandatory for all workers to review the orientation package and return it signed before starting their role.

Evaluation and Feedback

Using form 15-2 - Health And Safety Training Documentation, the Health and Safety Team will collect information through on-the-job evaluation. Supervisors will assess employees' practical application of training through direct observation, performance reviews, and feedback from peers or operators.

Based on feedback and performance assessments, the training programs will be updated regularly to address emerging needs, improve content quality, and enhance delivery methods. Regular reviews of training materials and techniques will ensure they remain relevant and effective.

Communication of Training Information

- **Pre-Training Communication:** Employees will be notified in advance of scheduled training sessions through email and internal communication systems. Information will include the training topic, objectives, date, and location.

A training register will be maintained and updated on a quarterly basis which records the training completed by each employee, and the date of expiry (when applicable).

Continuous Improvement

Use feedback, incident reports, and evaluation results to continuously improve the OHS training program.

DISTRIBUTION

Our Training Matrix (**15-1 – Form**) will be reviewed by Health and Safety Team and Senior Management. All persons requiring training will receive notification and attendance will be mandatory.

RECORDS

Internal training documentation must be documented using (**15-2 - Form**), with copies which shall be provided to the Head Office for filing.

All external training documentation must be maintained by the individual worker, for use on construction projects.

All training documentation (internal and external) will be maintained at our Head Office, by the Health and Safety Team.

The following is a list of minimum training requirements for our employees, based on their respective roles. Please note that other training may be required to meet the specific needs of the program and/or hazards present in the workplace.

For the purposes of this section all employees shall include Senior Management, the Health and Safety Reps, Project Managers, Supervisors, and Workers.

In addition, workers shall be separated into the following categories, unless otherwise noted as Workers (in which case it will apply to all categories of workers): field workers, office workers, maintenance shop workers. Maxim Mechanical Group Inc will take into consideration the different levels of responsibilities, abilities = language skills and literacy of all our employees.

For the purposes of this section, the term affected workers shall apply to workers, only to whom the training applies - as a result of performing tasks requiring said training, or as a result of exposure to tasks requiring said training.

NOTE: Included below are the meaning of symbols found throughout the **Health and Safety Training Matrix:**

- * Mandatory Training Require - Prior to Commencing Any Work Activities
- *TG Mandatory Training Requirement for Target Group - Prior to Commencing Any Work Activities
- *TS Mandatory Training Requirement - Prior to Commencing Any Task Specific/Related Work Activities
- *ST Training Standard Applies (*there is a requirement to ensure training is provided by an approved provider*)

TERMS: Included below are a list of the terms used as headings and a brief description of their meaning:

Training Element: The training course, topic and/or element, that provides respective target groups with the knowledge and skills needed for a perform a particular task, activity, or to perform work which requires exposure to a particular hazard.

Target Group: The workplace party, as defined in Section 2 of our Health and Safety Manual, to which the Training Element applies.

Minimum Frequency: The frequency at which Training Elements must be taken. Also, the most amount of time permitted between a workplace party receiving a respective Training Element, and the subsequent training date.

Comments & Notes: Specifies training standards, frequencies, applicable legislation/regulations, and when needed, specifies who the term “Affected Workers” applies to.

15-1 - HEALTH AND SAFETY TRAINING MATRIX

TRAINING ELEMENT	INTERNAL TARGET GROUP	APPLICABILITY & REQUIREMENTS	MINIMUM FREQUENCY	COMMENTS & NOTES
Accessibility for Ontarians with Disabilities Act	All Employees.		Once and as needed.	Additional Information Included as part of Employee Orientation (EO).
Asbestos Awareness	All Employees.			Information Included as part of EO.
Carbon Monoxide	Affected Workers. Affected Subcontractors.	Worker who carries out testing for airborne concentrations of carbon monoxide in an enclosed structure where an internal combustion engine is being operated.	As Needed*	Additional Information Included as part of EO.
Chainsaw	Affected Workers. Affected Subcontractors.	Worker who uses a chainsaw	As Needed*	
Client Specific Training	Affected Workers. Affected Subcontractors.	Based on Client requirements.	As Needed	Will be defined on a client and/or project specific basis.
Confined Spaces	Affected Workers. Affected Subcontractors.	• Person who carries out a hazard assessment related to the confined space before a worker enters. • Person who develops and implements the written plan for the confined space, including procedures to control hazards identified in the assessment. • Every worker who enters a confined space or performs related work at a workplace that is not a project. • Every worker who enters a confined space or who performs related work at a workplace that is a project. • Persons who are available for immediate implementation of the on-site rescue. • Person who performs tests before and while a worker is in a confined space to ensure that acceptable atmospheric levels are maintained in accordance with the plan.	As Needed*	Additional Information Included as part of EO.

15-1 - HEALTH AND SAFETY TRAINING MATRIX

TRAINING ELEMENT	INTERNAL TARGET GROUP	APPLICABILITY & REQUIREMENTS	MINIMUM FREQUENCY	COMMENTS & NOTES
Cranes, Hoisting and Rigging (Use, Inspection, Setup, Maintenance)	Affected Workers & Subcontractors	Worker who operates a crane or similar hoisting device capable of raising, lowering, or moving material that weighs more than 30,000 lb. Hoisting Engineer – Mobile Crane Operator 1. Worker who operates a crane or similar hoisting device capable of raising, lowering, or moving material that weighs between 16,000 and 30,000 lb. Hoisting Engineer – Mobile Crane Operator 2. Worker who operates a tower crane. Hoisting Engineer – Tower Crane Operator.	As Needed*	Additional Information Included as part of EO
Drowning	Affected Workers & Subcontractors	Workers who perform rescue operations if a workers may drown at a project.		Additional Information Included as part of EO
Electrical Safety Awareness	All Employees.			Information Included as part of EO
Employee Orientation Package	All Employees.		Yearly.	
Equipment & Machinery	Affected Workers & Subcontractors.	Workers who use equipment and machinery.	As Needed*	Additional Information Included as part of EO
Excavation	Affected Workers & Subcontractors.	Person who supervises the removal of a support system for the walls of an excavation.	As Needed*	Additional Information Included as part of EO
Explosive Actuated Fastening Tools	Affected Workers & Subcontractors.	Workers who use an explosive actuated fastening tool.		
Fire Extinguisher (Use/Inspection)	Affected Workers & Subcontractors.	Workers who may be required to use fire extinguishing equipment and workers who are required to inspect fire extinguishing equipment.	Every 2 Years.	Additional Information Included as part of EO
Formwork	Affected Workers & Subcontractors.	Person who inspects formwork and falsework before concrete placement.	As Needed*	

15-1 - HEALTH AND SAFETY TRAINING MATRIX

TRAINING ELEMENT	INTERNAL TARGET GROUP	APPLICABILITY & REQUIREMENTS	MINIMUM FREQUENCY	COMMENTS & NOTES
Health and Safety Rep.	Affected workers.	Worker selected as Health and Safety Representative.	Once and as needed.	Required for those acting as Health and Safety Rep. but not JHSC member.
Lifting Devices and Mobile Equipment	Affected Workers & Subcontractors.	Person who operates a Lifting Device or Mobile Equipment.	As Needed*	Additional Information Included as part of EO
Mechanical Equipment	Affected Workers & Subcontractors.	Worker who inspects mechanically powered vehicles, machines, tools and equipment, rated at more than 10hp, for the purposes of identifying any defects or hazardous conditions.		Additional Information Included as part of EO
MOL Supervisor Health and Safety	Senior Management Supervisors		Once and as needed.	Additional Information Included as part of EO
Awareness in 5 Steps	Supervisors		Once and as needed.	
MOL Worker Health and Safety Awareness in 4 Steps	All Employees.		Once and as needed.	Additional Information Included as part of EO
Personal Protective Equipment	All Workers.	Workers required to use, maintain, inspect PPE. Workers provided with specialty PPE.		Additional Information Included as part of EO
Power Elevated Work Platforms	Affected Workers & Subcontractors.	Workers who use and inspect Power Elevated Work Platforms.	As Needed*	
Propane (TSSA CH-02 Certificate)	Affected Workers & Subcontractors.	Workers who activate a propane, natural gas, or oil-fired construction heater or torch, with an input of 400,000 BTU/h or less, and connects/disconnects it.	Every 3 Years.	
Signaling	Supervisors Workers, Health & Safety Team Affected Subcontractors.	Worker who acts as a signaler to assist the operator of a vehicle, machine, or equipment when the operator's view is obstructed or if a person could be endangered by the vehicle, machine, or equipment or the load.	As Needed*	Additional Information Included as part of EO

15-1 - HEALTH AND SAFETY TRAINING MATRIX

TRAINING ELEMENT	INTERNAL TARGET GROUP	APPLICABILITY & REQUIREMENTS	MINIMUM FREQUENCY	COMMENTS & NOTES
Standard First Aid	Supervisors Health & Safety Team Affected Workers in Charge of First Aid Station (Worker Rep.)		Every 3 Years.	Additional Information Included as part of EO
Supervisory Training (Basics of Supervising)	Supervisors Health & Safety Team	Employees who are appointed as Supervisors, or who performs supervisory duties.	Once and as needed.	Additional Information Included as part of EO
Traffic Control	Supervisors Workers Health & Safety Team Affected Subs.		As Needed*	Additional Information Included as part of EO
Vehicle Operation	Affected Workers.	Workers who operate company vehicles. Workers driving company vehicles. Relevant class license based on vehicle, needed.	As Needed*	Additional Information Included as part of EO
Working at Heights (MOL Approved Course)	Supervisors Workers Health & Safety Team Affected Subcontractors.		Every 3 Years.	Additional Information Included as part of EO
Workplace Hazardous Material Information System (WHMIS)	All Employees & Affected Subcontractors.		Once and yearly as needed.	Yearly review by Senior Management and Health & Safety Team to determine if additional training needed.
Workplace Violence and Harassment	All Employees.	Information Included as part of Employee Orientation.	Once	Additional Information Included as part of EO

*Check expiry dates on training certificates

LOCATION : _____

DATE : _____

TIME : _____

FACILITATOR : _____

TARGET GROUP : _____

TOPICS DISCUSSED

HANDOUTS

ATTENDANCE (Please Print)

PRINT NAME	SIGNATURE	PRINT NAME	SIGNATURE

COMMENTS:

FACILITATOR'S SIGNATURE: _____**Distribution:** ☐ Health and Safety Team ☐ File ☐ Other _____

Employee Name:						
Position Title:						
Purpose:						
Major job tasks for the position	Training/skills development required?		If yes identify what training needs exist.	How will this be achieved? (e.g. on the job, external training)	When?	Who to organise? Training provider?
	Yes	No				
What do we want to achieve in the period ahead?						
Where can you/we see your career moving in the next two years?						
How are we going to make this happen?						
What will you need from the company to assist you to reach your career goals?						

PURPOSE The purpose of this procedure is to establish a WHMIS Program that will ensure that hazardous materials in the workplace are managed effectively to prevent harm to workers, property and the environment.

SCOPE This procedure applies to the safe use of hazardous materials in the workplace. Once a hazardous material has entered the workplace, adherence to the WHMIS Program will control exposure to hazardous materials through a combination of assessments, training, labeling, Safety Data Sheets and maintenance of the Program.

RESPONSIBILITIES

Health and Safety Team Responsibilities

- Ensure all required SDSs are provided and documented from the manufacturer of the controlled product and that they are current.
- Ensure that all hazardous chemicals, controlled products and waste materials stored, transported or disposed of by company personnel, are identified and labeled in accordance with applicable legislation.
- Make readily available to employees exposed information regarding hazardous materials by providing Safety Data Sheets (SDS) for all work locations where chemicals, controlled products and/or hazardous waste materials are handled, stored or transported.
- When purchasing material for our office or construction projects, acquire SDSs.
- Ensure that SDS Binders are available to all employees and are current.
- Assist Senior Management in developing and scheduling employee training.

Senior Management Responsibilities

- Ensure that a company WHMIS Program is developed and implemented.
- Ensure that the company WHMIS Program is reviewed annually. This includes the review the WHMIS Program including the information and training regarding chemicals, controlled and hazardous materials, instruction and training provided to the employees and satisfying Legislative and/or Act requirements as a minimum.
- Define responsibilities under the WHMIS Program as they relate to the purchase, storage, handling and disposal of WHMIS-controlled products.
- Ensure that training courses are of a duration that permits all training objectives/topics to be adequately covered.
- Ensure that Worker Representative is consulted and that their recommendations are addressed regarding company WHMIS policies.

Supervisor Responsibilities

- When purchasing material for our office and workshop location, acquire SDSs, or instruct the Health and Safety Team to do so.
- Assist Senior Management in developing and scheduling employee training.
- Advise employees of the location of SDSs for WHMIS chemical materials and controlled products.

- Advise employees (who may be exposed to WHMIS chemical materials and/or controlled products) of the hazards associated with the products used in their workplace.
- Ensure that SDS Binders are available to all employees.
- On project sites, ensure that all SDSs are current.

Ensure workers have received appropriate training on WHMIS and workplace specific hazards, including appropriate storage practices and reference to applicable Workplace Task Standards.

Worker Responsibilities

- Attend and participate in education and WHMIS training programs on hazardous materials, as required.
- Use WHMIS-related information and training to protect health and safety on the job, by taking all necessary steps to protect themselves and their co-workers.
- Bring to the attention of their Supervisor any concerns about controlled products (e.g. damaged labels, outdated SDSs, defective personal protective equipment (PPE), health and safety concerns associated with hazardous product use, etc.).
- Advise Supervisor if experiencing any difficulties with assigned tasks, or if assigned tasks are beyond perceived limitations or medically not capable of performing tasks.
- Comply with all the requirements as defined under the *Occupational Health and Safety Act and Regulations*.

PROCEDURE

The WHMIS Program will be **developed** by the **Senior Management** with the assistance of the **Health and Safety Worker Representative**.

The Workplace Hazardous Material Information System Program will be **maintained** by the **Health and Safety Team, Senior Management** and the **Health and Safety Worker Representative**.

The program will include the following topics:

- Part 1: Training
- Part 2: Safety Data Sheets
- Part 3: Labeling

DISTRIBUTION

The WHMIS Program will be distributed and reviewed with:

- Joint Health and Safety Committee/Worker Trade Committee
- Health and Safety Team
- Senior Management

Once approved, workers may be provided training on the WHMIS Program.

This program will remain in the Health and Safety Manual and will also be placed in the front of SDS. All Workers and Subcontractors will be able to review this program at any time.

RECORDS

All training of employees will be documented and retained on file by the Health and Safety Team and Senior Management for a period of 5 years.

PART 1: TRAINING OF EMPLOYEES

WHMIS Training provided to our workers will consider and include information on the topics listed below. Information relevant to each topic below, will be included as part of a **“Workplace Task Standard”** (see Section 11 - Workplace Task Standard). The **WHMIS Workplace Task Standard** will include the information that must be communicated to workers during WHMIS Training:

- A. Legislative Requirements
- B. Target Groups
- C. Company Training
 - ☐ Training Considerations
 - ☐ Generic Training Information
 - ☐ Specific Training Information

A) Legislative Requirements

Employers must arrange for the delivery of worker training. Worker training must be designed to provide the knowledge needed to exercise the workers’ “Right to Know” about the hazardous materials handled, stored or used in the workplace. The means for delivery of the training must be planned and delivered in consultation with the Health and Safety Representative.

Updates and Reviews

The effectiveness of the WHMIS Program is to be assessed annually. The following will be a guideline to use when developing strategies for the training of employees.

B) : Target Groups

1. Develop a “Needs Analysis”, considering the following:
2. Toxicity of chemical agents used by workers
3. Likelihood of exposure to physical or chemical agents (working with or in proximity)
4. Common exposure to physical or chemical agents
5. Learning abilities (e.g. language barriers).

Define the target groups, based on the considerations listed above. These target groups will be submitted to the **Health and Safety Team**.

C) Company

Training

Considerations

Determine the requirements for each group to be trained and ensure that the training is performance oriented.

Generic Training Information

All training sessions as a minimum will cover the following:

- WHMIS Legislation
- Worker Education
- Labels
- Material Safety Data Sheets
- Emergency Procedures

Specific Training Information

The specific training needs will include the review of the chemical’s hazardous properties and

recent results from workplace health and safety monitoring and health and safety inspection findings. The training must include a review of Material Safety Data Sheets in use by the target groups and participants should gain an understanding of how to protect themselves and their co-workers when handling, storing or using potentially hazardous products as well as steps to be taken in the event of an emergency. A review should also be made on the Administrative Controls and Engineering Controls in place and/or the Personal Protective Equipment to be used. If Personal Protective Equipment is to be used, the trainer must explain the limitations, fit, use and care of the equipment.

Training Schedule

A training schedule will be arranged by the Health and Safety Rep and Senior Management. WHMIS Training must be conducted initially for all employees and reviewed at least annually.

PART 2: (MATERIAL) SAFETY DATA SHEETS

PURPOSE

Safety Data Sheets (SDS) are provided by the manufacturers/suppliers of WHMIS controlled products used workplaces. SDS will be available for review by all of our workers and Subcontractors (including their workers).

Safety Data Sheets are designed to provide the user with valuable health and safety information on the product that is being stored, handled or used. The worker's ability to use this information will be instrumental in the safe use of the product. (M)SDS also provide valuable information on first-aid measures to be taken if a worker is adversely affected by a hazardous product.

PROCEDURE

Senior Management, and the Health and Safety Representative, will determine procedures for obtaining the (M)SDS from suppliers and Subcontractors. They will also review the content of (M)SDS to ensure that appropriate control measures have been taken for the safe use, storage and handling of the product.

The requirements for the procurement, maintenance, monitoring and review of Material Safety Data Sheets are included in **Section 16 - WHMIS Procedure**, which address the following topics:

- Legislative (M)SDS requirements.
 - Conducting a yearly review of (M)SDS (ensuring they are current).
 - Maintaining/updating current (M)SDS.
 - Review of (M)SDS contents to ensure appropriate control measures are in place.
 - Distributing (M)SDS and ensuring they are available.
 - Training workers on use of (M)SDS (also found within this manual section).
-

DISTRIBUTION

All (M)SDS will be maintained in their relevant workplace's Safety Binder.

A master inventory of (M)SDS will be maintained by the Health and Safety Team and Senior Management.

RECORDS

Records to be maintained for (M)SDS's must include any correspondence to suppliers, requesting (M)SDS, and the (M)SDS themselves.

PART 3: LABELING**PURPOSE**

WHMIS legislation clearly defines the labeling requirements for controlled products brought into and used in the workplace. Labeling of controlled products is done in one of two manners:

1. Supplier Labels and/or
2. Workplace Labels.

Supplier Labels - must be provided and/or affixed to containers of controlled products by the supplier/manufacturer. These labels provide valuable health and safety information to the people handling/storing or using the product. They also alert the user that the product is considered a potentially hazardous product.

Workplace Labels - when controlled products are decanted from their original/primary containers into new/secondary containers, **Workplace Labels must be affixed to these new containers.**

This segment of the Workplace Hazardous Material Information System Program outlines the labeling requirements to be followed

PROCEDURE

The **Health and Safety Team, Senior Management** and the Joint Health and Safety Committee, will define the labeling requirements for all hazardous materials in the workplace. The labeling requirements must make provisions for the following:

- Requirements for Supplier Labels
- Requirements for Workplace Labels
- Receiving Hazardous Materials

DISTRIBUTION

The specific requirements for labeling will be reviewed during the training sessions with all employees.

PURPOSE

The purpose of this procedure is to develop and establish a Return to Work (RTW) Program, which facilitates a safe and early return to work for all Workers (employed by our company) who have sustained a workplace injury.

SCOPE

This procedure applies to all workplace parties involved in the RTW Program. The RTW Program will provide every opportunity for injured Workers to return to gainful employment in the event of a disabling workplace accident.

RESPONSIBILITIES**Health and Safety Team Responsibilities**

- Develop and implement in consultation with Senior Management and the Worker Representative a company RTW Program.
- In conjunction with Senior Management, review the company RTW Program annually and/or after an incident/accident has occurred. Changes will be implemented as necessary.
- Perform the roles and responsibilities (as prescribed below) of the RTW Coordinator.
- Maintain all documentation related to the injury, WSIB, modified work, and recovery progress.

Senior Management Responsibilities

- In conjunction with the Health and Safety Team, ensure that the company RTW Program is developed and implemented.
- Initiate and ensure that the Company RTW Program is reviewed annually.
- Ensure that the company RTW Program complies with the requirements of applicable legislation and/or acts.
- Arrange for suitable Modified Work.
- Ensure that Worker Representative is consulted and that their recommendations are addressed regarding company RTW policies.
- Communicate with the WSIB relating to the RTW process and existing claims.
- Cooperate with the RTW program and worker restrictions as required.
- Maintain all documentation related to the injury, WSIB, modified work, and recovery progress.

Supervisor Responsibilities

- Ensure that HS Worker Representative is consulted regarding RTW Procedure and RTW Program.
- Assist Senior Management developing/offering suitable Modified Work.
- Maintain communication with the injured worker during the RTW process.
- Assess and monitor the injured worker's progress during re-integration into the workforce.

Worker Responsibilities

- Participate in the RTW Program diligently.
- Obtain Functional Abilities information at each Health Care Practitioner's visit related to the work-related injury.

- Provide all RTW documentation (provided by the Health Care Practitioner) to your supervisor or Health and Safety Rep.
 - Advise Supervisor if experiencing any difficulties with assigned tasks, or if assigned tasks are beyond perceived limitations or medically not capable of performing tasks.
-

PROCEDURE

Once an injured Worker has been placed on a RTW program, the Supervisor for that Worker, with assistance from the Health and Safety Team, will be expected to follow the RTW Program with the injured Worker. Implementation of the RTW Program must be documented using the following forms:

- **Modified Job Description Form (17-1 Form)**
- **Supervisor's Follow-up Report (17-2 Form)**
- **Worker's Progress Report Form (17-3 Form)**

Supervisors will also be expected to keep Senior Management and the Health and Safety Team updated as required.

The RTW program will be broken into two stages:

Stage 1: To prevent Workers from losing time due to workplace injuries through prompt medical treatment and adherence to the *Workplace Safety and Insurance Act (WSIA)*.

Stage 2: To return Workers to gainful employment as soon as medically authorized. This will be done in 2 potential ways:

- a) Temporary Modified Work (**17-1 Form**).
 - b) Permanent Modified Work (**17-1 Form**).
-

DISTRIBUTION

The entire workforce must also be made aware of the RTW program during Employee Orientations.

RECORDS

Records generated through the RTW program must be maintained indefinitely.

The purpose of having an RTW program is to provide workers who have been injured on the job, a safe means for returning to gainful employment in an expedient manner while ensuring that "Lost Time" is kept to an absolute minimum.

The Workplace Safety and Insurance Board (WSIB) have put the onus on the Employer to return injured Workers to the workplace as soon as possible. As per the *Workplace Safety and Insurance Act, 1997, s. 40* (See below). All employers are required to have a Return to Work program.

PART V RETURN TO WORK

Duty to cooperate in return to work

40. (1) The employer of an injured worker shall cooperate in the early and safe return to work of the worker by,

- (a) contacting the worker as soon as possible after the injury occurs and maintaining communication throughout the period of the worker's recovery and impairment;
- (b) attempting to provide suitable employment that is available and consistent with the worker's functional abilities and that, when possible, restores the worker's pre-injury earnings;
- (c) giving the Board such information as the Board may request concerning the worker's return to work; and
- (d) doing such other things as may be prescribed. **1997, c. 16, Sched. A, s. 40 (1).**

Same, worker

(2) The worker shall cooperate in his or her early and safe return to work by,

- (a) contacting his or her employer as soon as possible after the injury occurs and maintaining communication throughout the period of the worker's recovery and impairment;
- (b) assisting the employer, as may be required or requested, to identify suitable employment that is available and consistent with the worker's functional abilities and that, when possible, restores his or her pre-injury earnings;
- (c) giving the Board such information as the Board may request concerning the worker's return to work; and
- (d) doing such other things as may be prescribed. **1997, c. 16, Sched. A, s. 40 (2).**

Same, construction industry

(3) Employers engaged primarily in construction and workers who perform construction work shall cooperate in a worker's early and safe return to work and shall do so in accordance with such requirements as may be prescribed. Subsections (1) and (2) do not apply with respect to those employers and workers. **1997, c. 16, Sched. A, s. 40 (3).**

1.0 INTRODUCTION

Return to Work Programs became mandatory effective January 1, 1998 as a result of *Bill 99*. Employers and their workers are required to work cooperatively and communicate in the facilitation of the worker's return to work. The failure of any workplace party (employers or workers) to comply with these initiatives could result in penalties by the Board, as a provincial offence, under the *Workplace Safety and Insurance Act* (WSIA).

The focus of an effective Return to Work Program (RTW) is the well being of our most valuable resource, our workers. This program is a temporary measure (in some extreme cases - permanent) that will facilitate a safe and early return to work in the event of a disabling workplace accident and provide every opportunity for injured workers to return to gainful employment.

This Program can only be successful if there is commitment, cooperation and communication between the employer and workers and as necessary the treating physician, health care providers and the WSIB.

Return to Work Goal Setting:

The primary goal of a return to work plan is a return to the pre-injury job as soon as possible. By comparing the physical demands of the job and the functional abilities, the Return to Work Coordinator, Senior Management, Supervisor and the employee can determine if the job needs modifying and if accommodations would be required.

If the employee is not able to return to their pre-injury position, the Return to Work Coordinator, Senior Management and their Supervisor will attempt to accommodate the worker as soon as possible. The accommodation should be suitable and restore the employee's earnings. The employer will make every effort to provide meaningful modified work. The Return to Work Coordinator, Senior Management and their Supervisor will use the following hierarchy as a guideline to return to work plan development:

1. Pre-injury job (starting point and overall goal).
2. Pre-injury job, accommodate to meet the workers' abilities.
3. Work comparable in nature and earnings to the pre-injury job (with accommodation if required).
4. Alternate suitable work (with accommodation if required).

2.0 REPORTING REQUIREMENTS TO WSIB

Under Section 21(1) of the WSIA, an employer shall notify the Board within (3) days after learning of an accident to a worker employed by him/her or if the accident necessitates health care or results in the worker not being able to earn full wages. Also, an employer shall give a copy of the **Form 7** to the worker at the time the notice is given to the WSIB. Equally, the worker shall give a copy of his or her claim to his or her employer at the time their claim is given to the Board.

Under **Section 21(3)** of the WSIA, an employer who fails to comply with this section shall pay the prescribed amount to the Board under the Act. Under **Section 157**, if a corporation commits an offence under this Act, every director or officer of the corporation who knowingly authorized, permitted or acquiesced in the commission of the offence is guilty of an offence, whether or not the corporation has been prosecuted or convicted.

Wage Changes: Under the WSIA a change in a worker's wage or condition constitutes a material change that affects a person's entitlement to benefits and services under the Act. Any change in wages must be reported to the WSIB **within (10) days** of the change.

Changes in Modified Work Duties/Duration of Program

As is necessary, the modified work duties as performed by the worker shall be monitored or adjusted, to ensure progress or difficulties being encountered by the worker are being addressed.

All changes in duties **must be documented** on the worker contact log and medically authorized by the treating physician. Also, all changes in duties should be reviewed and approved by the JHSC and explained to the worker, the Supervisor and others involved in the RTW Program.

Failure to Cooperate

If the WSIB determines that an employer is not cooperating in RTW activities, the employer will be notified by the WSIB regarding their obligation to cooperate in RTW activities and finding of non-cooperation.

If the WSIB determines that a worker is not cooperating in RTW activities, the decision-maker notifies the worker of the obligation to cooperate in RTW activities, and consequences of this finding (i.e., reduction or suspension of benefits).

Return to Regular Pre-Accident Work Duties/End of RTW Program

All injured workers should obtain medical clearance from their treating physician, via a Functional Abilities Form or note from the treating physician, prior to resuming his or her pre-accident duties. The WSIB must also be advised of this change.

3.0 ROLES AND RESPONSIBILITIES

Assigning ownership in any Return to Work Program is vital in achieving desired results. As such, identifying and understanding each party's role and responsibility is the first key.

The role of the Health and Safety Team: Ensure regular communication exists between Worker, Supervisor and the Health Care Provider. Under the return to work obligations **Part V Section 40, (Subsection 1)** of WSIA the employer of the injured worker shall cooperate in the return to work program by:

- Contact the worker as soon as possible after the injury occurs and document ongoing communication using the workers contact log (**Appendix G**) throughout the period of the worker's impairment and recovery.
- Providing suitable employment that is available and consistent with the worker's functional abilities and that, when possible, restores the worker's pre-injury earnings.
- Giving the Board such information as the Board may request concerning the worker's return to work, and doing such things as may be prescribed.

Independent medical assessments: Where there are discrepancies or differences in opinions around the employee's prognosis or functional abilities, the employer may request that an independent medical assessment be completed in an attempt to resolve the issue.

The role of the Injured Worker when filing a claim, a worker must consent to the disclosure to his or her employer of information provided by a health professional under **Subsection 37(3)** concerning the worker's functional abilities. The disclosure is for the sole purpose of facilitating the worker's return to work.

Under the return to work obligations **Part V Section 40, (Subsection 2)** of the WSIA the worker shall cooperate in his or her return to work by:

- Contacting his or her employer as soon as possible after the injury occurs and maintain communication throughout the period of the worker's impairment and recovery.
- Assisting the employer, as may be required or requested, to identify suitable employment that is available and consistent with the worker's functional abilities and that, when possible, restores his or her pre-injury earnings.
- Giving the Board such information as the Board may request concerning the workers' return to work.
- Doing such things as may be prescribed.

The role of the Health Care Provider: is to provide medical treatment to an injured worker. The health care provider shall complete a **Form 8** during the initial visit and provide the completed third page of the Form 8 to the worker. This third page represents the functional abilities information found during the assessment. Every subsequent visit, the physician will complete a functional Abilities Form provided by the injured party.

The role of the WSIB: is to monitor the progress of the workers' return to work and to provide assistance if either the employer or the injured worker has any difficulty or dispute concerning either parties' cooperation with the RTW. Under **Section 40(6)** of the WSIA, either party could contact the WSIB for assistance. This includes the assistance of a WSIB assigned Return to Work Mediator who will assist both workplace parties in resolving any/or all disputes that need to be addressed.

4.0 SUPERVISOR'S DUTIES

Experience dictates that the Supervisors play an integral role from the time of the accident to the injured worker's return to work. As such, the following guidelines are to clarify the Supervisor's roles and responsibilities.

Refer to the following documents and forms within the "**Injury Management Package**" to ensure the necessary procedures and paperwork are completed:

Injury Management Package:

Forms

Offer of Modified Work - Letter to the Employee (**Form - 17-1-1**)

Letter to Health Care Provider (**Form - 17-1-2**)

Modified Work Description Report (**Form - 17-1-3**)

Worker Contact Log (**Form - 17-1-4**)

Worker's Progress Report (**Form - 17-1-5**)

Supervisor's Follow Up Report (**Form - 17-1-6**)

Return to Work Self-Assessment Report (**Form - 17-1-7**)

Functional Abilities Form (**Form - 17-1-8**)

Documents

WSIB Form 82 – In Case of Injury Poster (**Doc. - 17-1-9**)

Attending to an Injured Employee (**Doc. - 17-1-10**)

In Case of Injury Flow Chart (**Doc. - 17-1-11**)

1) Provide prompt medical treatment by arranging transportation for the injured worker and accompany or assign someone to take the worker to a medical treatment facility. In cases of serious accidents, where the possible improper movement (transportation) of an injured worker could result in further injuries or unnecessary pain to the injured worker, an ambulance must be called (9-1-1).

2) Should the injured worker choose to be seen by his/her family doctor, the injured worker must be given an Injury Management Package to be completed and returned before the following shift. Explain that your company has developed and implemented a Return to Work Program that requires all parties' cooperation.

3) Should the employee choose not to attend the nearest medical walk-in clinic on the day of the accident or reporting, and does not return page 3 of **Form 8** or the Functional Abilities Form prior to the next shift, the employee should be asked to cooperate and attend a walk-in clinic as arranged by the company, to have the **Form 8** or Functional Abilities Form completed and returned to the Supervisor.

4) Assign suitable modified duties if medically required, in accordance with the physical restrictions noted on page 3 of Form 8, or the Functional Abilities Form.

5) Maintain regular contact with the RTW Coordinator, Senior Management and injured worker to ensure progress and deal with difficulties encountered by the worker to avoid a recurrence.

6) Investigate the accident and provide a completed copy to the RTW Coordinator to ensure all WSIB reporting requirements are met.

5.0 CONTACT WITH THE INJURED WORKER

Under Section 40(1) of the WSIA, the employer of an injured worker shall cooperate in the return to work of the worker by:

40(1) (a) Contacting the worker as soon as possible after the injury occurs and maintaining communication throughout the period of the worker's recovery and impairment.

40(2) (a) The worker shall cooperate in his or her return to work by, contacting his or her employer as soon as possible after the injury occurs and maintaining communication throughout the period of the worker's recovery and impairment.

To ensure contact is established and maintained the program coordinator is required to complete a Worker's Contact Log (**Appendix F**).

In the event that a problem cannot be resolved between the Supervisor, injured worker and the program coordinator, a meeting should be arranged between the parties for resolution. If the dispute cannot be resolved, then this matter can be taken up with the WSIB for dispute resolution.

Establishing Early Contact: If an employee is off due to an injury or illness, it is recommended (where appropriate depending on the severity or circumstances of the injured/ill worker) that contact be initiated by the Supervisor and/or the RTW coordinator **within 24 to 48 hours**. Contact can be a telephone call or a face-to-face meeting.

Frequency of Contact: The frequency of contact required by the employee and Return to Work Coordinator will be determined by the health recovery status. At minimum, a follow up case conference between the worker and Return to Work Coordinator by telephone at least twice a week.

Health Recovery: The Return to Work Coordinator will assist and support the injured employee during their recovery. The process will involve consultation with the treating health professional and the employee. The Return to Work Coordinator will obtain the Functional Abilities Form to be utilized when developing the return to work plan.

6.0 MEDICAL MONITORING AND TREATMENT

Regular review of the worker's physical abilities will provide an employer with the opportunity to accommodate an injured worker and facilitate the goal of returning a worker to his/her pre-injury duties as soon as possible.

To assist in the medical monitoring and treatment, a worker should be given a Functional Abilities Form to have completed and returned to the employer on the day of the workers scheduled medical appointment.

Note: Section 22(5) of the WSIA, when filing a claim, a worker must consent to the disclosure to his/her employer information provided by a health professional concerning the worker's functional abilities for the purpose of facilitating the worker's return to work.

Dispute resolution process: In situations where there is an issue in dispute related to either the RTW process or the suitability of the RTW plan, and where a meeting with the worker did not resolve the dispute, the RTW Coordinator will refer the matter to Management to facilitate a resolution.

All findings and discussions will be recorded on the Contact Log (**Appendix F**). If the matter cannot be resolved, a referral to the WSIB may be made where the dispute involves cooperation in return to work or suitability of the job accommodation. The WSIB may then requisition a Return to Work Specialist to meet with all parties to assist in a resolution.

7.0 PROVISIONS FOR MODIFIED WORK

Safe Duties - It is essential that an employer impress upon an injured worker that they are a valuable employee and the Return to Work Program is not intended to cause further injury. Before returning an injured or ill employee to any form of work duty it is important to have pre-determined levels of accommodated Modified Duties for the injured worker to perform.

(Example Modified Field Level Duties for less serious injuries where a worker can still perform some work on site and Sedentary Duties for more serious injuries, describing duties that can be performed in a shop/office environment).

Other Available Work - The enclosed Suitable Modified Work Job Description or Physical Demands Analysis (**Appendix E**) is designed to assist an employer in assembling/documenting the duties of the modified positions to provide to the worker's treating physician for approval.

In the case of a permanent impairment, the members of the JHSC will meet with the injured worker, the Health and Safety Team and/or other members of Senior Management, to consider what additional measures might be necessary for placement in a suitable and sustained permanent position that could require further (re)training.

Worker Progress Log - It is recommended that the Supervisor contact the worker so that any difficulties can be communicated and readily resolved.

The program coordinator should ensure that the worker is completing the Worker's Return to Work Progress Report Form (**Appendix G**) and that it is being reviewed and signed by the Supervisor, at the end of the first day back to work, and also at the end of each week.

These forms are to be completed at least until the worker can return to his/her pre-accident job. After the injured worker has been integrated back into the workplace, the next stage is to ensure that the follow-up procedures are understood and followed.

8.0 RE-INTEGRATION OF THE WORKER TO REGULAR WORK

Transitional Work - With injured workers who have been off work for a substantial period of time due to a more serious injury, it is recommended starting them off with a transitional work program, which usually includes light duty work and a restricted number of work hours.

Moving forward, the transitional work program would see a gradual increase in workloads every week or every other week, as his/her condition permits. This would be continued until the injured worker is working pre-accident hours, and has returned to their pre-accident condition (when need to perform physical work).

It is felt that by implementing this gradual increase in hours, you are reducing the risk of re-injury or possibly a new injury. In addition, this return to work phase will assist the worker in re-adjusting (work hardening, acclimatizing) to working again, both physically and mentally.

Supervisors, together with the injured worker, are encouraged to utilize whatever measures are most appropriate in the individual case.

Work Hardening: Through active rehabilitation treatment and work hardening, injured workers will be able to recover from their injuries in an expedient manner.

Furthermore, rehabilitation treatment will help the injured worker understand the nature of the injury and methods of avoiding a recurrence (e.g. back injuries - proper lifting techniques, etc.).

To ensure minimal disruption to the Return to Work Program, it is recommended that all physiotherapy and doctor appointments be arranged for the end of the workday or after work.

9.0 MONITORING AND EVALUATING THE RTW PROGRAM

Monitoring and Evaluating of our return to work program will be completed at least yearly. The Return to Work Coordinator will complete the evaluation and present it to Senior Management for review. This review may also include feedback from individuals within the workplace that have gone through the RTW process.

Following the review, Management will prepare an action plan and implement required changes.

The WSIB RTW Self-Assessment tool will be used as the evaluation tool during the annual evaluation conducted by the RTW Coordinator.

The Return to Work Self-Assessment is used to assist in realizing the benefits of having evidence-based best practice approach to returning our injured and ill workers in a safe and timely manner and completed by the Safety Team.

The Return to Work Self-Assessment will identify:

- Organizational Framework
- Return to Work Responsibilities
- Return to Work Program Maintenance
- Successes and Areas Where Improvement is Needed

Based on the results of the RTW self-assessment, an annual gap analysis from the findings of the RTW program will consider the following:

- Current policy and procedure
- Forms or documents that currently exist
- Current statistics, e.g. injury types, causes, duration, costs, etc.

Dear: _____

Date: _____

In cooperation with the *Workplace Safety and Insurance Board (WSIB)*, Maxim Mechanical Group Inc has implemented a successful Return to Work Program. This Program is intended to permit an return to work activity for individuals such as yourself who may have suffered a work related injury.

This letter is to advise you that Maxim Mechanical Group Inc is offering you modified duties as noted in the enclosed Suitable Modified Work Job Description Form. These duties are available for you on either a full-time basis or on graduated hours if necessary at your pre-accident wage.

Under the WSIA, as a worker you are required to cooperate in your return to work by:

- Contacting your employer as soon as possible after the injury occurs and maintain communication throughout the period of your impairment and recovery.
- Assisting your employer, as may be required or requested, to identify suitable employment that is available and consistent with your functional abilities and that, when possible restores your pre-injury earnings.
- In addition, we the employer, will provide additional modified duties based on standard medical restrictions and information documented on the Form 8 and/or Functional Abilities Form.

Maxim Mechanical Group Inc is prepared to accommodate any medical restrictions that you may have with respect to your injury. We are prepared to allow you to work at your own pace, take breaks and rest as needed, alter your position from sitting to standing as required and are prepared to accommodate any time off work (within reason) that you may require to attend any further medical treatment for your compensable injury. In order to minimize disruption with your return to work, we ask that all medical appointments, including physiotherapy, be arranged for the end of the day, if possible.

In order to facilitate your safe return to modified work we ask that you take the attached letter and Modified Work Job Description to your doctor and request the third page of Form 8 be completed and returned. Should your treating physician include additional precautions on Form 8 (including transportation), they will be accommodated provided they are medically warranted.

Please return the completed form to my attention the same day it is completed by the attending physician.

Please sign this letter confirming you intend to accept the modified work being offered to you. This work will be within your capabilities and limitations as approved by your treating physician.

Yours sincerely,

Management

Worker

Attachment: Letter to Doctor with Modified Job Description Form

Copy with employee's signature for file

Date: _____

Dear Doctor:

Maxim Mechanical Group Inc is committed to meeting the health care needs (both acute medical and rehabilitative) of employees sustaining workplace injuries. A return to work program has been developed and implemented that provides our injured employees with modified work duties that will not in any way infringe upon their injury, and that will not prove hazardous to fellow workers.

If this is an initial visit with an injured worker, please complete the Form 8 and detach and provide the injured worker with the completed third page.

We are prepared to offer all accommodations that you may feel necessary including transportation, if medically warranted, to assist our employee's return to these accommodated duties. Assignments will be based on the physical restrictions and limitations noted on the completed Functional Abilities Form.

Please find enclosed:

1. Modified Work Description or Physical Demands Analysis that are available for the injured employee.
2. Form 8 or Functional Abilities Form (to be used for each subsequent visit) for a Timely Return to Work.

We would ask you to kindly review the physical demands of the available positions, and to complete the Functional Abilities information and provide a copy to the injured worker.

Your cooperation in helping to keep our employees fully employed when they have sustained minor injuries is greatly appreciated.

Sincerely,

Management

Attachment - Functional Abilities Form
- Suitable Modified Job Description/Physical Demands Analysis

Administrative Information (please print):

Employee's Name: _____ Claim #: _____
Regular Job Title: _____ Date of Accident: _____
Treating Physician: _____ Phone #: _____ Fax #: _____

Physical Restrictions:

Provided By: ☐ WSIB (authorized) _____ ☐ Doctor ☐ Specialist
Documentation: ☐ Functional Abilities Form ☐ Form 7 ☐ Doctor's Note
☐ Other _____
Proposed Duration of Restriction: _____ Actual Duration: _____

LIGHT DUTIES/MODIFIED JOB DESCRIPTION

(The returning worker must understand that he/she is not to exceed the restrictions/limitations detailed by the treating physician/WSIB physician. As necessary, this Modified Job Description will be further modified to reflect the injured worker's (dis)abilities.)

Job Title: _____ Department: _____

Conditions:**Weights and Sizes:****Job Tasks:****List Essential Duties:****List Non-Essential Duties:**

Additional Notes Attached: ☐ Yes ☐ No

Employee's Name: _____

DATE	NAME	ORGANIZATION	DESCRIPTION OF CONTACT (VERBAL OR WRITTEN)

Employee's Name: _____ Date: _____ Date of Injury: _____

Claim Number: _____ Report Period: From: _____ To: _____

Treating Physician: _____ Phone #: _____ Fax #: _____

(Please check the appropriate statement)

☐ The job duties which I have been performing for the past _____ week(s) have been within my physical restrictions/limitations, which were prescribed by my treating physician/health care specialist. I have not encountered any difficulties performing the assigned tasks.

☐ I am having difficulty performing the job duties (or a component of the work) which have been assigned to me, for the following reasons:

I feel that my physical condition has:

☐ Improved☐ Remained the same☐ Deteriorated

Please explain any concerns that you may have regarding your return to work.

Note: Any questions, concerns, or problems must be addressed with your supervisor, in cooperation with the Modified Work Committee and/or the Joint Health and Safety Committee.

Worker's Signature: _____ Date: _____

Supervisor's Signature: _____ Date: _____

Reviewed By: _____ Date: _____

To be completed by the supervisor in cooperation with the injured worker.

Employee's Name: _____ Claim Number: _____ Date: _____

Date of Injury: _____ Report Period: From: _____ To: _____

Supervisor's Name: _____

Description of Follow-up (check appropriate box) - ☐ Initial Day Back ☐ Daily Follow-up

Date: _____ Number of Hours Worked: _____

Describe worker's duties and any concerns reported:

Supervisor's Signature: _____ Worker's Initials: _____

Description of Follow-up - _____ day on the Return to Work Program (1st, 2nd, etc.)

Date: _____ Number of Hours Worked: _____

Describe worker's duties and any concerns reported:

Supervisor's Signature: _____ Worker's Initials: _____

Description of Follow-up - _____ day on the Return to Work Program (1st, 2nd, etc.)

Date: _____ Number of Hours Worked: _____

Describe worker's duties and any concerns reported:

Supervisor's Signature: _____ Worker's Initials: _____

Company Name: _____ Worker Name: _____
Workplace Location: _____ Date: _____

If you answer "YES" or "NO" to any of the following questions, please supply comments regarding details.

List the Return To Work activities that you perform on a daily, weekly or monthly basis.

Does your company have a written RTW policy that is clear and simple to understand? ☐ YES
☐ NO

Comments and Details:

Is your RTW policy accessible to all employees? ☐ YES
☐ NO

Comments and Details:

Does your company have a strategy in place for reducing or containing its costs associated with workplace injury and illness? ☐ YES
☐ NO

Comments and Details:

Does your RTW policy define the roles and responsibilities for all workplace parties? ☐ YES
☐ NO

Comments and Details:

Has your RTW policy been endorsed by management? ☐ YES
☐ NO

Comments and Details:

Does your company regularly review the effectiveness of its policy dissemination, and is the process improved based on the outcomes of the reviews? ☐ YES
☐ NO

Comments and Details:

Is your company's RTW policy formally reviewed regularly? ☐ YES
☐ NO

Comments and Details:

Does your company have an area or person responsible for RTW program management? ☐ YES
☐ NO

Comments and Details:

Is there regular contact with WSIB adjudicators and/or RTW expert resources regarding cases? ☐ YES
☐ NO

Comments and Details:

When your organization hires new employees, does their training and/or orientation include the organization's RTW policy and the case Supervisor's role? ☐ YES
☐ NO

Comments and Details:

Does your company use the following performance indicators? Examples: Number and average cost of WSIB claims, Claim rate per 100 employees, Interval between date of injury and start of RTW plan.

☐ YES
☐ NO

Comments and Details:

Is your company's RTW policy accompanied by an implementation strategy?

☐ YES
☐ NO

Comments and Details:

Does your company have an Employee Assistance Program (EAP)?

☐ YES
☐ NO

Comments and Details:

Does your company begin planning RTW before a claim is established by the WSIB?

☐ YES
☐ NO

Comments and Details:

Does your company have a reporting system that ensures immediate notification of an injury or incident?

☐ YES
☐ NO

Comments and Details:

Does your company have a reporting system that ensures immediate notification of an injury or incident?

☐ YES
☐ NO

Comments and Details:

Are your company's supervisors, and Supervisors notified immediately of injuries or illnesses that could keep an employee from reporting for work?

☐ YES
☐ NO

Comments and Details:

Do you develop individualized RTW plans in consultation with the injured employee, health care providers, Supervisors and supervisors, as well as the WSIB, as necessary?

☐ YES
☐ NO

Comments and Details:

Does your company routinely review all WSIB cases?

☐ YES
☐ NO

Comments and Details:

Does your RTW policy provide suitable employment for injured employees that is safe and productive?

☐ YES
☐ NO

Comments and Details:

Do you regularly monitor the effectiveness and efficiency of alternative duty and job placement strategies across your company?

☐ YES
☐ NO

Comments and Details:

Do you monitor employees following their return to work?

☐ YES
☐ NO

Comments and Details:

IN CASE OF INJURY OR ILLNESS AT WORK



1

Get medical help

Your employer is responsible for providing first aid. Go to the doctor or hospital if you need treatment. Your employer pays for your transportation.



2

Document

Tell your employer about your injury or illness. They investigate and keep a record of what happened.



3

Report to the WSIB

Employers must tell us within three days if an injury or illness happens. You can report by submitting Worker's Report of Injury/Illness (form 6).



4

Work together

We work with you and your employer to help you recover and return to work safely and at the right time.

Questions? We're here to help.

Call us at: 1-800-387-0750 | TTY: 1-800-387-0050

For details visit wsib.on.ca/reporting

82 (0082C-02/18)

wsib
ONTARIO

Attending To An Injured Employee

In the event of an illness or injury in the work place, the following lists should be used to determine whether the employee should be sent to the hospital, family doctor or to a Walk-in Clinic.

These lists are not exhaustive, but when used in conjunction with your St. John's Ambulance/Link-To-Life First Aid Manual, they should help you to direct the employee to the correct facility.


TO THE NEAREST DOCTOR'S OFFICE OR CLINIC

- Minor burns that are smaller than 4 cm (1 ½").
- Minor cuts requiring stitches
- Minor head injuries where no loss of consciousness is involved
- Small scrapes and cuts
- Injured limbs with bruising and/or swelling
- Dust and other small particles in the eye
- Illness that one would normally treat in a doctor's office
- Back injuries that result from heavy lifting and twisting where the patient can walk and sit

TO THE HOSPITAL

- Difficulty breathing
- Severe chest pain
- Severe crush injuries of body or limbs
- Head injuries that rendered the employee unconscious (even if the episode of unconsciousness was short)
- Partial or complete amputations
- Penetrating eye wounds
- Deep stab-like wounds
- Broken bone injuries that cause the limb to be deformed looking or where bone pieces are visible through the skin
- Large wounds that are spurting bright red blood in a pulsation manner (these wounds involve severed arteries)
- Persons who are very faint, pale and sweaty
- Severe back injuries (e.g. where employee has difficulty moving limbs or has a loss of sensation in limbs)
- Severe neck injuries
- Burns that are larger than 4 cm.
- Any patient who requests to be sent to the hospital instead of a clinic (the patient knows best)

These cases are examples of where medical treatment may be required, and are not meant to be all-inclusive. When in doubt, call for emergency services (9-1-1).

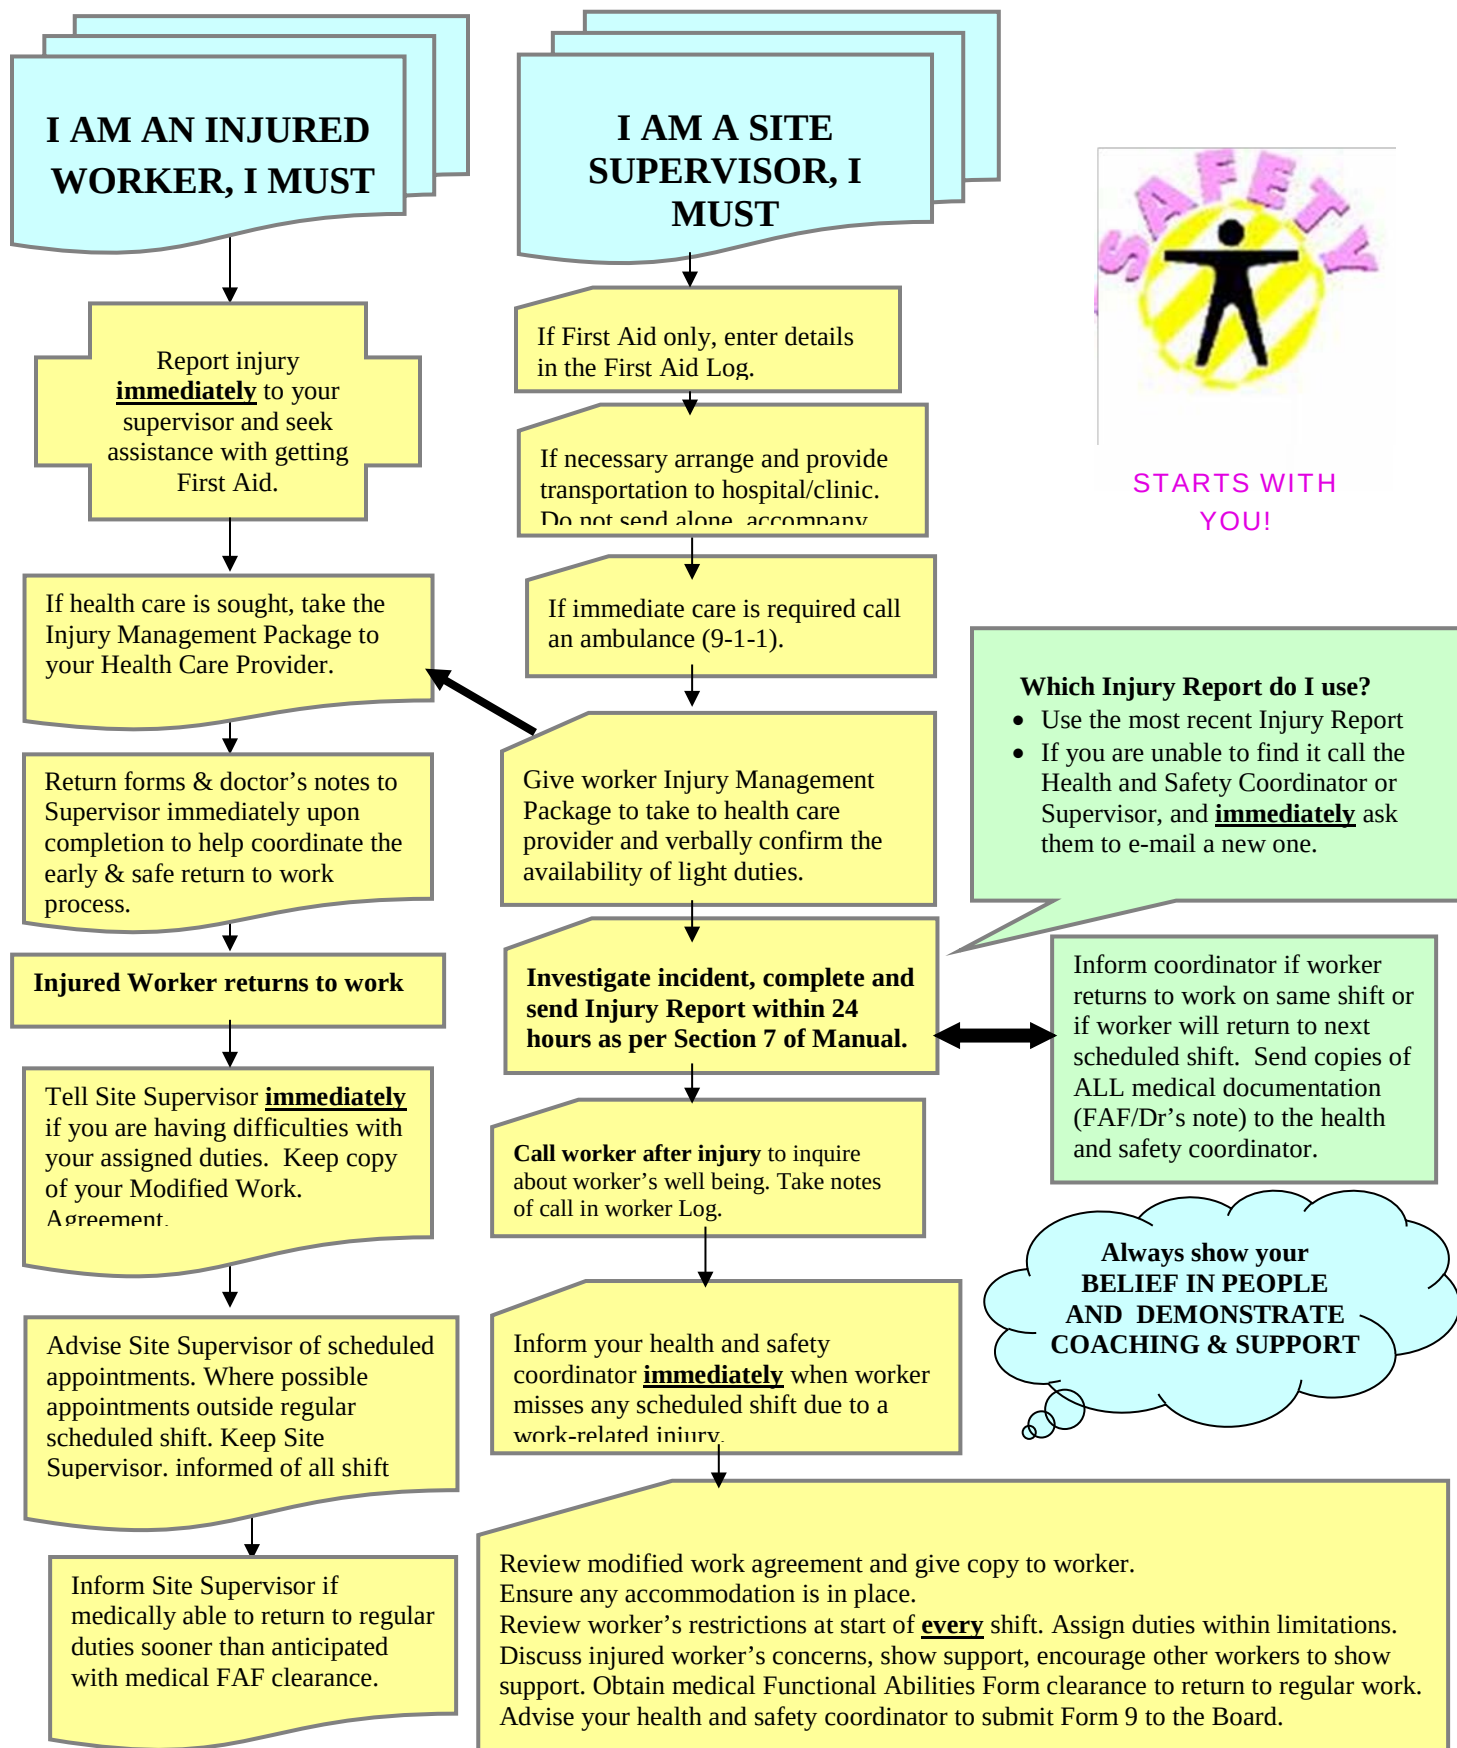

PART 1: ADMINISTRATION		
PROJECT:		DATE AND TIME:
ORIENTATION BY:		SITE SUPERVISOR:
PART 2: SUBCONTRACTOR INFORMATION		
NAME:		
PROJECT PARTICIPANTS:		
DESCRIPTION OF THE WORK TO BE PERFORMED:		
# OF WORKERS:	START:	PORTIONS OF WORK SUBCONTRACTED? ☐ Y ☐ N
	PEAK:	
	FINISH:	
SITE SUPERVISOR:		
WORKER HEALTH AND SAFETY REP:		
HEAD OFFICE CONTACT:		
PART 3: INFORMATION REVIEWED		
ITEM	CHECK-OFF	COMMENTS
1. PROJECT SPECIFIC SAFETY PLAN COMPONENTS	☐	
→ PROJECT SPECIFIC RESPONSIBILITIES	☐	
○ CONTRACTOR AND SUBCONTRACTOR RESPONSIBILITIES	☐	
○ WORKER HEALTH AND SAFETY REPRESENTATIVE	☐	
○ JOINT HEALTH AND SAFETY REPRESENTATIVE	☐	
○ PROVISION OF DOCUMENTS	☐	
○ JOBS REQUIRING WRITTEN PROCEDURES	☐	
→ EMERGENCY RESPONSE PLAN	☐	
→ TRAINING REQUIREMENTS	☐	
→ INCIDENT, ACCIDENT, & REPORTING	☐	
2. EVALUATION OF CONTRACTOR'S PAST PERFORMANCE	☐	

3. WORKER ORIENTATION PROCESS	☐	
COMMENTS:		
PART 4 - SUBCONTRACTOR INFORMATION & DOCUMENTATION REQUISITION CHECKLIST		
MANDATORY INFORMATION AND DOCUMENTATION		
ITEM	CHECK-OFF	COMMENTS
1. HEALTH AND SAFETY POLICY AND PROGRAM	☐	
A. HAZARD ANALYSIS FORMS	☐	
B. HAZARD CONTROL FORMS	☐	
2. REGISTRATION OF CONSTRUCTORS AND EMPLOYERS ENGAGED IN CONSTRUCTION FORMS	☐	
3. SUBCONTRACTOR ACKNOWLEDGEMENT SHEET	☐	
4. WSIB CLEARANCE CERTIFICATE	☐	
5. LIABILITY INSURANCE NAMING MAXIM MECHANICAL AS INSURED.	☐	
6. PROOF OF WORKER TRADE CERTIFICATION	☐	
7. WHMIS TRAINING CERTIFICATES	☐	
8. WORKING AT HEIGHTS TRAINING CERTIFICATES	☐	
9. WORKER 4 STEP AWARENESS CERTIFICATES	☐	
10. OTHER TRAINING CERTIFICATIONS:	☐	
BASED ON YOUR SCOPE OF WORK, INDICATE WHICH ACTIVITIES YOU WILL BE UNDERTAKING AND THEREFORE WHICH SAFE JOB PROCEDURES WILL BE PROVIDED. (AND OTHER ASSOCIATED DOCUMENTS/INFORMATION LISTED) NOTE: WE WILL REVIEW THIS SECTION AND MAY REQUEST ADDITIONAL INFORMATION/DOCUMENTATION BE PROVIDED		
ITEM	CHECK-OFF	COMMENTS
1. Hazardous Energy Control - Lock-out/ Zero Energy Procedures	☐	
2. Hot-Work Procedures	☐	
3. Rigging and Hoisting Procedures	☐	
4. Crane Use	☐	
o Procedures	☐	
o Engineered Drawings	☐	
o Multi-tiered Load including	☐	
a. Engineered Design Drawings	☐	
b. Professional Engineer Written Report based on the Integrity of the Building and Supporting Structure	☐	

c. Safe Job Procedures	☐	
o Logbook (Inspections, Tests, Maintenance, Modifications, Repairs)	☐	
o Rescue Procedures	☐	
o Inspection by Professional Engineer or Competent Person, stating installation is installed or erected in accordance with the design drawings.	☐	
o Tower Crane	☐	
a. Non-Destructive Testing (Including Professional Engineers Report of Testing Results)	☐	
b. Engineered Drawings (Foundations/Supporting Surfaces, Shoring, Bracing, Tower Crane, Installation Design Drawing)	☐	
c. Erection and Dismantling Procedures	☐	
o Derricks, Stiff Leg Derricks and Similar Hoisting Devices:	☐	
a. Professional Engineers Design Drawings and Specifications	☐	
b. Inspection by Professional Engineer, stating installation is installed or erected in accordance with the design drawings and manufacturer's instructions.	☐	
5. 5. Rotary Foundation Drill Rig Use	☐	
o Safe Job Procedures	☐	
o Engineered Design Drawings and Written Report (Specifications)	☐	
o Written Report of Inspection (of supporting surface and path of travel for drill rig) by Professional Engineer, stating reports of results	☐	
o Drilling Procedure (approved by Professional Engineer)	☐	
o Erection and Dismantling Procedures	☐	
6. 6. Scaffolds	☐	
o Erection and Dismantling Procedures	☐	
o Engineered Design Drawings	☐	
o Inspection by Professional Engineer or Competent Person, stating installation is installed or erected in accordance with the design drawings.	☐	
7. 7. Suspended Work Platforms	☐	
o Erection and Dismantling Procedures	☐	
o Engineered Design Drawings	☐	
o Generic or Site-Specific Installation Drawing	☐	
o Inspection by Professional Engineer or Competent Person, stating installation is installed or erected in accordance with the design drawings and manufacturer's instructions.	☐	
o Report by Professional Engineer Stating Conformance with Construction Regulations	☐	

(s.137.3)		
○ Inspection by Professional Engineer or Competent Person	☐	
○ Roof Plan (Showing Fixed Supports) Approved by Professional Engineer	☐	
○ Written Safe Job Procedures and Site-Specific Work Plat	☐	
○ Rescue Procedures Specific to Suspended Work Platform	☐	
8. 8. Ladders, Stilts and Work Platforms	☐	
9. 9. Confined Spaces	☐	
10. 10. Asbestos Awareness, Contact and Removal	☐	
11. 11. Working at Heights	☐	
○ Fall Prevention Plan	☐	
○ Fall Rescue Plan	☐	
○ Engineer's drawings for horizontal lifelines	☐	
12. 12. Access To and Work on Roof Areas	☐	
13. 13. Suspended Work Platforms	☐	
14. 14. Excavating and Shoring	☐	
15. 15. Utility Locates and Surface Penetration	☐	
16. 16. Atmospheric Monitoring	☐	
17. 17. Re-Shoring, Formwork and Falsework	☐	
○ Engineered Design Drawings including: a. Establishment of loads it designed to bear b. If a manufactured system is used, shall identify the components c. If non-manufactured system components are used, shall show the size, grade and specifications of the non-manufactured system components d. Shall show the design loads for the structure and shall detail the bracing and external ties required to adequately support the design loads e. If the structure is a unitized modular formwork or falsework structure intended to be lifted or moved as a unit, shall show the attachment points for rigging and hoisting f. Shall set out the erection instructions that are specified by the manufacturer or by the professional engineer.	☐	
○ Load Testing Results Verified by Professional Engineer	☐	
○ Inspection by Professional Engineer or Competent Person, stating installation is installed or erected in accordance with the design drawings.	☐	
18. 18. Electrical Work	☐	
19. 19. Overhead Electrical Hazards	☐	
20. Core Drilling	☐	

21. Severe Weather and Lightning Safety	☐	
22. Ergonomic and Manual Material Handling	☐	
23. Power and Hand Tools	☐	
24. Hearing Conservation Program	☐	
25. Heat Stress	☐	
26. Cold Stress	☐	
27. Spill Prevention and Procedures	☐	
28. Handling and Storage of Hazardous Materials	☐	
29. Designated Substances	☐	
	☐	
30. Traffic Control	☐	
o Written Traffic Management Plan (Procedures)	☐	
o Visual Traffic Management Plan	☐	
31. Working on or Near Bodies of Water	☐	
32. Use of Internal Combustion Engine in an Excavation, Building or Enclosed Structure	☐	
o List of Equipment	☐	
o Written Testing Strategy for Testing of Airborne Concentrations of Carbon Monoxide	☐	
33. Signaling	☐	
34. Removal of Waste (Documents – Waste removal plan (reduce, re-use, recycle)	☐	
35. Safety Data Sheets	☐	

ACCEPTANCE & ACKNOWLEDGEMENT

We have received the site policies and requirements and agree to perform all work activities at or above these requirements and the minimum requirements of *the **Occupational Health & Safety Act*** and ***Regulations for Construction Projects*** and any related statutes. Any outstanding documentation or information listed above will be provided on or before the date pending. We also recognize that these requirements are not all-inclusive and may be expanded and/or modified to suit the changing site conditions.

 Contractor Owner/Manager

 Date

 Time

 Contractor Supervisor

 Date

 Time

 Project Supervisor

 Date

 Time

Updated: July 202

Use this form

Subcontractor:			Subcontract Type:	
Project Name:				
Project Location:				
Project No.:				
Manhours:	Direct:	Indirect:	Evaluation Date:	
Work Description:			Overall Rating:	

Key to Ratings:	5 = Exemplary 4 = Above Average	3 = Average 2 = Below Average	1 = Poor 0 = Unacceptable
-----------------	------------------------------------	----------------------------------	------------------------------

RATING PARAMETERS:

1. Adherence to Specification/Requirements	
2. Adherence to Schedule Requirements	
3. Adherence to Price	
4. Quality of Workmanship	
5. Overall Crafts Productivity	
6. Planning/Scheduling/Coordination of Labour	
7. Planning/Scheduling/Coordination of Materials	
8. Planning/Scheduling/Coordination of Equipment	
10. Cooperation/Coordination with other Contractors	
11. Responsiveness of Office Construction Management Support	
13. Quality of Technical Knowledge	
14. Decision Making in Field Activities	
15. Safety at Jobsite	
16. Housekeeping at Jobsite	
17. Overall Cost Control	
19. Promptness/Adequacy - Pricing Additional Work	
21. Availability of Adequate Equipment/Tools	
22. QA/QC follow up	
23. Management	
24. Site Manager	
Total Rating:	

Updated: July 2024

Overall Evaluation

1. Would you recommend this subcontractor for future work?	☐ Yes ☐ No
2. Should this subcontractor be considered for larger, smaller or the same size work?	☐ size Larger ☐ Smaller ☐ Same

COMMENTS REGARDING RATING: (attach additional sheets if necessary)

Evaluation completed by:	
Title:	
Date:	

Updated: April 6, 2023

PURPOSE

The purpose of this procedure is to establish a Subcontractor Procurement process, enabling us to select Health and Safety minded Subcontractors and Suppliers. The procurement process will be based on a selection process that incorporates a review of the Subcontractors past performance and documented policies and procedures.

SCOPE

All prospective Subcontractor or Supplier will be provided with information pertaining to our health and safety requirements and can therefore perform their work in compliance with our standards.

Procurement of appropriate Subcontractors will help achieve our corporate health and safety objectives.

RESPONSIBILITIES**Health and Safety Team Responsibilities**

- Assist in the completion of Subcontractor checklists.
- Requesting Subcontractor documents to ensure all Subcontractors can demonstrate competency and implement the project specific workplace requirements in conjunction with Senior Management and Supervisors.

Senior Management Responsibilities

- Development workplace requirements under Subcontractor Requirements and Information Form 18-1-1
- Review workplace specific requirements under the Subcontractor Requirements and Information Form 18-1-1
- Review and approve the Subcontractor Procurement process, at a minimum on a yearly basis.
- Ensure that the Subcontractor Procurement process is implemented and maintained.
- Ensure communication of the requirements under Subcontractor Requirements and Information Form 18-1-1 is scheduled with all site level personnel including workers and Subcontractors.
- Ensure subcontractor procurement procedure complies with legislative requirements.
- Assist in the completion of Subcontractor checklists.
- Requesting Subcontractor documents to ensure all Subcontractors can demonstrate competency and implement the project specific workplace requirements in conjunction with the Health and Safety Team and Supervisors.

Supervisor Responsibilities

- Ensure communication of the requirements under Subcontractor Requirements and Information Form 18-1-1 is scheduled with all site level personnel including workers and Subcontractors.
- Ensure communication with work-place parties when changes are made to the Health and Safety Policies and Procedures
- Requesting and reviewing Subcontractor documents to ensure all Subcontractors can demonstrate competency and implement the project specific workplace requirements in conjunction with Senior Management and Health and Safety Team.
- Assist in the completion of Subcontractor checklists.

Worker Responsibilities

- Advise Supervisor if experiencing any difficulties with assigned tasks, or if assigned tasks are beyond perceived limitations or medically not capable of performing tasks.
- Comply with all the requirements as defined under the *Occupational Health and Safety Act and Regulations*.

PROCEDURE

The detailed description of all responsibilities for each role is written above in the section titled “Responsibilities”, please review that section before reading the rest of this procedure.

When selecting contractors and service providers, the Senior Management team must assess the subcontractor’s ability to manage and control hazards to ensure the safety of both their workers and the Maxim’s employees. As part of the Subcontractor Approval process, subcontractors are required to complete and submit a hazard assessment and safety management capability review prior to commencing work. These assessments must be submitted for review and approval at least annually, or prior to the start of any new project. Documentation must include details on hazard controls, training certifications, and incident history. Failure to provide these documents may result in disqualification from approved vendor status.

The Health and Safety Rep and Senior Management shall use the form 18-1-1 to identify and select the qualifying Subcontractors and Suppliers. The selection process must include the following:

1. Selecting Contractors

The Senior Manager will create a short list of potential subcontractors to work with Maxim that will be a good fit for the specific job or task required. This list may be curated by word of mouth, previous experience or desktop research. It is up to the discretion of the owner.

a. OHS Competency and Ability:

Once a has been identified, Senior Management will request a copy of the subcontractor’s hazard assessment to provide evidence of their competency in identifying and assessing hazards and controlling risks specific to their scope of work. Demonstrating their ability to conduct hazard analysis and implement effective risk controls in accordance with relevant OHS legislation and industry standards.

Senior Management will consider the following criteria when soliciting and hiring sub-contractors for any projects:

- Experience and Expertise:** Maxim will look for contractors who have a proven track record of providing services related to similar companies and industries.
 - Compliance with Regulations:** Sub-contractors must: (a) provide a valid WSIB clearance certificate prior to starting work and maintain it current for the duration of the project; (b) provide proof of insurance coverage meeting Maxim Mechanical’s minimum requirements (as specified in the
-

subcontract or procurement. Ensure that the sub-contractor is in compliance with all OHS regulations and standards applicable to the work they will perform. This includes licensing, certification, and training requirements through Form 1000.

- iii. **Safety Policies and Procedures:** Sub-contractors must Submit a copy of their health and safety program documentation (e.g., policies, procedures, training matrix) for review as part of the pre-qualification process. Check if the sub-contractor has safety policies and procedures in place that align with your Maxim's OHS policies. Review their safety procedures to ensure they address all relevant hazards and risks and develop controls to mitigate them.
- iv. **Incident Reporting and Investigation:** The sub-contractor should have a process for recording and analyzing incidents to identify underlying causes and prevent future occurrences and analyze the controls to ensure effectiveness. We will confirm this by requesting a copy of their WSIB certificate of clearance.
- v. **Training and Qualifications:** Verify that the sub-contractor's employees who will be performing OHS services are properly trained and qualified for the job. Requesting copies of any relevant and appropriate certifications and licenses to complete the job.

b. List of Forms needed to complete the selection process

Senior management shall collect the following documentation, when applicable:

Current WSIB certificate of clearance
Ministry of Labour form 1000
Liability insurance certificate naming Maxim as an additional insured (minimum \$2million)
Health and Safety Program Material
Purchase Order and Site Safety Plan Signoff
Complete the following elements from the COR Audit Tool: • Element 2: Hazard Assessment • Element 3: Controls
18-1-1 Subcontractor Procurement Checklist

c. Subcontractor Approval

The Senior Manager and Owner will sit down and review the requirements and documents listed above and pick a sub-contractor that fulfil all the needs listed above. Once a Sub-contractor is approved, it is the responsibility of the Senior Manager and Health and Safety Team to manage their productivity. This includes:

- i. Ensuring that the sub-contractor's OHS obligations are clearly outlined in the contract. Include provisions for monitoring and evaluating their performance, as well as consequences for non-compliance.
- ii. The hazard assessment must be submitted to Maxim Senior Manager for review at least 5 business days prior to the

- iii. Reviewing the sub-contractor's OHS services regularly to ensure they continue to meet your company's needs and expectations. Adjust the criteria as necessary to reflect changing circumstances and industry standards
- iv. Ensuring that the sub-contractor's OHS obligations are clearly outlined in the contract. Include provisions for monitoring and evaluating their performance, as well as consequences for non-compliance.
- v. Review the sub-contractor's OHS services regularly to ensure they continue to align with Maxim's needs and expectations. Adjust the criteria as necessary to reflect changing circumstances and industry standards.

d. Agreement for Non-Compliance Penalties

- i. The Subcontractor shall hold harmless the owner, constructor and their respective officers, employees and agents for any failure by the Subcontractor to comply with the requirements of these guidelines or their statutory responsibilities. The Subcontractor shall be responsible, financially and otherwise for the non-compliance of his employees, Subcontractors, suppliers or visitor on the project.
- ii. The following progressive discipline and penalties may be levied without recourse, against the Subcontractor, his employees, suppliers or other person for non-compliance.
 - verbal, written and removal from site provided on a progressive and documented method
 - termination of the contract where the Subcontractor refuses and/or fails to fulfill his duties and responsibilities
 - immediate ejection from the site of any offending employee, Subcontractor, supplier or other person, temporarily or permanently.

2. Monitoring Contractors

During the project, the Supervisor shall monitor subcontractor performance through (4.4):

- Regular documented inspections or spot checks of subcontractor work using a Contractor Monitoring or site inspection form;
- Verification that subcontractors are completing their required documentation (e.g., Daily JHAs, toolbox talks, equipment inspections);
- Observation of subcontractor work practices and PPE use to identify any unsafe acts or conditions and ensure compliance with site rules.

a. Agreement Of Communication Between Workplace Parties

Maxim has developed an effective communication plan between an organization and a sub-contractor to ensure work is completed safely, on time, and within budget.

- i. Before entering into a contract with a sub-contractor, both parties
-

will identify the key personnel and establishing communication protocols.

- ii. The sub-contractor is required to follow Maxim's rules for reporting and investigating incidents that occur during the work being performed, see section 7 of this health and safety manual.
- iii. The sub-contractor will need to communicate any changes to the scope of work, timeline, health and safety plan, health and safety manual or Health and Safety concerns using Toolbox Safety Talks (Form 5-1).
 - The Senior Manager at Maxim will communicate any changes to their policies and procedures that can potentially effect the sub-contractors work through email.
- iv. Maxim will ensure that all communication is documented throughout the contract period and that all parties are aware of their obligations as the contract comes to a close.

The selected sub-contractor is required to follow Maxim's rules and regulations when related to Occupational Health and Safety on site. Maxim will be the lead coordinator for the group.

All subcontractors and their workers shall complete a site-specific orientation using the Project Specific Safety Plan (PSSP)/ Subcontractor Orientation form before commencing work. As a minimum, the site-specific orientation shall cover:

- Project overview and scope of work;
- Site-specific hazards and applicable controls;
- Emergency response procedures, alarm signals, evacuation routes, muster points and emergency contacts;
- First aid arrangements and locations of first aid kits and equipment;
- Site PPE requirements;
- Site access and egress routes, traffic management arrangements and restricted areas;
- Reporting requirements for incidents, hazards, near misses and work refusals;
- Site safety rules, safe work practices and any permit requirements (e.g., hot work, confined space).

In multi-employer workplaces, it is the responsibility of the Supervisor to lead the coordination of pre-start meetings for the day. This includes ensuring that all workers and subcontractors are aware of and adhere to the established safety protocols for the site. The Supervisor will facilitate communication and collaboration to identify potential hazards, implement appropriate control measures, and establish clear lines of responsibility for health and safety. This coordination ensures a unified approach to safety, reduces risks, and promotes a culture of shared accountability, ensuring the well-being of all workers on site.

b. Incident Reporting and Corrective Actions

Senior Management will be responsible for maintaining effective subcontractor incident reporting and corrective action processes which are crucial to maintaining a safe working environment. This helps to quickly identify hazards, prevent recurrence, and ensure that safety standards are consistently met.

- i. Incident Reporting: Sub-contractors should be required to report all accidents, injuries, near misses, and unsafe conditions immediately, regardless of their severity.
- ii. Reporting should be done in writing and documented through a formal incident report form or system.
- iii. Reporting should be filled correctly with minimal spelling mistakes, all sections completed where applicable and,
- iv. Reports should be submitted on-time

3. Evaluating Contractor

Once the project is complete, the Senior Management team will conduct a final evaluation of the sub-contractor's safety performance using **form 18-1-2:**

- i. Safety Performance Review: Assess how well the sub-contractor adhered to health and safety protocols, including adherence to safety regulations, proper use of PPE, and how incidents were handled.
- ii. Feedback from Site Personnel: Gather feedback from supervisors, workers, and other contractors to get a comprehensive view of the sub-contractor's safety culture on-site.
- iii. Completion of Safety Requirements: Verify that all required safety measures, documentation, and corrective actions were completed before project handover. including but not limited to review of subcontractor monitoring and inspection records completed during the project to confirm that identified issues were corrected in a timely manner.

DISTRIBUTION

The Health and Safety Team, Senior Management and Supervisors will ensure distribution of this documentation when requested and gathering of all pertinent information during the procurement process.

The Health and Safety Team, Senior Management and Supervisors will also be responsible for the distribution and gathering pertinent information to/from the Subcontractors during the Site Orientation.

Senior Management and Supervisors will communicate with relevant work place parties when changes have occurred to the Occupational Health and Safety Policy or Procedure through Tool Box Forms.

RECORDS

All information gathered during the hiring process and the orientation process shall remain on file for a period of at least five years.

PART 1: ADMINISTRATION		
PROJECT:		DATE AND TIME:
ORIENTATION BY:		SITE SUPERVISOR:
PART 2: SUBCONTRACTOR INFORMATION		
NAME:		
PROJECT PARTICIPANTS:		
DESCRIPTION OF THE WORK TO BE PERFORMED:		
# OF WORKERS:	START:	PORTIONS OF WORK SUBCONTRACTED? ☐ Y ☐ N
	PEAK:	
	FINISH:	
SITE SUPERVISOR:		
WORKER HEALTH AND SAFETY REP:		
HEAD OFFICE CONTACT:		
PART 3: INFORMATION REVIEWED		
ITEM	CHECK-OFF	COMMENTS
1. PROJECT SPECIFIC SAFETY PLAN COMPONENTS	☐	
→ PROJECT SPECIFIC RESPONSIBILITIES	☐	
○ CONTRACTOR AND SUBCONTRACTOR RESPONSIBILITIES	☐	
○ WORKER HEALTH AND SAFETY REPRESENTATIVE	☐	
○ JOINT HEALTH AND SAFETY REPRESENTATIVE	☐	
○ PROVISION OF DOCUMENTS	☐	
○ JOBS REQUIRING WRITTEN PROCEDURES	☐	
→ EMERGENCY RESPONSE PLAN	☐	
→ TRAINING REQUIREMENTS	☐	
→ INCIDENT, ACCIDENT, & REPORTING	☐	
2. EVALUATION OF CONTRACTOR'S PAST PERFORMANCE	☐	

3. WORKER ORIENTATION PROCESS	☐	
COMMENTS:		
PART 4 - SUBCONTRACTOR INFORMATION & DOCUMENTATION REQUISITION CHECKLIST		
MANDATORY INFORMATION AND DOCUMENTATION		
ITEM	CHECK-OFF	COMMENTS
1. HEALTH AND SAFETY POLICY AND PROGRAM	☐	
A. HAZARD ANALYSIS FORMS	☐	
B. HAZARD CONTROL FORMS	☐	
2. REGISTRATION OF CONSTRUCTORS AND EMPLOYERS ENGAGED IN CONSTRUCTION FORMS	☐	
3. SUBCONTRACTOR ACKNOWLEDGEMENT SHEET	☐	
4. WSIB CLEARANCE CERTIFICATE	☐	
5. LIABILITY INSURANCE NAMING MAXIM MECHANICAL AS INSURED.	☐	
6. PROOF OF WORKER TRADE CERTIFICATION	☐	
7. WHMIS TRAINING CERTIFICATES	☐	
8. WORKING AT HEIGHTS TRAINING CERTIFICATES	☐	
9. WORKER 4 STEP AWARENESS CERTIFICATES	☐	
10. OTHER TRAINING CERTIFICATIONS:	☐	
BASED ON YOUR SCOPE OF WORK, INDICATE WHICH ACTIVITIES YOU WILL BE UNDERTAKING AND THEREFORE WHICH SAFE JOB PROCEDURES WILL BE PROVIDED. (AND OTHER ASSOCIATED DOCUMENTS/INFORMATION LISTED) NOTE: WE WILL REVIEW THIS SECTION AND MAY REQUEST ADDITIONAL INFORMATION/DOCUMENTATION BE PROVIDED		
ITEM	CHECK-OFF	COMMENTS
1. Hazardous Energy Control - Lock-out/ Zero Energy Procedures	☐	
2. Hot-Work Procedures	☐	
3. Rigging and Hoisting Procedures	☐	
4. Crane Use	☐	
o Procedures	☐	
o Engineered Drawings	☐	
o Multi-tiered Load including	☐	
a. Engineered Design Drawings	☐	
b. Professional Engineer Written Report based on the Integrity of the Building and Supporting Structure	☐	

18-1-1 SUBCONTRACTOR REQUIREMENTS AND INFORMATION

c. Safe Job Procedures	☐	
o Logbook (Inspections, Tests, Maintenance, Modifications, Repairs)	☐	
o Rescue Procedures	☐	
o Inspection by Professional Engineer or Competent Person, stating installation is installed or erected in accordance with the design drawings.	☐	
o Tower Crane	☐	
a. Non-Destructive Testing (Including Professional Engineers Report of Testing Results)	☐	
b. Engineered Drawings (Foundations/Supporting Surfaces, Shoring, Bracing, Tower Crane, Installation Design Drawing)	☐	
c. Erection and Dismantling Procedures	☐	
o Derricks, Stiff Leg Derricks and Similar Hoisting Devices:	☐	
a. Professional Engineers Design Drawings and Specifications	☐	
b. Inspection by Professional Engineer, stating installation is installed or erected in accordance with the design drawings and manufacturer's instructions.	☐	
5. 5. Rotary Foundation Drill Rig Use	☐	
o Safe Job Procedures	☐	
o Engineered Design Drawings and Written Report (Specifications)	☐	
o Written Report of Inspection (of supporting surface and path of travel for drill rig) by Professional Engineer, stating reports of results	☐	
o Drilling Procedure (approved by Professional Engineer)	☐	
o Erection and Dismantling Procedures	☐	
6. 6. Scaffolds	☐	
o Erection and Dismantling Procedures	☐	
o Engineered Design Drawings	☐	
o Inspection by Professional Engineer or Competent Person, stating installation is installed or erected in accordance with the design drawings.	☐	
7. 7. Suspended Work Platforms	☐	
o Erection and Dismantling Procedures	☐	
o Engineered Design Drawings	☐	
o Generic or Site-Specific Installation Drawing	☐	
o Inspection by Professional Engineer or Competent Person, stating installation is installed or erected in accordance with the design drawings and manufacturer's instructions.	☐	
o Report by Professional Engineer Stating Conformance with Construction Regulations	☐	

(s.137.3)		
○ Inspection by Professional Engineer or Competent Person	☐	
○ Roof Plan (Showing Fixed Supports) Approved by Professional Engineer	☐	
○ Written Safe Job Procedures and Site-Specific Work Plat	☐	
○ Rescue Procedures Specific to Suspended Work Platform	☐	
8. 8. Ladders, Stilts and Work Platforms	☐	
9. 9. Confined Spaces	☐	
10. 10. Asbestos Awareness, Contact and Removal	☐	
11. 11. Working at Heights	☐	
○ Fall Prevention Plan	☐	
○ Fall Rescue Plan	☐	
○ Engineer's drawings for horizontal lifelines	☐	
12. 12. Access To and Work on Roof Areas	☐	
13. 13. Suspended Work Platforms	☐	
14. 14. Excavating and Shoring	☐	
15. 15. Utility Locates and Surface Penetration	☐	
16. 16. Atmospheric Monitoring	☐	
17. 17. Re-Shoring, Formwork and Falsework	☐	
○ Engineered Design Drawings including: a. Establishment of loads it designed to bear b. If a manufactured system is used, shall identify the components c. If non-manufactured system components are used, shall show the size, grade and specifications of the non-manufactured system components d. Shall show the design loads for the structure and shall detail the bracing and external ties required to adequately support the design loads e. If the structure is a unitized modular formwork or falsework structure intended to be lifted or moved as a unit, shall show the attachment points for rigging and hoisting f. Shall set out the erection instructions that are specified by the manufacturer or by the professional engineer.	☐	
○ Load Testing Results Verified by Professional Engineer	☐	
○ Inspection by Professional Engineer or Competent Person, stating installation is installed or erected in accordance with the design drawings.	☐	
18. 18. Electrical Work	☐	
19. 19. Overhead Electrical Hazards	☐	
20. Core Drilling	☐	

21. Severe Weather and Lightning Safety	☐	
22. Ergonomic and Manual Material Handling	☐	
23. Power and Hand Tools	☐	
24. Hearing Conservation Program	☐	
25. Heat Stress	☐	
26. Cold Stress	☐	
27. Spill Prevention and Procedures	☐	
28. Handling and Storage of Hazardous Materials	☐	
29. Designated Substances	☐	
	☐	
30. Traffic Control	☐	
o Written Traffic Management Plan (Procedures)	☐	
o Visual Traffic Management Plan	☐	
31. Working on or Near Bodies of Water	☐	
32. Use of Internal Combustion Engine in an Excavation, Building or Enclosed Structure	☐	
o List of Equipment	☐	
o Written Testing Strategy for Testing of Airborne Concentrations of Carbon Monoxide	☐	
33. Signaling	☐	
34. Removal of Waste (Documents – Waste removal plan (reduce, re-use, recycle)	☐	
35. Safety Data Sheets	☐	

ACCEPTANCE & ACKNOWLEDGEMENT

We have received the site policies and requirements and agree to perform all work activities at or above these requirements and the minimum requirements of *the Occupational Health & Safety Act* and *Regulations for Construction Projects* and any related statutes. Any outstanding documentation or information listed above will be provided on or before the date pending. We also recognize that these requirements are not all-inclusive and may be expanded and/or modified to suit the changing site conditions.

 Contractor Owner/Manager

 Date

 Time

 Contractor Supervisor

 Date

 Time

 Project Supervisor

 Date

 Time

Updated: July 202

18-1-2 SUBCONTRACTOR REVIEW FORM

Use this form

Subcontractor:			Subcontract Type:	
Project Name:				
Project Location:				
Project No.:				
Manhours:	Direct:	Indirect:	Evaluation Date:	
Work Description:			Overall Rating:	

Key to Ratings:	5 = Exemplary 4 = Above Average	3 = Average 2 = Below Average	1 = Poor 0 = Unacceptable
-----------------	------------------------------------	----------------------------------	------------------------------

RATING PARAMETERS:

1. Adherence to Specification/Requirements	
2. Adherence to Schedule Requirements	
3. Adherence to Price	
4. Quality of Workmanship	
5. Overall Crafts Productivity	
6. Planning/Scheduling/Coordination of Labour	
7. Planning/Scheduling/Coordination of Materials	
8. Planning/Scheduling/Coordination of Equipment	
10. Cooperation/Coordination with other Contractors	
11. Responsiveness of Office Construction Management Support	
13. Quality of Technical Knowledge	
14. Decision Making in Field Activities	
15. Safety at Jobsite	
16. Housekeeping at Jobsite	
17. Overall Cost Control	
19. Promptness/Adequacy - Pricing Additional Work	
21. Availability of Adequate Equipment/Tools	
22. QA/QC follow up	
23. Management	
24. Site Manager	
Total Rating:	

Updated: July 2024

Overall Evaluation

1. Would you recommend this subcontractor for future work?	☐ Yes ☐ No
2. Should this subcontractor be considered for larger, smaller or the same size work?	☐ size Larger ☐ Smaller ☐ Same

COMMENTS REGARDING RATING: (attach additional sheets if necessary)

Evaluation completed by:	
Title:	
Date:	

Updated: April 6, 2023

PURPOSE	The purpose of this procedure is to establish a process for the development and maintenance of a Project Specific Safety Plans - a document defining project specific expectations and standards.
SCOPE	The Project Specific Safety Plan will be used to convey minimum health and safety requirements that must be followed by all of our workers and Subcontractors performing work on our projects. This document provides a baseline of requirements that will help us ensure that our workers, subcontractors (their worker'), and visitors have guidelines and requirements that they are contracted to follow.

RESPONSIBILITIES

Health and Safety Team Responsibilities

- Develop a Project Specific Safety Plan Procedure.
- Ensure the procedure is implemented as required.
- Review requirements under the PSSP and provide feedback as needed.
- Comply with all the requirements as defined under the *Occupational Health and Safety Act and Regulations*.
- In conjunction with the Supervisor, review Subcontractor documents to ensure all Subcontractors can implement their workplace specific requirements and the project specific expectations under the PSSP.
- In conjunction with the Supervisor, ensure the completion of Subcontractor checklists

Senior Management Responsibilities

- On an annual basis, review requirements under the PSSP, and provide feedback as needed.
- In conjunction with the Health and Safety team and Supervisors, define requirements under the Project Specific Safety Plan (PSSP).
- Ensure that applicable legislation is listed and incorporated within the Project Specific Safety Plan in conjunction with the Health and Safety Team.

Supervisor Responsibilities

- In conjunction with the Project Manager, define requirements under the Project Specific Safety Plan (PSSP).
- In conjunction with the Health and Safety Team, review Subcontractor documents to ensure all Subcontractors can implement their workplace specific requirements and the project specific expectations under the PSSP.
- In conjunction with the Health and Safety Team, ensure the completion of Subcontractor checklists.
- Ensure communication and enforcement of the project specific and workplace requirements as defined under the PSSP.

Worker Responsibilities

- Advise Supervisor if experiencing any difficulties with assigned tasks, or if assigned tasks are beyond perceived limitations or medically not capable of performing tasks.
 - Comply with all the requirements as defined under the *Occupational Health and Safety Act*, application Regulations, and the Project Specific Safety Plan.
-

PROCEDURE

The Project Specific Safety Plan will be:

- Developed and made project specific prior to the start each project, by the Health and Safety Team and the Supervisor.
- Reviewed by the Health and Safety Coordinator.
- Approved by Senior Management.

Once approved the Project Specific Safety Plan will be used as follows:

- During subcontractor procurement.
- During orientation of our workers and subcontractors.
- Used on site as minimum health and safety requirements
- Reviewed / updated on a yearly basis (for project lasting longer than a year).

DISTRIBUTION

Distribution of the Project Specific Safety Plan is as follows:

- To all Subcontractors during the Subcontractor Procurement process.
- To all Subcontractor supervisors during Project Specific Safety Plan orientations.
- Made available on all workers on our construction projects.

Where revisions are made, distribution will be provided to the aforementioned parties.

RECORDS

All activities involving the distribution and/or review of the Project Specific Safety Plan must include appropriate documentation demonstrating the implementation of such activities.

The Health and Safety Team and Senior Management will be responsible for maintaining the document as identified in the Orientation of Subcontractors procedures.

All documentation must remain in the project file indefinitely.

Maxim Mechanical Group Inc

PROJECT SPECIFIC SAFETY PLAN

PROJECT NAME:

PURPOSE

The purpose of this Project Specific Safety Plan is to define the specific health and safety requirements for all **Maxim Mechanical** employees and subcontractors involved at all of our projects.

This plan will clarify the legislated as well as Our Clients standards as they pertain to our project. The subcontractor must, in turn, set procedures to ensure compliance with all applicable legislation, OUR CLIENTS standards and the following requirements to ensure that their work is conducted safely.

DEFINITIONS

Subcontractor means the persons or a company holding a contract directly with **Maxim Mechanical**. The subcontractor is directly responsible for anyone visiting or working on the project on their behalf and includes but is not limited to their workers, sub-subcontractors, consultants, engineers, architects, suppliers or other visitors.

Energy Control means to neutralize all potential sources of energy or power in the equipment/ machinery to be worked on. No part of the equipment should be capable of inadvertent activation or movement, which may lead to personal injury. Removing a fuse, closing a valve or turning a switch is not an acceptable isolation from the energy source.

Be Aware Of All Potential Energy Sources:

- Hydraulic
- Pneumatic
- Thermal Electrical
- Gravitational
- Residual Chemical
- Radioactive
- Refer to specs

Hot work means any work or process which produces higher temperature surfaces, flames, sparks, electrical discharges, flash or slag. Hot work is particularly hazardous when performed in locations where flammable or combustible materials are present and/or in confined spaces.

SCOPE

This Plan applies to the entire project and will be carried out by **Maxim Mechanical** on behalf of the Our Clients.

NOTE

It is the responsibility of the subcontractor to ensure that all persons or sub-subcontractors working on behalf of the subcontractor are aware of the Project Specific Safety Plan. Furthermore, all persons must adhere to the requirements of this plan, their company's safety program, applicable regulatory requirements, Our Clients requirements and Our Clients standards at all times.

COMMUNICATIONS

1. All subcontractors performing work for **Maxim Mechanical** will receive a copy of this plan. The subcontractor will complete the Acknowledgment Sheet and return it to **Maxim Mechanical's** Site Supervisor, prior to the commencement of work on the project.
2. Communication between subcontractors and Site Supervisor will be maintained via email, and periodically scheduled meetings throughout the duration of the project. Safety talks will also be conducted on a regular basis with subcontractors to create and maintain awareness regarding any all applicable issues, including but not limited to: safety, security, environmental and emergency response, etc. All communication activities will be documented and

18-2-1 PROJECT SPECIFIC SAFETY PLAN

be readily available upon request. Note: the scheduling of safety talks and/or meetings will be based on **Maxim Mechanical** company policies and/or client requirements, if applicable.

3. Communication between **Maxim Mechanical**, Our Clients management and the Our Clients will be conducted on regular basis and as required. These communications will be used to facilitate the management of all issues that may pertain to the project. These issues include: planning and scheduling of work activities, obtaining security clearance, Our Clients safety requirements, etc.
-

TABLE OF CONTENTS

PART 1: POLICY STATEMENTS	4
A) HEALTH, SAFETY AND ENVIRONMENTAL POLICY STATEMENT	4
B) VISITORS POLICY STATEMENT	5
C) WORKPLACE VIOLENCE & HARASSMENT PREVENTION POLICY STATEMENT	6
D) FITNESS FOR DUTY POLICY	7
PART 2: PROJECT DETAILS	8
LOCATION:	8
ADDRESS:	8
APPROXIMATE START DATE:	8
APPROXIMATE END DATE:	8
WORKING HOURS:	8
H&S REPRESENTATIVE & JOINT HEALTH AND SAFETY COMMITTEE:	8
A) EMERGENCY CONTACTS	9
B) SITE CONTACTS	10
SITE MANAGEMENT TEAM & INTERNAL CONTACTS:	10
EXTERNAL CONTACTS:	10
C) SCOPE OF WORK	10
PART 3: EMERGENCY PREPAREDNESS AND RESPONSE PLAN	11
A) EMERGENCY PERSONNEL	11
B) EMERGENCY RESPONSE TEAM (ERT):	11
C) GROUPING AREAS & MUSTER POINTS	11
D) TYPES OF EMERGENCIES	11
E) DIRECTIONS TO THE NEAREST HOSPITAL (<i>INSERT HERE</i>)	18
PART 4: PROJECT RESPONSIBILITIES	19
A) EMPLOYER RESPONSIBILITIES	19
B) SUPERVISOR RESPONSIBILITIES	20
C) WORKER RESPONSIBILITIES	20
D) SUPPLIER RESPONSIBILITIES	21
PART 5: TRAINING REQUIREMENTS	22
PART 6: SUBCONTRACTOR GUIDELINES	25
PART 7: PROJECT SPECIFIC WORKPLACE TASK STANDARDS	44
PART 8: WORKER & VISITOR ORIENTATION	45
WORKERS	45
VISITORS	45
PART 9: ACKNOWLEDGEMENT AND DECLARATION	46

Part 1: Policy Statements

A) HEALTH, SAFETY AND ENVIRONMENTAL POLICY STATEMENT

At **Maxim Mechanical**, we place the utmost importance on the health, safety and well-being of our employees and others who may be affected by our work. Senior Management at **Maxim Mechanical** recognizes that it is the right of all workers to work in a safe and healthy work environment, and as such is committed to providing a safe and healthy workplace. It is our responsibility to achieve and maintain a safe and healthy working environment. We have developed a Health & Safety Program to promote workplace safety and control unsafe working conditions. The Health & Safety Program promotes specific health and safety training for all employees, and is designed to monitor the workplace for compliance with legislative requirements and attain best operating practices at all times.

Maxim Mechanical:

- Believes that it is responsible to incorporate proven health and safety principles into all phases of our operations and emphasize these as integral components of prudent business practice.
- Understands that the responsibilities for workplace health and safety must extend to all workplace parties (senior management, front line management and workers) on or off the job.
- Recognizes that accident prevention and quality of working life must continue to be an essential part of our business operations and as such, will empower each individual to actively participate in their health & safety program.
- Commits to working jointly and cooperatively with all workplace parties, in the development and implementation of our Health and Safety Program.
- Accepts the concept that the causes of accidents and illnesses can be controlled and the occurrence of personal injuries can be further reduced and is therefore committed to the prevention of occupational illness and injury in the workplace.
- Will continue to support the efforts of the worker health and safety representative.
- While complying with *Ontario's Occupational Health and Safety Act* and *Environmental Protection Act* and all applicable regulations, accepts these statutes as minimum standards.
- Recognizes that it is the responsibility of all workers to work in accordance with the practices and procedures set forth in the health and safety program, in addition to the applicable legislative requirements.
- Recognizes that it is the responsibility of all workers to report all hazards, unsafe acts, and unsafe conditions.
- Recognizes the responsibility of all supervisors to ensure that safe and healthy work conditions are maintained.
- As outlined in our early safe return to work program, will endeavor to offer modified work to those employees who have sustained injury or illness with a view to facilitate their rehabilitation and to safely return them to their pre-injury job function as soon as they are capable.

The success of our organization depends on our reputation to provide a quality product and service in a safe and timely manner. Health and safety must be incorporated into all facets of our operations.

Through open lines of communication, objective discussions and cooperation between Workers, Supervisors, Senior Management, Managers, the Worker Health and Safety Representative and other outside parties, our objectives of a workplace free of hazards, injury and illness can and will be achieved.

B) VISITORS POLICY STATEMENT

At **Maxim Mechanical**, we believe that occupational health and safety should always be an integral aspect of our business and everyday lives. We sincerely hope and expect that all visitors will join us in our efforts to make each and every day a safe one.

We remain responsible for the well-being of our visitors.

- Visitors are required to accompany their host at all times.
- Visitors are asked to report concerns, unsafe conditions or situations to their host.
- The host will inform each visitor of their safety responsibilities and ensure that the personal protective equipment appropriate for their location and activities, is worn or used at all times. A minimum appropriate head and foot protection must be worn at all times on our construction projects. High-visibility traffic control vests must also be worn by visitors. Other protective equipment must be worn when required.

To ensure that our employees and guests are working in a safe environment we kindly insist that these minimum standards be strictly observed.

All Visitors must:

- Always wear required personal protective equipment,
- obey all posted signs and warnings,
- only smoke in designated smoking areas,
- be alert and yield to vehicular traffic,
- not touch or interfere with work activities, materials or equipment,
- stay with their host and keep out of restricted areas, and
- never enter unguarded areas or areas that have been barricaded.

In Case of Emergency:

- Call 911 and state the nature of the emergency, location and the person making the call.
- Stay on the line until information is confirmed.
- If you hear an emergency alarm, walk to the nearest safe exit and proceed to the grouping area.
- Stay with your host at the grouping area.
- Do not leave the site, unless advised to do so. (Everyone must be accounted for.)

C) WORKPLACE VIOLENCE & HARASSMENT PREVENTION POLICY STATEMENT

For the purpose of this Policy, the terms workplace violence and harassment as defined in the *Occupational Health and Safety Act* are as follows:

Workplace Violence

- (a) the exercise of physical force by a person against a worker, in a workplace, that causes or could cause physical injury to the worker;
- (b) an attempt to exercise physical force against a worker, in a workplace, that could cause physical injury to a worker;
- (c) a statement or behaviour that is reasonable for a worker to interpret as a threat to exercise physical force against the worker, in a workplace, that could cause physical injury to the worker.

Acts of workplace violence can take the form of either physical contact or threat of physical contact. They may occur as a single incident or may involve a continuing series of incidents.

Workplace Harassment

Workplace harassment is defined in the *Occupational Health and Safety Act*, as “engaging in a course of vexatious comment or conduct against a worker in a workplace that is known or ought reasonably to be known to be “unwelcome”. The following definitions have been provided as examples of what we consider to be different forms of harassment:

Workplace harassment can also include derogatory comments or actions regarding age, creed, colour, marital status, sexual preference, disability, political or religious affiliation, or place of national origin.

We strive to provide all employees, suppliers, contractors, customers and visitors with an environment free of workplace violence and harassment. Mutual respect must be the basis of interaction, co-operation and understanding among all staff and/or contractors. We will not tolerate or condone behaviour that is likely to threaten the health and safety of any of our workers or contractors. This policy applies to all business operations and personnel as well as social events that are organized by or on behalf of the company.

Any potential situation of violence or harassment that can affect the workplace or another worker shall be immediately reported to their Supervisor or Manager. All of these incidents shall be investigated and appropriate measures will be taken, which may include disciplinary action and contacting of relevant authorities.

Successful implementation of this policy will be ensured through effective planning, implementation, open communications and monitoring of procedures regarding the prevention of workplace violence. All workers, supervisors, managers and contractors will receive training regarding standards of workplace behaviour, their roles and obligations, and procedures for dealing with any concerns and issues raised.

Retaliation against persons who bring a complaint of actual or perceived violence or harassment is strictly prohibited and will be dealt with accordingly. A complaint of workplace violence or harassment that is intentionally fraudulent, frivolous or malicious may be subject to disciplinary action.

D) FITNESS FOR DUTY POLICY

Senior Management recognizes the legal and moral responsibility to provide a safe, productive and reliable work environment for all workers. Drug and alcohol abuse in the workplace results in incidents, injuries, lower productivity, lost profits, increased health care costs and legal difficulties for workers and employers. The possession, distribution, or use of drugs and alcohol in the workplace possesses serious risks to the health, safety and well-being of our workers. For these reasons, we have adopted the following stipulations that will be consistently enforced:

- No workers shall possess, distribute or use alcohol or illegal drugs on company property (including parking areas and other Company grounds), or while otherwise performing work duties away from company premises.
- No worker shall report to work or be at work under the influence of alcohol or drugs that may or will affect their ability to work safely.
- Strict adherence to all legal stipulations regarding drug and alcohol testing, including but not limited to; medical testing protocols, human rights, confidentiality of medical information and records, as well as worker privacy.
- Worker shall use prescription or non-prescription drugs while at work as directed by the worker's physician. If a worker is taking a prescription or non-prescription drug for which there is a potential unsafe side effect, he or she has an obligation to report it to the supervisor.
- Workers are responsible for reporting any situations where a violation of the company Fitness for Duty Policy has occurred.
- Supervisors are required to investigate any situation where a violation of the company Fitness for Duty Policy exists.
- Review on a regular basis the best practices regarding the management of alcohol and drug abuse related issues in the workplace.
- Communicate through toolbox talks, memos, safety meetings, etc., the company policy regarding Fitness for Duty.

Part 2: Project Details

Location:

Address:

Approximate Start Date:

Approximate End Date:

Working Hours:

H&S Representative & Joint Health And Safety Committee:

Is a Worker Health and Safety Representative currently required on this project?
(If yes, refer to the following Project Specific Safety Plan sections:)

☐ Yes ☐ No

Is a Joint Health and Safety Committee currently required on this Project?
(If yes, refer to the following Project Specific Safety Plan sections:)

☐ Yes ☐ No

A) EMERGENCY CONTACTS

**FOR ALL EMERGENCIES CALL:
9-1-1**

Maxim Mechanical EMERGENCY RESPONSE TEAM (ERT)

Position	Name	Phone Number(s)	Email
Emergency Response Coordinator			
ERC Assistant			
Other			

OTHER (PROJECT RELATED) EMERGENCY CONTACTS

Company & Position	Name	Phone Number(s)	Email

GOVERNMENT SAFETY & EMERGENCY AGENCIES

Agency	Office Phone Number	Name (If Applicable)
Ministry of Labour (MOL)		
Technical Safety Standards Association (TSSA)		
Electrical Safety Authority (ESA)		
Local Fire Department (Non-Emergency)		
Local Police Department (Non-Emergency)		
Hydro		
Gas		
Water		

B) SITE CONTACTSSite Management Team & Internal Contacts:

Position	Name	Phone Number(s)	Email

External Contacts:

Company & Position	Name	Phone Number(s)	Email

C) SCOPE OF WORK

→

Part 3: Emergency Preparedness and Response Plan

A) EMERGENCY PERSONNEL

Emergency Response Coordinator (ERC): _____

Alternate: _____

B) EMERGENCY RESPONSE TEAM (ERT):

Name	Cell #	Company Name

C) GROUPING AREAS & MUSTER POINTS

Area 1 _____

Area 2 _____

D) TYPES OF EMERGENCIES

- i. Evacuation Plan & Headcount Record
- ii. Fire and Explosion
- iii. Medical Emergencies
- iv. Hazardous Material Accidents and Spills
- v. Emergency Violence Response

i.EVACUATION PLAN

In the event of an emergency situation, we require all employees to respond quickly and calmly and evacuate the building to prevent any injuries.

If You Hear the Emergency Alarm:

- Remain calm.
- Turn off the power to your workspace or equipment if safe to do so.
- Leave the area/ building by the nearest, safe exit.
- Close all doors behind as you leave.
- Proceed directly to designated Staging Area (Meeting Zones)
- Advise your Health and Safety Coordinator member at the meeting zone of any observations or status of other employees.
- Remain calm at the meeting zone and await further instructions from your supervisor or ERC/ERT member.

Worker Responsibilities:

- If for any reason the facility must be evacuated, the employees will be advised verbally by their supervisor to evacuate.
- All employees must promptly leave the facility by the nearest safe exit as soon as reasonably practicable.
- All employees will meet at the designated staging area or meeting zone for a head count
- Once at the designated staging area or meeting zone, all workers must remain there and not re-enter the building for any reason.
- Workers will only be allowed to re-enter the building when it has been deemed safe by the emergency responders.
- Follow directions of the ERC/ERT

Supervisors Responsibilities:

- Ensure all workers under your supervision are aware of the requirement to evacuate the building.
- Exit the building through the nearest safe exit point and proceed directly to the designated staging area or meeting zone.
- Assist in a head count and let the ERC/ERT members know that your workers are accounted for or advise of any missing personnel.
- *Under no circumstances should anyone go looking for missing workers in the building.*
- Provide first aid to injured workers, if trained.
- Follow the directions of the ERC/ERT members or emergency responders.

Emergency Response Coordinator / Team Members (ERC / EMT)

- Call emergency responding personnel (911). The phone numbers are posted on Health and Safety Board or in your Emergency Evacuation Package.
- Exit the building through the nearest safe exit point and go directly to the designated staging area or meeting zone you are responsible for.
- Take a headcount and record all names under the Headcount recording form. Communicate with all ERT members and other employees to gather information and confirm head counts.
- ERC will greet the emergency responding personnel when they arrive.
- Provide the emergency responding personnel with specific event information including if any workers are missing or advise the emergency personnel that all are accounted for.
- Take direction from the emergency responding personnel.
- Allow employees to re-enter the building when given the all clear from emergency responding personnel.
- Communicate with other Management personnel to update the status of the Emergency situation.

HEADCOUNT RECORD

ERC/ERC will take a head count and record each workers name on the list below:

#	Employee Names	#	Employee Names
1		16	
2		17	
3		18	
4		19	
5		20	
6		21	
7		22	
8		23	
9		24	
10		25	
11		26	
12		27	
13		28	
14		29	
15		30	

ii.FIRE AND EXPLOSIONS

When you hear the emergency alarm, proceed and follow below:

WORKERS

- Initiate evacuation procedure.
- Exit your area through the nearest or alternate emergency exit.
- Close doors behind you.
- Notify the ERC/ERT when you have arrived at the designated staging area or meeting zone.

SUPERVISORS

- Initiate evacuation procedure.
- Notify ERC/ERT in the designated staging area or meeting zone.
- Assist ERC/ERT member in writing a list of evacuated workers at the designated staging area or meeting zone.
- Await further instruction from ERC or emergency responding personnel.

ERC and ERT

- Initiate evacuation procedure.
- Call 9-1-1 (or appropriate number for fire) and report fire.
- Give your name, the company name, address, major intersections, entrance to site, area of site and advise that persons will be available outside for direction. Remain on phone until 9-1-1 operator terminates the call, remain near phone.
- Communicate with ERT members to gather emergency information and determine who may have been in the building. Establish phone calls to those may be unaccounted for.
- Communicate with emergency responding personnel throughout the emergency situation.

iii.MEDICAL EMERGENCIES**WORKERS**

- Notify facility First Aid trained personnel and site management team.
- Initiate evacuation procedure if required.
- Assist if possible and safe to do so.

FIRST AIDER

- Assess the scene to determine personal risks or hazards.
- Assess the victim and wear any Personal Protective Equipment (PPE) for personal protection (gloves, mask).
- Take control of the situation and maintain a calm environment.
- Administer first aid if safe to do so.
- Do not move ill or injured person(s), unless it is essential for their safety. Try to make them comfortable.
- Send a worker to notify Facility Management and ERC.
- Direct a worker or the ERC to direct ambulance where the medical emergency is occurring.
- Have someone call 911 if the situation dictates.

For Serious Injury/Illness:

- Notify ERC or facility management as soon as possible.
- ERC or facility management to call 9-1-1 as soon as possible.
- Give your name, the company name, address, major intersections, entrance to site, area of site and advise that persons will be available outside for direction. Remain on phone until 9-1-1 operator terminates the call, remain near phone.
- ERC/ERT member to clear immediate area and direct coworkers to safe place and maintain a calm environment.
- ERC to direct ambulance and other emergency responding personnel to location of emergency situation.
- Secure scene for investigation.

iv.

HAZARDOUS MATERIALS ACCIDENTS AND SPILLS

Any spill or leak of a chemical must be treated as being a potential hazardous material incident until the chemical can be identified. If the magnitude of the incident is determined to be of serious concern, initiate the evacuation procedures and call 911.

WORKERS AND SUPERVISORS

- Initiate evacuation procedure if required.
- If evacuation procedure are not required, notify ERC or facility management as soon as possible.
- Determine the name of the spilled or leaking chemical or material from the label on the container or from the shipping manifest or invoice.
- Initiate cleanup of material if safe to do so.
- If during the cleanup of the hazardous material, any worker shows signs or symptoms of distress, immediately remove the individual to a safe location and call 911 for further assistance.

ERC/ ERT Members

- ERC/ERT to assess hazards at the scene and establish the magnitude of the incident.
- ERC/ERT to identify hazard (review MSDS, containers, etc.).
- ERC/ERT to initiate evacuation procedures and call Emergency Services (911)

v.

EMERGENCY VIOLENCE RESPONSE

If you observe or are notified of a person(s) in possession of a weapon, forcing entry into the building, or appear to be acting in an extremely aggressive manner, the following steps should be followed:

WORKERS AND SUPERVISORS

- Do not confront the individual.
- Initiate evacuation procedure immediately.
- Call 911 immediately.
- Contact the facility manager/ERC as soon as possible.

ERC/ERT Members

- Do not confront the individual.
- Initiate evacuation procedure immediately.
- Call 911 immediately.
- Inform arriving emergency responding personnel of details known to this point.

E) DIRECTIONS TO THE NEAREST HOSPITAL (INSERT HERE)

Part 4: Project Responsibilities

A) EMPLOYER RESPONSIBILITIES

- Adhere to the requirements of the Project Specific Safety Plan.
- Participate and complete the procurement process.
- Provide the necessary documentation during the procurement process and as necessary - based on the various scopes of work performed by the subcontractor.
- Ensure all workers receive/complete an orientation prior to commencing work.
- Instruct, inform and supervise workers to protect their health and safety.
- Assist in a medical emergency by providing any information—including confidential business information—to a qualified medical practitioner and other prescribed persons for the purpose of diagnosis or treatment.
- Appoint competent persons as supervisors. “Competent person” is a defined term under the Act. A “competent person” is defined as one who must:
 - Be qualified—through knowledge, training and experience—to organize the work and its performance.
 - Be familiar with the Act and the regulations that apply to the work being performed in the workplace.
 - Know about any actual or potential danger to health and safety in the workplace.
- An employer may appoint themselves as supervisors if they meet all three qualifications.
- Inform a worker, or a person in authority over a worker, about any hazard in the work and train that worker in the handling, storage, use, disposal and transport of any equipment, substances, tools, material, etc.
- Help joint health and safety committees and health and safety representatives to carry out their functions.
- Not employ or permit persons, who are under the prescribed age for the employer’s workplace to be in or near the workplace.
- Take every precaution reasonable in the circumstances for the protection of a worker.
- Post in the workplace a copy of the OHSA, as well as explanatory material prepared by the Ministry of Labour that outlines the rights, responsibilities and duties of workers. This material must be in English and the majority language in the workplace.
- In workplaces in which more than five workers are regularly employed, prepare a written occupational health and safety policy, review that policy at least once a year and set up and maintain a program to implement it.
- Post a copy of the occupational health and safety policy in the workplace, where workers will be most likely to see it.
- Provide the joint health and safety committee or the health and safety representative with the results of any occupational health and safety report that the employer has. If

the report is in writing, the employer must also provide a copy of the parts of the report that relate to occupational health and safety.

- Advise workers of the results of such a report. If the report is in writing, the employer must, on request, make available to workers copies of those portions that concern occupational health and safety.
- Ensure that every part of the physical structure of the workplace complies with load requirements prescribed in the applicable Building Code provisions, any prescribed standards and sound engineering practice.
- Prepare policies with respect to workplace violence and workplace harassment and review them at least once a year.
- Regardless of how many workers they employ, develop programs supporting workplace harassment and workplace violence policies and include measures and procedures for workers to report incidents of workplace harassment and workplace violence, and set out how the employer will investigate and deal with incidents or complaints.

B) SUPERVISOR RESPONSIBILITIES

- Ensure that a worker works in compliance with the Act and regulations.
- Ensure that any equipment, protective device or clothing required by the employer is used or worn by the worker.
- Advise a worker of any potential or actual health or safety dangers known by the supervisor.
- If prescribed, provide a worker with written instructions about the measures and procedures to be taken for the worker's protection.
- Take every precaution reasonable in the circumstances for the protection of workers.
- Supervising the work on the project at all times, either personally or by having an assistant who is a competent person do so when the supervisor is unavailable.
- Inspecting or having the supervisor's assistant inspect, at least once a week, all machinery and equipment, including fire extinguishing equipment, magazines (storage for flammables and explosives), electrical installations, communications systems, sanitation and medical facilities, buildings and other structures, temporary supports and means of access and egress at the project to ensure workers are not endangered.

C) WORKER RESPONSIBILITIES

- Work in compliance with the Act and regulations.
- Use or wear any equipment, protective devices or clothing required by the employer.
- Report to the employer or supervisor any known missing or defective equipment or protective device that may endanger the worker or another worker.
- Report any hazard or contravention of the Act or regulations to the employer or supervisor.

- Not remove or make ineffective any protective device required by the employer or by the regulations other than in circumstances specified below.
- Not use or operate any equipment or work in a way that may endanger any worker.
- Not engage in any prank, contest, feat of strength, unnecessary running or rough and boisterous conduct.

D) SUPPLIER RESPONSIBILITIES

- Every person who supplies workplace equipment of any kind under a rental, leasing or similar arrangement must ensure that the equipment complies with the Act and regulations, is in good condition, and (in specified circumstances) is maintained in good condition.
- Suppliers must complete and return a 'Supplier Health and Safety Compliance Agreement'.

Part 5: Training Requirements

TRAINING ELEMENT	INTERNAL TARGET GROUP	APPLICABILITY & REQUIREMENTS	MINIMUM FREQUENCY
Accessibility for Ontarians with Disabilities Act	All Employees.		Once and as needed.
Asbestos Awareness	All Employees.		
Carbon Monoxide	Affected Workers. Affected Subcontractors.	Worker who carries out testing for airborne concentrations of carbon monoxide in an enclosed structure where an internal combustion engine is being operated.	As Needed (Check expiry dates on training certificates).
Chainsaw	Affected Workers. Affected Subcontractors.	Worker who uses a chainsaw	As Needed (Check expiry dates on training certificates).
Client Specific Training	Affected Workers. Affected Subcontractors.	Based on Client requirements.	As Needed (Check expiry dates on training certificates).
Confined Spaces	Affected Workers. Affected Subcontractors.	- Person who carries out a hazard assessment related to the confined space before a worker enters. - Person who develops and implements the written plan for the confined space, including procedures to control hazards identified in the assessment. - Every worker who enters a confined space or performs related work at a workplace - Persons who are available for immediate implementation of the on-site rescue procedures. - Person who performs tests before and while a worker is in a confined space to ensure that acceptable atmospheric levels are maintained in accordance with the plan.	As Needed (Check expiry dates on training certificates).
Cranes, Hoisting and Rigging (Use, Inspection, Setup, Maintenance)	Affected Workers. Affected Subcontractors.	- Worker who operates a crane or similar hoisting device. - Worker who operates a crane or similar hoisting device capable of raising, lowering, or moving material that weighs more than 30,000 lb. Hoisting Engineer – Mobile Crane Operator 1. - Worker who operates a crane or similar hoisting device capable of raising, lowering, or moving	As Needed (Check expiry dates on training certificates).

18-2-1 PROJECT SPECIFIC SAFETY PLAN

		material that weighs between 16,000 and 30,000 lb. Hoisting Engineer – Mobile Crane Operator 2. - Worker who operates a tower crane. Hoisting Engineer – Tower Crane Operator.	
Drowning	Affected Workers. Affected Subcontractors.	Workers who perform rescue operations if a workers may drown at a project.	
Electrical Safety Awareness	All Employees.		
Employee Orientation Package (Workplace Task Standards)	All Employees.		Yearly.
Equipment & Machinery	Affected Workers. Affected Subcontractors.	Workers who use equipment and machinery.	As Needed (Check expiry dates on training certificates).
Excavation	Affected Workers. Affected Subcontractors.	Person who supervises the removal of a support system for the walls of an excavation.	As Needed (Check expiry dates on training certificates).
Explosive Actuated Fastening Tools	Affected Workers. Affected Subcontractors.	Workers who use an explosive actuated fastening tool.	
Fire Extinguisher (Use/Inspection)	Affected Workers. Affected Subcontractors.	Workers who may be required to use fire extinguishing equipment and workers who are required to inspect fire extinguishing equipment.	Every 2 Years.
Formwork	Affected Workers. Affected Subcontractors.	Person who inspects formwork and falsework before concrete placement.	As Needed (Check expiry dates on training certificates).
Health and Safety Rep.	Affected workers.	Worker selected as Health and Safety Representative.	Once and as needed.
Lifting Devices and Mobile Equipment	Affected Workers. Affected Subcontractors.	Person who operate a Lifting Device or Mobile Equipment.	As Needed (Check expiry dates on training certificates).
Mechanical Equipment	Affected Workers. Affected Subcontractors.	Worker who inspects mechanically powered vehicles, machines, tools and equipment, rated at more than 10hp, for the purposes of identifying any defects or hazardous conditions.	
MOL Supervisor Health and Safety Awareness in 5 Steps	Senior Management Supervisors Health and Safety Coordinator		Once and as needed.

18-2-1 PROJECT SPECIFIC SAFETY PLAN

MOL Worker Health and Safety Awareness in 4 Steps	All Employees.		Once and as needed.
Personal Protective Equipment	All Workers.	Workers required to use, maintain, inspect PPE. Workers provided with specialty PPE.	
Power Elevated Work Platforms	Affected Workers. Affected Subcontractors.	Workers who use and inspect Power Elevated Work Platforms.	As Needed (Check expiry dates on training certificates).
Propane (TSSA CH- 02 Certificate)	Affected Workers. Affected Subcontractors.	Workers who activate a propane, natural gas, or oil fired construction heater or torch, with an input of 400,000 BTU/h or less, and connects/disconnects it.	Every 3 Years.
Signaling	Supervisors Workers (Field Workers) Health and Safety Coordinator Affected Subs.	Worker who acts as a signaler to assist the operator of a vehicle, machine, or equipment when the operator's view is obstructed or if a person could be endangered by the vehicle, machine, or equipment or the load.	As Needed (Check expiry dates on training certificates).
Standard First Aid	Supervisors Health and Safety Coordinator Affected Workers in Charge of First Aid Station (Worker Rep.)		Every 3 Years.
Supervisory Training (Basics of Supervising)	Supervisors Health and Safety Coordinator	Employees who are appointed as Supervisors, or who performs supervisory duties.	Once and as needed.
Traffic Control	Supervisors Workers (Workers) Health & Safety Coordinator Affected Subs.		As Needed (Check expiry dates on training certificates).
Vehicle Operation	Affected Workers.	Workers who operate company vehicles.	As Needed (Check expiry dates on training certificates).
Working at Heights (MOL Approved Course)	Supervisors Workers (Field) Health and Safety Coordinator Affected Subcontractors.		Every 3 Years.
Workplace Hazardous Material Information System (WHMIS)	All Employees. Affected Subcontractors.		Once and yearly as needed.
Workplace Violence and Harassment	All Employees.		

Part 6: Subcontractor Guidelines

1.0 General Requirements

Policy:

The safe physical condition of our project and its surroundings is of prime importance. All workers, Subcontractors, suppliers and any other visitors to our project must cooperate and make all reasonable efforts to ensure that;

- guardrails/ handrails
- floor openings
- access/ egress
- ladders/ ramps
- scaffold
- excavations, trenches and caissons
- general cleanliness
- treatment of ice and snow

These standards meet and/ or exceed the minimum requirements specified in the *Occupational Health and Safety Act*, pertinent regulations and the following site requirements. It is not the intent of these site safety requirements to exempt the workplace parties from any requirements, duties or responsibilities as they relate to the legislative health and safety requirements.

1.01 Guardrails and Floor Coverings

- guardrails should always be considered as the first line of defence in the prevention of falls from heights. When necessary and it's not practical to utilize guardrails, appropriate floor coverings are an acceptable substitute. Permission for the substitution of guardrails must be granted by the Site Superintendent.
- always ensure that guardrails or floor coverings are installed where required and in a manner as outlined in the current regulations.
- Subcontractor's, who through the nature of their work create fall hazards must take the necessary measures to progressively install guardrails (or floor coverings) as required. The subcontractor must ensure that floor openings, perimeter edges and/or pathways to which a worker has access are at all times adequately protected by guardrails.
- It's the responsibility of the subcontractor to utilize appropriate guardrails and/or floor coverings to protect workers from falls. During the performance of work and in situations where the use of guardrails is not practical, approved Travel Restraint, Travel Restrict and/or Fall Arrest systems must be utilized.
- where the absence of guardrails exists and or guardrails are found to be incomplete, unsafe or damaged, report this condition immediately to the site management team for rectification and don't attempt or continue to work in the area until the guardrails are installed, reinstalled or repaired
- guardrails or floor coverings may be removed temporarily to perform work in or around an opening, provided a worker is adequately protected and signs are posted in accordance with the legislative requirements. Where guardrails or floor coverings are removed, workers performing work must use other means of protection such as travel restraint, fall restrict or fall arrest system, "DANGER" signs must be posted and a means of preventing inadvertent access must be utilized.
- guardrails must be provided around the perimeter of all working and walking surfaces, platforms and roofs where a worker may fall 8 feet (2.4m) or more, or onto/into a hazardous object. Guardrails must consist of a top rail, intermediate rail and toe-board or be otherwise approved by the Ministry of Labour to meet the criteria for guardrails per the Regulations for Construction Projects. (i.e. safety fence, wire rope, etc.).

Handrails

- securely fastened handrails must be installed on the open sides of all stairs and guardrails must be installed on any open side of stair landings.
- handrails must be constructed of the same materials required for guardrails and secured in place.
- always ensure that handrails are free of protruding objects such as nails and that the wood does not pose slip hazards, furthermore, wood handrails should not protrude into the aisle.

1.02 Floor Coverings

- Where it is not possible to provide guardrails around floor openings, they must be covered with securely fastened coverings capable of supporting all loads to which they may be subjected and identified (i.e. "DANGER, FLOOR OPENING").
- Floor coverings must have a professional engineer's opinion if provided in an area where mobile equipment may be used.
- All floor openings 3 inches or greater in diameter must be protected immediately.

1.03 Access/ Egress

- overhead protection or appropriate barricades and pedestrian traffic control measures must be provided where work is being carried out above a means of access/ egress or work area.
- access to and egress from work areas that are above or below ground must be appropriate for work being done and maintained in a safe condition. (i.e. ladders, scaffold stairs, ramps and runways, etc.). Temporary stairs must be used where regular access/ egress is required from one level to another and/ or tools and materials are being handled manually.
- no means of access or egress to units or to the site in general shall be blocked or restricted without prior notification to the site superintendent (due to emergency access/ egress). This condition will only be permitted under strict supervision by the Subcontractor only if permission has been granted by the site superintendent.
- access to unguarded work areas, roof areas or equipment is restricted to trained and authorized workers utilizing other appropriate means of Fall Prevention. Prior to working in such areas, the subcontractor supervisor must evaluate all hazards and ensure that an adequate means of fall protection is used.

1.04 Ladders/ Ramps

- ladders should be set up on a firm level surface. If the base is to rest on soft uncompacted or rough soil, a mudsill must be used.
- ensure ladders are of proper length (extended 3 feet (90 cm) beyond the landing). landing areas at both ends of the ladder must be clear of debris and materials.
- always visually inspect ladders prior to using them. Ladders with weakened, broken, bent or missing steps; broken or bent side rails; broken, damaged or missing non-slip bases; or otherwise defective must not be used and are to be removed from the site immediately.
- all access ladders must be tied off or otherwise secured to prevent movement.
- where a ladder is used to complete a task or for access and egress, a fall arrest system must be used where a worker may fall 10 feet (3m) or more.
- depending on length, straight ladders should be set up on an angle such that the horizontal distance between the top support and the base is not less than one-quarter or greater than one-third the vertical distance between these points.

- always maintain three-point contact when climbing a ladder (e.g. two feet and one hand or one foot and two hands). When a short-term duration task must be performed while standing on a ladder, the length of the ladder should be such that the worker stands on a rung no higher than the second from the top, maintaining his/her body between the side rails.
- ladders should not be erected on boxes, carts, tables, scaffold platforms, elevated work platforms or on vehicles. Ladders should not be used horizontally as substitutes for scaffold planks, runways or other service for which they have not been designed.
- Metal ladders, or ladders with metal reinforcing must not be used near energized electrical equipment or conductors.

1.05 Scaffold

- the erection, inspection and dismantling of scaffold must be carried out by trained, knowledgeable and competent persons.
- scaffold planks must be of good quality; free of defects such as loose knots, splits or rot; rough sawn; measuring 2 inches x 10 inches (51mm x 25.4mm) in cross section; No.1 spruce.
 - scaffolds must be erected with all braces, pins, screwjacks, baseplates, wheels and other fittings installed as required by the manufacturer.
- scaffold platforms and benches must be at least 18 inches (46 cm) wide and planked across their full width.
- scaffolds must be tied in to a building at vertical intervals not exceeding three times the least lateral dimension, including the dimension of any outrigger stabilizing devices.
- where scaffolds cannot be tied into a building, adequately secured guy lines must be used to provide stability.
- scaffold planks must be securely fastened to prevent them from sliding.
- scaffolds must be erected, used and maintained in a reasonably plumb condition.
- remove ice, snow, oil, grease and other slippery material from the platform and the surface shall be treated to prevent slip hazards (where required).
- a vertical access ladder must be used to access/ egress scaffold. Fall arrest equipment must be incorporated for heights of 10 feet (3m) or more.
- A competent person must inspect scaffold prior to each use.

Scaffold on Wheels or Castors

- all castors or wheels must be provided with a functioning braking device.
- brakes on the castors shall be engaged when working on the scaffold.
- ensure surface is firm and level prior to moving scaffold.
- no worker shall mount scaffold unless the brakes are applied.
- where a rolling scaffold is being moved, with a worker on a platform that is 8 feet (2.4m) high or more, the worker must wear fall arrest secured to the scaffold.
- a scaffold mounted on castors or wheels shall be equipped with guy wires or outriggers to prevent its overturning if the height of the scaffold platform exceeds three times the least lateral dimension of the scaffold.
- measured at the base of the scaffold.
- if outriggers are used, measured between the outriggers.

1.05 a No Stilts

- the use of stilts is prohibited on this job.

1.06 Surface Penetrations/ Excavations

- locates must be obtained prior to any surface penetration (walls, floors, etc) or soil disturbance (trenches, auguring, fence holes, etc.) of any kind. Locate must be current and are only **valid for 30 days**.
- locate drawings must be reviewed by the supervisor and be in the possession of the equipment operator.
- **All excavation activities, etc. require a 'valid locate'.** What's valid? Paint markings or stakes/flags in the ground where excavation will take place and appropriate paper work indicating the limits of a locate or the digging boundary (found on a locate sheet) are valid locates. **Markers only indicate the presence of a pipeline. They should not be used or relied upon to determine the exact location of a pipeline. With that in mind, you must carefully hand dig within three feet (or one metre) of those markings as required by law under TSSA's *Guidelines for Excavations*.**
Note: Locates are valid only for 30 days. If any excavation or soil disturbance activities are required after 30 days, new locates are required to be conducted.

Trenches and Excavations

- where workers are required to enter a trench or excavation, proper means of access/ egress must be provided.
- where personnel are required to enter a trench deeper than 1.2 metres (4 feet), the walls must be cut back on a one to one gradient. Where it is not possible to slope the walls adequately, they must be supported as prescribed in the Regulations for Construction Projects (i.e. shoring or a trench box designed by a professional engineer).
- when a worker is in a trench, a competent worker trained in first aid must be stationed on the surface to alert the workers in the trench if any unsafe conditions develop. Workers must stay within the protected area of the trench. No one may enter an unprotected trench, no matter how short the period.
- all loose material must be scaled or trimmed from the sides and surface of an excavation or trench. Materials, equipment or machinery may be stored or used no closer than 6 feet (1.8 m) from the surface of the caisson, trench or excavation.
- soil conditions and/ or the shoring systems must be inspected by a competent person (designated by the professional engineer) before a worker enters the trench or excavation and then on a regular basis.

Caissons

- confined space entry procedures/ permits must be followed for caisson entry.
- atmospheric testing must be performed to ensure that the work environment is safe.
- workers must be competent and trained before entering the caisson.
- caissons must have linings installed to within 1.2 metres (4 feet) of the bottom.
- a fall arrest system/ retrieval system and a worker trained in its use and CPR must be stationed at the top of the caisson being entered.
- A professional engineer must design the bucket used to lower the worker into the caisson and the drawings must be available on the equipment.
- a fall prevention system must be used to protect workers from unprotected caissons and/ or drilling equipment.
- caissons must be securely covered and identified immediately following drilling.

1.07 General Cleanliness

- all major pathways shall be kept clean and free of obstructions at all times!
- scrap materials and general dunnage shall be placed in waste containers immediately and removed from the work area to the identified scrap containers on a daily basis. Each Subcontractor and all workers should reduce waste, reuse and recycle materials.
- each Subcontractor is responsible for maintaining and cleaning their work area and materials on a daily basis. Pop cans, coffee cups and other garbage are to be put in waste containers.
- pieces of lumber with protruding nails are to be promptly piled out of the way and the nails withdrawn or bent over.
- other protruding objects, such as reinforcing steel (rebar) must be protected by a suitable means (capped) to prevent injury/ impalement.

1.08 Treatment of Ice and Snow

- Accumulations of ice or snow which create slip hazards on access routes and/ or work areas will be cleared/ treated as soon as practical. Always exercise caution when walking during inclement weather conditions.
- should you discover that access to your work area or the work area itself is slippery due to inclement weather conditions, please see the site superintendent for Calcium Chloride and/or other materials (e.g. sand), which will be provided for the treatment of the work surface.
- if the conditions are such that the treatment of the surfaces would not be practical, therefore leaving the work area slippery, workers should refrain from working in such areas until they can be made safe.

1.09 Bracing and Securing

- during the course of work, all Subcontractors must ensure that they use appropriate wall/floor/structure/component bracing/securing techniques to prevent any part of the structure under construction, temporarily/permanently installed components (e.g. stairs or windows) or equipment in use, from toppling over or collapse. Braces or supports should only be removed progressively when components or structural members no longer pose the danger of collapse or toppling over.
- Materials that are not secured and are subject to windy conditions could pose a striking hazard to unsuspecting workers or others. Subcontractors must take the necessary precautions required to secure materials and provide protection from the dangers associated with effects of sudden windy conditions.

1.10 Utilities

- **underground utilities** – prior to excavating, locates must be performed and identified accordingly for all underground utilities. In the event that during the excavating of soil, the operator begins to encroach on an identified utility, the operator shall cease use of the powered equipment and digging shall only be performed by a worker using a hand held shovel (if safe to do so)
- **overhead utilities** - whenever there is a danger of equipment, persons and/or materials encroaching on the minimal allowable distances (O. Reg. 213/91) See chart below) or making contact with any energized electrical conductors, safety precautions (e.g. de-energizing of power source, insulating electrical conductors, use of spotters, having power lines moved, utilization of warning signs for operators of equipment, written and communicated procedures, etc.) must be taken in accordance with Sections 188 to 191 Reg. 213/91.

Minimal distances

Column 1	Column 2
Nominal phase-to-phase voltage rating	Minimum distance
750 to 150,000 volts	3 metres
150,000 to 250,000 volts	4.5 metres
more than 250,000 volts	6 metres

- When unsure, always treat electrical conductors as if they are energized (verify with site management) and take precautions accordingly. Should any utility appear to be damaged, immediately notify the Site Superintendent.
- energized overhead conductors must be identified with the appropriate signage and/or warning devices in the vicinity of the conductor and visible to the operator a crane vehicle or any equipment that may be operated near an energized overhead conductor and it is possible for the part of the vehicle/equipment or its load to encroach on the minimum distances. Operators of equipment/machinery required to work in the vicinity of energized overhead conductors must be provided with written notification of the hazard prior to beginning work. Furthermore a legible sign visible to the operator and warning of the potential electrical hazard must be posted at the operator's station.

1.11 Electrical Safety**Notes:**

1. No worker shall connect, maintain or modify electrical equipment or installations unless the worker is a certified electrician under the Trades Qualification and Apprenticeship Act or the worker is otherwise permitted to connect maintain or modify electrical equipment or installations under the Trades Qualifications and Apprenticeship Act.

Lockout/Tagout Requirements

- working on energized electrical systems, installations and or equipment must only be conducted by certified electricians
- furthermore the subcontractor performing work must have a written lockout/tagout procedure in place that has been communicated to his/her workers/subcontractors.
- prior to performing any tie-ins, installation, maintenance or repairs on electrical equipment, energized conductors, power sources must be de-energized, locked out/tagged out and tested.
- **NO LIVY WORK on or near electrical equipment installations or conductors** (Work may only be acceptable in **extreme cases** if written procedures are in place for the protection of the workers and the conditions of the all safety regulations pertaining to live work have been met and furthermore, permission has been granted by the Site Superintendent).
- devices used in the lockout/tagout process must meet or exceed the health and safety legislative requirements and be used in accordance with the requirements.
- **No worker** (other than the worker who installed the lock or tag) shall tamper with or remove a lock (lockout device) or tag.
- When repairs, testing, installation or decommissioning of machinery or equipment must take place, all energy sources (electrical, gravity, pneumatics, hydraulics and stored energy) must be de-energized for the protection of a worker.

General Site Electrical Safety

- Tools, ladders, scaffolding and other equipment or materials capable of conducting electricity must not be used in close proximity to energized electrical equipment installations or conductors that they make electrical contact.
- report defective electrical equipment to your supervisor immediately. Defective electrical equipment must be tagged and taken out of service.

- electrical panels and disconnects must not be covered or hidden by articles of clothing, materials or machinery.
- Only authorized personnel are allowed to access electrical rooms
- All energized electrical panels must be adequately covered
- all electrical extension cords must have a grounding conductors and at least two other conductors
- all cords and equipment must be effectively grounded.
- extension cords must be inspected and maintained in proper working order.
- Ground Fault Circuit Interrupters (GFCI) must be used outdoors or in damp locations. Tripping of GFCI's shall be reported and investigated immediately
- report any loose, unprotected electrical wires/ cables or other damaged electrical equipment to your supervisor and the Site Superintendent immediately.

1.12 West Nile Virus

- a West Nile Virus prevention plan will be implemented, communicated and posted at each project. Subcontractors will be required to actively participate in the plan and help prevent creating potential breeding grounds for mosquitoes.

1.13 Heat Stress Plan

- a Heat Stress prevention plan will be implemented, communicated and posted at each project. Subcontractors will be required to active participate in the plan and ensure that they have implemented measures to protect workers from the potentially harmful effects of heat stress.
- The project specific plan will warn workers when heat levels are excessive, subsequently the subcontractor must take the necessary precautions to protect the workers from the potential harmful effect heat stress. Each subcontractor is required to know the expected weather conditions forecasted for the day and subsequently plan the work accordingly.

2.0 Material Storage

Policy:

To ensure both the appropriate flow of material and the safe storage of materials on site, Subcontractors and suppliers must coordinate the shipment, handling and storage of materials. This policy is meant to address the areas of;

- compressed gas cylinders
- welding
- flammable/combustible materials
- general material storage
- hazardous materials
- fire protection

and achieve awareness and compliance with the *Occupational Health and Safety Act*, Regulations for Construction Projects, WHMIS Regulations, the Fire Code and Energy Act as minimum standards. This policy is not all inclusive of the legislative requirements and should be used as a guide only. The Subcontractor must be aware of and work in compliance with all legislation that governs their work.

2.01 Compressed Gas Cylinders:

- handle compressed gases with extreme caution. Compressed gas cylinders may only be transported or hoisted on site where a suitable crib, secured from movement, is used.
- only competent authorized workers are to handle compressed gas cylinders
- use/ store and transport all compressed gas cylinders adequately secured in an upright position. Storage cages or racks must be made available in a safe location away from work areas and other areas where damage may occur (e.g. roadways)
- after using a compressed gas cylinder, ensure the valve has been closed. Cylinder valves must also be covered (where applicable) with their appropriate screw on caps.
- upon discovery of a compressed gas leak from a cylinder, hose, valve or other connection, discontinue use, remove from work area (if safe to do so) and report it immediately. Under no circumstances, is a leaking compressed gas cylinder to be used! Cylinders should be tested with soapy water.
- empty containers of compressed gases should be stored separately from full or partial containers. Flammable materials should be stored separately from oxygen. Only one day's supply or less of compressed gas is to be stored indoors, at any time
- store cylinders in cages identified with the company name when not in use.
- welding/ cutting torches, hoses, regulators and flashback arrestors must be inspected prior to each use.

Propane

The use of propane is common in construction. When working with any equipment that is fueled by propane, the following safety precautions must be observed:

- keep sources of ignition a minimum of 3 metres (10 feet) from a propane cylinder.
- an approved and charged fire extinguisher must be readily available.
- only competent, authorized personnel with a record of training (ROT) may handle/ connect compressed gas cylinders.
- always handle compressed gas cylinders and their contents with extreme caution.
- after using a compressed gas cylinder, ensure the valve has been closed.
- Unless designed for horizontal use, store all propane cylinders in an upright position, adequately secured in an approved, identified storage crib
- empty propane cylinders should be stored separately from full or partially full containers and identified accordingly.
- upon discovery of a propane leak from a cylinder, hose, valve or other connection, close valve if possible and safe to do so, warn others, leave the area and notify your supervisor immediately.

2.02 Welding/Cutting/Soldering or other operations creating sparks

- where cutting, welding, soldering or other spark producing work is performed the Subcontractor shall assess the areas of work and subsequently take the necessary precautions to prevent the outbreak of fire.
- unless suitable precautions have been taken, no cutting welding, soldering or other spark producing work is allow above or in an area where workers or the general public have access and/or combustible or flammable materials are used or stored.
- the Subcontractor shall utilize a fire-watch and/or provide fireproof tarpaulins where it is necessary to cover equipment, materials, part of the structure or combustible materials.
- performing operations that generate sparks or open flames in the vicinity of flammable liquids, compressed gasses or refueling areas is not permitted.

2.03 Flammable/ Combustible Materials

- flammable liquids must be stored in approved containers with flash arresting caps in place. Containers must be grounded and bonded during decanting.
- flammable or combustible materials must not be stored or situated in areas where welding, cutting or open flames are produced.
- flammable materials must be stored outside in isolated or fenced areas outside of units (see the Site Superintendent for appropriate storage areas). Such areas shall be appropriately marked with "NO SMOKING and/or Sources Of Ignition allowed in this area".
- all flammable or combustible materials must be clearly labeled as to their contents, hazards (i.e. WHMIS Regulations) and have company identification.
- draining of gasoline, fuel oil, motor oil or other flammable liquids onto the ground or into an open sewer is strictly prohibited. Disposal must be done in accordance with the Material Safety Data Sheets and the local Ministry of Environment requirements.

2.04 Hazardous Materials

- hazardous materials must be stored in areas designated by the site superintendent. The Subcontractor must notify the site superintendent of special storage requirements for particularly hazardous or designated substances.
- all hazardous materials brought on site must have appropriate labeling and have up to date Material Safety Data Sheets (maximum 3 years old). MSDS must be provided to the site superintendent and be available on site.
- all workers must have received WHMIS training or the appropriate upgrading within the last year. This should include specific training to ensure they are fully aware of use, storage, emergency and disposal requirements for the hazardous materials they may use. Proof of training must be available on the worker.
- improper use, handling, storage and disposal of hazardous materials may create imminent hazards, which could result in a serious accident. To ensure proper storage of hazardous materials, refer to Material Safety Data Sheets.
- spills or discharges of any hazardous material must be safely contained and reported to the site superintendent immediately.
- disposal must be done in accordance with the Material Safety Data Sheets and the local Ministry of Environment requirements.

2.05 General Material Storage

- • large shipments must be pre-arranged with the Site Superintendent.
- all materials are to be stored in an organized manner in the designated storage areas outside the building.
- materials must be stored in such a manner that they will not tip, collapse, and fall or protrude from a load in a dangerous manner. Care must be taken while unloading/ unpacking trucks and crates.
- doorways, aisles, roadways and work areas are to remain unobstructed, by materials and other objects.
- materials must not be stored within 6 feet (1.8 m) from the edge of a roof, floor, excavation or other openings.
- materials must be adequately secured in place to prevent movement in strong winds or other inclement weather conditions.

- approval must be obtained from the Site Superintendent for receiving of materials from the roadway. Appropriate signaling, traffic control and electrical conductor precautions must be taken.

2.06 Fire Protection

- subcontractors must assess work areas prior to commencing work activities that could potentially lead to the outbreak of fire. All precautions necessary must be taken to prevent the outbreak of fire during or after work activities.
- where sparks or open flames may be present, fire extinguishers must be; readily accessible in adequately marked locations, properly maintained, regularly inspected and promptly refilled after use.
- subcontractors must ensure that workers who may be required to use fire extinguishers in emergency situations, are trained in their safe use
- portable extinguishers must be safely secured to all moving vehicles and machines (i.e. backhoes, crane cabins, etc.).
- portable extinguishers are classified according to their capacity for handling specific types of fires. Underwriters Laboratories of Canada 4A40BC rating meets the minimum legislative requirements for construction projects.

Class "A" Extinguishers

For fires of ordinary combustion materials such as wood, paper textiles where a quenching, cooling effect is required.

Class "B" Extinguishers

For flammable liquid and gas lines, such as oil, gasoline, paint and grease where oxygen exclusion or flame-interruption is essential.

Class "C" Extinguishers

For fires involving electrical wiring and equipment where the non-conductivity of the extinguishing agent is crucial.

3.0 Personal Protective Equipment

Policy:

Appropriate personal protective equipment must be supplied, used and maintained according to the manufacturer and/ or CSA standards. This policy is not all inclusive of the legislative requirements and should be used as a guide only. The Subcontractor must be aware of and work in compliance with all legislation that governs their work.

Subcontractors must ensure their workers, Subcontractors, suppliers and visitors are familiar with all safety equipment required on the project and have been instructed how to use and maintain the equipment, according to good safety and hygiene practices.

The following is a list of the personal protective equipment to be used in accordance with the *Occupational Health and Safety Act* and Regulations for Construction Projects. This list and the requirements of legislation must be treated as a minimum standard and expanded on by each Subcontractor to meet the needs of their work environment:

3.01 Foot Protection

- CSA certified Grade 1 boots (Green Triangular Patch) must be worn at all times by construction workers.
- Note: Work boots should be fully laced and tied.

3.02 Head Protection

- Site Approved Hard Hats must be worn at all times by construction workers.
Note: Hard hats must be replaced when the interior (suspension system) or exterior is damaged.

3.03 Skin Protection/ Protective Clothing

- Proper protective clothing must be worn at all times, i.e. full length pants and at least, short sleeve shirts (no cut-off). Sun block is recommended for outdoor work.
- Other protective clothing must be worn, when required, to prevent exposure to a noxious gas, liquid, dust, fume, or objects which may cut, puncture, abrade or burn skin, or as required by Material Safety Data Sheets.
- Tear-away fluorescent vests must be worn by all workers working around heavy machinery, while backing up vehicles and signaling cranes or traffic.

3.04 Eye and Face Protection

- CSA approved glasses with side shields must be worn where the hazard of eye injuries may exist.
- Suitable CSA approved goggles and/or welding shields with the appropriate shading shall be worn when welding or cutting.
- Face shields in combination with safety glasses must be used where there is a possibility of injury to eyes or face. (grinding, chipping, handling hazardous substances, etc...,)

3.05 Fall Prevention

- Every Subcontractor must develop a fall prevention plan to assess, eliminate and/ or control falls from heights.
- The fall prevention plan must address the prevention of falls through the use of guardrails, travel restraint or fall restrict systems. If the hazard of falling may not be eliminated then a fall arrest plan must be implemented. The fall arrest plan must include procedures to inspect equipment and to rescue a worker that has fallen.
- Workers must receive training in the fall prevention, fall arrest, inspection and rescue plan and procedures. Documentation must be provided to the site superintendent.
- A worker must be protected against falls from heights whenever a worker is exposed to any of the following hazards;
 - Falling more than 3 metres.
 - Falling more than 1.2 metres, if the work area is used as a path for wheelbarrow or similar equipment.
 - Falling into operating machinery.
 - Falling into water or another liquid.
 - Falling into or onto a hazardous substance or object.
 - Falling through an opening on a work surface
- When guardrails, floor coverings, travel restraint or fall restrict systems are not feasible the workers must be equipped with Fall Arrest systems. A fall arrest system may consist of any of the following components so long as it will not cause the wearer to be subjected to an arrest force of greater than 1800 lbs. (8kN), all CSA standards are met and the worker is not able to ground-out.
 - CSA approved full body safety harness

- CSA approved shock absorbing lanyards (where appropriate) (to achieve 100% tie-off a “Y” lanyard may be required) equipped with double locking anti roll-out clips
 - CSA approved connecting devices (i.e. chokers, rope grabs, etc.)
 - approved anchorage points
 - CSA approved vertical or retractable lifeline
 - horizontal lifeline (where designed by a professional engineer and drawings are submitted to site superintendent)
 - safety nets
- These components or others, submitted as part of a fall prevention plan must be used in accordance with the OHS Act and Regulations for Construction Projects as a minimum. Procedures must be submitted to the site superintendent.
 - All components of a fall prevention system must be inspected by a competent person prior to its first use on site and by the worker daily thereafter. Mechanical components should be inspected and labeled by the manufacturer according to the manufacturer and CSA standards.

3.06 Hearing Protection

- Each worker should have hearing protection available for use at their work area (to be worn at all times in designated areas where noise levels exceed 85 dB. (i.e. chipping, using explosive actuated tools, grinding, etc.).

3.07 Respiratory Protection/ Air Quality

- The Subcontractor must take all actions necessary to ensure the quality of air on the project and in their work areas is not affected by fugitive emissions caused by their work processes or by materials used. Equipment must be maintained in optimal working condition, so as not to add excessive fugitive emissions into the workplace.
- Where the quality of air is or may be affected through work activities or by pre-existing conditions the Subcontractor must take measures to ensure the hazards that may be present are identified and controlled. (i.e. air quality tests, ventilation, etc.)
- All air quality tests must be conducted in the presence of a worker safety representative, appointed by the JHSC, and reports must be copied to the site superintendent and the JHSC.
- Where required, NIOSH approved respiratory protection must be used to ensure workers do not exceed legislated or recommended exposure criteria as identified by the appropriate air quality tests, on the Material Safety Data Sheet or Regulations for Exposure due to Biological or Chemical Agents or Occupational Exposure Limits.
- Workers must be trained regarding the fit testing requirements, maintenance and limitations of respirators.
- Work areas or processes (i.e. Cement finishing in basements) should be ventilated to decrease the potential for worker over exposure to harmful emissions.
- Confined Space Entry procedures with criteria for testing, entry, ventilation, rescue, etc. must be provided to the site superintendent and are required prior to entering a confined space.

4.0 Equipment and Machinery

Policy

Equipment and machinery are the direct responsibility of the Subcontractor and/ or supplier, however, as constructor, we must ensure compliance with legislation and ensure the protection of workers on the project. It is, therefore, our policy to identify equipment and machinery requirements so that Subcontractors may ensure their safe use, maintenance and the appropriate supporting documentation. This policy will cover the areas of ;

- general and hoisting equipment,
- log books and operator's manuals
- signal persons
- equipment and tool use
- vehicle operation on site (speed, parking)
- electrical equipment,

for the purpose of education and awareness. This policy is not all inclusive of the legislative requirements and should be used as a guide only. The Subcontractor must be aware of and work in compliance with all legislation that governs their work

4.01 General Equipment/ Elevated Work platforms

- equipment is to be operated and maintained by competent trained and authorized personnel. Proof of training must be kept in the operator's possession and provided to the site superintendent, upon request. Preoperational checks must be made daily.
- equipment must arrive on the project and be maintain in good repair on the project at all times
- operators must not leave vehicles or equipment running while unattended, nor shall the keys remain in unattended vehicles or equipment.
- Hoisting equipment must not be left unattended while any part is in a raised position.
- in the event that the view of an operator is obstructed or where working near a roadway, electrical conductor or public/ pedestrian way, the operator shall be assisted by a competent, trained signalperson.
- excavating equipment shall be equipped with roll-over protection as required by the Regulations for Roll Over Protective Structures.
- prior to use on site all equipment over 10 horsepower must have;
 - ✚ a pre-job inspection certificate and sticker signed by a competent maintenance person.
 - ✚ have a letter bearing the seal of a professional engineer stating the equipment is in compliance with applicable legislation and CSA/ CAN standards.
 - ✚ the operators manual

This information must be readily available for review on the equipment.

Elevated Work Platforms

- only personnel trained and authorized by the supplier for that specific equipment are allowed to operate self-propelled elevating work platforms. Workers on this type of equipment must use appropriate fall protection at all times.
- pump-jacks may be used on the job-site provided the equipment is in good repair, the manufacturer's engineer's drawings are available on site and the workers have erected the equipment in accordance with the specifications. Proper mudsills must be used and the support legs (at the base) must be secured to prevent them from slipping. Guardrails must be installed to prevent the workers from falling and an access ladder must be used as required.

4.02 Hoisting Equipment/ Lift-Trucks

- loads being hoisted must not pass over workers, or be handled in a manner, which might endanger a worker. Hoisting equipment is to be operated by certified or trained personnel only, as required for the capacity and type of equipment.
- The operator of the hoisting equipment at all times must obtain full visibility. In the event that his view is obstructed or work is conducted near equipment, machinery, electrical conductors or other hazards, a competent trained signalperson shall be used.
- at no time shall the operator of the hoisting equipment attempt to lift an object or load, which is in excess of the maximum load, rated capacity. The capacity of the equipment and any attachments must be readily available.
- the operator must always ensure that full control of the load is maintained.
- loads must not be left suspended, unless an operator is at the controls of the equipment

Lift Trucks

- Lift trucks must be in good condition and equipped with an overhead guard and all necessary safety devices.
- The Lift - truck shall be suitable for the work involved.
- Persons operating lift trucks must be qualified and the Subcontractor must have documented proof of recent training.
- Operators must know the weights of the loads to be carried or lifted and must know the lifting capacities of the Lift-Truck. Loads that exceed the load rating of the lift-truck must not be lifted.
- Subcontractors shall check load capacities of any floor or roof with the Site Superintendent before loading with any material or equipment.
- When traveling without a load, the forks of a lift truck must be tilted back and raised at least 4 inches off the floor to avoid any obstructions. When not in use, the forks of a lift truck must be rested on the ground. Powered equipment shall not be left unattended unless forks, buckets, blades and similar parts are in the lowered position or solidly supported.
- The raising of personnel on the forks or a platform of a lift truck is prohibited.
- No person other than the operator shall ride on the lift truck or its load.
- Lift trucks, are required to stop and sound their horn at all intersections and when backing up
- The operator must always maintain a clear view and/or use trained signal persons to assist during travel.
- Where it is required to control vehicle traffic, required provisions must be in place including barriers, signs, properly instructed flag people and reflective fluorescent vests for the flag people.
- Any large, heavy, round objects with a tendency to roll must be blocked on the equipment or when stored to prevent any movement.

4.03 Log Books and Operators Manuals

- must be maintained by Subcontractors for all incoming mechanical /electrical machinery or equipment to be used on the project rated at 10 horse power or greater. The logbook will identify previous inspections performed and contain details of the inspection (e.g. frequency of inspections, maintenance and repairs). All Log books must be maintained as prescribed in the Construction Regulations and be available for review at any time by the site superintendent. Operators Manuals must be supplied by the equipment manufacturer, supplier or an equivalent and maintained on the project, readily available to equipment operators or the site superintendent.

4.04 Signal Persons

- Subcontractors must provide signalpersons who are "Competent Workers" and therefore have received the appropriate training to meet the criteria defined in the *Occupational Health and Safety Act and Regulations* for Construction Projects. Every vehicle backing up must have a signal person present. Proof of training must be provided to the Site Superintendent.

4.05 Equipment and Tool Use

- All equipment/ tools must be inspected for defects prior to each use. Tools must be effectively guarded and used in a safe manner.
- Chain saws are only to be used by those who have received adequate instruction and can produce a valid Record Of Training (ROT).
- Ensure electrical tools are grounded. If the cord is cut/frayed, or the motor casing is defective, they must be tagged out of commission, repaired and/ or removed from the site.
 - • Do not operate electrical power tools or run electrical cords in damp or wet areas. Ground Fault Circuit Interrupters (GFCI) must be used for all electrical tools used outdoors.
- Do not leave power tools/ equipment turned on when unattended.
 - • All tools and equipment must be stored so they do not create a hazard for other workers on the project.

Explosive Actuated Fastening Tools

- workers using these tools must have a current record of training (ROT), supplied by the manufacturer, with them and available for review.
- eye protection, hard hats and hearing protection must be worn.
- the tool must be inspected prior to use to ensure it is clean, operating freely, the barrel is obstruction free and there are no defects.
- this tool must always be stored in a locked container when not in use and must never be left unattended when out of its case.
- this tool shall never be pointed at anyone, whether it is loaded or not.
- only shells/loads suitable for the application and as specified by the manufacturer of the tool, shall be used.
- misfired loads shall be placed in a water filled container and removed daily from site.

4.06 Vehicle Operation

- The Subcontractor shall see to it that their employees park in the designated areas, in a manner which will not impede access of emergency apparatus/equipment.
- only competent, trained and authorized persons are to use vehicles, hoists, cranes, elevated work platforms, lift-trucks, excavating equipment, elevated work platforms or other motor powered equipment or machinery, while on site. Proof of training must be maintained on the operator and a copy provide to the Site Superintendent.
- operators must always work cautiously and ensure that at no time is the operation of their vehicle/ machine/ equipment placing themselves or others in danger and/ or likely to cause damage to the structure, equipment or machinery.
- Posted "speed limits" must be observed at all times on the site. Where there are no limits posted, the maximum speed is walking speed.
- Parking on-site must be in designated areas only. Vehicles parked on-site obstructing traffic or materials flow will be removed at the owner's expense.

4.07 Temporary Heat

- when propane or natural gas are used to fuel heaters, the following precautions must be followed by the subcontractor;
 - ensure circulation of fresh air in the unit (open windows while working in the unit)
 - ensure a fire extinguisher (4A40BC) is readily available for use
 - never store or use flammable or combustible materials on or near the heater
 - should you detect a gas leak, advise anyone in the unit to leave and do so yourself (leave the door to the unit open). After exiting the unit, proceed to the propane cylinder and shut the cylinder valve off and then report the condition to the site management team immediately.

Note: when electrical means are used to heat units, always ensure that flammable and/or combustible materials are not stored and or used in close proximity to the heater.

4.08 Equipment Powered By Internal Combustion Engines

- when using internal combustion powered equipment such as cement finishing equipment, salamander heaters, chain saws, quick-cut saws, etc., ensure the area of use is well ventilated to prevent worker over exposure to potentially lethal toxins such as carbon monoxide
- to maintain the lowest levels of harmful exhaust emissions, all equipment should be serviced regularly and if work areas cannot be ventilated, other precautions must be taken to prevent worker over exposure to carbon monoxide (e.g. the use of electrical equipment, proper respiratory equipment for workers, etc.)

5.0 Public and Occupant Safety

Policy

The safety of the general public and occupants of existing buildings on our project and its surroundings are of prime importance. All workers, Subcontractors, suppliers and any other visitors to our project must cooperate and make all reasonable efforts to ensure the maximum protection and minimum inconvenience to the general public or occupants, through;

- appropriate signage
- installation and maintenance of fencing, hoarding and other precautions
- designation and use of construction access and parking
- reporting incidents involving occupants or general public
- appropriate traffic control and equipment on public/private ways

that meet and are used according to all requirements of applicable legislation/ statutes and the following site policies. This policy is to be posted in the Subcontractor's site office, made available and explained to workers and Subcontractors on the project prior to performing work;

5.01 Signage

- appropriate signage will be provided by the Subcontractor, as required, to ensure the appropriate identification of construction areas, access routes, overhead dangers, electrical conductors and the boundaries of the project. Please note, that in the absence of signage, the "ORANGE" snow fence or hoarding signifies the project boundaries and should not be crossed by unauthorized non-construction personnel or the general public.
- signage must also be supplied by the Subcontractor to identify hazards to other workers, the general public or occupants of existing buildings. In addition to signage, hazardous areas or operations must be restricted from access by unauthorized persons.

5.02 Fencing, Hoarding and Other Precautions

- appropriate fencing, hoarding, covered ways and other precautions (i.e. fire routes/ escapes, dust barriers, etc.) must be provided, as required, to ensure the appropriate restriction of work areas and safe access to existing buildings or through the project (if necessary) for the general public or occupants.
- fencing, hoarding, covered ways and other precautions (i.e. fire routes/escapes) may only be altered or removed with the expressed authorization of the company. and/or governing authorities (i.e. Ministry of Labour, Fire Marshall, etc.)
- additional precautions must be taken by the Subcontractor to ensure appropriate protection of occupants or the general public where work conducted creates unsafe conditions or exceeds safety factor provided by existing precautions. (i.e. removal of windows, work performed outside project boundaries, ,etc.)

5.03 Construction Access and Parking

- all construction personnel must use "designated" construction access routes and parking areas.
- driveways, laneways, walkways or emergency vehicle routes must not be blocked or restricted at any time by construction vehicles, machinery, equipment or materials.
- overnight parking of equipment or vehicles must be done with the permission of the site superintendent. The Subcontractor must ensure the security of equipment or vehicles. No vehicle is to be left without appropriate brakes/ blocking, unlocked or with keys in place.
- construction equipment such as zoom booms, scissor lifts, bulldozers, forklifts, etc. must have all moveable parts kept in their lowered positions when left unattended.
- The Subcontractor must make the site superintendent aware of any change in process, which may cause unforeseen hazards or concern to occupants. Where required, information will be supplied to occupants regarding hazards.

5.04 Traffic Control and Equipment on Public Ways

- Subcontractors must ensure that appropriate flag persons, signalpersons, barricades or signage is installed on public or private ways on the project to protect workers, the general public, occupants and vehicles on that way. Flag persons or signalpersons must be provided with written instructions by their supervisor.
- priority must be given to ensuring that public or private ways are accessible to emergency service vehicles at all times. Where the public or private way is to be blocked, an alternative route must be provided and clearly marked.
- Equipment to be used on public or private ways must be barricaded where practical and equipped with a working flashing amber light .
- where roadwork has been performed the appropriate barricades and flashing light standards must be installed to prevent hazards to traffic or pedestrians.
- good housekeeping practices must be followed, at all times, to prevent, general public or occupant contact with waste, scrap or other unsafe conditions on public or private ways.

6.0 Personal Conduct

Policy:

The safe and proper conduct of all employees, Subcontractors, suppliers and any other visitors to our project is of prime importance. All requirements of the Regulations for Construction Projects identified by the *Occupational Health and Safety Act*, Employment Standards Act and the following site policies;

6.01 General Conduct

The following is a guideline to be followed by all workers or Subcontractors employed on the project;

- ensure that you are familiar with and abide by these guidelines, your Company Policy and these Safety Guidelines;
- always work in compliance with the *Occupational Health and Safety Act* and pertinent Regulations.
- co-operate with Ministry of Labour Inspectors, site safety personnel, worker health and safety representatives, supervisors and others who are attempting to achieve and maintain a healthy and safe workplace;
- **minimum age** of any personnel on site is 16 (sixteen).
- **Immediately** report unsafe conditions, near misses and accidents to the Site Management Team
- always wear the personal protective equipment required for the site;
- do not engage in horseplay or fighting;
- use discretion, if it does not look or feel safe, ask for your supervisor's assistance;
- read and follow all posted notices and warnings;
- portable/ personal radios (i.e. walkmans) are not permitted on the project;
- rings, jewelry and loose clothing must not be worn during work activities;
- if you are not familiar with the use of any equipment, machinery, or tools, ask your supervisor for assistance;
- do not disturb fellow workers while they are setting up or operating any equipment or machinery;
- a clean work area is also a safe work area. Always keep work areas and access ways clean and free of spills, scrap, debris, and congestion.

Incidents Involving Occupants or General Public

- communications by construction workers with the general public and/ or occupants of existing homes must be limited and must not be confrontational. Report any adverse encounters with general public or occupants to your supervisor and the site management team.

6.02 Alcohol and Drug Procedure

- the Subcontractor shall ensure that all workers must be fit for the duties they have been hired to perform.
- Intoxication due to or possession of alcohol or illicit drugs will not be permitted on the project whatsoever.
- The use of prescription drugs is permitted as prescribed by a physician, provided it does not affect the worker's fitness to perform job duties safely. The Subcontractor must ensure that the site superintendent is notified of these requirements.
 - where a worker is suspected of being intoxicated, the following procedures must be followed;
 - the worker will be escorted and requested to remain in a safe location away from the work area.
 - the worker's supervisor and safety representative, if available, will be requested to attend.
 - the group present will determine the appropriate course of action and a means of transport to a suitable safe location.

- where a dispute exists regarding the worker's fitness for duty, the appropriate health care practitioner or authorities will be summoned to make a further assessment. The employer and supervisor must act on this assessment and advise the site superintendent regarding the outcome.

6.03 Visitors

- **The Subcontractor must ensure the health and safety of visitors to the project.**
- Upon arrival to the site, visitors must report to the Site Office. They will only be allowed on site if granted permission from the Site Management Team. Visitors must always be accompanied by a competent supervisor and must wear the required personal protective equipment.
- Visitors must be aware of these guidelines (available on site). Visitors must not perform work.
- Visitors must report any hazards observed on the project to the site superintendent.
- Visitors must wear the protective equipment required for the work area and as a minimum CSA approved hard hats and safety boots. Fall arrest, eye protection, respiratory protection, hearing or other protection may be necessary.

Part 7: Project Specific Workplace Task Standards

Part 8: Worker & Visitor Orientation

A) WORKERS

All persons performing work on the project must attend an orientation session covering the requirements of the Project Specific Safety Plan.

Upon completion of this Orientation, workers must will complete and sign an acknowledgement declaration.

Participants must be there prior to start of the orientation, or they will not be permitted to attend.

B) VISITORS

All persons temporarily on site and not performing work (e.g., high risk suppliers, visitors, client representative, engineers, etc.) must attend a Visitor orientation session.

Upon completion of this Orientation session, they will complete and sign-in (and subsequently upon exiting the site - sign-out) on the Visitor Sign-In/Out Log.

Participants must be there prior to start of the orientation, or they will not be permitted to attend.

Part 9: Acknowledgement and Declaration

Please read this page carefully, sign and tear out of the booklet and then forward to your Supervisor or Site Foreman.

I, (name) _____ representing (Company) _____, acknowledge I have read and received a copy of the **Maxim Mechanical "Project Specific Safety Plan"** provided and explained to me. I understand that I must work in a safe manner and I will comply with the *Health and Safety Act* and Regulations and **Maxim Mechanical** project safety policies.

I further understand that the **Maxim Mechanical "Project Specific Safety Plan"** has been provided in order to create an awareness of the types of conditions or situations, which could pose a potential health or safety hazard.

I will not hesitate to ask my Supervisor for assistance if I do not understand any of the contents of these guidelines or safe operating principles presented.

I acknowledge that willful or persistent violations of this policy will be considered cause for discipline and/or dismissal.

Signature: _____

Date: _____

PURPOSE	The purpose of this procedure is to define "Project Requirements" - a listing of considerations that the site management team will have at their disposal to assist with the development of the Project Specific Safety Plan.
SCOPE	The pre-project requirements will be a combination of checklists designed to give the management team a guideline for consideration before and during the duration of the project. This will aid in the completion of a Project Specific Safety Plan, designed to assist in the implementation and evaluation of project specific health and safety initiatives.
RESPONSIBILITIES	Health and Safety Team Responsibilities • Assist in developing corporate health and safety documentation, policies and procedures where required. • Provide Pre-Project Checklists and documentation where required. • Ensure that all legislated posting requirements are met at applicable locations. Senior Management Responsibilities • Review and approve Pre-Project Requirements Procedure, on an annual basis. • Assign and provide resources identified as being necessary for project specific health and safety initiatives. • Ensure that pre-project requirements procedures comply with all the requirements as defined under the Occupational Health and Safety Act and Regulations. • Ensure that all legislated posting requirements are met at applicable locations. • Provide Pre-Project Checklists and documentation where required in conjunction with the Health and Safety Team. Supervisor Responsibilities • Complete all required pre-project checklists and documentation and ensure it is available for review. • Ensure considerations identified are included as part of the Project Specific Safety Plan. • Ensure implementation of all identified requirements. Worker Responsibilities • Advise Supervisor if experiencing any difficulties with assigned tasks, or if assigned tasks are beyond perceived limitations or medically not capable of performing tasks. • Comply with all the requirements as defined under the Occupational Health and Safety Act and Regulations.
PROCEDURE	As it relates to the project and prior to the start of the project, the Supervisor will: 1. Consider and complete the requirements of the 'Pre-Project Considerations Checklist' (19-1 - Form). 2. Review the requirements of the "Project Postings Checklist" (19-2 - Form) and ensure the required documents are posted.

DISTRIBUTION

Distribution of the completed documentation for the “Project Posting Checklist” will be distributed as follows:

- Senior Management
- Health and Safety Team
- Supervisor

RECORDS

All records will be documented and maintained in the Project Health and Safety Files within safety binders and at Head Office by Health and Safety Team.

PROJECT:	DATE:
COMPLETED BY:	POSTION:

NOTE:

The following form is to be used as guide by the project management team for the set-up of a Project Specific Safety Plan and project related safety measures. This form is to be used in conjunction with the "Project Postings Checklist".

ITEMS OF CONSIDERATION			
ITEM	DATE OF REVIEW	ACTIONS	DATE OF COMPLETION
IDENTIFY SITE BOUNDARIES			
CONSTRAINTS OF SITE BOUNDARIES			
→ hoarding/fencing			
→ parking areas			
→ traffic plan (minimize backing-up of vehicles)			
→ emergency access/egress			
→ covered walkways			
→ temporary site access/egress			
→ permanent site access/egress			
→ Other:			
DEFINE			
→ Off-loading areas			
→ Lay down areas/ Compounds			
→ Location of man/material hoist			
CRANES			
→ Copy of Operators License			
→ Location			
→ Adjacent structures			
→ Utilities			
→ Swing path			
→ Communication system			
→ Crane Manual			
→ Crane Log Book			
→ Foundation eng. Drawings			
→ Test blocks			
→ NDT Testing/Eng. Report			
HIGH VOLTAGE CONDUCTORS			
→ Identify w/signs & advise applicable trades			
→ Locates current and done before any surface penetrations			
→ Ensure proper working distances are maintained			
→ Plan for work in the area – relocation of conductors, Insulation and/or lockout energy			
FIRE PREVENTION			
→ Location of fire extinguishers			
→ Location of waste storage containers			
→ Location waste chutes			
→ Location of waste containers			
→ Fire hydrants / Stand Pipes			

→ Flammable and combustible storage - Site Plan			
→ Compressed Gas Storage Location			

OTHER ITEMS

→ First-Aid Supplies			
→ Washrooms and Clean-up Facilities			
→ Set -up communications system			
→ Potable Drinking water			
→ Arrange for Security Coverage			
→ Camera and film for on-site use			
→ Equipment over 10 hp with operators manuals			
→ Equipment pre-use inspections e.g. rigging, hoisting devices, fall protection, powered equipment 10hp or more, man-lifts etc.			
→ Ensure that the Formwork contractors has Competent person designated by P. Eng. to inspect formwork/false work prior to pours			
→ Ensure P. Eng. Design drawings for all formwork/falsework			
→ Identify potential confined spaces			

COPIES TO

→

→

→

19-2 - PRE-PROJECT POSTINGS CHECKLIST

PROJECT:	DATE:
COMPLETED BY:	POSTION:

NOTE:

The following Posting Checklist is to be completed in conjunction with the procedures set out in the Pre-Project Checklist.

POSTINGS		
POSTINGS	YES, NO, N/A	COMMENTS
Health and Safety Policy		
Workplace Violence and Harassment Policy		
Notice of Project		
Emergency Response Plan and Phone Numbers		
Directions and Map to the Nearest Hospital		
Certificates of First Aid Trained Persons		
Registration of Constructors and Employers Engaged in Construction		
Hours of Work on Site		
OHSa and Regulations For Construction Projects		
First Aid Regulations (O Reg. 1101)		
Project Specific Safety Plan		
WSIB Form 82 "In Case of Injury"		
Traffic Management Plan		
Fall Arrest Rescue Procedures		
Joint Health and Safety Committee Members Names		
Joint Health and Safety Committee Meeting Minutes		
(Material) Safety Data Sheet Binder		
Address and Phone # of Nearest Ministry of Labour Office		
Safety Signage as Required		
Health and Safety at Work "Prevention Stars Here" Poster		
Workplace Inspection Reports		
ESA Poster "What You Need to Know"		
MOL Inspector's Orders and Reports		
(Material) Safety Data Sheets		

Project Specific Safety Binder

PROJECT:	
FILE NUMBER:	
ADDRESS:	
PROVIDED BY:	PROVIDED TO:
DATE:	

19-2 Form – Project Safety Binder Content & Postings

**NOTE: THIS FORM MUST BE COMPLETED IN ADDITION TO THE
'PRE-PROJECT CHECKLIST' USED TO MAKE THE PROJECT SPECIFIC SAFETY PLAN.**

TAB	FORMS	CONFIRM INCLUSION		FREQUENCY	COMPLETED BY
1	Daily Job Safety Assessment Plan	☐		Daily	Supervisor
2	Visitor Policy & Sign in Log	☐		As Needed	Supervisor
3	Vehicle Pre-Use Inspection Checklist	☐		Pre-Use	Worker
4	Equipment Pre-use Inspection Checklist	☐		Pre-Use	Worker
5	Weekly Workplace Inspections	☐		Weekly	Supervisor
6	Weekly Toolbox Safety Talks	☐		Weekly	Supervisor
7	Traffic Management Plan	☐		As Needed	Supervisor
8	First Aid Log	☐		As Needed	First Aider
9	First Aid Kit Inspection Checklist	☐		Monthly	Supervisor
10	Progressive Discipline Form	☐		As Needed	H&S Coordinator
11	Hazard Reporting	☐		As Needed	Supervisor
12	Subcontractor Procurement Checklist	☐		As Needed	Supervisor
13	Confined Space Entry Permit	☐		As Needed	Supervisor
14	Investigation Kit	☐		As Needed	Supervisor
TAB	REQUIRED POSTINGS & REFERENCE DOCUMENTS	LOCATED IN/ON		FREQUENCY	COMPLETED BY
		BINDER	SAFETY BOARD		
15	Policy Statements (4)	☐	☐		
16	Project Specific Safety Plan (Incl. Project. Specific WTS)	☐	☐	Once Per Proj.	H&S Mgr. & Cord.
17	Employee Guidelines Package	☐	☐		
18	Subcontractor Guidelines	☐	☐		
19	Training Documents	☐	☐	Ongoing Collection	Supervisor
20	Emergency Plan, Phone #'s & Directions to Nearest Hospital	☐	☐	Once Per Proj.	H&S Mgr. & Cord.
21	Certificates of First Aid Trained Persons	☐	☐	Ongoing Collection	Supervisor
22	Ministry of Labour Awareness Posted	☐	☐		
23	WSIB Form 82 (black/yellow)	☐	☐		
24	Subcontractor Procurement Documents	☐	☐		
25	Fall Arrest Rescue Procedures	☐	☐	As Needed	Supervisor or Sub.
26	Occupational Health and Safety Act and Regulations	☐	☐		
27	First Aid Regulations	☐	☐		
28	Material Safety Data Sheet Binder	☐	☐		

PURPOSE

The purpose of this procedure is to establish a process to manage falls from heights. This is completed through the recognition of hazards and implementation of control strategies.
In addition, this process will address the development and implementation of strategies to effectively manage and rescue a worker arrested in a fall.

SCOPE

This procedure applies to the Health and Safety Team, the Project Manager and the Supervisor (herein referred to as the Site Management Team) responsible for managing work conducted at heights.

RESPONSIBILITIES**Health and Safety Team Responsibilities**

- Develop and amend Fall Prevention and Fall Rescue Procedures, as needed.
- Ensure that Worker Representative is consulted and that their recommendations are addressed regarding company Fall Prevention and Rescue policies.
- Ensure that the Fall Prevention Plan and Fall Rescue Procedures are reviewed annually, with Senior Management.
- Maintain 'Fall Prevention - Working at Heights', training records at head office, in conjunction with Senior Management.
- In conjunction with Supervisors, ensure potential fall hazards related to the work are defined along with the appropriate procedures and required Personal Protective Equipment (PPE) within the Project Specific Safety Plan.
- Ensure appropriate training and testing is conducted for all required company personnel to ensure thorough understanding of the appropriate procedures and work practices relating to Fall Prevention and Working at Heights.
- Ensure the regular inspection of all fall protection equipment is completed and documented by a competent worker.
- Ensure required protective equipment, materials and protective devices are provided, maintained and used as required at site and office locations.
- Provide required protective devices, measures and procedures required by the *Occupational Health and Safety Act and Regulations*.

Senior Management Responsibilities

- Ensure that a company Fall Prevention Plan and Fall Rescue Procedures are developed and implemented.
- Ensure that the company Fall Prevention Plan and Fall Rescue Procedure are reviewed and approved annually.
- Comply and ensure that the Fall Prevention Plan and Fall Rescue Procedures complies with all the requirements as defined under the Occupational Health and Safety Act and Regulations.
- Purchase and replace all fall protection equipment as required.
- Ensure appropriate training and testing is conducted for all required company personnel to ensure thorough understanding of the appropriate procedures and work practices relating to 'Fall Prevention – Working at Heights'.
- Ensure that Worker Representative is consulted and that their recommendations are addressed regarding the company Fall Prevention Plan and Fall Rescue Procedures.

- Ensure that the equipment, materials and protective devices as prescribed are provided, maintained in good condition and used as prescribed.
- Work with the Health and Safety team and Supervisors to define a written project specific Fall Prevention Plan and project specific Fall Rescue Procedure within the Project Specific Safety Plan (PSSP), when applicable.
- Provide communication and disciplinary actions upon discovery of non-compliance with Legislative and Regulatory requirements of workers.

Supervisor Responsibilities

- Work with the Health and Safety team to define a written project specific Fall Prevention Plan and project specific Fall Rescue Procedure within the Project Specific Safety Plan (PSSP), when applicable.
- Ensure potential fall hazards related to the work are defined along with the appropriate procedures and required Personal Protective Equipment (PPE) within the Project Specific Safety Plan.
- Advise all workers and Subcontractors of the risks associated with the assigned work.
- Ensure inspection records on fall protection equipment and devices are kept and maintained.
- Ensure the regular inspection of all fall protection equipment is completed and documented by a competent worker. Ensure that visual inspections are completed daily by workers prior to use and sign off on inspection documentation.
- Ensure that workers are trained to use the equipment and follow the procedures specified for the task in the PSSP.
- Ensure that every Worker and Subcontractor have the appropriate fall protection equipment including a safety harness, lanyard, shock absorber, rope grab, and self-retracting device for the hazardous or dangerous conditions the worker may be exposed to.
- Check guardrails and covers of floor/roof openings daily to ensure they are installed properly and adequate for the situation.
- Identify appropriate anchor points to be used and configuration of lifelines or other systems.
- Remove all damaged fall protection equipment and/or components from service and provide appropriate replacements.
- Ensure that a written project specific Fall Rescue Procedure is in place and known by all Workers and Subcontractors.
- Ensure all workers work in the manner and with the protective devices, measures and procedures required by the Occupational Health and Safety Act and Regulations.
- Advise a worker of the existence of any potential or actual danger to the health or safety of the worker, of which the Supervisor is aware of.
- Take every precaution reasonable in the circumstances for the protection of a worker.
- Where so prescribed, provide workers with written instructions as to the measures and procedures to be taken for protection of the worker.
- Comply with all the requirements as defined under the Occupational Health and Safety Act and Regulations.
- Provide communication and disciplinary actions upon discovery of non-compliance with Legislative and Regulatory requirements of workers.

- Review Subcontractor documents to ensure all Subcontractors can implement their workplace specific requirements and the project specific expectations under the PSSP.

Worker Responsibilities

- Appropriately use and wear all required protective equipment as necessary.
- Inspect all protective equipment prior to use.
- Remove all damaged fall protection equipment and/or component from service and seek appropriate replacements.
- Advise Supervisor if experiencing any difficulties with assigned tasks, or if assigned tasks are beyond perceived limitations or medically not capable of performing tasks.
- Comply with all the requirements as defined under the *Occupational Health and Safety Act and Regulations*.

PROCEDURE

When Working at Heights is identified as a task to be completed on one of our projects or at one of our workplaces, the Supervisor will use the Fall Prevention Plan to further identify site specific controls. When the use of fall arrest devices is needed, the Supervisor will use the Fall Rescue Plan, to further identify site specific controls.

The Supervisor must ensure that the Fall Prevention Plan is reviewed with all Workers and Subcontractors. This review should be done in conjunction with the Project Specific Safety Plan orientation or Toolbox Safety Talks.

Where site specific needs vary from the Fall Prevention Plan, the Site Management Team (Supervisor) with the assistance of the Health and Safety Team where required must provide ongoing revisions to the plan according to project specific hazards.

DISTRIBUTION

Information (as part of Workplace Task Standards) related to the Fall Prevention Plan will be distributed to all workers during their Employee Orientation and POSTED in our workplace locations (office safety board, project safety boards, and safety binders) for review.

RECORDS

Documentation of all 'Fall Prevention – Working at Heights' training, including subsequent reviews (safety talks, Daily Job Safety Assessment Plans, PSSP orientations, etc.) of the Fall Prevention Plan will be maintained on projects (for construction projects).

All copies of 'Working at Heights Training' must be provided to the Health and Safety Team and/or Senior Management, upon completion of training. Copies of other documentation related to reviews on the Fall Prevention Plan and Fall Rescue Procedures, must be submitted as per their respective procedures.

FALL PREVENTION PLAN

All Employees – Typical fall from heights hazards that are encountered by workers in construction include, however are not limited to the following:

- Elevator shaft openings
- Stairwell openings
- Perimeter openings
- Roof tops
- Excavation, Trench or Caisson openings
- Work off ladders
- Elevated work platforms
- Work off scaffolds
- Work of Mast Climbers
- Suspended Access Platforms

Fall from heights can be eliminated through the use of any of the following control strategies alone and/or in combination with others:

1. When possible, implement policies restricting certain types of work that put workers at a risk of falling from heights.
2. Training on Recognition/Evaluation and Control of falls from heights.
3. Installation of guardrail systems or floor coverings.
4. Use of Travel Restraint system.
5. Use of Travel Restrict system.
6. Use of Fall Arrest systems when necessary.

Falls from Heights Plan

Policies for prevention of falls from heights:

1. All workers must receive 'Working at Heights' training, from a Ministry of Labour approved training provider, prior to the commencement of working at heights. Subsequent retraining must be conducted as required, and at least every 3 years.
2. Workers are not allowed to access any unguarded roof areas, unless a roof plan has been implemented and the worker has received training on the plan.
3. Workers must not enter areas where there are no guardrails or floor coverings protecting floor openings and elevator shafts.
4. The installation of guardrails around openings and handrails on stairs will only be completed by trained workers utilizing travel restraint systems when necessary (This must be done under the direction of the Supervisor).
5. Excavation or Trench openings that are not sloped in accordance with the legislative requirements and that a worker could fall into more than 2.4 metres (7ft. 10 inches) deep shall be protected by an appropriate barrier (Subcontractors responsibility). This will be monitored by the Site Management Team and workers.
6. Caissons must be adequately guarded by the Subcontractor. This will be monitored by the Site Management Team and our workers.
7. Work off ladders will be limited. However, should a worker be required to work off a ladder, the following must be remembered:
 - The ladder must be in safe working condition and **must be** inspected prior to use.
 - The ladder must be secured (top and bottom) (stabilizers can also be used to assist with stabilization).
 - The ladder must be of an appropriate length and design for the work. Extension ladders must extend 900 millimetres (3 feet) above the floor or landing.
 - Set the ladder up in accordance with the manufacturer's instructions and at a minimum for extension ladders, at a ratio of between 1: 4 (1 foot out for every 4 feet up) and 1:3 (1 foot out for every 3 feet up).

- Three-point contact must be maintained while on the ladder at all times.
 - Ladders are generally intended for access and egress, therefore work from ladders should only be short in duration.
 - Maintain clean footwear while ascending or descending from a ladder.
 - Never set up ladders near live electrical conductors.
8. Work off Elevated Work Platforms will only be performed by workers trained in the specific Elevated Work Platform application. Fall protection **must be** used at all times while in powered elevated work platforms.

Travel Restraint and Fall Arrest Components

All components in each system must be used as per the manufactures instructions and as a minimum, the systems must include the following:

- Appropriate anchor points for the type of system in use.
- A user wearing a full body harness equipped with a lanyard (shock absorbing lanyard preferred for most applications – some exceptions do exist).
- Lifelines designed for the system (when necessary).
- Rope grab or other movement control device (when necessary).
- Self-locking connecting devices to connect various components of the systems.
- Material to protect the lifeline from being cut, chaffed or abraded (when necessary).

Other Fall Protection System Requirements

- Understand how the system can be used safely and do not hesitate to ask for assistance from you Supervisor.
- Only use the system in accordance with the manufactures requirements.
- Do not expose the equipment to corrosive materials.
- Do not expose the equipment to sparks or flames.
- Inspect the system and all its components prior to each use.
- Report any defects of the equipment or absence of devices immediately to your supervisor and only proceed if corrective actions have been taken.
- If any fall protection equipment has been involved in a fall, it must be taken out of service immediately and sent to the manufacturer for inspection.
- Fall arrest systems must be set up in a manner which will not allow the worker to hit an object or the level below.
- Only equipment approved by your Supervisor may be used in a fall protection system.

Good Fall Protection Practices

- Always be aware of your surroundings.
- Never rest up against or push on guardrails.
- Look where you walk and do not step on floor coverings or other objects that may be on the walking surface as those objects may be hiding a floor opening.
- Do not walk backwards when you are on a work surface that may contain a floor opening (guarded or not).
- Always report unguarded openings and/or unsafe floor coverings to your supervisor immediately.
- Take time to review the following fall rescue procedures and make notes to suit them to your site conditions.
- Review the fall rescue plan(s) and make note of the equipment required.

Other Site Specific Notes

POST THIS INFORMATION

FALL ARREST RESCUE PLAN

IF A WORKER IS OBSERVED SUSPENDED IN A FALL ARREST SYSTEM:

1. Assess the situation – ensure your safety at all times (do not attempt a rescue or enter a work area with an unguarded edge without using an appropriate fall protection system). Only workers trained in rescue operations are allowed to perform rescue operations.
2. Obtain assistance – alert your supervisor, the rest of the crew and the Constructor or Owner. Identify the exact location and the nature of the emergency.
3. If the suspended worker is conscious, try to determine the extent of his/her injuries so that the appropriate emergency services personnel can be notified.
4. Call 9-1-1. The supervisor will designate workers to meet emergency services personnel at the entrance to the site.

Note: Time is of the essence, the rescue plan must be initiated immediately to help prevent potential injury to the fallen worker.

OTHER WORKERS MUST:

1. Assist as requested by your supervisor or emergency services personnel. Stay clear of activities. If you are not involved directly in the rescue, remain at a safe distance from any unprotected edges and from the rescue area so as not to interfere with the rescue operations.
2. The status of the affected (injured) worker and further direction will be provided as it becomes available

POST THIS INFORMATION

20-1 - FALL PREVENTION AND RESCUE PLAN

Option # 1 - Fall Arrest Rescue – USING A Powered Elevating Work Platform (PEWP)

Note: Workers will be prevented from exposure to fall hazards when working from the PEWP using a guardrail system and a full body harness with lanyard connected to an appropriate anchor point as defined in the manufacturer's operating instructions.

1. If two workers are performing work from the PEWP, lower the platform to ground level so that one worker may dismount from the platform. PEWP are not designed for use by more than two workers at a time.
2. Once the PEWP reaches the ground, the worker dismounting from the platform should only disconnect their lanyard from the D- ring on their full body harness. The other end of the lanyard should remain connected to the anchor point in the platform for use by the suspended worker upon rescue. The worker dismounting is responsible to call 9-1-1 (if necessary). Where necessary attach another lanyard to the anchor point in the PEWP (only one worker should be using the PEWP).
3. Raise the platform to a position directly underneath the suspended worker and slowly continue raising the platform until the suspended worker is inside the guardrails of the platform.

NOTE: Extra caution should be taken if the suspended worker is unconscious. If it is suspected that the worker has sustained head or spinal injuries do not move the injured worker, wait until medical help arrives.

4. If the fallen worker is conscious and has not sustained any head or spinal injuries, connect the spare lanyard that is already attached to the anchor point on the PEWP to the D-ring on the back of the suspended worker's full body harness.
5. Disconnect the existing self-retracting lifeline or lanyard.
- 6.

NOTE: The shock-absorbing lanyard or self-retracting lifeline that the suspended worker is connected to should not be removed until after the suspended worker is safely inside the guardrails of the PEWP.

7. Once the original self-retracting lifeline or shock-absorbing lanyard is disconnected, carefully lower the platform to ground level.
8. At ground level, administer First-Aid to the rescued worker, if necessary. Only trained workers are to administer First-Aid and must have the permission of the rescued worker to do so (if the rescued worker is conscious).
9. Secure the incident scene for further investigation.
10. Notify the Health and Safety Team and/or Construction Project Manager (if applicable) immediately for direction and notification requirements.

Pre-Job Review

- | | |
|--|--|
| a. Is the PEWP available? | ☐ Yes ☐ No |
| b. Is an PEWP operator available? | ☐ Yes ☐ No |
| c. Is the equipment in Reasonable Proximity? | ☐ Yes ☐ No |

PEWP Rescue -- Site Specific Notes:

POST THIS INFORMATION

Option # 2 - Fall Arrest Rescue – Using an Extension Ladder

Note: Extension ladders of the correct length must be on site and available to perform this type of Lower level rescue (3 metres or less). This type of rescue will only be performed if a Power Elevated Work Platform is not available.

1. Rescue of a suspended worker using an extension ladder should only be performed if the suspended worker is conscious and has not sustained any injuries that would prevent him/her from ascending or descending a ladder.
2. Position the extension ladder adjacent to the position of the suspended worker with the appropriate ladder set-up.
3. Carefully secure the ladder at the top and bottom (using 1:4 - 1:3 ratio).
4. Instruct the suspended worker to climb onto the ladder.

Vertical Lifeline Fall - lifeline extending to the ground:

5. Once three-point contact is established and maintained on the ladder, the suspended worker will:

- a) Ascend to location of the rope grab on the vertical lifeline.
- b) Slide the rope grab to waist level.
- c) Descend 3-4 rungs.
- d) Repeat steps b and c until the ground level is reached.

*Vertical Lifeline Fall – lifeline **NOT** extending to the ground*

6. Once three-point contact is established and maintained on the ladder, the suspended worker will remain on the ladder until emergency services arrive.

Pre-Job Review

- | | | |
|--|------------------------------|-----------------------------|
| 1. Is the equipment available? | ☐ Yes | ☐ No |
| 2. Is an operator available? | ☐ Yes | ☐ No |
| 3. Is the equipment in Reasonable Proximity? | ☐ Yes | ☐ No |

Ladder Rescue -- Site Specific Notes:

POST THIS INFORMATION

Option # 3 - Fall Arrest Rescue Assistance – Circulation Relief – Using a Zoom Boom Forklift

If a Power Elevating Work Platform is not available, the following procedure has been prepared to aid in the prevention of Suspension Trauma to a worker suspended in a harness. This procedure isn't intended to be used for raising or lowering the worker, rather simply to provide support until Emergency Services arrive.

Circulation Relief – Using a Platform:**Step 1**

- A. Ideally purchase or build a sturdy platform with guardrails and a means of securing the platform to the carriage of the Zoom Boom Forklift ahead of time and leave on site for Emergency Rescue purposes only.
- B. If (A) hasn't been done, attempt to locate a platform/cage that can be used for this support function. Secure the platform/cage to the carriage of the Zoom Boom Forklift.
- C. If (A) & (B) aren't available, build a sturdy/safe makeshift platform (that can be secured in place) using suitable materials that will help provide support for the worker.

Step 2

1. The Zoom Boom Forklift operator must pick up the platform and secure it to the carriage of the Zoom Boom.
2. The Zoom Boom Forklift operator must then drive to the desired location.
3. The operator will place the machine in "park", apply the hand brake and carefully lift the platform/cage into position below the suspended worker's feet (angled slightly back towards the carriage – to prevent the secured platform from slipping).
4. The operator will then inch the platform up slowly to allow for the worker to stand on the platform. The suspended worker must remain secured to the fall arrest system at all times.
5. Await the assistance of emergency response personnel and follow their instructions.

Pre-Job Review

- | | |
|--|--|
| 1. Is the Sturdy Platform available? | ☐ Yes ☐ No |
| 2. Is a Zoom Lift operator available? | ☐ Yes ☐ No |
| 3. Is the equipment in reasonable proximity? | ☐ Yes ☐ No |

Forklift/Zoom Lift Relief -- Site Specific Notes:

POST THIS INFORMATION

PURPOSE	The purpose of this procedure is to ensure that a system is in place (when required) to manage hazards related to traffic management. This includes hazards related to access and egress to and from the project, vehicular movement on the project and pedestrian traffic.
SCOPE	This procedure applies to those projects where potential hazards that may be created by vehicular traffic, mobile equipment and/or members of the public have been identified. In addition, it applies to those individuals responsible for addressing these hazards. General Contractors provide traffic management plans to Maxim. If a traffic plan provided is not adequate or if none is provided, Maxim will apply the following procedure for managing hazards related to traffic management and develop a traffic management plan.

RESPONSIBILITIES

Health and Safety Team Responsibilities

- Assist in development and implement in consultation with Senior Management, and Worker Representative a company Traffic Management Plan Procedure.
- Ensure that the company Traffic Management Plan Procedure is reviewed annually.
- When requested, assist Supervisors in developing a project specific Traffic Management Plan.

Senior Management Responsibilities

- Develop and ensure that a company Traffic Management Plan Procedure is developed and implemented.
- Ensure a project specific Traffic Management Plan for all workplaces and sites are developed and in place.
- Ensure that the company Traffic Management Plan Procedure is reviewed annually.
- Ensure that Worker Representative is consulted and that their recommendations are addressed regarding the company Traffic Management Plan Procedure.
- Ensure that applicable legislation has been utilized as reference in development and review of Traffic Management Plan Procedure and practices.
- Review local by-laws that govern public ways to ensure site compliance.
- Ensure equipment, materials and protective devices provided are maintained and used as required at site and office locations.
- Provide required protective devices, measures and procedures required by the *j*.
- Arrange education and training by certified trainers to workers who are responsible for traffic control.

Supervisor Responsibilities

- Develop (and when not trained in Traffic Control - in conjunction with a trained Traffic Control Person) a project specific Traffic Management Plan for all workplaces and sites when required.
- Ensure known Traffic Management related hazards are defined with a project specific plan and contained in the Traffic Management Plan.
- Brief all workers and Subcontractors on the Traffic Management Plan.
- Take prompt and appropriate action when contraventions with the

Traffic Management Plan have been identified.

- Appoint competent traffic controllers to coordinate and direct traffic flow on site.
- Advise a worker of the existence of any potential or actual danger to the health or safety of the worker, of which the Supervisor is aware of.
- Where so prescribed, provide workers with written instructions as to the measures and procedures to be taken for protection of the worker.

Worker Responsibilities

- When performing traffic control duties do not undertake any other responsibilities.
- If required, participate in Traffic Control training.
- Report any traffic control violations immediately to your supervisor.
- Adhere to the requirements outlined in the Traffic Management Plan developed and implemented for the project.

PROCEDURE

Prior to commencement of work on a project with potential hazards related to Traffic Management, the Supervisor will:

1. Review the project layout drawings.
2. Conduct a physical audit of the project.
3. Review local by-laws that govern public ways.
4. Determine when peak traffic periods exist in the vicinity of the project and how traffic that accesses or egresses the project will be affected.
5. Review the schedule and determine when peak vehicular/pedestrian traffic may occur - plan deliveries and/or other activities that may affect public ways accordingly.

Using a site map, define the following:

- Access/egress to and from the project.
- Flow of traffic.
- Parking of site vehicles (e.g. one side of the street).
- Delivery and off-loading areas.
- Lay down areas.
- Mobile equipment storage.
- Emergency vehicle access.
- Compound storage areas.
- Restricted parking area.

Develop a written site-specific Traffic Management Plan (**21-1 - Form**) that will be used in conjunction with a site map detailing all the specifics detailed above.

Notes:

1. Through a well-defined Traffic Management Plan, the safe movement of vehicular traffic and mobile equipment can be achieved.
 2. The plan must be designed with a view to eliminate reversing of vehicular traffic and mobile equipment.
 3. The flow of traffic on the site must be designed to allow for emergency vehicles to have complete access to all areas of the project
 4. Depending on the project location, local police may be required to
-

conduct traffic control duties, or trained traffic control personnel may be required.

Review the plan on a regular basis to ensure that it meets the ever-changing construction environment. Re-distribute and review with those affected.

DISTRIBUTION

Upon completion of the Traffic Management Plan, the Supervisor will post the plan on the Health and Safety Board, and/or in the onsite Safety Binder. Furthermore, the Traffic Management Plan will be distributed as follows:

- To all Subcontractors and Suppliers during daily hazard assessment.
- Reviewed with the Health and Safety Worker Representative
- Reviewed with all workers.
- Reviewed with Trained Traffic Control Personnel.
- Copies to the Health and Safety Team.

RECORDS


Documentation and other information must be maintained on file for the duration of the project. Upon completion of the project, all information related to the Traffic Management Plan must be submitted to the Health and Safety Team and/or Senior Management.

ADMINISTRATION	
SITE LOCATION:	
DATE ISSUED:	JOB NAME:
	FILE NUMBER:
COMPLETED BY: _____	
☐ Supervisor ☐ Project Coordinator ☐ Project Manager	

SITE -- TRAFFIC MANAGEMENT INFORMATION	DETAILS
Normal hours of operation	Start: _____ Finish: _____
Normal days of operation	
Main entrance(s) to the site	Street Name: _____
Main exit(s) from the site	Street Name: _____
Subcontractor and Supplier Parking	
Delivery Drop-Off Areas	
Designated Storage Area	
Site Speed Limit	
Signal-persons required for reversing vehicles?	

PUBLIC-WAY TRAFFIC CONTROL REQUIREMENTS	Y/N/NA	DETAILS
Traffic control duties conducted by Subcontractor?		
Trained signal person(s) available (proof required)		
State the Number of Traffic Control Personnel Required		
Considerations for public pedestrian traffic		
Considerations for adjoining properties		
Local Police Required to Conduct Traffic Control		
Traffic Control Signs Available		
Tear Away Traffic Control Vests Available		
What Traffic Control Devices are Required? (i.e. Warning Signs, Longitudinal buffer area, Flashing Lights/Arrow Board, Barrels, etc.)		

ADDITIONAL DETAILS

VISUAL TRAFFIC MANAGEMENT PLAN-LAYOUT

Traffic Management Plan and Site Layout provided to:

☐ All Subcontractors and Suppliers ☐ Selected Subcontractors & Suppliers ☐ Posted in Trailer

PURPOSE

The purpose of this procedure is to ensure that a process is in place to identify the specific requirements for the use of Personal Protective Equipment (PPE).

SCOPE

To protect employees from potential workplace hazards, control of exposure to the hazards will be performed through use of the three general control strategies in the following order:

1. Controls at the Source
2. Controls Along the Path
3. Controls at the Worker

The use of Personal Protective Equipment falls into the third and least desirable control method (Control at the Worker). Control at the Worker will only be considered as a supplement to another control method and/or if it is the most practical method.

RESPONSIBILITIES**Health and Safety Team Responsibilities**

- Arrange for specific PPE to be purchased and distributed.
- Arrange for training related to specialized PPE.
- Ensure that the company PPE Program is reviewed annually.
- Ensure the PPE Program is implemented across all workplaces and areas of responsibility.
- Ensure known project related hazards are defined within the Project Specific Safety Plan.
- Ensure project specific PPE requirements are set out in required documents and are implemented and maintained.
- Develop and implement in consultation with Senior Management, and Worker Representative a company Personal Protective Equipment (PPE) Program.

Senior Management Responsibilities

- Develop and implement in consultation with the Worker Representative a company Personal Protective Equipment (PPE) Program.
- Ensure that a company PPE Program is developed and implemented.
- Ensure that the company PPE Program is reviewed and approved annually.
- Ensure that Worker Representative is consulted and that their recommendations are addressed regarding company PPE policies.
- Ensure that the equipment, materials and protective devices as prescribed are provided, maintained in good condition and used as prescribed.
- Provide required protective devices, measures and procedures required by the *Occupational Health and Safety Act and Regulations*.
- Ensure equipment, materials and protective devices provided are maintained and used as required at site and office locations.
- Ensure project specific PPE requirements are set out in required documents and are implemented and maintained.

Supervisor Responsibilities

- Ensure known project related hazards are defined within the Project Specific Safety Plan.
- Ensure appropriate PPE is provided, maintained and used as required.
- Define to all workers and Subcontractors the appropriate PPE that is required for the specific work and location.
- Take prompt and appropriate action when contraventions with the use or maintenance of PPE have been identified.
- Arrange for training related to specialized PPE.
- Ensure all workers work in the manner and with the protective devices, measures and procedures required by the *Occupational Health and Safety Act and Regulations*.
- Using **Form 22 – 2 PPE Inspection**, Supervisors are required to inspect their own, and worker PPE to ensure it is working in good state and maintained regularly

Worker Responsibilities

- When required, use, inspect and maintain all required PPE.
- Report any damage or missing PPE immediately to your supervisor.
- Advise Supervisor if experiencing any difficulties with assigned tasks, or if assigned tasks are beyond perceived limitations or medically not capable of performing tasks.
- Comply with all the requirements as defined under the *Occupational Health and Safety Act and Regulations*.

PROCEDURE

The detailed description of all responsibilities for each role is written above in the section titled “Responsibilities”, please review that section before reading the rest of this procedure.

The Health and Safety Team with the assistance of the Worker Representative and Senior Management, has developed a Personal Protective Equipment Program (22-1). This program provides orientations to **Supervisors** and **Workers**, to review the agreed upon requirements of the Personal Protective Equipment (PPE) Program.

The specific requirements for selection, use, care, maintenance and limitations of PPE will be discussed and demonstrated. Supervisors and Workers will discuss the hazards of the job using **form 10-1** and identify the proper PPE needed to complete the work safely. These forms are then sent to the HSM to review and store in a safe space.

In order to ensure that workers are protected from hazards where possible, it is policy that all personnel wear the appropriate PPE required by the construction regulations at all times on site. This regularly includes the following equipment that meets or exceeds current CSA standards: head protection, foot protection, eye protection, hearing protection, fall arrest protection, and other applicable equipment (where appropriate).

Using **Form 22 – 2 PPE Inspection**, Supervisors are required to inspect their own, and worker PPE daily or before each use to ensure it is

working in good state and maintained regularly. Any damaged or worn PPE must be replaced immediately. The project supervisor is to clearly state that failure to comply with the PPE requirements in the OHSA and construction regulations, any worker that defies the legislation will result in disciplinary actions.

The process of documenting activities required by PPE involves the following steps:

- **Mandatory PPE:** All employees, visitors and guests wear the appropriate PPE while in our various workplaces.
- **Documentation of Requirements:** Specific PPE requirements for tasks/jobs are documented and posted at workplace locations, along with appropriate warning signs.
- **Toolbox Safety Talks and Orientations:** Information about PPE requirements is discussed during Toolbox Safety Talks and Employee Orientations. These discussions are documented.
- **Training Records:** Training courses and certifications related to PPE are documented by Senior Management and the Health and Safety Team.
- **Forms Usage:** Supervisors and workers use forms like Form 10-1 to identify hazards and proper PPE, and Form 22-2 for daily PPE inspections. These forms are reviewed and stored by the Health and Safety Manager (HSM).
- **Indefinite Record Keeping:** All forms of documentation, including training records and discussions, are kept on file indefinitely.

Maxim Mechanical Group Inc. will provide employees and works with necessary PPE when needed.

- All PPE used, will be in compliance with Legislative, Regulatory and Standard (CSA) requirements.
 - The health and safety representative will be responsible for reviewing legislation on an annual basis and make sure all gear provided to workers is up to date. If a change in legislation is made the HSR will inform Senior Management and being the process of switching out the PPE for all workers to ensure legislative compliance.
 - Process for Inspecting and Maintaining PPE as Part of Manufacturer and Legislative Requirements:
 - **Initial Inspection:** PPE is inspected at the time of issue to ensure it meets manufacturer specifications and legislative requirements
 - **Initial Inspection:** PPE is inspected at the time of issue to ensure it meets manufacturer specifications and legislative requirements.
 - **Pre-Use Inspection:** Workers are required to inspect PPE before each use to check for damage, wear, or defects. This ensures the equipment is in good working condition.
 - **Daily Inspections:** Supervisors use Form 22-2 to inspect their own PPE and that of workers daily or before each use. Any damaged or worn PPE must be replaced immediately.
 - **Maintenance:** PPE must be cleaned and maintained
-

according to manufacturer instructions. Proper care includes storing PPE in a clean, dry place to prevent damage.

- **Legislative Compliance:** The Health and Safety Representative (HSR) reviews legislation annually to ensure all PPE provided complies with current standards. If changes in legislation occur, the HSR informs Senior Management and initiates the process of replacing outdated PPE.
- **Tagging and Removal:** Defective or damaged PPE is tagged as damaged, removed from use, and discarded. Replacement PPE is provided promptly.
- **Worker Reporting:** Workers report damaged or missing PPE to their supervisor immediately. Supervisors approve replacements or provide PPE from storage, depending on the type of gear required.
- **Training and Guidelines:** Workers participate in training on PPE use, care, and limitations. They are instructed to follow specific use guidelines to ensure effective protection.

If a worker needs to replace their current PPE or a new employee needs to invest in PPE, they are required let their supervisor know by approaching them and verbally informing them or sending a text message with a picture showing the item has been damaged, if applicable. The supervisor will then verbally approve the worker to go purchase the required PPE or will provide them with any PPE that is left over in storage depending on the type of gear required, i.e. if it is a generic fit (vest/safety goggles) vs a specific fit (boots/prescription glasses).

To ensure effective protection, workers must properly fit, care for, and use Personal Protective Equipment (PPE). This involves selecting PPE that fits snugly and comfortably, inspecting it before use for damage, cleaning and maintaining it according to manufacturer instructions, and storing it in a clean, dry place. Workers should follow specific use guidelines, participate in training on PPE use and limitations, and replace damaged or worn PPE promptly. Adherence to these practices ensures PPE remains effective and helps maintain a safe work environment. A detailed description of our rules can be found in section 22-1 the PPE Program which explains in detail:

- PPE Policy
- Selection/Use
- Maintenance
- Monitoring
- Employee Training

PPE requirements will also be discussed during Toolbox Safety Talks and Daily Job Safety Assessment Plans.

DISTRIBUTION

The specific requirements for PPE including which tasks/jobs require what PPE will be documented and posted in the workplace locations (where required), along with appropriate warning signs.

RECORDS

Documentation of information discussed/provided to employees, will be documented using Toolbox Safety Talks and Employee Orientations. Other forms of training related to PPE, provided during training courses/certification, will be documented as well by Senior Management and Health and Safety Team. All forms of documentation will remain on file indefinitely.

INTRODUCTION

The primary focus of our Health and Safety Program is to eliminate or control potential hazards to which our employees could be exposed.

We acknowledge that the use of Personal Protective Equipment (PPE) is the least desired method of controlling workplace hazards, therefore, the use of Personal Protective Equipment will only be considered after other control methods have been explored.

At times it is also necessary to use Personal Protective Equipment in combination with other control methods or in instances where it would not be feasible/beneficial and/or cost effective to use an alternative control strategy.

Potential harmful hazards exist in our facility/sites and we will implement control measures to eliminate and/or control the harmful effects of these hazards. Engineering and Administrative Controls will be used for the most part however, there are some circumstances and job functions which require the use of Personal Protective Equipment to control the exposure to the hazard.

The following program will identify the need for Personal Protective Equipment and the implementation of a program designed to protect our employees. This program will encompass the following areas:

- PPE Policy
- Selection/Use
- Maintenance
- Monitoring
- Employee Training

I have read the PPE Policy and understand will follow the rules and expectations set forth in the Health and Safety Manual.

Signature: _____

Date: _____

PPE POLICY

The primary focus of our Health and Safety Program is to eliminate or control potential hazards to which our employees could be exposed. It has been acknowledged that the use of Personal Protective Equipment (PPE) is the least desired method of controlling workplace hazards, therefore, the use of Personal Protective Equipment will only be considered after other control methods have been explored.

It is our policy that:

- All employees, visitors and guests wear the appropriate Personal Protective Equipment while in our various workplaces.
 - **Maxim Mechanical Group Inc.** will provide employees and works with necessary PPE when needed.
 - All Personal Protective Equipment used, will be in compliance with Legislative, Regulatory and Standard (CSA) requirements.
 - Personal Protective Equipment shall be inspected at the time of issue and subsequently thereafter, before each use.
 - As is the case with all tools, equipment and machinery, Personal Protective Equipment will be removed from use if it is found to be defective, damaged or in need of repair. All Personal Protective Equipment that is removed from use, will be tagged as damaged. All damaged PPE will be discarded and replaced accordingly.
 - We consider Specialized Personal Protective Equipment to be the following types, given our jobs/tasks/activities and workplace environments:
 - PPE related to Working at Heights (Fall Protection Lanyards, Harnesses, rope grabs)
 - Respiratory Protection
 - Hearing Protection
 - We will provide and make available to employees, all required specialized PPE (necessary to perform specific activities, and as identified in Workplace Task Standards)..
-

SELECTION AND USE

In order to determine the required Personal Protective Equipment (PPE) for the workplace, Job Hazard Analysis (as part of Workplace Task Standards must be performed by the appropriate workplace parties. Once hazardous conditions warranting the use of Personal Protective Equipment have been identified, the appropriate selection of such equipment may begin. Workplace Task Standards will document the required PPE for each specific activity.

In the Employee Orientation Package (specifically the Task Instructions), requirements for the use of Personal Protective Equipment have been identified.

The selection of Personal Protective Equipment should be based on the following three criteria:

1. Protection of employees
2. Compliance with Company Policy and/or legislative requirements
3. Technical feasibility

The following are the requirements for Personal Protective Equipment which will be used. This listing is not all-inclusive and when required, it may be necessary for employees to use alternative PPE. All Personal Protective Equipment **must be CSA approved** and in good working order.

Hearing Protection

- Hearing protection will be required in designated areas of the facility where noise levels exceed 85 decibels (dBs). Hearing protection will be either plugs or muffs. The type of hearing protection to be used may vary according to the noise levels, therefore, specific types of hearing protection will be provided for employee's exposed to excessive noises (job/departmentspecific).

Face Protection

- Full-face protection must be worn to protect employees against the hazards of flying projectiles. A face shield will be worn in addition to safety and prescription glasses and cover goggles when employee is exposed to potential flying projectiles.

SPECIALTY PPE

Eye Protection

- Employees will be required to wear CSA approved safety eyewear, with side shields, in designated areas. For employees who perform tasks which require additional eye protection (e.g. welding shields), equipment will be made available.

Respiratory Protection

- Where required, the appropriate respiratory protection and training will be provided.

Skin Protection

- Aprons, bibs, sleeves, coveralls, etc., and other additional job specific clothing may be required for some job functions and will be available when necessary.

Hand/Arm Protection

- Suitable gloves with hide split fitters and a 4" safety cuff should be worn when handling material. Gloves should not be worn when work is being performed around moving machinery as it could cause an entanglement hazard.
- Arm gauntlets or sleeves will be provided to employees performing tasks which make them susceptible to wrist or forearm cuts.

Foot Protection

- Foot protection appropriate for the job must be worn. Open toed shoes are not to be worn. On projects, employees will wear CSA Certified Grade 1 Footwear (Green Patch) as a minimum.

Head Protection

- Where exposed to the hazard of being struck by falling objects, a CSA approved hard hat, in good condition, must be worn (hardhats are required at all times on construction projects).

Note: Additional or alternative Personal Protective Equipment will be made available as is necessary for the task and/or when recommended on a product's Material Safety Data Sheet. (e.g. fall protection, neoprene gloves, etc.)

MAINTENANCE

All employees will be trained on the limitations and proper care and maintenance of their Personal Protective Equipment by competent persons, the Health and Safety Team and/or members of the JHSC. This instruction will be done according to the manufacturer's specifications.

All required maintenance activities for PPE will be completed.

MONITORING & INSPECTION

Monitoring for use of the required Personal Protective Equipment will be conducted by all supervisors, the Worker Representative and the Health and Safety Team. Supervisors will visually check to ensure that employees are wearing and using the equipment when required. Supervisors will also ensure that employees are using PPE according to the manufacturer's specifications and job requirements.

Supervisors are responsible to ensure that the required Personal Protective Equipment is used. Supervisors must initiate appropriate progressive disciplinary actions, to those employees who fail to wear the appropriate Personal Protective Equipment as required.

All employees must inspect their PPE prior to each use. Workers must immediately report missing or broken Personal Protective Equipment to their supervisor for replacement or repairs as required. Employees must fill out the Form **22 – 2 PPE Inspection**.

EMPLOYEE TRAINING

Training on the proper use, care, maintenance and limitations of the Personal Protective Equipment provided to employees will be arranged by the Health and Safety Team. This training will cover the following topics:

- How to obtain required Personal Protective Equipment
- How to use the Protective Equipment
- How to clean the equipment
- How and where to store the equipment
- The limitations of the equipment

All training sessions provided to employees will be documented and maintained on file. New employees will receive this training during their Employee Orientation to the workplace and during specific task training.

In order to ensure that workers are protected from hazards where possible, it is policy that all personnel wear the appropriate PPE required by the construction regulations at all times on site. This regularly includes the following equipment that meets or exceeds current CSA standards: head protection, foot protection, eye protection, hearing protection, fall arrest protection, and other applicable equipment (where appropriate).

The project supervisor is to clearly state that failure to comply with the PPE requirements in the OHSA and construction regulations, any worker that defies the legislation will result in disciplinary actions.

Inspection		“✓” Condition;		In need of (Mark with an “X”)		
Hard Hat	Proper fit (refer to standard)	Pass	Fail	Clean	Replace	Repair
	Evaluate for fit					
	Damage to shell: cracks, dent and abrasions					
	Damage to liner: rips, tears or thermal damage					
Action Taken:						
Inspection		“✓” Condition;		In need of (Mark with an “X”)		
Footwear	Proper fit (refer to standard)	Pass	Fail	Clean	Replace	Repair
	Evaluate for fit					
	Soiling					
	Rips, tears, cuts					
	Loss of water resistance					
	Closure system damage					
	Damage or deformed steel toe, midsole or shank					
	Seam integrity and condition of liner					
	Heel and excessive trend wear					
	Closure system damage and functionality					
Action Taken:						
Inspection		“✓” Condition;		In need of (Mark with an “X”)		
Vest	Proper fit (refer to standard)	Pass	Fail	Clean	Replace	Repair
	Evaluate for fit					
	Soiling					
	Rips, tears, cuts					
	Thermal damage such as charring, burn holes, or melting in layer					
	Reflective trim: attached, reflectivity, damage					
	Closure system functionality					
Action Taken:						

Inspection		“✓” Condition; In need of (Mark with an “X”)				
Gloves	Proper fit (refer to standard)	Pass	Fail	Clean	Replace	Repair
	Evaluate for fit					
	Soiling					
	Contamination					
	Rips, tears, cuts, or thermal damage					
	Inverted liner					
Action Taken:						

Inspection		“✓” Condition; In need of (Mark with an “X”)				
Eyewear	Proper fit (refer to standard)	Pass	Fail	Clean	Replace	Repair
	Damage or missing components to face-shield or goggle system					
Action Taken:						

Inspection		“✓” Condition; In need of (Mark with an “X”)				
Respirator	Proper fit (refer to standard)	Pass	Fail	Clean	Replace	Repair
	Damage or missing components					
	Filters					
Action Taken:						

Comments:

Inspected by: _____ Signature: _____

Date: ____ / ____ / ____

Updated: July 2024

PURPOSE

The purpose of this procedure is to establish a Confined Space Program. This Program provides an overview of a system to direct owners, constructors, employers, contractors, supervisors and workers involved in confined space entry work to work safely.

SCOPE

This procedure applies to all work in all potential confined space situations and personnel managing this type of work activity.

RESPONSIBILITIES**Health and Safety Team Responsibilities**

- Develop confined space procedures to define corporate expectations relating to work within Confined Spaces.
- Review confined space procedures on an annual basis.
- Schedule and coordinate Confined Space awareness training as required.

Senior Management Responsibilities

- Develop confined space procedures to define corporate expectations relating to work within Confined Spaces.
- Ensure that a company Confined Space Program is developed and implemented.
- In conjunction with the Health and Safety Team, ensure that the company Confined Space Program is reviewed annually and meet legislative requirements.
- Ensure that Worker Representative is consulted and that their recommendations are addressed regarding company Confined Space policies.
- Provide required protective devices, measures and procedures required by the *Occupational Health and Safety Act and Regulations*.

Supervisor Responsibilities

- Ensure confined space and safe work procedures, training and equipment are procured as required.
- Ensure all workers work in the manner and with the protective devices, measures and procedures required by the *Occupational Health and Safety Act and Regulations*.
- Advise a worker of the existence of any potential or actual danger to the health or safety of the worker, of which the Supervisor is aware of.
- Where so prescribed, provide workers with written instructions as to the measures and procedures to be taken for protection of the worker.
- Ensure confined space and safe work procedures, training and equipment are procured as required, including project specific confined space plan/procedure, and confined space entry control plans, where applicable.
- Ensure that the equipment, materials and protective devices as prescribed are provided, maintained in good condition and used as prescribed.
- Coordinate appropriate Subcontractors to perform all Confined Space work as required.

Worker Responsibilities

- Advise Supervisor if experiencing any difficulties with assigned tasks, or if assigned tasks are beyond perceived limitations or medically not capable of performing tasks.
 - Comply with all the requirements as defined under the *Occupational Health and Safety Act and Regulations*.
-

PROCEDURE

In general, entry into confined spaces shall be avoided whenever possible. Where possible, work will be conducted by alternate means from outside the space (e.g. using an extender, possibly utilizing a robot, etc.).

All potential confined spaces will be identified and assessed by a competent person/worker who has adequate knowledge, training and experience to perform/conduct this exercise.

A Confined Space Entry Permit (CSEP) (**23-1 Form**) shall be completed before (and during) each entry into a confined space. This will identify and assess potential hazards related to the confined space. It will also detail duties and responsibilities and outline the specific safe work procedures for the work that is to be completed.

DISTRIBUTION

Records of inventories (locations), assessments, coordination plans, equipment inspections, training records, and Confined Space Entry Permits, shall be completed and kept on the relevant projects, and subsequently in our office files indefinitely.

These records may/will be used as reference material for our Job and Task Instructions and future entries into confined spaces or controlled access areas.

RECORDS

All owners, constructors, contractors, supervisors and workers working in or around confined space or controlled access areas shall receive copies of the agreed to safe work procedures and these are to be made available upon request to the Worker Representative(s).

INTRODUCTION

This Program provides an overview of a system to direct owners, constructors, employers, contractors, supervisors and workers involved in confined space entry work to work safely.

PROCEDURE

In general, entry into confined spaces shall be avoided whenever possible. Where possible, work will be conducted by alternate means from outside the space (e.g. using an extender, possibly utilizing a robot, etc.).

All potential confined spaces will be identified and assessed by a competent person/worker who has adequate knowledge, training and experience to perform/conduct this exercise.

A Confined Space Entry Permit (CSEP) (**23-1 Form**) shall be completed before (and during) each entry into a confined space. This will identify and assess potential hazards related to the confined space. It will also detail duties and responsibilities and outline the specific safe work procedures for the work that is to be completed.

STANDARD WORK PROCEDURE

Each Employer and/or Subcontractor who is associated with working in a Confined Space **must** submit a written copy of their confined space and rescue procedures prior to the commencement of work.

All health and safety hazards shall be eliminated or adequately controlled by engineering, administrative or other control measures before entry is made into a confined space.

A lead employer will be identified when the confined space entry work involves multiple employers and/or contractors working in the area at the same time.

If the situation occurs where workers of multiple employers/contractors are obligated to work within a confined space at the same time, a consensus must be met as to who will be responsible for each part of the Confined Space Entry Permit processes. One process will be chosen and affected workers will work to this standard.

In either situation, the Confined Space Entry Program and process will focus on:

- Incorporating the requirements of our Job and Task Instructions.
- Performing a written project specific hazard assessment (can be incorporated into the Confined Space Entry Permit).
- Ensuring all persons involved in the confined space entry are competent persons/workers and documentation of these credentials are available.
- Atmospheric assessment and monitoring equipment is available with appropriate calibration and bump test records available.
- Continuous monitoring will be provided prior to entry and when any worker is in the confined space.
- Providing a dedicated Confined Space Attendant who is competent, trained and present at the opening of the confined space.
- Providing all appropriate Personal Protective Equipment, rescue gear and appropriate numbers of trained personnel to affect a rescue, with training records available.
- Emergency response team which is readily available, trained, and with the appropriate equipment necessary for the situation.
- Ensuring that there is a worker who is trained in First Aid and CPR readily available.

In the event that all of these stipulations cannot be met, it is suggested that a third-party Subcontractor, who is specifically trained and equipped in confined space entry and rescue procedures be retained. These third-party contractors must have the necessary rescue equipment and be trained to conduct and carry out their safe rescue procedures.

RESCUE PLANNING

A vast array of health and safety and rescue equipment is required to ensure safe entries into and rescues from a space deemed to be a Confined Space.

These items must be supplied and maintained by the employer and evaluated by a competent worker prior to each use to ensure that they are functioning properly. The extent of actual equipment required will depend on which hazards are present and the atmospheric and physical surroundings of the area to be entered. This will be addressed on the Confined Space Entry Permit (CSEP) **(23-1 Form)** and under Confined Space Entry Control Plans and Confined Space Entry Permits.

Additional training **must** be provided to every worker who will be involved in Confined Space. This training will include generic and hazard specific training and hands-on usage of all required equipment. This will ensure that all workers who may be required to use the equipment will become proficient in its use and understanding of its function and limitations.

LEGISLATION

The confined space legislation addressed in these guidelines denote minimum standards or requirements. As outlined in our Job and Task Instructions, and project specific safe work procedures more stringent or rigorous measures may/will have to be implemented.

Each individual entering a confined space should:

- Be competent and aware of all potential hazards.
- Follow the prescribed specific safe work procedures (as addressed in the CSEP).
- Know the limitations of the equipment and devices being used.

These guidelines have been worded to incorporate the intent and “**best practice**” principles from a variety of legislative requirements, codes, standards and work sectors in Ontario and across Canada.

Note: that provincial governed employers working on federal projects must determine which standards apply.

DISTRIBUTION

Records of inventories (locations), assessments, coordination plans, equipment inspections, training records, and Confined Space Entry Permits, shall be completed and kept on the relevant projects, and subsequently in our office files indefinitely.

These records may/will be used as reference material for our Job and Task Instructions and future entries into confined spaces or controlled access areas.

RECORDS

All owners, constructors, contractors, supervisors and workers working in or around confined space or controlled access areas shall receive copies of the agreed to safe work procedures and these are to be made available upon request to the Health and Safety Worker Representative(s).

**YOU DON'T HAVE TO PROVE IT IS A CONFINED SPACE...
YOU HAVE TO PROVE IT IS NOT.**

PART 1: ADMINISTRATION**SPACE TO BE ENTERED:** _____**DATE CREATED** _____**DATE OF ENTRY:** _____**TIME OF ENTRY:** _____**DURATION OF ENTRY:** _____**DESCRIPTION OF WORK:****PERMIT #:** _____**WORK TO BE DONE:**

- ☐ INSTALLATION
☐ NEW/EXISTING FINISHING
☐ HOT-WORK
☐ CLEANING-INSPECTION
☐ OTHER: _____

PART 2: PRELIMINARY TESTING*TO BE COMPLETED BY CONFINED SPACE ENTRY CO-ORDINATOR & TESTER*

ATMOSPHERIC HAZARDS	ACCEPTABLE LIMITS	REQUIRED?	TEST RESULTS	ACCEPTABLE?
OXYGEN CONTENT	MINIMUM READING= 19.5% MAXIMUM READING= 23%		O ₂ _____%	☐ YES ☐ NO
FLAMMABLE GASSES AND VAPOURS	MINIMUM READING= <10% LEL MAXIMUM READING= <20% LEL		LEL _____%	☐ YES ☐ NO
TOXIC SUBSTANCES	Carbon monoxide (25% of TLV-TWA=6 ppm)		_____ppm	☐ YES ☐ NO
	Carbon dioxide (25% of TWAEV=1250 ppm)		_____ppm	☐ YES ☐ NO
	Hydrogen sulfide (25% of TWAEV=2.5 ppm)		_____ppm	☐ YES ☐ NO
	Ozone (25% of TWAEV=2.5ppm)		_____ppm	☐ YES ☐ NO
	Sulfur Dioxide (25% of TWAEV=0.5 ppm)		_____ppm	☐ YES ☐ NO
	Other (specify): _____		_____ppm	☐ YES ☐ NO

METER TYPE USED: _____**SERIAL NUMBER:** _____**CONFIRM FUNCTIONAL (BUMP) TEST PERFORMED:** ☐ YES**CONFIRMATION**_____
CONFINED SPACE CO-ORDINATOR (Signature)_____
CONFINED SPACE TESTER (Signature)
(if different from co-ordinator)_____
DATE_____
DATE

PART 3: ENTRY PLAN**EQUIPMENT***(Check all that apply and describe setup/use)***PERSONAL PROTECTIVE EQUIPMENT**

- ☐ RESPIRATORY
☐ HEARING
☐ FOOT
☐ HEAD
☐ GLOVES
☐ SKIN
☐ EYE
☐ HIGH VISIBILITY
☐ CLOTHING
☐ FLOTATION DEVICES
☐ OTHER: _____

RESCUE & OTHER EQUIPMENT

- ☐ BODY HARNESS
☐ LIFE-LINE
☐ TRIPOD AND WINCH
☐ AIR MONITORING EQUIPMENT
☐ MECHANICAL VENTILATION
☐ INTRINSICALLY SAFE (NON-SPARKING) TOOLS
☐ COMMUNICATION DEVICES
☐ LIGHTING
☐ PORTABLE LADDERS
☐ OTHER: _____
☐ OTHER: _____

DESCRIPTION:**CONFIRMATION**

I have inspected and verify that all required equipment is in good working order and is certified in accordance with CSA or other equivalent standards:

NAME

SIGNATURE

DATE

POSITION/TITLE

PART 4: CONTROL MEASURES**MANDATORY****RESCUE PROCEDURE:****COMMUNICATION PROCEDURE:****ATMOSPHERIC TESTING:****ENTRY AND EXIT:****PERMIT #:****IF REQUIRED****HAZARDOUS ENERGY CONTROL:****HOT-WORK PROCEDURE:****VENTILATION & PURGING:****OTHER:**

PART 5: PLANNING AND AUTHORIZATION

DETAIL	ATTENDANT	AUTHORIZED WORKER (ENTRANT)	AUTHORIZED WORKER (ENTRANT)	OTHER
--------	-----------	-----------------------------------	-----------------------------------	-------

NAME:

DUTIES:

TRAINING RECEIVED:

PLAN SPECIFIC
TRAINING:

SIGNATURE:

NOTE IF CO-ORDINATION REQUIRED WITH OTHER WORKERS:

PART 6: CONFIRMATION

I certify that the requirements of this permit (which includes a hazard assessment and confined space entry plan) have been met.

CONFINED SPACE ENTRY SUPERVISOR NAME

SIGNATURE

DATE

POSITION/TITLE

**THIS DOCUMENT SERVES AS THE CONFINED
SPACE HAZARD ASSESSMENT, ENTRY PLAN,
RESCUE PLAN, AND ENTRY PERMIT.**

[illegible]

CONTINUOUS MONITORING DOCUMENTATION							
	TIME	TIME	TIME	TIME	TIME	TIME	TIME
ACCEPTABLE LIMITS							
Minimum reading = 19.5% Maximum reading = 23%	O ₂ _____%	O ₂ _____%	O ₂ _____%	O ₂ _____%	O ₂ _____%	O ₂ _____%	O ₂ _____%
Hot work = undetectable Cold work = <10% LEL Clean & insp. = <20% LEL	LEL _____%	LEL _____%	LEL _____%	LEL _____%	LEL _____%	LEL _____%	LEL _____%
Carbon monoxide (25% of TLV-TWA=6 ppm)	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm
Carbon dioxide (25% of TWAEV=1250 ppm)	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm
Hydrogen sulfide (25% of TWAEV=2.5 ppm)	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm
Other:	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm

	TIME	TIME	TIME	TIME	TIME	TIME	TIME
ACCEPTABLE LIMITS							
Minimum reading = 19.5% Maximum reading = 23%	O ₂ _____%	O ₂ _____%	O ₂ _____%	O ₂ _____%	O ₂ _____%	O ₂ _____%	O ₂ _____%
Hot work = undetectable Cold work = <10% LEL Clean & insp. = <20% LEL	LEL _____%	LEL _____%	LEL _____%	LEL _____%	LEL _____%	LEL _____%	LEL _____%
Carbon monoxide (25% of TLV-TWA=6 ppm)	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm
Carbon dioxide (25% of TWAEV=1250 ppm)	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm
Hydrogen sulfide (25% of TWAEV=2.5 ppm)	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm
Other:	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm	_____ ppm

Updated: July 2024

PURPOSE

The purpose of this procedure is to establish a process for managing the appropriate performance and preventative maintenance of our machinery and equipment. This program is implemented to ensure that our machinery and equipment is serviced according to the manufacturer specifications and/or to meet all legislative requirements.

SCOPE

This procedure applies to all workplace parties involved in the management and use of machinery and equipment.

RESPONSIBILITIES**Health and Safety Team Responsibilities**

- Arrange for specific PM to be scheduled and followed-up.
- Ensure appropriate PM requirements are completed for all equipment or machinery as required.
- Ensure known workplace related hazards are defined and appropriate PM requirements are completed for all equipment or machinery as required.

Senior Management Responsibilities

- Develop and implement in consultation with Senior Management and the Worker Representative a company Preventative Maintenance (PM) Program.
- In conjunction with the Health and Safety Team, review *Occupational Health and Safety Act and Regulations* to ensure compliance within the PM Program, on an annual basis.
- Ensure appropriate PM requirements are completed for all equipment or machinery as required.
- Ensure equipment, materials and protective devices are provided, maintained and used as required at all site and office locations.
- Ensure known workplace related hazards are defined and appropriate PM requirements are completed for all equipment or machinery as required.
- Take prompt and appropriate action when violations with the use or maintenance of equipment and/or machinery has been identified.
- Take all measures reasonably necessary to protect employees from vehicles and equipment failures and breakdowns.

Supervisor Responsibilities

- Schedule all equipment or machinery PM as required.
- Ensure appropriate PM requirements are completed for all equipment or machinery as required.
- Ensure known workplace related hazards are defined and appropriate PM requirements are completed for all equipment or machinery as required.
- Take prompt and appropriate action when violations with the use or maintenance of equipment and/or machinery has been identified.
- Advise a worker of the existence of any potential or actual danger to their health or safety, of which the Supervisor is aware of.

Worker Responsibilities

- Complete all equipment or machinery PM as required.
 - Report any damage or malfunctioning equipment or machinery
 - Advise Supervisor with any difficulties with assigned tasks, or above the scope of knowledge or medically not capable of performing tasks.
-

PROCEDURE

The detailed description of all responsibilities for each role is written above in the section titled “Responsibilities”, please review that section before reading the rest of this procedure.

Execution of Preventative Maintenance Tasks

Regular maintenance schedules will be established for all equipment, vehicles, tools, and facilities. These schedules will be based on manufacturer recommendations, industry best practices, and historical data. Routine inspections will be conducted before, during, and after equipment use. Facilities will be inspected regularly for signs of wear, damage, or safety concerns.

An inventory must be maintained and be displayed at each worksite, so all workers and supervisors are aware of the maintenance schedule and related tasks. This list will serve as the foundation for the preventative maintenance schedule as it identifies the specific items that require maintenance in accordance with legislative, manufacturer, or company requirements.

This document will be updated by the Supervisor and the HSR at the start of a new job, when new machinery or equipment is purchased, rented, or added to the site, or when changes are made to legislation or manufacturer requirements.

A Preventative Maintenance Log will be maintained for each piece of equipment, whether owned, leased, or rented. Items under \$500 CAD will be replaced, and items over \$501 CAD will be maintained if applicable.

The maintenance log will include:

- Date and time of maintenance performed
- Description of the maintenance task
- Parts or components inspected or replaced
- Any irregularities or issues noted
- Technician or personnel who performed the task

Please see **form 24-4** for a current list of equipment and machinery.

In the event of an unexpected issue or equipment failure, a Maintenance Report should be filed outlining the cause, actions taken, and any recommendations for further repairs or adjustments.

The Supervisor will review all logs monthly to ensure completeness and identify any recurring issues or patterns that may require additional attention. Any issues or flag which arise will be logged using **forms 24-2** and brought to the attention of the Owner or Senior Manager through email, text message or phone call.

Routine inspections will be conducted by the supervisor or worker before, during, and after equipment use. Facilities will be inspected regularly for signs of wear, damage, or safety concerns. See Forms 24-3 and 24-4 for expected maintenance dates. The information collected will be documented in the Preventative Maintenance Program will address the

following:

1. Machinery and Equipment Inventory (Part 1)
2. Preventative Maintenance Schedule (Part 2)
3. Conducting and Recording of Preventative Maintenance Activities (Part 3)

Maintenance Activities

The Maintenance portion of the procedure is vital for extending the lifespan and ensuring the safe and reliable operation of equipment. The worker will:

- Conduct a thorough visual inspection of the equipment. Look for any obvious signs of wear or damage such as cracks, corrosion, leaks, unusual vibrations, or noise.
- Inspect all accessible components including valves, seals, motors, bearings, and electrical connections.
- Check for fluid levels, contamination (e.g., dirty oil or coolant), and any missing or loose parts.
- Clean any dirt or debris and apply the appropriate lubricants to moving parts, as recommended by the manufacturer or based on historical operational data.
- Test the equipment to ensure it is operating within specified parameters. This might include running equipment for a short time to verify it performs as expected.
- Make any necessary adjustments to alignment or settings to ensure that components are functioning optimally.

If at any time, maintenance reveals an issue that requires corrective action beyond the knowledge, experience, or qualifications of the worker or supervisor, the supervisor must immediately notify the owner. The owner will then coordinate with a third-party contractor who is qualified and specializes in the repair and maintenance of that specific equipment, in accordance with manufacturer requirements.

Inspections and maintenance are separate tasks and require distinct qualifications. Only workers who possess the appropriate training and certification—as determined by manufacturer guidelines, legislative requirements, and internal competency standards—are authorized to perform these tasks. These qualifications have been identified and documented through the process outlined in Section 15 of this manual, which establishes procedures for evaluating, approving, and recording competencies for maintenance and inspection personnel. A record of these qualifications is maintained by the HSR is available upon request.

Any machinery which is deemed damaged, worn or defective by the supervisor, will be removed from the shop/site and sent to the proper service facilities to be repaired.

- Where a repair is not possible, the equipment will be destroyed and replaced.
 - This decision will be made by Senior Management/the Owner and
-

them alone, no worker or supervisor can destroy equipment without a written confirmation from the owner via text or email.

Any equipment or vehicles that are overdue for maintenance must be addressed promptly to ensure safety and operational efficiency. If the equipment hits the maintenance mark in the middle of a task the worker is expected to complete the task if it is safe to do so, and schedule the maintenance at the next convenient time. For example, if an oil change is required ever 5,000km but the worker is driving down the highway to a jobsite, they can continue their commute and simply book an oil change for the next morning.

Excessive delays in maintenance must be avoided to prevent breakdowns, accidents, and costly repairs, ensuring that all equipment and vehicles remain in optimal working condition and compliant with safety standards.

Follow-up Actions

After the maintenance task is complete and documentation is finalized, the HSR will follow up with the supervisor to ensure everything is working properly. This could involve:

- Asking the equipment operators or users to report if the equipment is functioning as expected.
- The worker conduct a short re-check after a few hours of operation to confirm that no new issues have emerged.

All Documents will stored effectively. Please see the Records section of this procedure to see more.

Safety and Compliance

- Adhere to all safety guidelines and regulatory requirements during maintenance activities.
- Use personal protective equipment (PPE) as required.
- Ensure all personnel involved in maintenance are properly trained and aware of procedures. Conduct periodic refresher training sessions.

See **Execution of Preventative Maintenance Tasks** above for more information

DISTRIBUTION

All workers will be notified of any preventative maintenance work which will affect work/production (a suitable time should be worked out).

The Preventative Maintenance Program shall be reviewed by Senior Management and the Health and Safety Team, on an annual basis or more frequently as required to ensure that the program is in compliance with the following items, and that it is achieving the desired result of a safe and healthy workplace:

- Applicable legislation
 - Applicable standards and regulations
 - Manufacturer's Specifications
-

RECORDS

The Health and Safety Team and/or Senior Management will maintain all records on file for the life of the machinery or equipment, including the receipts provided by third party maintenance contractors.

Logs, reports, schedules, corrective actions and work orders are organized by equipment type in a secure room on the main office. Online conversations and invoices will be kept on a Google email accessible to the owner and select office staff.

Records will be kept for the required length of time to meet legal or company standards for retention, on average that will be 5 years, unless otherwise required by the manufacturer or longer if the machine/equipment is still in use.

| PART 1: MACHINERY AND EQUIPMENT INVENTORY

PROCEDURE

An inventory of equipment and machinery will be used by the Health and Safety Team and Senior Management in consultation with relevant workplace parties, to implement and maintain the Preventative Maintenance Program. The inventory of machinery and equipment will be developed by the Health and Safety Team and relevant Managers.

When developing the inventory of machinery and equipment, where a **threshold of 10 HORSEPOWER (10hp)** shall be the criteria used to include said items under this list. Items to be reviewed when developing the inventory include:

- **Mobile equipment** (e.g., trucks, vehicles, fixed generators, and other material handling equipment).
- **Other equipment** (e.g. fabrication shop equipment, cutting equipment, lathes)

REQUIRED INFORMATION

The inventory must include the following information:

- Name of the machinery or equipment.
- Serial number.
- List of required maintenance activities.
- The frequency for each of the required maintenance activities.

COMPLETION OF MACHINERY AND EQUIPMENT INVENTORY

The following steps should be taken when completing the Machinery and Equipment Inventory:

1. When recording the name of the machinery or equipment, both the common name used by employees for the machinery or equipment as well as the formal name (provided by the manufacturer) should be recorded. If a model number is identified on the machinery or equipment, it should also be included.
 2. The asset or serial number for the specific piece of equipment must be recorded to distinguish between specific pieces of equipment with the same common or formal names.
 3. The required preventative maintenance activities and frequency will be determined through a review of:
 - The manufacturer's recommendations contained in Operator's Manuals or Manufacturer's Specifications available for the specific machinery or equipment.
 - Applicable legislative, and regulatory requirements.
 - Applicable industry standards.
 - Current maintenance activities being performed.
 - Discussions with relevant Managers and technicians or maintenance personnel.
 4. The completed Machinery and Equipment Inventory will be reviewed with Senior Management and Health and Safety Team to ensure accuracy and completeness. The completed Machinery and Equipment Inventory will be maintained by the Health and Safety Team. The Health and Safety Team and Senior Management will ensure the inventory is kept current.
 5. Overdue and/or defective tools, equipment, facilities and vehicles will removed from service where necessary. All equipment will be recorded and kept on file.
-

| PART 2: PREVENTATIVE MAINTENANCE SCHEDULE

PROCEDURE

A preventative maintenance schedule will be developed based on the preventative maintenance inventory and implemented to ensure that preventative maintenance activities are planned, scheduled and performed by appropriately qualified personnel at the required intervals.

Preventative maintenance schedules will be developed for required pieces of equipment by the Health and Safety Team.

Each schedule will address all items included on the Machinery and Equipment Inventory and will assign specific dates and assign responsibility for the performance of the preventative maintenance activities from the manufacturer's recommendations and legislative requirements.

Items to be considered when developing the schedule include:

- The specific parts of machinery or equipment to be reviewed and the required frequency of review (as indicated on the Machinery and Equipment Inventory).
- The effect preventative maintenance activities will have on production schedules (as these activities should be scheduled to minimize their effect on production scheduling).
- The required qualifications of the person(s) assigned responsibility for performing the preventative maintenance activities (i.e., the activity to be performed by maintenance personnel, machinery or equipment operators or by an external specialty contractor).

Only appropriately certified third-party companies will be designated and allowed to perform preventative maintenance activities.

The Preventative Maintenance Schedule will be used to document completed preventative maintenance activities, conducted by the qualified personnel and/or certified third-party companies.

Copies of the Preventative Maintenance Schedule will be made available to the operators and site personnel upon request.

The Preventative Maintenance Schedule will be maintained by the Health and Safety Team. The Health and Safety Team and Senior Management will ensure the schedule is kept current.

| PART 3: CONDUCTING AND RECORDING PREVENTATIVE MAINTENANCE**PROCEDURE - CONDUCTING PREVENTATIVE MAINTENANCE ACTIVITIES**

Preventative Maintenance Activities will be performed by appropriately by certified third-party companies for each piece of equipment based on the Preventative Maintenance Schedule **Form 24-3**.

DOCUMENTATION

Preventative Maintenance records will be used to document all preventative maintenance activities. This documentation should also be used to document damaged or worn parts observed during routine preventative maintenance activities.

PREVENTATIVE MAINTENANCE PROCEDURES

Preventative Maintenance schedules will be developed for all equipment as required. Documentation of these maintenance activities must be maintained upon completion of the Preventative Maintenance.

Preventative Maintenance Records will be provided to the Health and Safety Team upon completion via receipts.

Preventative Maintenance Records will be maintained by the Health and Safety Team. The Health and Safety Team and Senior Management will ensure the schedule is kept current.

Location/Room _____

Machine: _____

Name: _____

MAINTENANCE RECORD

Date:	Task:	Maintenance performed by:	Maintenance Required (if any):	Corrective/Follow Up Actions:
	Visual inspection switches, controls, starter etc., to ensure these are in sound condition and no leaks present. Arrange for immediate repair of any faults.			
	Verify all Guards are secure and function correctly			
	Confirm availability and condition of Personal Protective Equipment . Ensure that no person can be endangered before operating			
	Ensure workspaces are clear and unobstructed and that no slip/trip-hazards are present			
	Conduct close inspection for damage to Switch Gear (Proper function of switch controls)			
	Lubricate if needed according to manufacturer's specification			
	Verify that all hand tools are in good working order			
	Other:			
	Other:			
	Other:			
	Other:			
	Other:			

WH&S legislation - Plant Code of Practice 2005 outlines that workers and others (maintenance contractors) using equipment should be trained and provided with information and instruction on:

- safe work practices and operating procedures
- maintenance procedures

This schedule has been designed to ensure preventative maintenance activities are planned, scheduled and performed by appropriately qualified personnel at the required intervals listed below. The schedule below is based off of legislative requirements and is reviewed yearly and updated as laws change.

Services	Daily	Weekly	Monthly	6 Months	Yearly
Inspect the work truck for flat tires, low oil, damages to the body, low gas etc.	X				
Check the forklift has the correct lubricant and brakes are working		X			
Check all hand tools are in good working condition	X				
Inspect the warehouse					X
check and repair building systems (electrical, plumbing, network) in warehouse					X
Review calibration and programming for machines.			X		
Check and maintain motors and other power sources				X	
Machinery is clear of debris, and clear from other equipment in direct contact with materials and inventory	X				
Check all machinery fluid levels and air filters and replace as needed		X			
Other:					
Other:					

Decided By: _____
Date: _____

List of items to be maintained

Name of the machinery or equipment.	Serial Number	Required Maintenance Activities	Frequency
Warehouse:			
Forklift	4EM00762	- Inspect the work truck for flat tires, low oil, damages to the body, low gas etc. - Check the forklift has the correct lubricant and brakes are working - Review calibration and programming for machines. - Check and maintain motors and other power sources - Machinery is clear of debris, and other equipment in direct contact with materials and inventory - Check all machinery fluid levels and air filters and replace as needed	Before each use
Scissor Lift	70034348	- Platform, guardrails, and toe boards intact, with no cracks, bends, or missing parts. - Entry gate/chain secure and functional. - Scissor arms free of cracks, weld defects, or damage. - Tires/wheels in good condition (no cuts, bulges, or excessive wear). - Hydraulic hoses, fittings, and cylinders free of leaks or damage. - Battery/fuel system (depending on model) secure, charged, and free of leaks. - Steps, ladders, and handholds secure and clean. - Fall protection anchor points intact (if applicable). - Fire extinguisher present (if required). - Ground and platform controls: all switches, buttons, and joysticks working. - Emergency stop buttons (both ground and platform) functioning. - Lift and lower functions smooth, with no jerking or unusual noise. - Steering and drive controls respond correctly. - Platform self-leveling system working properly. - Tilt, overload, and pothole protection systems functional. - Alarms and lights (tilt, descent, motion, and backup) working. - Brakes hold the lift stationary. - Ground surface stable, level, and free of holes, debris, or drop-offs. - Overhead clearance checked (power lines, beams, or other obstructions). - Adequate space for travel and positioning. - Weather acceptable (wind speed within manufacturer's limits, no storms). - Work area barricaded if required.	Before each use

Boom Lift	S80064786	-Ground surface stable, firm, and free of holes, debris, or slopes that exceed limits. -Overhead hazards checked: power lines, beams, trees, structures. -Adequate clearance for boom extension and travel. -Weather conditions acceptable (wind speed within manufacturer's limit). -Guardrails and entry gate/chain intact. -Fall protection anchor points present and undamaged. -Fire extinguisher (if required) present and charged. -No visible damage, cracks, rust, or missing parts on boom, platform, guardrails, or chassis. -Outriggers/stabilizers (if equipped) intact and working. -Tires/wheels: properly inflated, no cuts, cracks, or excessive wear. -Hydraulic hoses, fittings, and cylinders free from leaks or damage. - No debris, grease, or obstructions on platform or controls. -Ground controls: all switches, levers, and emergency stop buttons working. -Platform controls: all switches, joysticks, and emergency stop buttons working. -Boom lift, telescope, and rotation functions operate smoothly. -Platform leveling system working correctly. -Alarms and safety devices (tilt, motion, load-sensing) functioning. -Horn, lights, and backup alarm operational. -Brakes and drive controls respond correctly.	Before each use
Boom Lift	0300130951	-Ground surface stable, firm, and free of holes, debris, or slopes that exceed limits. -Overhead hazards checked: power lines, beams, trees, structures. -Adequate clearance for boom extension and travel. -Weather conditions acceptable (wind speed within manufacturer's limit). -Guardrails and entry gate/chain intact. -Fall protection anchor points present and undamaged. -Fire extinguisher (if required) present and charged. -No visible damage, cracks, rust, or missing parts on boom, platform, guardrails, or chassis. -Outriggers/stabilizers (if equipped) intact and working. -Tires/wheels: properly inflated, no cuts, cracks, or excessive wear. -Hydraulic hoses, fittings, and cylinders free from leaks or damage. - No debris, grease, or obstructions on platform or controls. -Ground controls: all switches, levers, and emergency stop buttons working. -Platform controls: all switches, joysticks, and emergency stop buttons working.	Before each use

		-Boom lift, telescope, and rotation functions operate smoothly. -Platform leveling system working correctly. -Alarms and safety devices (tilt, motion, load-sensing) functioning. -Horn, lights, and backup alarm operational. -Brakes and drive controls respond correctly.	
Boom Lift	Z601312329	-Ground surface stable, firm, and free of holes, debris, or slopes that exceed limits. -Overhead hazards checked: power lines, beams, trees, structures. -Adequate clearance for boom extension and travel. -Weather conditions acceptable (wind speed within manufacturer's limit). -Guardrails and entry gate/chain intact. -Fall protection anchor points present and undamaged. -Fire extinguisher (if required) present and charged. -No visible damage, cracks, rust, or missing parts on boom, platform, guardrails, or chassis. -Outriggers/stabilizers (if equipped) intact and working. -Tires/wheels: properly inflated, no cuts, cracks, or excessive wear. -Hydraulic hoses, fittings, and cylinders free from leaks or damage. - No debris, grease, or obstructions on platform or controls. -Ground controls: all switches, levers, and emergency stop buttons working. -Platform controls: all switches, joysticks, and emergency stop buttons working. -Boom lift, telescope, and rotation functions operate smoothly. -Platform leveling system working correctly. -Alarms and safety devices (tilt, motion, load-sensing) functioning. -Horn, lights, and backup alarm operational. -Brakes and drive controls respond correctly.	Before each use
Telehandler	GTH1006A9674	- Frame, boom, and carriage free of cracks, bends, or weld damage. - Forks/blades straight, no cracks, distortion, or excessive wear. - Tires/wheels: inflated to proper pressure, no excessive wear, cuts, or embedded debris. - Steering components (tie rods, linkages) secure and undamaged. - Counterweight secure, no damage. - Hydraulic hoses, lines, and cylinders intact, no leaks or chafing. - Attachments properly mounted, locked, and secure. - No leaks (oil, fuel, coolant, hydraulic). - ROPS/FOPS (Roll-Over & Falling Object Protection Structure) in good condition.	Before each use

		- Seat belt present, undamaged, and functioning. - Fire extinguisher (if required) present and charged. - Horn, lights, backup alarm, and mirrors clean and operational. - Load charts visible, legible, and correct for the machine/attachment. - Safety decals and warning labels present and readable. - Start-up: gauges, warning lights, and indicators working. - Steering (all modes if applicable: front, crab, 4-wheel) operates smoothly. - Service and parking brakes hold properly. - Transmission shifts properly in forward/reverse. - Boom lift, extend/retract, and tilt functions smooth and controlled. - Fork tilt/side-shift functions operate correctly. - Stabilizers/ outriggers (if equipped) deploy and retract properly. - Emergency/auxiliary controls function correctly. - Ground surface is firm, stable, and level for travel and lifting. - Overhead hazards checked (powerlines, beams, trees). - Travel route free of obstructions, debris, and excessive slopes. - Weather conditions safe (wind within manufacturer limits).	
Mini Excavator	AJ1912366	- Boom, stick, bucket, and linkage free of cracks, dents, or weld damage. - Pins and bushings properly greased and secured. - Tracks/undercarriage free of excessive wear, mud buildup, or loose bolts. - Roll-over protective structure (ROPS)/canopy intact. - Steps, handholds, and cab access areas secure and clean. - Seat belt functional. - Fire extinguisher present and charged (if required). - Windows and mirrors (if equipped) clean and intact. - Start engine: all gauges and warning lights operate correctly. - Horn, backup alarm, and lights working. - Swing, boom, stick, and bucket movements smooth with no unusual noises. - Blade and auxiliary hydraulics operate correctly. - Parking brake engages/disengages properly. - Controls return to neutral when released. - Emergency shutoff switch functioning. - Ground surface stable (check for soft soil, trenches, or steep slopes). - Adequate clearance for swing radius. - Overhead hazards checked (power lines, trees, beams). - Work area free of bystanders and obstacles. - Weather conditions acceptable (visibility, rain, ice, wind).	Before each use

		Attachments -Quick coupler (if used) locks securely. -Bucket teeth intact and not excessively worn. -Pins and retaining clips in place. - No cracks, bends, or deformation in attachment.	
Skid Steer	T4V05000355	- Tire pressure, wear or damage - Oil or water leakage from tractor or implement - Engine and transmission oil, radiator and recovery tank, coolant and fuel level - Damage to tractor body, tightness of all bolts, nuts and pins - Implement and accessory blades and belts for wear and damage - Parking brake, speed control lever, all safety switches and easy checker functions - Abnormal noise or vibrations - Daily cleaning – radiator screen and core, panel and hood screens, air cleaner primary element	Before each use
Welding machine	124 311-00733898	- Review calibration and programming for machines. - Check and maintain motors and other power sources - Machinery is clear of debris, and clear from other equipment in direct contact with materials and inventory	Before each use
Welding Machine	ND080234L	- Review calibration and programming for machines. - Check and maintain motors and other power sources - Machinery is clear of debris, and clear from other equipment in direct contact with materials and inventory	Before each use
Hand Tools	N/A	- Check all hand tools are in good working condition. Destroy and replace if damaged.	Before each use
Building	N/A	- check and repair building systems (electrical, plumbing, network) in warehouse	Monthly
Threading Machine	604051	- ensuring that the machine is clean and free of dust, dirt, and debris. - Clean jaw inserts with a wire brush - Check the oil level in the machine's reservoir and ensure there are no leaks - Check for any loose or damaged safety guards or shields and repair or replace them if necessary - Check the alignment of the machine to ensure that it's threading accurately - Lubricate shaft bearings ever 4 months - Check motor brushes ever 6 months -	Daily Quarterly
Threading Machine	ED55938-I99	- ensuring that the machine is clean and free of dust, dirt, and debris. - Clean jaw inserts with a wire brush - Check the oil level in the machine's reservoir and ensure there are no leaks - Check for any loose or damaged safety guards or shields and repair or replace them if necessary - Check the alignment of the machine to ensure that it's	Daily

		threading accurately - Lubricate shaft bearings every 4 months - Check motor brushes every 6 months -	
Site:			
Ram Truck		- Check all machinery fluid levels and air filters and replace as needed - Oil change and 75 point	Weekly Every 5km
GM Truck		- Check all machinery fluid levels and air filters and replace as needed - Oil change and 75 point	Weekly Every 5km
Cadillac (2)		- Check all machinery fluid levels and air filters and replace as needed - Oil change and 75 point	Weekly Every 5km
Hand Tools	N/A	Check all hand tools are in good working condition	Before each use
		-	
		-	
		-	
		-	

PURPOSE

The purpose of this procedure is to define a daily based hazard analysis process that helps organize our various jobs, tasks and activities, ensuring they are completed both safely and efficiently. Our Daily Job Hazard Assessment (Daily JHA) performed to determine a given day's jobs/tasks, their potential hazards and respective control strategies.

SCOPE

Our Daily JHA is a vital component of the Health & Safety Program. The Daily JHA will be completed on construction projects prior to commencing daily work activities. Completed Daily JHA will be reviewed on site to "break down" the job into individual components (tasks) and identify all requirements necessary to perform these tasks. Daily JHA's are collected on a weekly basis and reviewed by Senior Management. In the case that Maxim is the General Contractor, copies of Daily JHA's on site until the completion of each project.

RESPONSIBILITIES**Health and Safety Team Responsibilities**

- In conjunction with Senior Management, review the Daily JHA procedure on an annual basis, after investigations, and if scope of work changes.
- Develop the project specific safety plans and project specific job hazard assessment forms, to be used as reference documents during the completion of the Daily JHA.
- Receive and review copies of completed Daily JHAs on a weekly basis.
- File Daily JHAs in project folders accordingly.
- Ensure the requirements and contents of the Daily JHA are implemented by all Workers and Subcontractors.
- Arrange hazard awareness training for all workplace and project personnel.
- Ensure the Daily JHA form identifies hazards origination outside of the workplace which Maxim can control.

Senior Management Responsibilities

- Review *Occupational Health and Safety Act and Regulations* to ensure compliance within the Daily JHA procedure.
- Ensure a specific Daily Job Hazard Assessment (Daily JHA procedure/form) for all workplace activities and sites is developed, maintained and records maintained.
- Review and approve the Daily JHA procedure on an annual basis.
- Arrange hazard awareness training for all workplace and project personnel.
- Verify legislative requirements for hazard assessments for job sites and office.
- Ensure the requirements and contents of the Daily JHA are implemented by all Workers and Subcontractors.
- Receive and review copies of completed Daily JHAs on a weekly basis.
- Develop the project specific safety plans and project specific job hazard assessments, to be used as reference documents during the completion of the Daily JHA.

Supervisor Responsibilities

- Complete the Daily JHA as per the procedure below.
- Ensure the requirements and contents of the Daily JHA are implemented by all Workers and Subcontractors.
- Communicate to workers and subcontractors the requirements and content of the Daily JHA, to break down and describe the critical work tasks and jobs for all expected activities that day including the appropriate PPE and controls that are required for the specific work and location.
- Ensure known hazards defined with a project specific safety plan, are

- referenced, and documented when completing/reviewing the Daily JHA.
- Take prompt and appropriate action(s) when contraventions of any established Daily JHA requirements or contents, are either observed or reported by workers.
- Develop the project specific safety plans and project specific job hazard assessments, to be used as reference documents during the completion of the Daily JHA.
- Take all measures reasonably necessary in the circumstances to protect employees from exposure to any related hazards at all workplace locations.
- Ensure that Daily JHA Forms are readily available on work sites.

Worker Responsibilities

- Participate in the completion of the Daily JHA.
- Acknowledge the requirements of the Daily JHA.
- Follow all requirements as defined within the Daily JHA as directed by your supervisor.
- Provide constructive feedback regarding the Daily JHA based on their work experience and knowledge of site level activities.
- Advise Supervisor if experiencing any difficulties with assigned tasks, or if assigned tasks are beyond perceived limitations or medically not capable of performing tasks.

PROCEDURE

The detailed description of all responsibilities for each role is written above in the section titled “Responsibilities”, please review that section before reading the rest of this procedure.

Routine and Non-Routine Operations

Hazard assessments shall be conducted for both routine and non-routine operations.

- Routine operations are regular daily tasks that are performed on a consistent basis as part of normal work activities.
- Non-routine operations include infrequent or new tasks, emergency situations, equipment changes, seasonal activities, maintenance shutdowns, or any work that deviates from standard daily operations.

Hazard assessments for non-routine operations must be completed prior to the commencement of the task and must consider the unique hazards that may arise from unfamiliar work, different equipment, changed site conditions or emergency circumstances. No non-routine work shall proceed until the associated Daily Job Hazard Assessment has been completed, reviewed and signed by the supervisor.

Hazard Assessment Review Triggers

Daily Job Hazard Assessments and higher-level hazard/risk assessments shall be reviewed and updated when any of the following occur:

- An incident, accident or near miss occurs related to the assessed activity.
 - The project phase changes (for example, moving from excavation to formwork, from formwork to mechanical installation, etc.).
 - New equipment, processes or materials are introduced to the scope of work.
 - A worker identifies a new or previously unrecognized hazard.
 - Site conditions or surrounding activities change in a way that may affect risk (e.g., weather, adjacent contractor activities, traffic patterns).
 - Legal or client requirements change in a way that affects the task or controls.
-

- g. At minimum, on an annual basis as part of the health and safety program review.

When any of these triggers occur, the existing hazard assessment shall be reviewed, updated with new hazards and controls as necessary, and re-approved by the supervisor or management before work continues.

External Hazards

Hazard assessments shall consider external hazards originating from outside the immediate work area, including, but not limited to:

- Weather conditions (extreme temperatures, wind, precipitation, lightning);
- Adjacent operations and work activities by other contractors or trades;
- Public traffic (vehicular and pedestrian), delivery vehicles and material movements;
- Overhead and underground utilities and services;
- Activities on neighbouring properties or public space that may impact worker safety;
- Environmental factors such as noise, dust, fumes, and restricted visibility.

The Daily Job Hazard Analysis Report (25-1-1 Form) shall be used to document the consideration of external hazards at the start of each work shift and whenever conditions change.

It is essential that a detailed and specific job hazard analysis be conducted and communicated to all workplace personnel prior to starting each workday. These hazard assessments will be kept on file in the on-site Supervisor office in a drawer or filing cabinet (depending on size of job). They will be sent to head office quarterly to be analyzed and identify any patterns or missing controls that are to be implemented. Hazard Assessments must be conducted for all operations including routine and non-routine, and human factors. This will be completed as part of the Daily Job Hazard Assessment (Daily JHA) and documented on the **Daily JHA form (25-1-1 Form)**. We require genuine effort into the completion of the process.

To ensure effective hazard assessments, analysis, and implementation of control measures, personnel assigned to these responsibilities must possess clearly defined competencies. These include a comprehensive understanding of applicable safety regulations, proficiency in risk assessment methodologies, and the ability to recognize and evaluate potential hazards across various work environments. These competencies are critical for accurately assessing risks and applying suitable control measures to minimize hazards.

Competency requirements are identified through the training needs analysis process Section 15 of this Manual. This process determines the skills, knowledge, and abilities required for specific roles and tasks and ensures they are documented and reviewed regularly. For this section, the same mechanism is used to define the competencies required for hazard assessment, analysis, and control responsibilities.

- a. Maxim will ensure these competencies are maintained and applied through: Ensuring knowledge of relevant safety regulations (e.g., MOL, local safety codes etc.).
 - b. Proficiency in hazard identification and risk assessment techniques through understanding the health and safety manual.
 - c. Senior Management and HSR ability and commitment to develop and implement appropriate control strategies based on identified risks.
-

- d. Regular training and certification updates required to maintain these competencies through internal tracking documents and open communication with workplace parties.

The competencies listed above are required to effectively conduct hazard assessments, analysis, and control to ensure workplace safety and health. Competent individuals such as workers, supervisors, maintenance, engineering and suppliers will identify, assess, and control hazards to prevent incidents, injuries, and illnesses. Involvement will be based on the individual parties meeting the competency requirements or their inclusion based on their professional qualifications.

Maxim will ensure the JHA are completed by following the procedure below:

1. **Assign Competent Personnel:** The Senior Management will appoint qualified and trained personnel to conduct hazard assessments and implement control measures.
2. **Conduct Hazard Assessment:** Proactively prior to commencement of any work or tasks the competent person will be required to identify potential hazards during routine inspections, process changes, or when new tasks are introduced. This includes when equipment, material, substance or process is introduced or changed. Or if there are any changes to the OHS, Manual may impact workplace operations or activities.

This process is carried out across three levels:

- i. **Formal Hazard Assessment** – A comprehensive, documented assessment that encompasses all potential hazards and risks associated with the organization's operations. This includes office, shop/yard, and site-based tasks. It incorporates the risk analysis requirements and must be reviewed annually. Any gaps identified through the Job Hazard Analysis (JHA) process must be addressed and incorporated into the Formal Hazard Assessment.
- ii. **Site-Specific Hazard Assessments** – A documented assessment focused on hazards unique to particular work sites. This level may be implemented as needed depending on the complexity or variability of the worksite conditions.
- iii. **Field-Level Hazard Assessment (FLHA)** – A documented assessment conducted at the point of work to identify specific conditions and hazards present prior to starting any task. This requirement is fulfilled through the completion of a Job Hazard Analysis (JHA), which must be reviewed daily or whenever site conditions change. If new hazards are identified that were not captured in the Formal Hazard Assessment, immediate control measures must be implemented to ensure worker protection

A JHA hazard assessment must be carried out for every type of work being done, whether it is part of regular day-to-day tasks (routine) or unusual, one-off, or emergency tasks (non-routine). Additionally, it includes considering human factors, such as how workers' actions, behavior, or physical and mental states might contribute to hazards in the workplace.

Workers must inform their supervisor if an hazards are observed immediately.

Managing External Hazards

In addition to internal workplace hazards, Maxim recognizes that external hazards—such as environmental factors, public health threats, and regulatory or societal changes—can significantly impact workplace operations and occupational health and safety (OHS). These external hazards may include, but are not limited to:

- Severe weather events (e.g., storms, floods, heatwaves)
- Public health emergencies (e.g., disease outbreaks)
- Legislative or regulatory changes
- Societal events or disruptions

To ensure a consistent and comprehensive approach to hazard identification, Maxim incorporates the PEMEP principle into its hazard assessment process. PEMEP stands for People, Equipment, Materials, Environment, and Process. This structured method supports the evaluation of site-specific conditions and how interactions between these five elements may give rise to hazards.

Supervisors are responsible for applying the PEMEP framework when completing **JHAs** and other hazard assessments. This ensures that all relevant internal and external factors are considered. When completing a JHA, supervisors must assess potential external hazards and document them accordingly if there is any likelihood that they could affect workplace operations or worker safety.

This approach requires the identification of potential hazards for all tasks and emphasizes evaluating human factors. By addressing both internal and external hazards through the PEMEP principle, Maxim ensures its safety program is proactive, consistent, and resilient in the face of emerging challenges.

Before any work commences on the jobsite, the Supervisor will walk around the worksite and observe the design and layout of the work area, ergonomics, machinery, and process. At this point they will also review any external hazards which may affect them directly or indirectly. If there are any potential risks, they will write it down on daily JHA form **25-1-1**. Once they have completed their walk through the Supervisor will discuss their findings (if any) they will conduct a tool-box-talk meeting and share any important information with their workers. At this point the supervisor will ask the workers if there are any hazards they have identified that they would like to address. All comments will be recorded on form **5-1**.

3. Risk Assessment:

Before starting the work, hazards must be clearly identified through:

- Workplace inspections
 - Incident and near-miss reports
 - Job Safety Analysis (JSA) or Job Hazard Analysis (JHA)
 - Consultation with workers and supervisors
 - Manufacturer or supplier documentation (e.g., SDS, manuals)
-

A standardized risk rating system shall be used for all hazard assessments conducted by Maxim Mechanical, including the Daily Job Hazard Assessment (Daily JHA), Formal Hazard Assessments and Site-Specific Hazard Assessments. The purpose of the risk assessment is to prioritize hazards so that the most serious risks are controlled first.

Once hazards are clearly identified, the Supervisor will determine who is at risk of being harmed and how they could be harmed (e.g., slips, trips, falls, exposure, contact with equipment). This helps prioritize controls for the most vulnerable groups. Supervisors shall also ensure that hazards arising from external factors and human factors have been considered in accordance with the “External Hazards” and “Human Factors” subsections of this procedure.

Risk Rating Method

For each identified hazard, the competent person shall determine a numerical risk rating as follows:

Risk Level = Likelihood of Occurrence (1–5) × Severity of Consequence (1–5)

Likelihood of Occurrence:

- 5 – **Almost Certain:** expected to occur in most circumstances
- 4 – **Likely:** will probably occur in most circumstances
- 3 – **Possible:** might occur at some time
- 2 – **Unlikely:** could occur at some time, but not expected
- 1 – **Rare:** may occur only in exceptional circumstances

Severity of Consequence:

- 5 – **Catastrophic:** fatality, permanent disability, or property damage greater than \$100,000
- 4 – **Major:** serious injury or illness, significant lost time, or property damage greater than \$25,000
- 3 – **Moderate:** medical aid, moderate lost time, or property damage greater than \$5,000
- 2 – **Minor:** first aid only, minor illness, or property damage up to \$5,000
- 1 – **Insignificant:** no injury or negligible damage

An evaluation of the likelihood and severity of harm occurring from the hazard including the likelihood and severity of the consequences. The information will be collected using the risk matrix to assign a risk rating (see section below) to guide prioritization.

Transfer these findings to the JHA and any hazards not mentioned in the Formal Assessment should be documented at this time, and a risk assessment must be completed.

Risk assessments are living documents and must be reviewed:

- After an incident or near-miss
- When introducing new equipment, processes, or substances
- When changes occur in the workplace
- On a scheduled basis (e.g., annually or more frequently based on risk level)

Update the assessment as needed to ensure it remains accurate and effective.

Risk Rating Calculation:

Multiply the likelihood score by the severity score to give an overall risk rating

(e.g., risk rating = likelihood × severity). This rating helps prioritize tasks based on the potential risk they pose.

Low Risk (1-6): Tasks with minimal hazard or impact, requiring less control. Existing controls may be sufficient; continue to monitor and maintain controls

Medium Risk (7-15): Tasks that may pose moderate risks, requiring standard. Standard controls must be implemented and documented in the JHA or related procedure. Supervisor shall ensure workers understand and follow the required controls.

High Risk (16-25): Critical tasks that pose significant hazards, requiring stringent controls and monitoring. Additional controls must be implemented and the task must not proceed until the risk is reduced to an acceptable level. A written Safe Job Procedure is required and supervisory oversight must be documented.

Severity / Likelihood	Very Unlikely	Unlikely	Possible	Likely	Almost Certain
Catastrophic	Medium	High	High	Very High	Very High
Major	Medium	Medium	High	High	Very High
Moderate	Low	Medium	Medium	High	High
Minor	Low	Low	Medium	Medium	High
Insignificant	Low	Low	Low	Medium	Medium

*The risk rating system must take place before the controls are implemented so that the risks can be prioritized. The risk assessment must be revisited when equipment, material, substance or process is introduced or changed Or if there is a change to the OHSMS may impact workplace operations or activities.

4. Identify Critical Tasks and Activities:

To ensure that critical tasks and activities within the workplace are identified and prioritized based on the risk rating system to minimize potential hazards and protect employee health and safety. Once the risk analysis is complete the supervisor will identify the tasks or activities that have a high likelihood of causing serious harm or have severe consequences in case of failure (e.g., working at heights, operating heavy machinery, handling hazardous substances).

Inherent and Residual Risk

For each hazard, the competent person (Supervisor) shall:

- Assess and document the inherent risk rating (before controls are applied); and
 - Assess and document the residual risk rating (after controls are applied).
- Where the residual risk remains at a High Risk level (16–25), work shall not proceed until further controls are put in place to reduce the risk. If acceptable risk levels cannot be achieved, the task shall be re-planned or not performed.

Recording Risk Ratings

Risk ratings shall be recorded on:

- The Daily Job Hazard Assessment form (25-1-1) for field-level hazard assessments; or
- The applicable formal hazard/risk assessment form for office, shop and project-wide assessments.

Risk assessments are living documents and must be reviewed and updated when triggers identified in the “Hazard Assessment Review Triggers” subsection occur (e.g., after incidents or near misses, when conditions or processes change, or at least annually).

Organize tasks into categories based on their risk ratings to allow for focused attention on the highest-priority tasks. Include relevant details for each critical task, include details such as:

- Task description
- Risk rating (calculated using the risk rating system)
- Potential hazards identified
- Control measures currently in place or required

To engage workers, the Supervisor will consult with individuals who perform these tasks regularly to ensure that all potential risks are identified, and that the risk ratings reflect practical conditions.

- 5. Implement Control Measures:** The qualified person will apply the appropriate control measures, following the hierarchy of controls, to eliminate or minimize identified risks. This may involve:
- Engineering controls (e.g., machine safeguards)
 - Administrative controls (e.g., job rotation, safety protocols)
 - PPE (e.g., hard hats, gloves, respirators)

See section 28 – Controls for more information

- 6. Documentation:** If a hazard, both potential and actual, is identified during the Daily JHA, including the identified hazards, risk evaluations, and control measures it must be reported to Senior Management. The Supervisor on duty must ensure the assessment is easily accessible for reference during work activities. Please refer to Section 10 - Hazard Reporting Procedure for a detailed breakdown of the procedure.
- 7. Communication and Reporting:** The Supervisor is responsible for communicating the findings of the hazard assessment and the required control measures to all affected workers. Communication methods may include written instructions, safety meetings, toolbox talks, or visual aids posted in the work area.

Supervisors must also ensure that a two-way communication process is in place. Workers must be encouraged and provided with clear mechanisms—such as verbal reporting, hazard reporting forms, or digital reporting tools—to communicate any actual or potential hazards they observe to their supervisor.

If site conditions change or new risks emerge, hazard assessments must be promptly updated, and any changes must be communicated to all affected workers. This continuous feedback loop ensures that all identified hazards are addressed in a timely manner, and that control measures remain current and

effective in protecting worker safety.

- 8. Monitor and Review:** The HSR and Senior Management must ensure that appropriate controls are in place prior to the commencement of work, ensuring that identified risks are reduced to an acceptable level. To support continuous improvement, they will conduct annual reviews of the hazard assessment process. This includes evaluating the effectiveness of existing controls and incorporating insights from incident reports, near misses, and worker feedback.

In accordance with Section 14: Management of Change, the hazard assessment process must be reviewed and updated as needed when significant changes occur. These may include changes to equipment, processes, personnel, legislation, or the work environment.

Workers are encouraged to actively participate in this process by reporting hazards and suggesting control improvements. This feedback can be communicated through toolbox talks, safety meetings, or hazard reporting forms. Worker input is especially important for identifying risks related to human factors, which may not be immediately evident during formal assessments.

- 9. Adjustment of Procedures:** Once the hazards are reviewed and controls are approved and put into place (see section 28 – Controls) the HSR and Senior Management will continue to adjust hazard controls or assessment procedures based on lessons learned from incidents, new technology, or updated safety regulations on an annual basis. This ensures that hazard assessments remain relevant and up-to-date.

10. Regular Legislative Monitoring and Updates

Following Section 27 of this manual (Legislation) The HSR will Monitor sources like the Ontario Ministry of Labour, Training and Skills Development website, industry associations, and government publications. Using this information – the HSR will summarize and communicate legislative updates via email, meetings, and postings.

A register of all relevant legislation and standards will be maintained and updated quarterly by the Health and Safety Representative. Changes in legislation will be communicated to employees through meetings, emails, and training sessions.

The most current versions of the OHSA, employment standards, and any mandatory notices will be posted on health and safety boards in all workplaces. All applicable legislation and compliance records will be stored electronically and in printed format at each workplace. A copy can be requested from the HSA or Senior Management at any time and can be provided electronically or printed.

The Daily JHA, is to be completed when working on construction projects (as defined by the *Occupational Health and Safety Act, and Regulations*), and follows all legal requirements and associated standards. It is required that all competent workplace parties participate in the Daily JHA, which includes but is not limited to workers, supervisors, maintenance, engineering, and suppliers.

Legislative Requirements

Hazard assessments shall consider applicable legislative requirements, standards and guidelines, including but not limited to:

- Ontario Occupational Health and Safety Act (OHSA);
- O. Reg. 213/91 – Construction Projects;
- O. Reg. 632/05 – Confined Spaces, where applicable;
- WHMIS requirements and associated regulations;
- Occupational Health and Safety Awareness and Training Regulation;
- Applicable CSA standards, TSSA codes, and recognized industry best practices;
- Client-specific health and safety requirements, where more stringent.

Reference shall be made to Section 27 – Legislation Procedure and the Legislative Document Checklist for a complete list of applicable regulations and standards. Where practicable, the hazard assessment shall document which specific regulatory or client requirements apply to the task being assessed and confirm that selected controls meet or exceed these minimum requirements.

Human Factors

Hazard assessments shall consider human factors that may contribute to incidents or affect the ability of workers to perform tasks safely. Human factors include, but are not limited to:

- Fatigue, length of shift, overtime and time of day;
- Stress, workload, production pressure, deadlines and personal issues;
- Repetitive motion and high-frequency tasks;
- Ergonomic considerations such as lifting, carrying, pushing/pulling, awkward postures and sustained static positions;
- Weather exposure effects on worker performance (heat stress, cold stress, rain, wind);
- Noise levels and related communication difficulties;
- Confined, restricted or poorly lit workspaces;
- Worker capabilities and limitations (experience level, training, physical ability, mental state and focus).

Where human factors are identified as contributing to hazard risk, appropriate controls shall be implemented including, but not limited to, work rotation, scheduled rest breaks, modification of tasks, clarification of instructions, additional supervision, or engineering controls to reduce physical demands.

Worker Participation

Workers are directly affected by hazards and control measures. All affected workers are required to participate in hazard assessment activities and in the identification and control of hazards.

Worker participation in the hazard assessment process shall be demonstrated through:

- Pre-job safety meetings (e.g., toolbox / safety talks) where workers contribute to identifying hazards and developing control measures for the planned tasks;
 - Review of the Daily Job Hazard Analysis Report (25-1-1 Form) at the start of each shift and whenever conditions change;
 - Worker sign-off on the Daily Job Hazard Analysis Report confirming that:
 - They have reviewed the identified hazards and controls;
 - They have had the opportunity to provide input into the assessment; and
-

-
- They understand and agree to follow the specified safe work methods and controls;
 - Reporting hazards and concerns through the Hazard Reporting Procedure (Section 10) and associated Hazard Reporting Form (10-1);
 - Participation in workplace inspections and follow-up discussions on identified issues;
 - Participation in the development and review of hazard assessments for higher-risk or non-routine work, as requested by supervisors or the Health and Safety Representative.

Workers must report any actual or potential issues or deficiencies in equipment, processes or existing controls to their supervisor immediately. Supervisors shall ensure that the input from workers is incorporated into the hazard assessment and that revised assessments are communicated back to all affected workers.

DISTRIBUTION

- A. Supervisors will maintain copies within their site safety records.
 - B. Copies will be provided to the Health and Coordinator on a weekly basis or as requested.
 - C. All competent workplace parties will have access to the Daily JHA, which includes but is not limited to workers, supervisors, maintenance, engineering, and suppliers.
-

RECORDS

All records of Daily JHAs will be sent to the Senior Management and/or Health and Safety Team for review. Hazard Assessment forms will be reviewed after an investigation is complete to ensure the safe of our employees on a yearly basis. Changes to the form will be tracked using for **26-2 Form Tracker** and will have the corresponding date at bottom right hand corner.

Records will be maintained onsite for the duration of the project and thereafter in our office's project safety files for a period of 3 years.

1.RISK ASSESSMENT

Ensure a risk assessment is conducted using the following activities:

Specific workplace violence assessments will be completed on construction sites by the **Supervisors** during the daily hazard assessment.

Any risks identified through this process will result in the development and implementation of a specific violence prevention plan to address this risk. A review of the risk assessment and violence prevention plan will be conducted by the **Supervisors** on an annual basis. These documents will also be reviewed and changes will be made, if the following situations occur:

- Change in nature of the workplace, type of work or work conditions**.
- Worker or Health and Safety Representative indicates that procedures or programs in place to address workplace violence are inadequate.
- A violent incident has occurred.

Note: **Nature of the workplace refers to the physical aspects of the workplace, including exits, entrances, lighting and objects that can be used as weapons. Type of work refers to the tasks workers perform and the workplace parties they interact with (e.g. clients, members of the public, etc.). Work conditions refer to work hours, working alone, the surrounding neighbourhood, etc.

As part of the violence risk assessment process, the following issues will be considered:

- Past occurrences of violence at that workplace.
- Violent incidents that have occurred in similar workplaces.
- Potential circumstances and interactions that occur in the course of performing work.
- Geographic location and layout of the workplace.
- Domestic Violence.

25-1-1 - DAILY HAZARD ANALYSIS REPORT

DATE:	_____	SUPERVISOR:	_____
PROJECT:	_____	JOB NUMBER:	_____
LOCATION:	_____	WEATHER:	°C ☐ Rain ☐ Snow ☐ Sun ☐ Wind ☐ Lightning
MUSTER POINT:	_____	NEAREST HOSPITAL:	_____
EMERGENCY RESPONSE COORDINATOR: _____			

1. TODAY'S GENERAL ACTIVITY

→

- | | | |
|--|---|--|
| ☐ WORKING AT HEIGHTS | ☐ CRANE USE, HOISTING AND RIGGING | ☐ ELECTRICAL WORK |
| ☐ EQUIPMENT/TOOL USE | ☐ MANUAL MATERIAL STORAGE & HANDLING | ☐ PLUMBING WORK |
| ☐ WORK PLATFORM USE (LADDER/SCAFFOLD) | ☐ DRYWALL INSTALLATION/FINISHING | ☐ HVAC WORK |
| ☐ HAZARDOUS ENERGY CONTROL (LOTO) | ☐ FLOORING INSTALLATION | ☐ SPRINKLER WORK |
| ☐ EXCAVATION & TRENCHING | ☐ PAINTING | ☐ HOT-WORK |
| ☐ DEMOLITION | ☐ CONCRETE FORMING & POURING | ☐ HARDWARE INSTALLATION |
| ☐ TRUCK LOADING & UNLOADING | ☐ CONFINED SPACE | ☐ HOUSEKEEPING |

3. SPECIFIC HAZARDS AND SITE CONSIDERATIONS

- | | | |
|--|--|---|
| ☐ HAZARDOUS ENERGY | ☐ INCLEMENT WEATHER | ☐ DESIGNATED SUBSTANCES |
| ☐ RESPIRATORY HAZARDS | ☐ HEAT STRESS | ☐ NOISE |
| ☐ FALLS | ☐ COLD STRESS | ☐ ADJACENT PUBLIC AREAS |
| ☐ SLIPS, TRIPS | ☐ HIGH WINDS | ☐ OVERHEAD HAZARDS |
| ☐ HAZARDOUS MATERIALS/CHEMICALS | ☐ POOR LIGHTING | ☐ SITE VISIBILITY (HILL, BEND, NIGHT WORK) |
| ☐ DAMAGED EQUIPMENT | ☐ MOVING TRAFFIC/VEHICLES | ☐ DUSTS, MISTS, FUMES |
| ☐ LACK OF TRAINING | ☐ UNDERGROUND UTILITIES | ☐ LACK OF SUBCONTRACTOR PROCEDURES |

4. STANDARD SITE CONTROLS

- | | | |
|--|--|--|
| ☐ HAZARDOUS ENERGY CONTROL (LOTO) | ☐ EMERGENCY RESPONSE PROCEDURES | ☐ NOISE MONITORING |
| ☐ DUST CONTROL MEASURES | ☐ TRAFFIC MANAGEMENT PLAN | ☐ ADEQUATE DRINKING WATER AVAILABLE |
| ☐ PERSONAL PROTECTIVE EQUIPMENT | ☐ TEMPORARY LIGHTING | ☐ (M)SDS AVAILABLE |
| ☐ FALL PREVENTION PLAN | ☐ UTILITY LOCATES | ☐ SAFE ACCESS/EGRESS TO WORK AREAS |
| ☐ EQUIPMENT/TOOL INSPECTIONS | ☐ OVERHEAD HAZARDS IDENTIFIED | ☐ SUBCONTRACTOR PROCEDURES IN PLACE |
| ☐ TRAINING CERTIFICATIONS | ☐ NATURAL VENTILATION | ☐ SIGNAL PERSONS AVAILABLE |
| ☐ HOUSEKEEPING | ☐ MECHANICAL VENTILATION | ☐ PUBLIC PROTECTION IN PLACE |

5. PERSONAL PROTECTIVE EQUIPMENT REQUIRED DURING TODAY'S WORK ACTIVITIES (MUST BE CSA APPROVED)

 ☒ HEAD PROTECTION	 ☒ FOOT PROTECTION	 ☐ EYE PROTECTION	 ☐ ARC FLASH	 ☐ HEARING PROTECTION
 ☐ FALL PROTECTION	 ☐ HAND PROTECTION	 ☐ SKIN PROTECTION	 ☐ RESPIRATORY PROTECTION	 ☐ HI-VISIBILITY PROTECTION

☐ OTHER: (DETAIL BELOW)

→

→

→

EQUIPMENT/TOOL	CONDITION	NEED TO BE REPLACED?

6. JOB HAZARD ASSESSMENT

JOB	HAZARD	RISK RATING REQUIRED?	CONTROL

* if a risk rating is required, please fill out form 10-1

7. WORKER ACKNOWLEDGEMENT

By signing below, I confirm that:

- I have participated in the review of today's Daily Job Hazard Analysis Report;
- I understand the tasks to be performed, the hazards identified and the controls to be used;
- I have had the opportunity to provide input into the hazard assessment; and
- I agree to follow the specified safe work practices and controls and to report any additional hazards or concerns to my supervisor immediately.

WORKER NAME	SIGNATURE	CHANGE IN WORKING CONDITION (INITIAL)

8. WORKPLACE VIOLENCE ASSESSMENT (IF ANSWERING YES TO ANY QUESTION, LIST CORRECTIVE ACTIONS TAKEN, BELOW)

History of threats or Violence?	☐ Yes ☐ No
Near historically high crime area?	☐ Yes ☐ No
Concerns voice by JHSC or workers?	☐ Yes ☐ No
Workers required to work alone, late evenings or early mornings?	☐ Yes ☐ No
Workers in contact with public?	☐ Yes ☐ No
LIST CORRECTIVE ACTIONS TAKEN	

Last reviewed: Jan 2026

PURPOSE

The purpose of this procedure is to monitor and evaluate the health and safety performance of the company, specific job sites, supervisory personnel and workers. The record and statistics will identify common factors or trends in accidents and incidents, maintain the Preventative Maintenance Program and monitor and evaluate the effectiveness of the corrective actions and controls.

SCOPE

This procedure applies to workplace parties responsible for reviewing and maintaining the company health and safety program. A system must be in place to ensure that all documents are kept and handled accordingly.

RESPONSIBILITIES**Health and Safety Representative**

- Ensure that all health and safety-related documents are kept current, properly filed, and easily accessible to employees.
- Ensure accurate records of all incidents, accidents, near misses, and investigations are maintained and reported in a timely manner.
- Monitor and report key safety metrics, like injury rates, near misses, and audit findings, to evaluate the effectiveness of safety programs.
- Keep up-to-date records of worker training, certifications, and refresher courses, ensuring employees are appropriately trained.
- Ensure all safety documents are properly stored, archived, and easily accessible while ensuring obsolete documents are disposed of following company procedures.
- Ensure all records are maintained in accordance with applicable laws and regulations.
- Periodically review safety records to ensure accuracy, completeness, and compliance with internal and external standards.
- Maintain confidentiality of sensitive records, ensuring personal information is secure and in compliance with privacy regulations.
- Regularly report safety statistics, trends, and records to management and workers, fostering a transparent safety culture.
- Assist in the preparation for safety audits and inspections by ensuring all relevant documentation is readily available and accurate.

Senior Management Responsibilities

- Establish and maintain an effective document control to ensure all health and safety-related documents are up-to-date, secure, and properly archived.
- Ensure that the organization complies with all relevant health and safety record-keeping regulations.
- Ensure that all health and safety records are securely stored and handled with confidentiality, especially sensitive information.
- Provide training to ensure all employees understand their role in proper documentation and record-keeping, and comply with internal procedures.
- Conduct regular audits of health and safety records to ensure compliance and use findings to drive continuous improvement in safety practices.
- Allocate appropriate resources to support effective management and retention of health and safety records.
- Foster a culture of transparency and accountability where health and safety documentation is valued and employees are encouraged to actively report and participate in safety efforts.

Supervisor Responsibilities

- Ensure accurate and timely reporting of all incidents, accidents, and near misses, and assist in completing incident reports.
- Keep accurate and up-to-date records of daily and weekly safety inspections, hazard assessments, toolbox talks, and safety meetings.
- Ensure that all health and safety records are in compliance with legal and company requirements, and that records are accurate and up to date.
- Document and maintain records of safety meetings and briefings, including minutes and outcomes.
- Maintain records of corrective actions taken in response to safety concerns and ensure follow-up to confirm effectiveness.
- Ensure that all health and safety records are stored securely and remain confidential, in compliance with privacy laws and company policies.

Worker Responsibilities

- Immediately report all incidents, accidents, and near misses to their supervisor and assist in completing necessary reports.
- Accurately complete safety-related forms, hazard reports, and incident documentation as required.
- Attend and participate in all required safety meetings, training, and toolbox talks.
- Adhere to all health and safety procedures and use personal protective equipment (PPE) as required.
- Participate in safety surveys and audits and contribute feedback to improve safety performance and statistics.
- Assist with implementing corrective actions and safety improvements, and document actions taken.

PROCEDURE

The detailed description of all responsibilities for each role is written above in the section titled “Responsibilities”, please review that section before reading the rest of this procedure.

Effective health and safety management requires the participation of all workplace parties. Each role plays a crucial part in ensuring a safe working environment by monitoring performance, enforcing compliance, and continuously improving safety procedures. The following outlines the responsibilities assigned to each group within the organization.

Senior Management oversees the collection and analysis of health and safety statistics, reviewing annual reports, implementing corrective actions, and promoting a culture of safety. The Health and Safety Representative (HSR) conduct quarterly reviews, identifies trends, and recommends improvements. Supervisors enforce safety standards, ensure incidents are reported, and take corrective actions. Workers contribute by reporting hazards, following safety procedures, and actively participating in safety programs.

Performance Measurement Requirements

H&S performance at Maxim will be measured:

- Quarterly: By the Health and Safety Representative.
- Annually: By Senior Management.
- Ongoing: Through leading and lagging indicators.

Performance Measurement Methods

To effectively assess health and safety performance, both quantitative and qualitative measures must be utilized. Quantitative measures provide objective data that allows for statistical tracking of incidents, injuries, and compliance rates.

This type of data helps identify patterns over time and evaluate the effectiveness of safety programs. On the other hand, qualitative measures assess less tangible factors such as safety culture and worker engagement. These insights help in understanding the overall attitude towards safety in the workplace and the effectiveness of communication and training programs. By using both types of measurements, Maxim can ensure a comprehensive evaluation of its health and safety performance, leading to continuous improvement.

Quantitative Measures	Qualitative Measures
• Number of recordable incidents • Frequency and severity rates. • Number of first aid cases. • Near-miss reports filed. • Compliance audit results. • Training completion rates.	• Safety culture assessment. • Worker participation in safety programs. • Effectiveness of corrective actions. • Quality of incident investigations.

By regularly analyzing these performance measurement methods, Maxim can identify potential hazards, improve workplace safety practices, and foster a proactive safety culture.

Leading and Lagging Indicators

Lagging indicators measure workplace safety performance after an incident has occurred. These retrospective factors include the number and severity of incidents, lost time injury (LTI) rates, workers' compensation claims, and repeat safety violations. They help identify trends in past incidents, allowing for corrective actions to prevent recurrence.

In contrast, leading indicators are proactive measures that help identify potential hazards before an incident happens. These include the number of hazard reports submitted, safety training completion rates, participation in workplace safety programs, and compliance with safety inspections and audits. Additionally, completed inspections and issued discipline notices serve as key leading indicators, reflecting efforts to enforce safety standards and address risks before they result in an incident. By analyzing both leading and lagging indicators, Maxim takes a balanced approach to workplace safety, focusing on both prevention and accountability.

Leading Indicators:

- Number of hazard reports submitted.
- Safety training completion rates.
- Number of safety observations.
- Compliance with safety inspections and audits.

Lagging Indicators:

- Number and severity of incidents.
- Lost Time Injury (LTI) rate.
- Workers' compensation claims.
- Repeat safety violations.

Comparison of Current vs. Past H&S Performance

A comparative analysis will be conducted annually to track improvements or identify areas needing attention. By reviewing past and current health and safety performance, Maxim can assess the effectiveness of safety programs, identify persistent issues, and make data-driven decisions to enhance workplace safety.

Key comparisons will include total incident rates year-over-year, changes in the frequency of reported hazards and near-misses, and the impact of implemented corrective actions. This review will also evaluate the effectiveness of new safety programs and training initiatives, ensuring that any implemented measures lead to tangible improvements in safety outcomes.

By analyzing these trends, Maxim can proactively adjust its health and safety strategies, focusing on areas requiring additional attention. For example, if data indicates a rise in a particular type of incident, additional training or revised safety protocols may be introduced. Similarly, if near-miss reporting increases, it may signal improved hazard awareness, warranting reinforcement of proactive safety measures. These insights will help ensure continuous improvement in health and safety performance, fostering a culture of safety across all levels of the organization.

Statistical Analysis and Trend Identification

1. **Incident Trends:** Identify common factors in reported incidents, including location, task type, and time of day.
2. **Near-Miss Analysis:** Assess contributing factors and address hazards before incidents occur.
3. **First Aid Treatment Records:** Review types of injuries treated and identify opportunities for prevention.
4. **Compliance Trends:** Evaluate results from safety audits and inspections to improve adherence to regulations.

Results Recording and Communication

Effective communication of health and safety performance is essential to maintaining a proactive safety culture and ensuring continuous improvement. By recording and sharing key statistics and trend analysis results, Maxim fosters transparency and accountability at all levels of the organization. The proper dissemination of information allows workplace parties to identify risks, implement corrective actions, and enhance overall safety awareness.

All health and safety performance statistics, including incident rates, near-miss reports, and compliance trends, will be documented in the company's health and safety records. These records will serve as a reference for ongoing safety initiatives and regulatory compliance.

Results will be communicated to different workplace parties based on their level of responsibility and influence over safety programs. Senior Management will receive annual reports summarizing key findings, trends, and recommendations for improvements. The Health and Safety Representative will conduct quarterly reviews, ensuring that emerging trends and potential risks are identified in a timely manner. Supervisors and workers will be informed through toolbox talks and safety meetings, where data will be discussed in a practical and actionable manner. If applicable, results will also be presented to the Joint Health and Safety Committee to support collaborative decision-making.

In addition to reporting findings, corrective actions will be assigned and tracked to ensure accountability. Any identified deficiencies will be addressed through targeted training, procedural updates, or other mitigation strategies. By systematically recording and communicating results, Maxim promotes a data-

driven approach to workplace safety, reinforcing the company's commitment to continuous improvement.

Results will be communicated to:

- Senior Management (Annual Reports).
- Health and Safety Representative (Quarterly Reports).
- Supervisors and Workers (Toolbox Talks and Safety Meetings).
- Joint Health and Safety Committee (if applicable).

Required Forms

- Incident Report Form – For reporting workplace incidents.
- Hazard Inspection Form
- First Aid Treatment Record – For recording minor injury treatments.
- Safety Inspection Checklist – Assess compliance with safety standards.
- H&S Performance Review– To track and compare performance metrics

DISTRIBUTION

All records, statistics and relevant documents will be kept at the main office, and available access to any member of the company who wants to see them. They are clearly labeled and located in a binder in the lunchroom of the main office, so workers and employees can collect any document they need confidentially.

Any document needed on the worksite will also be clearly labeled and located in a binder by the Health and Safety Binder at each worksite for the workers to easily access as needed.

Any information which is considered private and confidential will be stored in a locked filing cabinet in the Senior Managements Office with zero access to employees other than the company owner. If a private and confidential document needs to be shared, any non-relevant information will be redacted before being provided to members of the organization where necessary.

RECORDS

All records and past documents/forms will be retained in banker boxes at the head office in a locked room above the warehouse, which is temperate-controlled and protected from the elements to ensure they remain legible and identifiable. Maxim will conform to all applicable legislation, including the *Occupational Health and Safety Act, Sections 25-28*, specifying the required retention periods for specific documents. Access to these records will be limited to authorized personnel to ensure confidentiality and security, particularly for sensitive information.

After the retention period has expired, records will be securely disposed of, either through shredding or secure electronic deletion. The records will be reviewed periodically for compliance, and audits will be conducted to ensure the proper management and storage of documents. Backup and recovery procedures are in place for electronic records to safeguard against data loss.

Title:		Date of Issue:													
Approved by:		Review/Revise Date:													
Location:															
Senior management will review Maxim Mechanical Group Inc.'s health and safety trends on an annual basis. Management will review the patterns and take corrective action. The Health and Safety Coordinator in consultation with the Joint Health and Safety Committee will prepare the trends review. The following documentation will be reviewed when developing the Safety Trends Review: ▪ Injury/illness root causes ▪ Workplace inspections ▪ Injury/Incident investigations ▪ Hazard Reports ▪ Work Refusal reports ▪ Health and Safety recommendations from the Joint Health and Safety Committee ▪ WSIB injury/illness summary. The Health and Safety Co-ordinator will create the summary of all injuries and near misses and review patterns of occurrence. The report will take into consideration the following patterns: by shift; by injury type; by time of day; by trade (occupation), and by type of equipment. Suggested categories for the Trends Review are: ▪ the number of work accident fatalities/critical injuries ▪ the number of lost workdays ▪ the number of non-fatal cases that required medical aid without lost workdays ▪ the incidence of occupational illnesses. The annual review will be completed using the following process: <table border="1" style="width: 100%;"> <tr> <td style="width: 10%;">Step 1:</td> <td>Health and Safety Co-ordinator will collect the data required to develop the Trends report. Consult with the designated JHSC member to review the data and develop the Trends report for management review. Report contents:</td> </tr> <tr> <td>Step 2:</td> <td> ▪ table of contents ▪ summary ▪ recommendations for management review ▪ graphs depicting the trends and findings ▪ Comparative industry or competitor trends if available ▪ tables representing the data used to create the graphs </td> </tr> <tr> <td>Step 3:</td> <td>Submit the Trends reports to management by [Date] of each year.</td> </tr> <tr> <td>Step 4:</td> <td>Management will review the Trends report at the [Date] management meeting and make reply in writing to the JHSC regarding any corrective action to be taken.</td> </tr> <tr> <td>Step 5:</td> <td>Health and Safety Co-ordinator will present management's response to the JHSC within 21 days of management's response.</td> </tr> <tr> <td>Step 6:</td> <td>Health and Safety Co-ordinator will monitor the completion of the corrective action.</td> </tr> </table>				Step 1:	Health and Safety Co-ordinator will collect the data required to develop the Trends report. Consult with the designated JHSC member to review the data and develop the Trends report for management review. Report contents:	Step 2:	▪ table of contents ▪ summary ▪ recommendations for management review ▪ graphs depicting the trends and findings ▪ Comparative industry or competitor trends if available ▪ tables representing the data used to create the graphs	Step 3:	Submit the Trends reports to management by [Date] of each year.	Step 4:	Management will review the Trends report at the [Date] management meeting and make reply in writing to the JHSC regarding any corrective action to be taken.	Step 5:	Health and Safety Co-ordinator will present management's response to the JHSC within 21 days of management's response.	Step 6:	Health and Safety Co-ordinator will monitor the completion of the corrective action.
Step 1:	Health and Safety Co-ordinator will collect the data required to develop the Trends report. Consult with the designated JHSC member to review the data and develop the Trends report for management review. Report contents:														
Step 2:	▪ table of contents ▪ summary ▪ recommendations for management review ▪ graphs depicting the trends and findings ▪ Comparative industry or competitor trends if available ▪ tables representing the data used to create the graphs														
Step 3:	Submit the Trends reports to management by [Date] of each year.														
Step 4:	Management will review the Trends report at the [Date] management meeting and make reply in writing to the JHSC regarding any corrective action to be taken.														
Step 5:	Health and Safety Co-ordinator will present management's response to the JHSC within 21 days of management's response.														
Step 6:	Health and Safety Co-ordinator will monitor the completion of the corrective action.														
Approval Signature:		Document to be posted: Yes – Annual trends report will be posted on the Health & Safety board for 14 days after review.													
Distribution to:															

Trends Review**Results of review**

Health and Safety Trends:	20__	20__	20__
Injuries/near misses at Location:			
1. Warehouse _____			
2. Office area _____			
3. Site: _____			
Number work accident fatalities:			
No Lost time injuries			
First Aid treatment only			
Incidence of Occupation illnesses			

Year End Injury Summary

Maxim Mechanical Group Inc.			Year:		
	Personal Injury Cases				
Month	Lost Time Cases	Medical Referral	Days Lost	Frequency	Severity
January					
February					
March					
April					
May					
June					
July					
August					
September					
October					
November					
December					
Total					
Manager's Signature:			Average:		
Date:					

Analysis of review/ notes:

Monthly Statistical Data Report

This report is required by ALL contractors and subcontractors performing work on this project.

Submit a separate report for each contract, each month, by the end of the first week of the next month, regardless of whether or not an injury occurred.

Contractor/Company Name:		
Purchase Order No:		
Contract Representative:		
Month Ending:		
	Current Month	Total to Date
Fires		
Spills or Releases of Hazardous Materials		
Near Miss Reports		
Total First Aids for the Month		
Total Medical Aids for the Month		
Total Lost Workday Cases/Lost-time Injuries (LTIs) for the Month		
Total Lost Workdays/LTIs for the Month		
Total Personnel Hours Worked for the Month		
Accidents and Near Misses completed by Sub-Contractor Contractor Name:		

Submitted By: _____

Signature: _____ Date: _____

This document is intended to track and monitor the forms that are required by legislations and procedures of the *Health and Safety Manual*. All forms will be logged on this form, to ensure no missing or forgotten forms occur.

Title	Form Number	Q1	Q2	Q3	Q4	Form Date
Visitor Sign – In Log	1-2					
Duties and Responsibilities Acknowledgement Sheet	2					
Orientation	4-1-1 4-2-1					
Toolbox Safety Talks Form	5-1					
Hazard Reporting	10-1					
Duties & Responsibilities Acknowledgement Sheet	2-1					
Workplace Task Standards Documents	11-2					
Task Inventory	11-1					
Revision TrackingForm	14-1-1					
Control Management Form	14-1-3					
Subcontractor Procurement Checklist	18-1-1					
PPE Inspection Form	22 – 2					
Daily Hazard Analysis Report	25-1-1					March 30, 2023
Health & Safety Trends Form	26-1-1					November 2022
Form Tracker	26-2					November 2022
Jobsite Document Checklist	27 - 2					

Forms are to be annually reviewed by Senior Management and the Health and Safety Team to ensure they are up to date and hold current and updated details and information. To ensure that no unnecessary and obsolete documents are used.

Reviewed By: _____

Signature(s): _____ Date: _____

Updated: July 2024

PURPOSE

The purpose of this procedure is to identify the requirements and procedures for regulations to set the standards and rules that ensure our employees are safe and the procedures are consistent and fair to everyone.

SCOPE

Preventing workplace illness and injury is an important of our responsibility towards creating a healthy and safe work environment for our employees and sub-contractors.

RESPONSIBILITIES**Health and Safety Team Responsibilities**

- Promotion of training, education and research.
- Act as an advisory body and help with the resolution of OH&S disputes
- Identify hazards and obtain information about them.
- Identify and review applicable legislation and regulatory changes.
- Ensure health and safety information is visibly posted in the workplace.
- Assist in compliance monitoring and participate in audits and inspections.
- Provide recommendations to management regarding legislative compliance.

Senior Management Responsibilities

- Ensure compliance with all applicable health and safety legislation, regulations, and standards.
- Allocate resources for the implementation and maintenance of this procedure.
- Take every reasonable precaution to ensure the workplace is safe.
- Train employees about any potential hazards and in how to safely use, handle, store and dispose of hazardous substances and how to handle emergencies.
- Communicate requirements to all employees of use for any necessary PPE
- Immediately report all critical injuries to the government department responsible for OH&S.
- Appoint a supervisor who sets the standards for performance, and who ensures safe working conditions are observed.

Supervisor Responsibilities

- Ensure workers are aware of and comply with applicable legislation and company policies.
- Monitor workplace conditions to ensure compliance with health and safety requirements.
- Report any non-compliance issues to management.
- Provide training on new legislative changes affecting their teams.

Worker Responsibilities

- Follow all company policies and procedures as they relate to health and safety legislation.
 - Report any hazards, incidents, or non-compliance issues to their supervisor.
 - Participate in required training and education programs related to health and safety laws.
-

- Know your three basic rights:
 - Right to refuse unsafe work.
 - Right to participate in the workplace health and safety activities
 - Right to know, or the right to be informed about, actual and potential dangers in the workplace.
-

PROCEDURE

The detailed description of all responsibilities for each role is written above in the section titled “Responsibilities”, please review that section before reading the rest of this procedure.

Maxim identifies the requirements of applicable legislation, regulations, standards and any other requirements to ensure the safety of our employees.

Beyond legislative compliance, Maxim recognizes the importance of the following requirements. The HSR will Monitor sources like the Ontario Ministry of Labour, Training and Skills Development website, industry associations, and government publications. Using this information – the HSR will summarize and communicate legislative updates via email, meetings, and postings.

The industry-specific standards and codes relevant to our operations may include:

- *Occupational Health and Safety Act (OHSA)*
- *Workplace Safety and Insurance Act (WSIA)*
- *Regulations for Industrial Establishments (O. Reg. 851)*
- *Construction Projects Regulation (O. Reg. 213/91)*
- *First Aid Requirements (Reg. 1101)*
- *Fire Code (O. Reg. 213/07)*
- *Canadian Standards Association (CSA) Standards related to PPE and workplace safety*
- *Other applicable municipal, provincial, and federal regulations*

A register of all relevant legislation and standards will be maintained and updated quarterly by the Health and Safety Representative. Changes in legislation will be communicated to employees through meetings, emails, and training sessions.

The most current versions of the OHSA, employment standards, and any mandatory notices will be posted on health and safety boards in all workplaces. All applicable legislation and compliance records will be stored electronically and in printed format at each workplace. A copy can be requested from the HSA or Senior Management at any time and can be provided electronically or printed.

Methods to Ensure Compliance

All employees will receive training on applicable legislation as part of their orientation and ongoing safety training. This will allow them to stay informed and updated through regularly monitor changes in regulations and laws and are asked to subscribe to reputable HR organizations,

publications, newsletters.

Regular workplace inspections will be conducted to ensure compliance with legislative requirements through annual internal audits. When necessary, the HSR will set up internal controls to monitor compliance and regularly review and adjust controls as needed.

Non-compliance issues will be addressed through the company's investigation and reporting procedure. Maxim will seek legal support to navigate complex rule changes effectively.

Communication and Training

- Using the **Form 27-2** the Supervisor will ensure all legislative documents are in place and available for the workers to review and use at any given time.
- We will communicate this policy to all employees and contractors.
- Regular training sessions will reinforce our commitment to safety and provide necessary knowledge and skills.
- Additionally, the Senior Management and Health and Safety will be responsible for ensuring that any informative legislative posts are seen in public areas.

Review and Improvement

The senior Management and Health and Safety team are responsible to continuously monitor changes or updates to legislation to ensure ongoing compliance.

The HSR who is responsible for conducting quarterly compliance reviews, will gather all the information and compile it into an Evaluation Report, which is then reviewed by management and stored for future reference. The Evaluation Report is a key document used to track and assess legislative compliance within the organization. It serves as a formal record of findings from compliance reviews, internal audits, and workplace inspections. The contents of the Evaluation Report include:

1. General Information
2. Scope of Evaluation
3. Findings
4. Corrective Actions Required
5. Follow-up Actions
6. Approval and Sign-off

The Evaluation Report will be reviewed by Senior Management to ensure corrective actions are implemented. Used to track trends in compliance performance over time, referenced in annual reviews to improve safety programs and procedures and stored for at least five (5) years as per the retention policy.

DISTRIBUTION

The **Form 27-2** Jobsite Document Checklist, is to be kept on site as an easy refence for employees, health and safety representatives and all other sub contractors.

RECORDS

All records and past documents/forms will be retained on file at head office indefinitely which follows applicable legislation: *Occupational Health and Safety Act, Sections 25-28*. Documents will be kept in a temperate controlled room, away from the elements to ensure they remain legible and readily identifiable.

Health & Safety Rep	Project	Date

The following documents MUST BE POSTED OR AVAILABLE at the workplace.

Section #	Occupational Health and Safety Act	Yes	No	N/A
25(2)(i) 25(3.1)	Occupational Health and Safety Act and Regulations for Construction Projects (aka the green book), Employment Standards Poster (MOL), Health and Safety at Work Poster (MOL), and any extracts (posted)			
57(10)	Copy of MOL Inspector's orders, inspection reports (posted)			
25(2)(k)	Employer occupational health and safety policy (posted)			
38(1)(a)	Safety data sheets (SDSs) for hazardous products (available)			
32.0.1(2)	Violence and harassment policies (posted)			
Section #	Construction Projects Regulation (213/91)	Yes	No	N/A
6(6)	MOL approved notification form for the project (posted)			
13(1)	Constructor's name and head office information (posted)			
13(1)(c)	Address, telephone number of nearest MOL office (posted)			
44	DANGER signs in hazardous areas (posted)			
13(2)	Name, trade and employer of health and safety rep (posted)			
29(10)	Location of toilet facilities (posted)			
5(2)(b)	MOL approved registration forms for all employers (available)			
26.2(1.1) & (4)	Working at Heights training records (available)			
	Emergency Planning	Yes	No	N/A
17(3)	Emergency procedures (posted)			
26.1(4)	Fall arrest rescue procedures (available)			
N/A	Location of nearest hospital (map)			
Section #	First Aid Requirements (WSIB Reg.1101)	Yes	No	N/A
1(1)(b)(i)	In Case of Injury Poster (WSIB Form 82) (posted on notice board)			
(ii)	Valid certificate of first aider on duty (posted on notice board)			
(iii)	Inspection card for first-aid box (posted on notice board)			
5	Employer records of first aid treatment given (available)			
	Emergency Phone Numbers	Yes	No	N/A
	Fire Department			
	Police Department			
	Ambulance			
	Hospital and Walk-in Clinic			
	Hydro			
	Bell Telephone			
	Consumers Gas			
	Water Department			
	Poison Information Centre			
	Head Office			

After 12 months, this form is no longer valid and must be completed again to ensure all documents are up to date and legible.

Updated: July 2024

PURPOSE

The purpose of this policy is to ensure the health and safety of all workplace parties by outlining the procedures for controlling hazards that may pose a risk to the health and safety of workers, contractors, visitors, or any other individual present in the workplace.

SCOPE

By identifying hazards, developing control measures, implementing those measures, and monitoring their effectiveness, the team helps to create a safer and healthier workplace for all.

RESPONSIBILITIES**Health and Safety Team Responsibilities**

- Reviewing the hazard assessments submitted and taking appropriate steps to mitigate the risk.
- Developing appropriate control measures to eliminate or minimize the risks associated with those hazards.
- Implementing hazard control measures that have been developed.
- Ensuring that all management and workers are trained on the control measures and that the measures are being followed correctly.
- Monitoring the effectiveness of the hazard control measures that have been implemented.
- Conducting regular inspections, reviewing incident reports, and conducting audits to ensure that the measures are being followed correctly.
- Conducting regular training and education sessions for all workers.
- Providing information on the hazards in the workplace, the control measures that have been implemented, and the importance of following safe work practices.
- Developing emergency preparedness and response plans to ensure that all workers know what to do in the event of an emergency.
- Conducting regular emergency drills, ensuring that all emergency response equipment is in good working order, and ensuring that workers are familiar with emergency procedures.
- Conducting regular program evaluations to ensure that the hazard control measures that have been implemented are effective.
- Reviewing incident reports, conducting audits, and making recommendations for improvements as necessary.

Senior Management Responsibilities

- Establishing and communicating health and safety policies for the organization. These policies provide the foundation for the development and implementation of hazard control measures.
- Allocating resources to ensure that appropriate hazard control measures are in place.
- Providing funding for equipment, training, and staffing to ensure that the organization has the necessary resources to control hazards effectively.
- Appointing qualified personnel to lead health and safety efforts within the organization.
- Hiring a health and safety manager or a safety coordinator to oversee hazard control efforts.
- Providing leadership and support to the health and safety team.
- Ensuring that health and safety is a priority within the organization

and that the necessary resources are available to support hazard control efforts.

- Reviewing and approving hazard control measures that have been developed by the health and safety team. This includes ensuring that hazard control measures are appropriate, effective, and compliant with relevant legislation and standards.
- Monitoring the effectiveness of hazard control measures that have been implemented.
- Reviewing incident reports, conducting audits, and making recommendations for improvements as necessary.
- Promoting a culture of safety within the organization through communicating the importance of health and safety, encouraging open communication about hazards and risks, and recognizing and rewarding safe work practices.

Supervisor Responsibilities

- Ensuring that the hazard control measures that have been developed by the health and safety team are implemented in their area of responsibility.
- Ensuring that workers are trained on control measures and that the measures are being followed correctly.
- Investigating incidents in their area of responsibility.
- Documenting the incident, determining the root cause, and developing recommendations for preventing similar incidents from occurring in the future.
- Conducting regular training and education sessions for workers by providing information on hazards in the workplace, the control measures that have been implemented, and the importance of following safe work practices.
- Ensuring that workers are following hazard control measures, wearing appropriate PPE, and using equipment safely.
- Recognizing workers who follow safe work practices and providing feedback and coaching to workers who need improvement.

Worker Responsibilities

- Following safe work practices established by the organization to control hazards.
 - Wearing appropriate PPE, using equipment and machinery safely, and reporting any unsafe conditions or hazards to their supervisor.
 - Participating in training and education sessions provided by the organization to ensure they are aware of the control measures that have been put in place.
 - Co-operating with the hazard control measures established by the organization, including participating in safety drills, following evacuation procedures, and reporting any concerns or issues with the control measures to their supervisor or the health and safety team.
 - Reporting any health and safety concerns related to the implemented controls to their supervisor or the health and safety team.
-

PROCEDURE

The detailed description of all responsibilities for each role is written above in the section titled “Responsibilities”, please review that section before reading the rest of this procedure.

All hazards in the workplace will be identified and assessed by a competent person using **Form 25-1** Daily Hazard Form and controls will be logged on the **Hierarchy of Controls Form (28-1)**. Other forms to review will include Safe Work Practices (SWPs) and Safe Job Procedures (SJPs). Hazards will be classified according to their level of risk and controls will be put in place to mitigate the risk of injury or illness.

To establish a clear and consistent approach for identifying, implementing, and maintaining effective controls to eliminate or minimize health and safety risks in the workplace, ensuring the safety and well-being of all workers. Hazard Assessments must be conducted for all operations including routine and non-routine, and human factors. This will be completed as part of the Daily Job Hazard Assessment (Daily JHA). For more information please see *Section 25 – Daily Job Hazard Assessments*.

Once the risks are analyzed and critical tasks and activities are identified, the Supervisor—working collaboratively with the Health and Safety Representative (HSR)—will identify and involve appropriate qualified parties to develop formal control measures. This group will include individuals who have the necessary knowledge, experience, and competency to assess the work effectively. Where applicable, this may include internal team members (e.g., subject matter experts, frontline workers) and, if necessary, external parties (e.g., safety consultants, equipment manufacturers). These parties will jointly apply the appropriate control measures, following the hierarchy of controls, to eliminate or minimize the identified risks. Safe Work Practices (SWPs) and Safe Job Procedures (SJPs) will be developed or updated as part of this process. They will do this by:

1. Implementing Controls

Once hazards are identified and their level of risk is prioritized using a standard risk rating system, the Supervisor—together with the qualified parties identified above will apply the Hierarchy of Controls methodology to systematically address and control the workplace hazards. These parties may include internal personnel such as the HSR, frontline workers, and subject matter experts, as well as external resources where necessary (e.g., safety consultants or equipment specialists).

The group will collaboratively assess each hazard and determine the most effective control method, starting with elimination and proceeding down the hierarchy through substitution, engineering controls, administrative controls, and personal protective equipment (PPE) as a last resort. Each decision must be documented, with justification for the selected control method based on feasibility, effectiveness, and validation through observation, consultation, or trial. This structured

process ensures that all formal controls—such as Safe Work Practices (SWPs) and Safe Job Procedures (SJPs)—are developed through a consistent, transparent, and verifiable approach.

The five levels of the Hierarchy of Controls are:

- i. **Elimination:** The most effective way to control a hazard is to eliminate it entirely. This can be done by removing the hazard from the workplace or by redesigning the work process so that the hazard is no longer present.
- ii. **Substitution:** If it is not possible to eliminate the hazard, the next best option is to substitute it with a less hazardous material, tool or process. This can include replacing a toxic chemical with a safer alternative or using a piece of equipment that reduces the risk of injury.
- iii. **Engineering controls:** If elimination or substitution are not feasible, engineering controls can be implemented to minimize the hazard. This can include adding physical barriers, ventilation systems, or other engineering controls to reduce exposure to the hazard.
- iv. **Administrative controls:** Administrative controls involve changing the way work is done, and typically involve policies, procedures, and training. This can include rotating workers to reduce exposure time, providing warning signs or labels, or implementing training programs.
- v. **Personal protective equipment (PPE):** PPE is the least effective method of controlling a hazard, but it can still be an important part of an overall hazard control plan. PPE includes items like respirators, gloves, safety glasses, and hearing protection.

Once a hazard is identified, a detailed description of the risks or concerns will be identified on **Hierarchy of Controls Form (28-1)** and to the formal controls identified in SWPs and SJPs, which describes the problem and concern, and how it will be handled. The form is to be completed by the Supervisor and submitted to Senior Management to review and approve. The Senior Manager will ensure that hazard control measures are appropriate, effective, and compliant with relevant legislation and standards.

2. Documentation of Hazard Control:

The HSR will document all controls implemented, including detailed descriptions of the hazard, associated risks, and the specific control measures in place.

Through reviewing the tool-box talks and in communication with the Supervisor through e-mail and phone-call the HSR will monitor and assess the effectiveness of controls. Regularly review whether controls are adequately reducing risk and whether additional measures are necessary.

3. Consideration of Legal Requirements

When reviewing the approved controls the HSR will ensure all controls identified must follow all applicable legal requirements. The HSR will follow Section 27 of this manual (Legislation and Other Procedures) to ensure consistency before granting any approvals. This includes:

- Local and national Occupational Health and Safety (OHS) legislation
- Environmental protection laws (e.g., air and water quality standards, waste management regulations).
- Industry-specific regulations
- Emergency preparedness and response requirements, including fire safety regulations, and provisions for dealing with hazardous substances or pandemics.
- Labor laws related to workplace safety (e.g., safe working hours, mandatory breaks).

It is the responsibility of the HSR to follow Section 27 of this manual (Legislation and Other Procedures) so that every control measure will] be checked for compliance with the applicable laws, regulations, and standards. Controls must not only be effective but also meet the minimum regulatory requirements.

4. Training and Communication:

The management team will ensure all employees are trained on the hazards present in their work environment, the control measures in place, and safe work practices. Training will be provided during employee onboarding, Maxim will provide periodic refresher courses to ensure workers remain aware of controls and any changes to safety protocols. See *Section 15 - Health and Safety Training Procedure & Program* for more information on the training procedure.

Information on hazards and hazard controls will be communicated to workers, contractors, and visitors as required. The method of communication—such as toolbox talks, safety meetings, posted procedures, signage, training sessions, and written notifications—must be clearly documented to ensure consistency and allow for validation. Supervisors are responsible for ensuring that controls are in place, maintained, effectively communicated, and followed. They must regularly inspect work areas and address any identified gaps in safety practices. Workers are required to report hazards to their supervisors and to actively participate in hazard control initiatives, including daily morning toolbox talks.

5. Review and Evaluation:

The health and safety policy and procedures will be reviewed annually by the management team to ensure that they remain effective and up-to-date.

The Health and Safety Team and Senior Management will be involved

in the review and evaluation of the policy and procedures.

The effectiveness of hazard controls will be monitored, and adjustments made as required.

DISTRIBUTION

All records, statistics and relevant documents will be kept at the main office, and available access to any member of the company who wants to see them. They are clearly labeled and located in a binder in the lunchroom of the main office, so workers and employees can collect any document they need confidentially.

Any document needed on the worksite will also be clearly labeled and located in a binder by the Health and Safety Binder at each worksite for the workers to easily access as needed.

Any information which is considered private and confidential will be redacted before providing to members of the organization where necessary.

RECORDS

All records and past documents/forms will be retained on file at head office indefinitely which follows applicable legislation: Occupational Health and Safety Act, Sections 25-28. Documents will be kept in a temperate controlled room, away from the elements to ensure they remain legible and readily identifiable.

Hierarchy of Controls:

- Elimination – Physically remove the hazard
- Substitution – Replace the hazard
- Engineering controls – Isolate people from the hazard
- Administrative controls – Change the way people work
- Personal protective equipment– Protect the worker with PPE

* Please see the Health and Safety Manual with a detailed description of each hierarchy if more information is needed.

	Date identified	Problem/ Concern/ Suggestion	Hierarchy of Control Used:	Supervisor Sign Off
1.				
2.				
3.				
4.				
5.				
6.				

Updated: July 2024

PURPOSE

The purpose of this procedure is to establish a consistent process for identifying, developing, implementing, and maintaining safe work practices at Maxim. Safe work practices provide step-by-step instructions to minimize risks and protect workers from injury, illness, or property damage.

SCOPE

This procedure applies to all workers, supervisors, contractors, and visitors at all Maxim workplaces, including offices, facilities, construction sites, vehicles, and client locations. It covers the development, implementation, communication, and review of safe work practices.

RESPONSIBILITIES**Health and Safety Team Responsibilities**

- Participate in the development and review of safe work practices.
- Monitor compliance during inspections.
- Communicate worker feedback and recommendations to management.
- Verify safe work practices are accessible to all workers.

Senior Management Responsibilities

- Provide resources to develop and maintain safe work practices.
- Ensure all supervisors and workers are trained in applicable practices.
- Review and approve new or revised practices.

Supervisor Responsibilities

- Implement safe work practices in daily operations.
- Ensure workers understand and follow applicable procedures.
- Monitor compliance and correct unsafe behaviours.
- Report deficiencies in practices or required updates to management.

Worker Responsibilities

- Participate in the development and review of safe work practices.
- Monitor compliance during inspections.
- Communicate worker feedback and recommendations to management.
- Verify safe work practices are accessible to all workers.

PROCEDURE**Identification of Need**

Hazards identified through inspections, incidents, risk assessments, or regulatory requirements are reviewed to determine the need for a new or revised safe work practice.

Development

Practices are drafted by management and supervisors in consultation with workers and the Health & Safety Representative.

Each practice must include: Purpose, Scope, Responsibilities, Step-by-Step Instructions, PPE requirements, and Emergency considerations.

Approval

Senior Management reviews and approves all new or revised practices

before implementation.

Implementation

Practices are communicated through training, safety meetings, postings, and inclusion in the Health & Safety Manual.

Monitoring and Compliance

Supervisors ensure workers follow practices.

Non-compliance is addressed immediately through coaching and, if required, corrective action.

Review and Continuous Improvement

Practices are reviewed at least annually, or sooner if legislation changes, new equipment is introduced, or incidents occur.

Procedure Steps**1. Preparation**

- Identify all energy sources (electrical, hydraulic, pneumatic, chemical, thermal, gravity, mechanical, etc.).
- Review the equipment's operating manual or energy control procedures.
- Notify affected workers that lockout/tagout will be performed.

2. Shutdown

- Power down the machine or equipment using normal operating controls.
- Wait until all motion has stopped.

3. Isolation

- Physically isolate the energy source (e.g., open disconnect switch, close valve, block mechanical parts, bleed pressure lines).

4. Lockout/Tagout Application

- Each authorized worker places their personal lock and tag on the isolation device.
- Tags must clearly state:
 - Worker's name
 - Date/time
 - Reason for lockout
- Only the worker who applied the lock may remove it.

5. Dissipation of Energy

- Relieve stored or residual energy (e.g., discharge capacitors, release pressure, lower suspended parts, drain fluids).

6. Verification

- Attempt a safe "start" of the equipment to confirm isolation.
 - Return controls to the OFF/neutral position after verification.
-

7. Performing the Work

- Proceed with maintenance or servicing once energy control is confirmed.
- Keep locks/tags in place until all work is completed.

8. Restoring Equipment to Service

- Inspect work area and remove tools/materials.
 - Ensure guards/safety devices are reinstalled.
 - Notify affected workers.
 - Each worker removes their own lock/tag.
 - Restore energy sources gradually and test operation
-

DISTRIBUTION

The approved procedure and related safe work practices will be included in Maxim's Health & Safety Manual.

Copies will be available in offices, on worksites, and electronically on the company server.

Workers will be informed of new or revised practices through toolbox talks, safety meetings, or direct supervisor instruction.

RECORDS

Training records confirming worker instruction on safe work practices will be maintained by the company.

All versions of safe work practices will be documented with revision dates.

Records of reviews, updates, and approvals will be retained for a minimum of three years.

Lockout/Tagout (LOTO) Procedure**Purpose**

To ensure the safety of all workers by preventing the accidental start-up, energization, or release of hazardous energy during maintenance, servicing, or repair of machines, equipment, or systems.

Scope

This procedure applies to all Maxim workers, contractors, and supervisors who may be exposed to hazardous energy from machinery, tools, vehicles, or systems.

Responsibilities

Employer/Management: Provide lockout/tagout devices, training, and enforce compliance.

Supervisors: Ensure workers follow procedures and equipment is properly locked out.

Workers/Authorized Persons: Follow this procedure before performing work, apply their personal locks/tags, and verify isolation.

Health & Safety Representative: Monitor compliance during inspections.

This form is used to identify equipment / machinery / systems that require lockout procedures.

Energy Types: Identify which type of energy is present and requires lockout / tagout prior to performing work for each piece of equipment or machine listed.

1 - Electrical

6 - High Pressure

2 - Thermal

7 - Gravity

3 - Compressed Air

8 - Kinetic

4 - Chemical

9 - Other (describe)

5 - Hydraulic

MAXIM MECHANICAL GROUP INC.				
	Equipment / machine	Location	Energy Type(s)	Lock Removed (Initial)
1.				
2.				
3.				
4.				
5.				
6.				

*Note: Inventory must be reviewed annually
Updated: September 2025