


# ← Project review - SQL1 Bootcamp. Team01

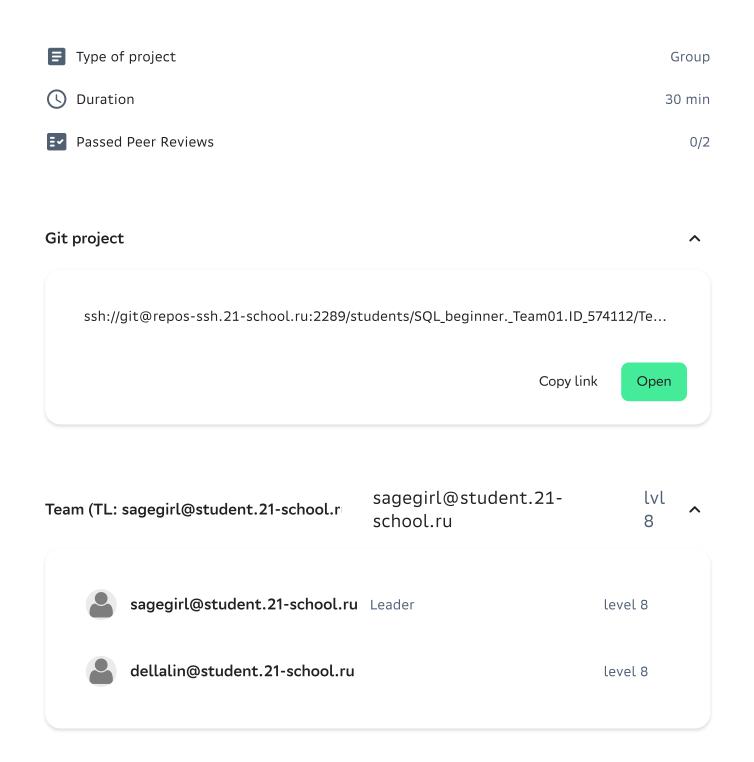

About

## Introduction

The methodology of School 21 makes sense only if peer-to-peer reviews are done seriously. Please read all guidelines carefully before starting the review.

- Please, stay courteous, polite, respectful and constructive in all communications during this review.
- Highlight possible malfunctions of the work done by the person and take the time to disc uss and debate it.
- Keep in mind that sometimes there can be differences in interpretation of the tasks and the scope of features. Please, stay open-minded to the vision of the other.
- If you have not finished the project yet, it is compulsory to read the entire instruction bef ore starting the review.

### **Guidelines**

- Evaluate only the files that are in src folder on the GIT repository of the student or group.
- Ensure to start reviewing a group project only when the team is present in full.
- Use special flags in the checklist to report, for example, an "empty work" if repository do es not contain the work of the student (or group) in the src folder of the develop branch, or "cheat" in case of cheating or if the student (or group) are unable to explain their work at a ny time during review as well as if one of the points below is not met. However, except for cheating cases, you are encouraged to continue reviewing the project to identify the probl ems that caused the situation in order to avoid them at the next review.
- Doublecheck that the GIT repository is the one corresponding to the student or the group.
- Meticulously check that nothing malicious has been used to mislead you.
- In controversial cases, remember that the checklist determines only the general order of the check. The final decision on project evaluation remains with the reviewer.

Main part

#### Exercise 00

Checks for the exercise 00

- The next command

select coalesce(u.name, 'not defined') as name,

coalesce(u.lastname, 'not defined') as lastname,

```
t1.type,
      t1.volume,
      coalesce(c.name, 'not defined') as currency_name,
      coalesce((select rate_to_usd from currency c1 where c1.id = c.id and c1.updated = c.l
ast_updated),
             1) as last_rate_to_usd,
      t1.volume::numeric * coalesce((select rate_to_usd
      from currency c1 where c1.id = c.id and c1.updated = c.last_updated),1) as total_volu
me_in_usd
    from (
    select user_id, type, currency_id, sum(money) as volume
    from balance b
    group by user_id, type, currency_id) as t1
    full join "user" u on u.id = t1.user_id
    full join (select id, name, max(updated) as last_updated from currency c group by id, na
me) as c on c.id = t1.currency_id
    order by 1 desc, 2, 3;
- The result is below
   "Петр"
             "not defined" "2" "203"
                                         "not defined" "1" "203"
                                         "EUR" "0.9"
   "Иван"
             "Иванов"
                          "1" "410"
                                                            "369"
   "not defined" "not defined" "0" "120"
                                              "JPY"
                                                       "0.0087" "1.044"
                                                       "1" "120"
   "not defined" "not defined" "1" "120"
                                              "USD"
                                "0" "50"
   "not defined" "Сидоров"
                                                       "0.9" "45"
                                              "EUR"
                                "1" "500"
   "not defined" "Сидоров"
                                              "USD"
                                                       "1" "500"
   "not defined" "Сидоров"
                                "2" "500"
                                              "JPY"
                                                       "0.0087" "4.35"
  No
              Yes
```

#### Exercise 01

Checks for the exercise 01

- The next command

```
select t1.name,
    t1.lastname,
    currency_name,
    money * rate_to_usd as currency_in_usd
from (
    select coalesce(u.name,'not defined') as name,
        coalesce(u.lastname,'not defined') as lastname,
        c.name as currency_name,
        money,
        coalesce((select rate_to_usd
        from currency c where b.currency_id = c.id and c.updated < b.updated order by c.up
dated desc limit 1),</pre>
```

```
(select rate_to_usd
           from currency c where b.currency_id = c.id and c.updated > b.updated order by
c.updated asc limit 1)) as rate_to_usd
    from balance b inner join
      (select c.id, c.name from currency c group by c.id,c.name) as c on c.id = b.currency_i
d
      left join "user" u on u.id = b.user_id) as t1
    order by 1 desc, 2, 3;
- The result is below
   "Иван"
             "Иванов"
                          "EUR" "150.1"
   "Иван"
             "Иванов"
                           "EUR"
                                   "17"
   "Иван" "Иванов"
                          "EUR"
                                   "158"
   "not defined" "not defined" "JPY"
                                        "0.948"
   "not defined" "not defined" "USD"
                                        "120"
   "not defined" "Сидоров"
                               "EUR"
                                        "39.5"
   "not defined" "Сидоров"
                               "JPY"
                                        "3.95"
   "not defined" "Сидоров"
                               "USD"
                                        "500"
  No
             Yes
```

Fails (i)

Forbidden functions Empty work Cheat

Comment

Leave a comment...