

WaterWizards

Justin Dewitz, Erick Zeiler, Max Kondratov, Julian jNachnamej

17. Juli 2025



Inhaltsverzeichnis

- Einleitung
- Organisation
- Technologie und Architektur
- DevOps
- Technische Erfahrungen
- Analyse
- Wiki
- Erfahrungen und Fazit

Einleitung

- ▶ Was ist WaterWizards?
 1. Multitplayer Real-Time Schiffe versenken
 2. Angriff durch Zauber, die durch Karten repräsentiert werden
 3. Ziel: Zerstörung der gegnerischen Schiffe
- ▶ Warum WaterWizards?
 1. Schiffe versenken ist ein Klassiker
 2. Durch Real-Time wird es dynamischer
 3. Für jede Altersgruppe interessant
- ▶ Was macht WaterWizards besonders?
 1. Kombination aus Strategie und schnellen Entscheidungen
 2. Zauber und Karten bringen neue Dynamik ins Spiel
 3. Multiplayer und Echtzeit sorgen für Spannung
- ▶ Für wen ist das Spiel gedacht?
 1. Strategie-Fans
 2. Familien und Freunde
 3. Alle Altersgruppen

Organisation

- ▶ git über GitHub für die Versionsverwaltung
- ▶ Scrum mit 2-Wochen-Sprints
- ▶ Kanban/Issue-Board über GitHub
- ▶ Kommunikation über Discord-Server

Backlog

Backlog

Estimated 9

This item hasn't started

WaterWords #254

Fixe Abgabe

Client Enhancement Medium

WaterWords #255

Refactoring File Structure

Client Enhancement Medium

WaterWords #256

Server functionality Card Storm

Karten Server

WaterWords #257

Mirror Buildin

Karten Server

WaterWords #258

Server functionality Card Polymorph

Iteration 5 Karten Server

WaterWords #259

Server functionality Card Mass Mending

Iteration 7 Karten Server

WaterWords #260

Damaged Cards Doppelgänger available

Iteration 7 Karten Server

WaterWords #262

Water Animation for miss

Client Low UI

+ Add Item

Bugs

Estimated 3

WaterWords #265

server Crash - playing Thunder

Iteration 3 bug Server

WaterWords #276

Wrong placement for enemy ships

bug Client Medium UI

WaterWords #227

Vorbildschirm Fixen

Client Medium UI

WaterWords #202

Parallelize Dot inconsistent time

bug UI

WaterWords #232

CallWindCard: Handle moving into Ship

bug Client Medium Script Server

WaterWords #233

CallWindCard: Cell States Handling Client and Server

Client Medium Script Server

WaterWords #234

Make Healing Remove damaged Cells from GameShip Objects

bug Client Low Script UI

+ Add Item

ToDo

Estimated 2

This is actively being worked on

WaterWords #234

Time tracking - Nachrichten

Iteration 3 M Iteration 5 documentation High question

WaterWords #225

AbschlussVideo

Iteration 7

WaterWords #234

Präsentation Gliederung vorbereiten

Iteration 6

WaterWords #223

Doku fertigstellen

Abschluss Präsentation

+ Add Item

In Progress

Estimated 3

WaterWords #241

Sounds

Iteration 1 M Client

WaterWords #232

Abschluss Präsentation

Abschluss Präsentation

WaterWords #234

Server functionality Card Mass Mending

Iteration 7 Karten Server

+ Add Item

In Review

Estimated 5

WaterWords #239

Playing a card should cost Mana

Iteration 5 Iteration 6 Karten Server

WaterWords #232

Implement Wizard Assets

Iteration 7 Asset Client Medium UI Iteration 5

WaterWords #236

Server functionality Card Perfect Mending

Iteration 7 Karten Server

WaterWords #230

Server functionality Card Rise Sun

Iteration 5 Karten Server

WaterWords #238

Create Documentation from Docstrings

documentation Medium

+ Add Item

Done

Estimated 14

This has been completed

WaterWords #25

test Tools/FormalCases

Iteration 5 UI Iteration 6 Test

WaterWords #222

delete Client

Iteration 5 Iteration 6

WaterWords #248

Refactor: Nicht-Gemutete Karten aus Deck/Löschen

Iteration 6 Karten Server

WaterWords #233

Cards Disapper from hand before card is done

Iteration 5 bug Client High Karten Iteration 6 Iteration 5

WaterWords #234

Cancel Cost of Card with Right Click

Iteration 5 Iteration 6 Client High Iteration 5 Iteration 6

WaterWords #247

Feature: Karten/verschiedenen Auszustand

Iteration 5 Iteration 6 Client Karten Server Iteration 5 Iteration 6

WaterWords #244

GameState.cs Refactor

Iteration 5 Iteration 5 High Server Iteration 5


WaterWords #231

Gold needs to be incremented on the Server Side

Iteration 5 Iteration 5 High Server UI

+ Add Item

Projektplan

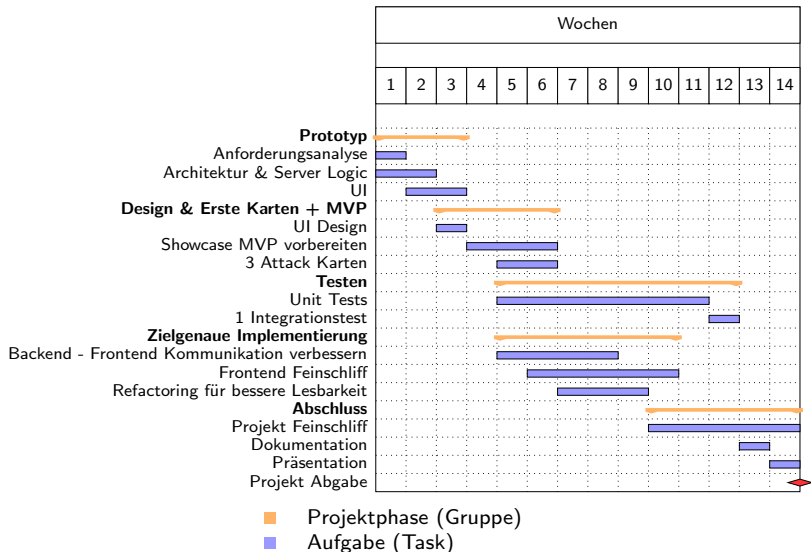

Rollen des Projektes

- ▶ Architektur: Justin Dewitz
- ▶ Dokumentation: Erick Zeiler
- ▶ Code-Qualität: Paul Schneider (abgesprungen)
- ▶ Git Repository: Max Kondratov

Ansprechpartner

Technologie und Architektur

- ▶ Programmiersprache: C#
- ▶ Raylib
- ▶ LiteNetLib
- ▶ Nuke für das Build-System
- ▶ CodeQL für die statische Code-Analyse
- ▶ GitHub Actions für die CD-Pipeline
- ▶ GitHub Pages für die Dokumentation
- ▶ Event-Driven Architektur
- ▶ Docker für die Containerisierung
- ▶ Hetzner Server für das Hosting

- ▶ Raylib für die grafische Darstellung
 1. Leichtgewichtige Library
 2. Einfacher Einstieg
 3. Kein Eigenes Key- und Maus-Event Handling

LiteNetLib für die Client-Server-Verbindung

1. Einfaches Setup?
2. Einfache Client-Server-Kommunikation über Nachrichten
3. Einfache Datenübertragung der Spieldaten

UI/Client



UI/Client

- ▶ Grafische Darstellung getrennt von Spielfunktionalität
 - ▶ Client übernimmt das Anzeigen und Handhabung des User Interfaces
- ▶ Gemeint sind Interaktive dargestellte Elemente, z.B.:
 - ▶ Das Main Menu, Die Kartenstapel, die Schiffe oder die Kartenhand
- ▶ Rendering und Client-Side Logik werden über Draw-Methoden direkt in der GameLoop ausgeführt wird.



UI-Beispiel aus der MainMenu Klasse

```
private static void HandleJoinButton(GameStateManager manager)
{
    Rectangle joinButton = new(
        (float)manager.screenWidth / 2 - 140,
        (float)manager.screenHeight / 2,
        246,
        72
    );

    bool hoverJoin = Raylib.CheckCollisionPointRec(Raylib.GetMousePosition(), joinButton);
    if (hoverJoin && Raylib.IsMouseButtonReleased(MouseButton.Left))
    {
        Raylib.PlaySound(SoundManager.ButtonSound);
        manager.SetStateToLobbyList();
    }

    Rectangle textureRec = new(0, 0, joinButtonAsset.Width, joinButtonAsset.Height);
    Raylib.DrawTexturePro(
        joinButtonAsset,
        textureRec,
        joinButton,
        Vector2.Zero,
        Of,
        Color.White
    );
    Raylib.DrawRectangleRec(joinButton, hoverJoin ? new(255, 255, 255, 31) : Color.Blank);
}
```


Nachrichtenempfang und Parsing im Client

```
private void HandleClientReceiveEvent(  
    NetPeer peer,  
    NetPacketReader reader,  
    byte channelNumber,  
    DeliveryMethod deliveryMethod  
)  
{  
    try  
    {  
        string messageType = reader.GetString();  
        Console.WriteLine($"[Client] Nachricht vom Server empfangen: {messageType}");  
  
        switch (messageType)  
        {  
            case "UpdatePauseState":  
                bool isPaused = reader.GetBool();  
                if (isPaused)  
                {  
                    GameStateManager.Instance.GetGamePauseManager().PauseGame();  
                }  
                else  
                {  
                    GameStateManager.Instance.GetGamePauseManager().ResumeGame();  
                }  
                break;  
            case "StartGame":  
                GameStateManager.Instance.SetStateToInGame();  
                break;  
            ...  
        }  
        ...  
    }  
}
```

Nachrichten senden an den Server

```
public void RequestCardBuy(string cardType)
{
    if (clientService.client != null && clientService.client.FirstPeer != null)
    {
        var writer = new NetDataWriter();
        writer.Put("BuyCard");
        writer.Put(cardType);
        clientService.client.FirstPeer.Send(writer, DeliveryMethod.ReliableOrdered);
        Console.WriteLine("[Client] Kaufe Karte");
    }
    else
    {
        Console.WriteLine("[Client] Kein Server verbunden, PlaceShip konnte nicht gesendet werden.");
    }
}
```


UI Struktur GameScreen

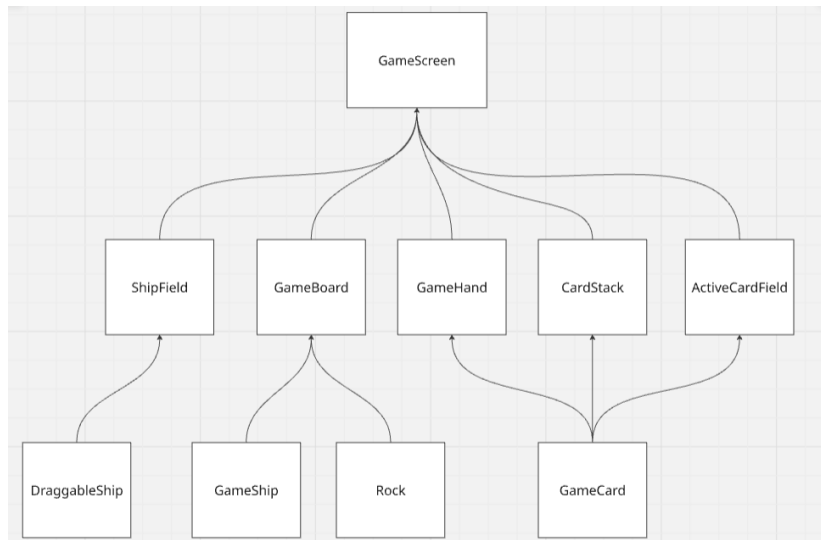

TextureManager

```
/// <summary>
/// Verwaltet das Laden und Entladen von Texturen für das Spiel.
/// </summary>
public class TextureManager
{
    private static List<Texture2D> textures = [];

    /// <summary>
    /// Lädt eine Textur aus einer Datei und speichert sie für späteres Entladen.
    /// </summary>
    /// <param name="file">Pfad zur Texturdatei</param>
    /// <returns>Die geladene Textur als <see cref="Texture2D"/></returns>
    public static Texture2D LoadTexture(string file)
    {
        var texture = Raylib.LoadTexture(file);
        textures.Add(texture);
        return texture;
    }

    /// <summary>
    /// Entlädt alle zuvor geladenen Texturen aus dem Speicher.
    /// </summary>
    public static void UnloadAllTextures()
    {
        foreach (var texture in textures)
        {
            Raylib.UnloadTexture(texture);
        }
    }
}
```


Server/Backend

- ▶ Das Backend ist in C# mit der Library LiteNetLib geschrieben
- ▶ Ein globaler Server der eine Lobby auf Hetzner bereitstellt
- ▶ Server wird in Docker-Containern ausgeführt
- ▶ Der Server wird auf dem Port 7777/UDP bereitgestellt

Backend - Client Kommunikation

Event-Driven Architektur

- ▶ UDP für die Echtzeit-Kommunikation
- ▶ Nachrichten basiertes Protokoll für beidseitige Kommunikation

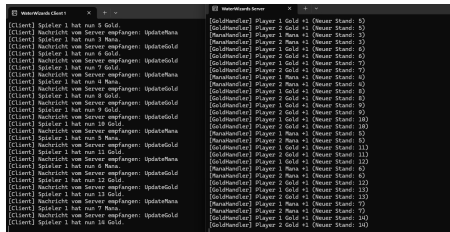

The screenshot displays two windows from a network analysis tool, likely Wireshark. The left window, titled 'Wireshark Client', shows a series of messages from the client to the server, including status updates for gold and mana for two players. The right window, titled 'Wireshark Server', shows the corresponding messages from the server to the client, providing the current status for both players. The messages are formatted as JSON-like structures, such as '[GoldHandler] Player 1 Gold +1 (Neuer Stand: 5)'.

```
[Client] Spieler 1 hat nun 5 Gold.  
[Client] Nachricht vom Server empfangen: UpdateMana  
[Client] Spieler 1 hat nun 3 Mana.  
[Client] Nachricht vom Server empfangen: UpdateGold  
[Client] Spieler 1 hat nun 6 Gold.  
[Client] Nachricht vom Server empfangen: UpdateGold  
[Client] Spieler 1 hat nun 7 Gold.  
[Client] Nachricht vom Server empfangen: UpdateMana  
[Client] Spieler 1 hat nun 4 Mana.  
[Client] Nachricht vom Server empfangen: UpdateGold  
[Client] Spieler 1 hat nun 8 Gold.  
[Client] Nachricht vom Server empfangen: UpdateGold  
[Client] Spieler 1 hat nun 9 Gold.  
[Client] Nachricht vom Server empfangen: UpdateMana  
[Client] Spieler 1 hat nun 10 Gold.  
[Client] Nachricht vom Server empfangen: UpdateGold  
[Client] Spieler 1 hat nun 11 Gold.  
[Client] Nachricht vom Server empfangen: UpdateMana  
[Client] Spieler 1 hat nun 6 Mana.  
[Client] Nachricht vom Server empfangen: UpdateGold  
[Client] Spieler 1 hat nun 12 Gold.  
[Client] Nachricht vom Server empfangen: UpdateGold  
[Client] Spieler 1 hat nun 13 Gold.  
[Client] Nachricht vom Server empfangen: UpdateMana  
[Client] Spieler 1 hat nun 7 Mana.  
[Client] Nachricht vom Server empfangen: UpdateGold  
[Client] Spieler 1 hat nun 14 Gold.
```

```
[GoldHandler] Player 1 Gold +1 (Neuer Stand: 5)  
[GoldHandler] Player 2 Gold +1 (Neuer Stand: 5)  
[ManaHandler] Player 1 Mana +1 (Neuer Stand: 3)  
[ManaHandler] Player 2 Mana +1 (Neuer Stand: 3)  
[GoldHandler] Player 1 Gold +1 (Neuer Stand: 6)  
[GoldHandler] Player 2 Gold +1 (Neuer Stand: 6)  
[GoldHandler] Player 1 Gold +1 (Neuer Stand: 7)  
[GoldHandler] Player 2 Gold +1 (Neuer Stand: 7)  
[ManaHandler] Player 1 Mana +1 (Neuer Stand: 4)  
[ManaHandler] Player 2 Mana +1 (Neuer Stand: 4)  
[GoldHandler] Player 1 Gold +1 (Neuer Stand: 8)  
[GoldHandler] Player 2 Gold +1 (Neuer Stand: 8)  
[GoldHandler] Player 1 Gold +1 (Neuer Stand: 9)  
[GoldHandler] Player 2 Gold +1 (Neuer Stand: 9)  
[GoldHandler] Player 1 Gold +1 (Neuer Stand: 10)  
[GoldHandler] Player 2 Gold +1 (Neuer Stand: 10)  
[GoldHandler] Player 1 Gold +1 (Neuer Stand: 11)  
[GoldHandler] Player 2 Gold +1 (Neuer Stand: 11)  
[ManaHandler] Player 1 Mana +1 (Neuer Stand: 5)  
[ManaHandler] Player 2 Mana +1 (Neuer Stand: 5)  
[GoldHandler] Player 1 Gold +1 (Neuer Stand: 12)  
[GoldHandler] Player 2 Gold +1 (Neuer Stand: 12)  
[ManaHandler] Player 1 Mana +1 (Neuer Stand: 6)  
[ManaHandler] Player 2 Mana +1 (Neuer Stand: 6)  
[GoldHandler] Player 1 Gold +1 (Neuer Stand: 13)  
[GoldHandler] Player 2 Gold +1 (Neuer Stand: 13)  
[ManaHandler] Player 1 Mana +1 (Neuer Stand: 7)  
[ManaHandler] Player 2 Mana +1 (Neuer Stand: 7)  
[GoldHandler] Player 1 Gold +1 (Neuer Stand: 14)  
[GoldHandler] Player 2 Gold +1 (Neuer Stand: 14)
```

- ▶ Programm wird in Zustands-Klassen (States) beschrieben
- ▶ Spiel wird in der GameState-Klasse beschrieben

Ausschnitt:

```
public class GameState
{
    public NetPeer[] players = new NetPeer[2];
    public static readonly int boardWidth = 12;
    public static readonly int boardHeight = 10;
    public readonly Cell[,] boards = new Cell[2][,];
    public Cell[,] Player1 => boards[0];
    public Cell[,] Player2 => boards[1];
    public readonly List<Cards>[] hands;
    private readonly NetManager server;
    public readonly ServerGameStateManager manager;
    public List<Cards> Player1Hand => hands[0];
    public List<Cards> Player2Hand => hands[1];
    public static List<Cards>? ActiveCards //[...]
    public static List<Cards>? UtilityStack //[...]
```

Factory Pattern

- ▶ Das Factory-Pattern wird für die Erstellung von Kartenobjekten verwendet
- ▶ Für jede Kartenart gibt es eine eigene Factory

Beispiel: DamageCardFactory

```
public static class DamageCardFactory
{
    public static IDamageCard Create(CardVariant variant)
    {
        return variant switch
        {
            CardVariant.Firebolt => new FireboltCard(),
            CardVariant.FrostBolt => new FrostBoltCard(),
            CardVariant.Lightning => new LightningCard(),
            _ => throw new ArgumentException($"Unknown variant: {variant}")
        };
    }
}
```

Vorteile:

- ▶ Neue Karten können einfach ergänzt werden
- ▶ Spiellogik bleibt unverändert
- ▶ Klare Trennung von Erstellung und Verwendung

Shared

- ▶ Shared enthält alle Klassen, die sowohl im Client als auch im Server verwendet werden
- ▶ Enthält die Definitionen der Karten und der Kartentypen
- ▶ Enthält die Definitionen der Schiffe und der Schiffs-Typen

Beispiel: Cards

```
// Damage Variants
{ CardVariant.MagicAttack, CardType.Damage },
{ CardVariant.ArcaneMissile, CardType.Damage },
{ CardVariant.Firebolt, CardType.Damage },
{ CardVariant.Fireball, CardType.Damage },
{ CardVariant.GreedHit, CardType.Damage },
{ CardVariant.FrostBolt, CardType.Damage },
{ CardVariant.LifeSteal, CardType.Damage },
//[...]
```


```
// Damage
{
    CardVariant.MagicAttack,
    new CardStats
    {
        Mana = 1,
        Gold = 2,
        CastTime = "instant",
        Duration = "instant",
        Target = new("1x1"),
    }
},
{
    CardVariant.ArcaneMissile,
    new CardStats
    {
        Mana = 2,
        Gold = 2,
        CastTime = "instant",
        Duration = "instant",
        Target = new("random 1x1"),
    }
},
}
```


- ▶ CI-Pipeline
- ▶ CD-Pipeline
- ▶ Statische Code-Analyse
- ▶ Pull Requests mit 4-Augen Prinzip
- ▶ Dokumentation auf Github Pages

CI/CD Pipeline

► CI

- Nuke build für die Continuous-Integration
- dotnet *restore*, *build*, *test*, werden bei jedem PR ausgeführt

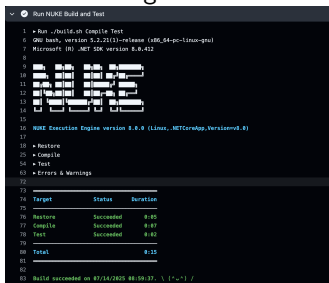


```
1 Run ./build.sh Compile Test
2
3 .NET Build, version 5.2.21(1)-release (x86_64-pc-linux-gnu)
4 Microsoft (R) .NET SDK version 8.0.412
5
6
7
8
9
10
11
12
13
14
15
16 Nuke Execution Engine version 1.0.0 (Linux, .NETCoreApp,Version=v8.0)
17
18 • Restore
19
20 • Compile
21
22 • Test
23
24 • Errors & Warnings
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
```

Target	Status	Duration
Restore	Succeeded	0:05
Compile	Succeeded	0:07
Test	Succeeded	0:02
Total		0:15

Build succeeded on 07/14/2025 08:50:37. \ [!~] /

► CD

- Github Actions für das Continuous-Deployment
- Baut eine exe Datei für Windows und eine MacOS App



CI-Pipeline Konfiguration

```
name: NUKE Build CI

on:
  push:
    branches: [ "main", "dev" ]
  pull_request:
    branches: [ "**" ]

workflow_dispatch:

jobs:
  build:
    runs-on: ubuntu-latest

    permissions:
      actions: read
      contents: read
      security-events: write

    steps:
      - name: Checkout repository
        uses: actions/checkout@v4
        with:
          fetch-depth: 0

      - name: Setup .NET SDK
        uses: actions/setup-dotnet@v4
        with:
          dotnet-version: '8.0.x'

      - name: Run NUKE Build and Test
        run: ./build.sh Compile Test
```

CD-Pipeline Konfiguration (Teil 1)

```
- name: Publish Client (Windows)
  run: dotnet publish src/WaterWizard.Client/WaterWizard.Client.csproj -c Release -r win-x64 --
        self-contained true -o ./publish/win --verbosity normal

- name: Publish Server (Windows)
  run: dotnet publish src/WaterWizard.Server/WaterWizard.Server.csproj -c Release -r win-x64 --
        self-contained true -o ./publish/win-server

- name: Publish Client (MacOS)
  run: dotnet publish src/WaterWizard.Client/WaterWizard.Client.csproj -c Release -r osx-x64 --
        self-contained true -o ./publish/osx --verbosity normal

- name: Publish Server (MacOS)
  run: dotnet publish src/WaterWizard.Server/WaterWizard.Server.csproj -c Release -r osx-x64 --
        self-contained true -o ./publish/osx-server

- name: Prepare release assets
  run: |
    mkdir release-assets

    # Find the actual executable names
    WIN_EXE=$(find ./publish/win -name "*.exe" -type f | head -1)
    OSX_EXE=$(find ./publish/osx -type f -executable | grep -v "\.dll$" | grep -v "\.so$" | head
              -1)
```

CD-Pipeline Konfiguration (Teil 2)

```
if [ -n "$WIN_EXE" ]; then
  cp "$WIN_EXE" release-assets/WaterWizard.Client.exe
else
  echo "Warning: No Windows executable found"
fi

if [ -n "$OSX_EXE" ]; then
  cp "$OSX_EXE" release-assets/WaterWizard.Client.MacOS
else
  echo "Warning: No MacOS executable found"
fi

echo "Release assets:"
ls -la release-assets/

- name: Create GitHub Release & Upload Assets
  uses: softprops/action-gh-release@v2
  with:
    tag_name: ${ steps.get_version.outputs.tag }
    name: Release ${ steps.get_version.outputs.version }
    body: ${ steps.changelog.outputs.changelog }
    draft: false
    prerelease: false
    files: release-assets/*
  env:
    GITHUB_TOKEN: ${ secrets.GITHUB_TOKEN }
```

Statische Code-Analyse

- ▶ CodeQL für die statische Code-Analyse
- ▶ CodeQL eigene Konfigurationsdatei
 - ▶ Möglich auch in der CI Konfigurationsdatei
 - ▶ Best Practice getrennt
 - ▶ Simplere Konfiguration durch separate Datei
- ▶ Ergebnisse in GitHub-Security

CodeQL Konfiguration (Teil 1)

```
name: CodeQL

on:
  push:
    branches: [ main, dev ]
  pull_request:
    branches: [ '**' ]
  workflow_dispatch:

jobs:
  analyze:
    name: Analyze
    runs-on: ubuntu-latest
    permissions:
      security-events: write
      actions: read
      contents: read

    strategy:
      fail-fast: false
    matrix:
      language: ['csharp']

    steps:
      - name: Checkout repository
        uses: actions/checkout@v4
        with:
          fetch-depth: 0
```

CodeQL Konfiguration (Teil 2)

```
- name: Setup .NET SDK
  uses: actions/setup-dotnet@v4
  with:
    dotnet-version: '8.0.x'

- name: Initialize CodeQL
  uses: github/codeql-action/init@v3
  with:
    languages: ${{ matrix.language }}
    config-file: .github/codeql/codeql.yml

- name: Build with NUKE (required by CodeQL)
  run: ./build.sh Compile

- name: Perform CodeQL Analysis
  uses: github/codeql-action/analyze@v3
  with:
    category: '/language:${{ matrix.language }}'
```


Containerisierung

- ▶ Docker für die Containerisierung des Servers
- ▶ Dockerfile im Server-Verzeichnis
- ▶ Docker Compose im root-Verzeichnis

Dockerfile Code

Dockerfile

```
FROM mcr.microsoft.com/dotnet/sdk:8.0 AS build
WORKDIR /source

COPY WaterWizards.sln .

COPY src/WaterWizard.Server/WaterWizard.Server.csproj ./src/WaterWizard.Server/
COPY src/WaterWizard.Shared/WaterWizard.Shared.csproj ./src/WaterWizard.Shared/
COPY src/WaterWizard.Client/WaterWizard.Client.csproj ./src/WaterWizard.Client/
COPY src/WaterWizardTests/WaterWizardTests.csproj ./src/WaterWizardTests/

RUN dotnet restore WaterWizards.sln

COPY src/WaterWizard.Server/ ./src/WaterWizard.Server/
COPY src/WaterWizard.Shared/ ./src/WaterWizard.Shared/
COPY src/WaterWizard.Client/ ./src/WaterWizard.Client/
COPY src/WaterWizardTests/ ./src/WaterWizardTests/

RUN dotnet publish src/WaterWizard.Server/WaterWizard.Server.csproj -c Release -o /app/
publish

FROM mcr.microsoft.com/dotnet/runtime:8.0 AS final
WORKDIR /app

COPY --from=build /app/publish .

EXPOSE 7777/udp

ENTRYPOINT ["dotnet", "WaterWizard.Server.dll"]
```

Docker-Compose Code

docker-compose

```
version: '3.8'

services:
  waterwizard-server:
    build:
      context: .
      dockerfile: ./src/WaterWizard.Server/Dockerfile
    ports:
      - "7777:7777/udp"
    environment:
      - PUBLIC_ADDRESS=${SERVER_IP}
```

Technische Erfahrungen

Analyse

Backlog 8 Estimate: 0 ...

This item hasn't been started

 WaterWizards #254

Finale Abgabe

Orga

 finale Abgabe

 WaterWizards #155 

Refactoring File Structure


Client

enhancement

Medium

 WaterWizards #98

Bug

 Water
server C

P1

 Water
Wrong p

bug

 Water
Vollbild

Erfahrungen und Fazit