


maXbox

EKON 29 Statistic Packages Slides

Posted on ~~October 2, 2025~~ ~~October 2, 2025~~ by [maxbox4](#)

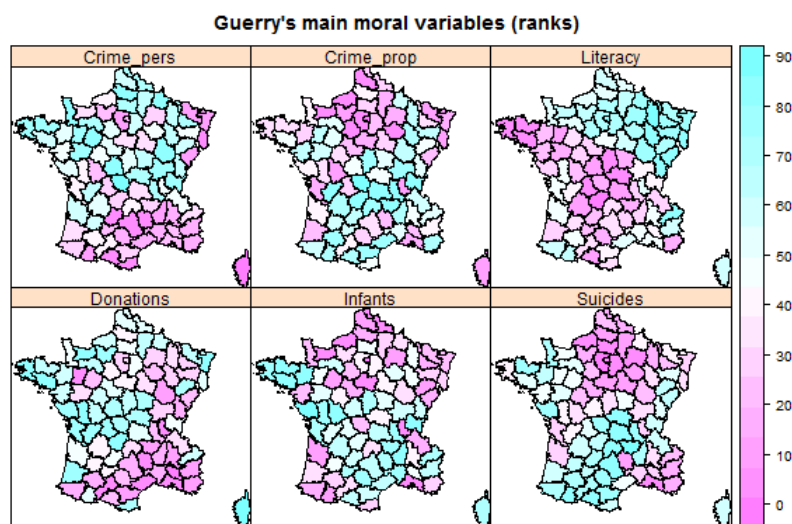

Statistic Packages Overview 2025

- Regression & Correlation box script demos
- 7 Statistic Methods & 5 Diagramtypes
- Stats Package TeeChart & mrMath, Delphi AI
- Sklearn & Statsmodels (P4D)
- AGSI, JSON, EdgeView2 and Weather Reports
- Alternate Packages, Top & Flops Statistic
- This session shows various ways of using statistic and plots in your apps.



[Why A Data Scientist Chooses Delphi For Powerful Real World Visualizations \(https://blogs.embarcadero.com/why-a-data-scientist-chooses-delphi-for-powerful-real-world-visualizations/\)](https://blogs.embarcadero.com/why-a-data-scientist-chooses-delphi-for-powerful-real-world-visualizations/)

A Base Class

```

2  Proc SIRegister_TStatisticClass(CL: TPSPascalCompiler);
3  begin
4      //with RegClassS(CL,'TOBJECT', 'TStatisticClass') do
5      with CL.AddClassN(CL.FindClass('TOBJECT'),'TStatisticClass') do begin
6          Proc Assign( const S : TStatisticClass);
7          Func Duplicate : TStatisticClass');
8          Proc Clear');
9          Func IsEqual( const S : TStatisticClass):Bool');
10         Proc Add( const V : MFloat);
11         Proc Add1( const V : array of MFloat);
12         Proc Add2( const V : TStatisticClass);
13         Proc AddNegated( const V : TStatisticClass);
14         Proc Negate');
15         Count', 'Integer', iptr);
16         Min', 'MFloat', iptr);
17         Max', 'MFloat', iptr);
18         Sum', 'MFloat', iptr);
19         SumOfSquares', 'MFloat', iptr);
20         SumOfCubes', 'MFloat', iptr);
21         SumOfQuads', 'MFloat', iptr);
22         Func Range : MFloat');
23         Func Mean : MFloat');
24         Func PopulationVariance : MFloat');
25         Func PopulationStdDev : MFloat');
26         Func Variance : MFloat');
27         Func StdDev : MFloat');
28         Func M1 : MFloat');
29         Func M2 : MFloat');
30         Func M3 : MFloat');
31         Func M4 : MFloat');
32         Func Skew : MFloat');
33         Func Kurtosis : MFloat');
34         Func GetAsString :Str');
35     end;
36 end;

```

A Brain Class



Brain Train

7 Statistical Methods Criteria

- 1. Bayesian Inference ($p(A)$)
- 2. Hypothesis Testing (t-test)
- 3. Factor Analysis (Loading Analysis)
- 4. Cluster Analysis (K-means)
- 5. Logistic Regression Classifier
- 6. Monte Carlo Simulation (Rnd)
- 7. Time Series Analysis (ARIMA)
- Data science is a multidisciplinary field that combines math, statistics, computer science, machine learning, and domain expertise to extract insights from data. While data science algorithms often put the spotlight, a solid foundation in statistical methods can be just as pivotal.

7 Data Science Statistical Methods

Data science is a multidisciplinary field that combines math, statistics, computer science, machine learning, and domain expertise to extract insights from data. While data science algorithms often put the spotlight, a solid foundation in statistical methods can be just as pivotal. The code in script is build on Python especially Python4Delphi as P4D.

1. Bayesian Inference Bayesian ... Continue reading

5 Important Diagram Types

Here, I'll show you how to analyze a runtime script created dataset and extract meaningful insights with 5 diagram types:

- Bar Chart
- Scatter Plot
- Histogram
- Box Plot
- Correlation Matrix

- **Bar charts:** Used to show comparisons between different categories.
- **Line charts:** Used to show trends over time or across different categories.
- **Pie charts:** Used to show proportions or percentages of different categories.
- **Histograms:** Used to show the distribution of a single variable.
- **Heatmaps:** Used to show the correlation between different variables.
- **Scatter plots:** Used to show the relationship between two continuous variables.
- **Box plots:** Used to show the distribution of a variable and identify outliers.
- **Correlation Matrix** shows relations to each other variable

7 Data Science Statistical Methods

Data science is a multidisciplinary field that combines math, statistics, computer science, machine learning, and domain expertise to extract insights from data. While data science algorithms often put the spotlight, a solid foundation in statistical methods can be just as pivotal. The code in script is build on Python especially Python4Delphi as P4D.


1. Bayesian Inference Bayesian ... Continue reading



1

Stats Dependencies

- https://sourceforge.net/projects/maxbox/files/Examples/EKON/EKON28/1274_GoogleDirForm2GeocodeWeather_General2request2.pas/download
(https://sourceforge.net/projects/maxbox/files/Examples/EKON/EKON28/1274_GoogleDirForm2GeocodeWeather_General2request2.pas/download)

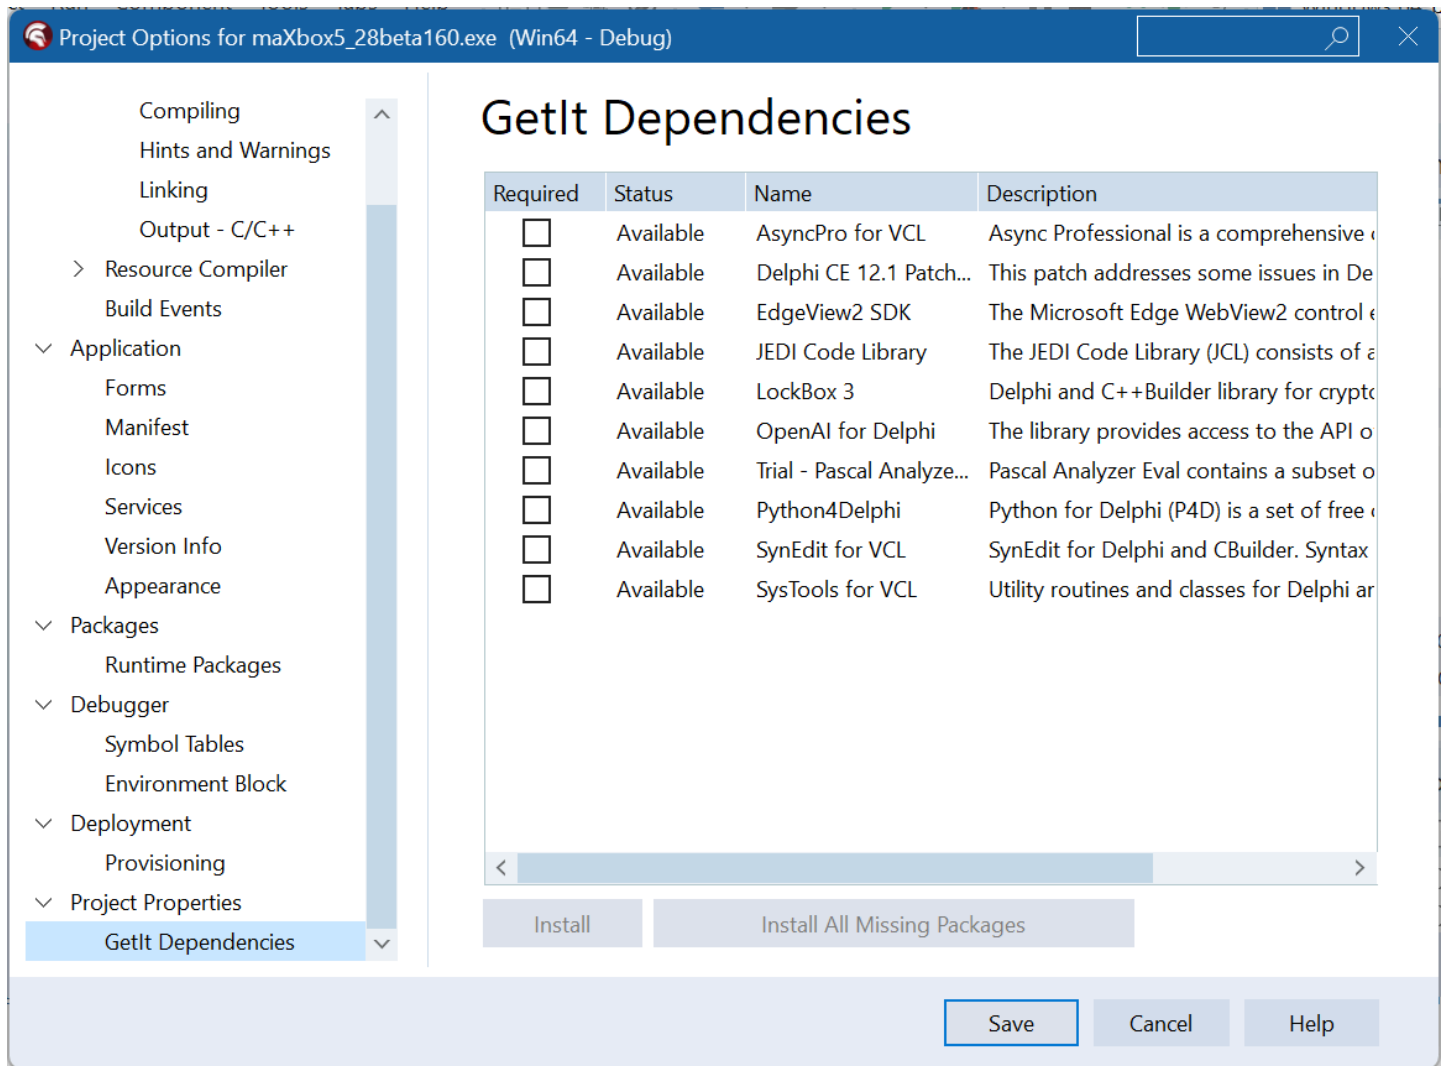

Systools Stats, JEDI and P4D


Cross-platform class TChart

- TeeChart is a powerful charting component developed by Steema Software, widely used in Delphi and C++Builder environments. It provides a comprehensive set of tools for creating various types of charts, including line, bar, area, pie, point, and horizontal bar charts, which can be viewed in both 2D and 3D formats.
- Key Features
- Versatility: TeeChart supports a wide range of chart types and can be used for business, real-time, financial, and scientific applications. It is included in most Delphi and C++Builder products and supports both VCL and FM.
- Cross-Platform Support: TeeChart can be used to create applications for Windows (x32/x64) and macOS. For Apple iOS support, TeeChart Pro.
- Interactivity: TeeChart allows users to interact with charts by zooming, panning, and exporting to various file types. This makes it suitable for applications that require real-time data visualization and user interaction.

Why A Data Scientist Chooses Delphi For Powerful Real World Visualizations (<https://blogs.embarcadero.com/why-a-data-scientist-chooses-delphi-for-powerful-real-world-visualizations/>)

Demo: 820_U_ProbabilityDist2ekon29_1_64.pas

GUI or Console?

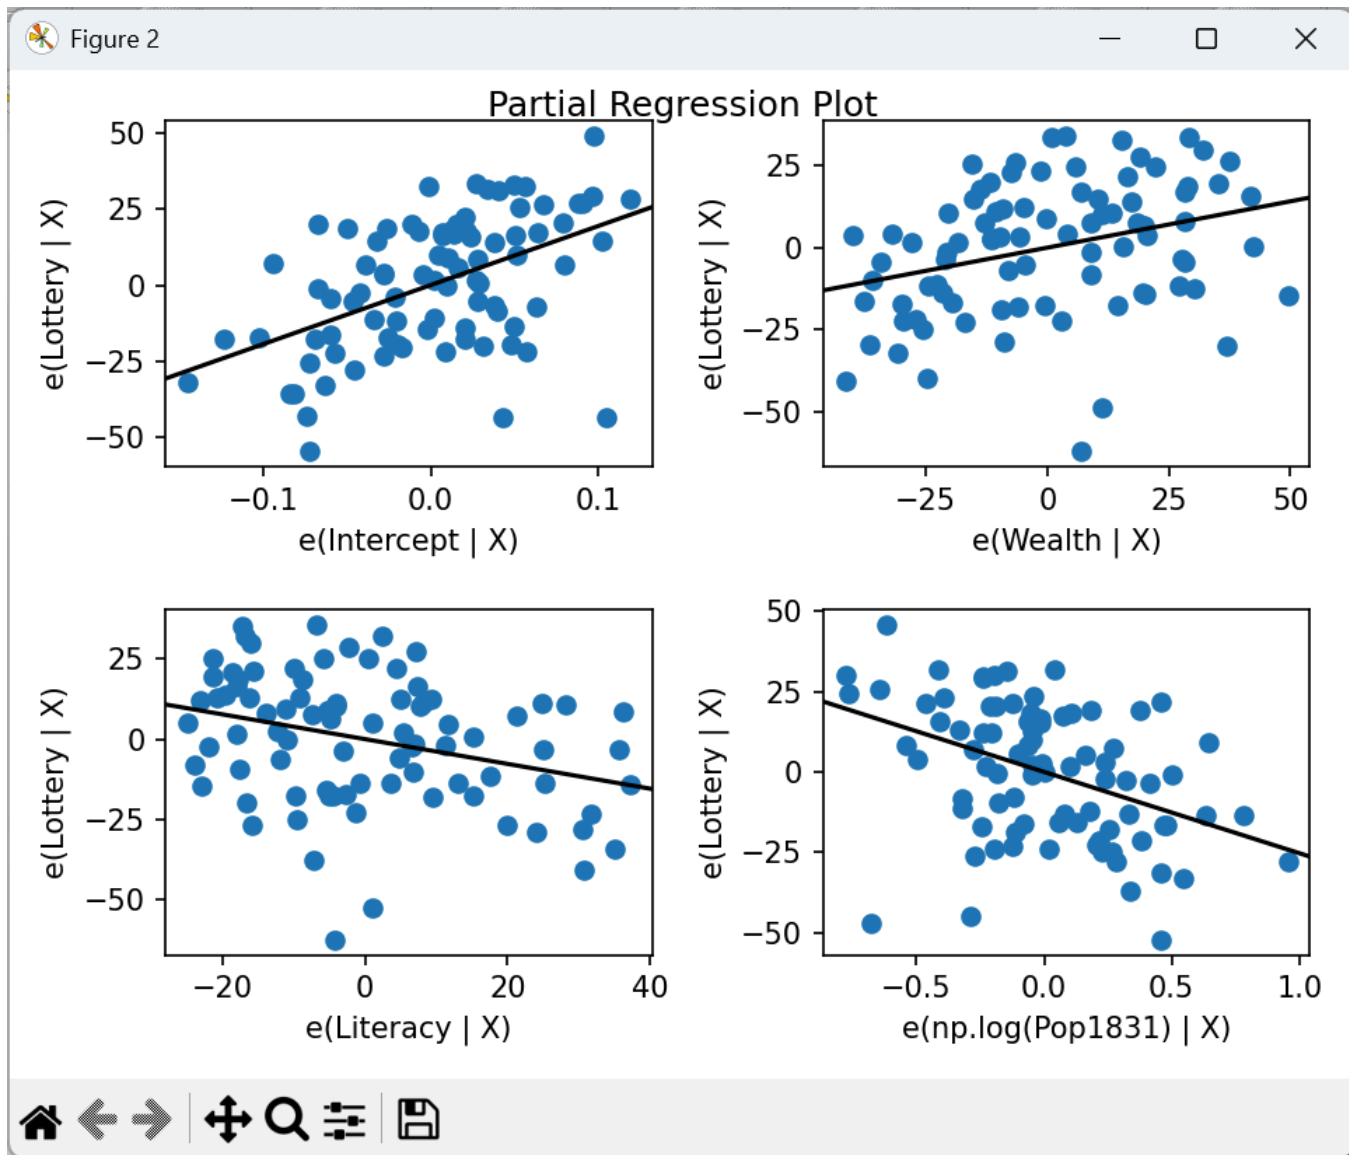

Lottery and Population

Mr Math Package

Demo: TestdemoStatisticClassifier64bit.exe

Important: On top of these classifiers there exists a few image database handling routines

and an 1D, 2D Haar Feature extractor which is based on an integral image approach.

The mrMath, mrStats, mrMatrix, mrImgUtils package includes:

- Standard Fisher LDA classifier
- Robust (and Fast Robust) version of this classifier
- Incremental (and Robust) Fisher LDA classifier learning.
- Support Vector Machines (least squares and lagrangian learning)
- Naive Bayes
- Simple Decision stumps
- Radial basis function
- C4.5 Decision trees.
- K-means
- Ensemble classifiers: AdaBoost, Gentle Boost, Bagging
- Simple feed forward Neural Nets

Mr Math II Test

```

15 uses
16   Windows, Messages, SysUtils, Variants, Classes, Graphics, Controls, For
17   Dialogs, BaseClassifier, ExtCtrls, StdCtrls, Matrix, ComCtrls, Haar2DAC
18   Haar2DSImageSweep, Image2DSweep, Types, Vcl.Imaging.jpeg;
19
20 type
21   TTrainSetType = (stGauss, stXOR, stCircles);
22 type
23   TfrmClassifierTest = class(TForm)

```

- A testing app TestClassifier.dpr which shows the usage and performance of these classifiers on various tasks (e.g. face recognition) which we slightly improved, compiled and signed can be found on git or sourceforge:
- https://github.com/maxkleiner/mrai_mx5/tree/master/TestApp (https://github.com/maxkleiner/mrai_mx5/tree/master/TestApp)
- <https://sourceforge.net/projects/maxbox5/files/binaries/TestClassifier64bit.exe/download> (<https://sourceforge.net/projects/maxbox5/files/binaries/TestClassifier64bit.exe/download>)

Stat Control

from Gereonswall 62-66, 50670 Köln, Germany to Europapl., 8020 Graz, Austria

9 hr 23 min (917 km)

via A3
Fastest route now, avoids construction and crashes on the A3

⚠ This route has tolls.
⚠ This route crosses a country border.

Gereonswall 62-66
50670 Köln, Germany

- > Take Hansaring and Riehler Str. to B55a
7 min (2.2 km)
- > Take A4, A45, A3, A8 and A9 to Judendorfer Str. in Graz, Österreich. Take exit Graz-Nord from A9
9 hr 31 min (909 km)
- > Follow Judendorfer Str. and B67 to Europapl.
9 min (6.0 km)

Europapl.
8020 Graz, Austria

Map data ©2024 Google, GeoBasis-DE/BKG (©2009), Inst. Geogr. Nacional, Switzerland, Terms, Privacy

Test Classifier App

This app and library contains classes for easy classifier design. For simple classifier design check out the TestApp – basically this is a unit test application.

Code Control II

Write a stateful function, class, generator or co-routine that takes a series of floating point numbers, one at a time, and returns the running standard deviation of the series.

Use this to compute the standard deviation of this demonstration set, $\{2,4,4,4,5,5,7,9\}$ which is 2. $\{\displaystyle \{2,4,4,4,5,5,7,9\}\}$

```
1 var dat: array of double; //Extended;
2   statclass: TStatisticClass;
3
4   setlength(dat,7);
5   dat:= [2,4,4,4,5,5,7,9]
6   statclass:= TStatisticClass.create;
7   for it:= 0 to high(dat) do
8     formatF('%2.0f -> %18.16f',[dat[it],AppendAndCalcStat(statclass,dat[it]
9   statclass.Free;
```

The **AppendAndCalcStat()** takes the statistic object to get filled and the continues dataset:

```
1 function AppendAndCalcStat(statobj: TStatisticClass; newVal:Extended):Exte
2 begin
3   statobj.add(newval);
4   result:= statobj.PopulationStdDev;
5 end;
```

Gas storage timeline AGSI dataset

https://wiki.freepascal.org/pas2js_Electron_Web_Application (https://wiki.freepascal.org/pas2js_Electron_Web_Application)

The data science tutorial explains the so called AGSI data storage and his visualization of the timeline. AGSI is the Aggregated Gas Storage Inventory and offers you the possibility to be kept up to date whenever a new service announcement or update from one of our data providers is posted on the website.

- **Mean Function:** Calculates the average of an array.
- **Covariance Function:** Computes the covariance between two arrays.
- **Correlation:** Uses covariance and standard deviations for the correlation coefficient.
- **ComputeCorrelationMatrix:** Iterates through all variable pairs to compute corr-matrix.
- **PrintMatrix:** Outputs the matrix to the console.

Delphi does **not** have a built-in correlation matrix function with a heatmap too, but you can implement one using standard math operations.

Statsmodels

Statsmodels is a Python library designed for statistical modeling, hypothesis testing, and data exploration with high reference.

It provides a wide range of statistical models, including linear regression, time series analysis, and generalized linear models.

The library supports both formula-based modeling (similar to R) and direct use of NumPy arrays.


OLS Regression Results

```
=====
Dep. Variable:          Lottery    R-squared:                0.414
Model:                  OLS        Adj. R-squared:           0.392
Method:                 Least Squares    F-statistic:             19.30
Date:                  Thu, 26 Jun 2025    Prob (F-statistic):      1.47e-09
Time:                  17:35:22    Log-Likelihood:         -375.28
No. Observations:      86        AIC:                    758.6
Df Residuals:          82        BIC:                    768.4
Df Model:               3
Covariance Type:       nonrobust
=====
```

Demo: 1417_statsmodels_64_delphi_python3.12.4debug130_EKON29.txt

Second multivariate with a higher R2:

```
Execstr('model=smf.ols("Lottery~ Wealth+Literacy+np.log(Pop1831)+Suicides+Donations",data=df).fit()');
```

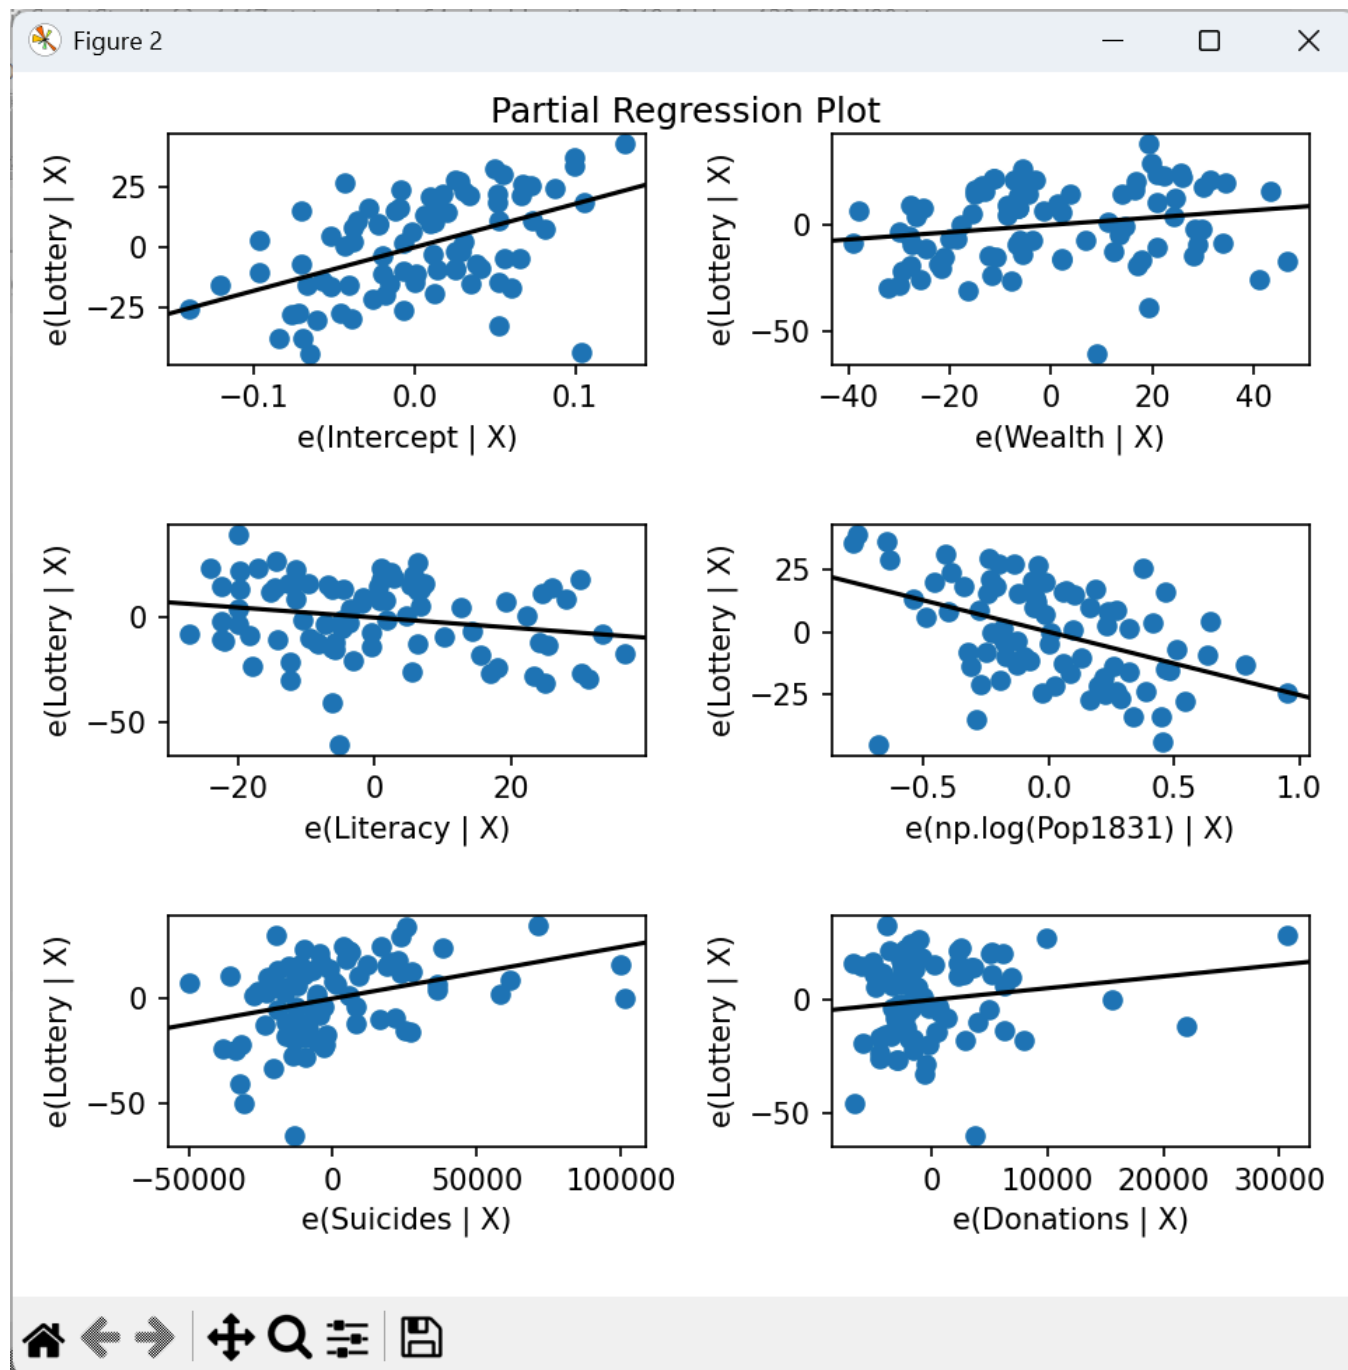

```

maXbox5 64-bit ScriptStudio 1417_statsmodels_64_delphi_python3.12.4debug130_EKON29.txt
File Program Options View Debug Output Help
Load Find Replace / Refact Go Compile! Use Cases
11 1417_statsmodels_64_delphi_python3.12.4debug1:
273 Execstr('model= smf.ols("Lottery ~ Wealth+Literacy+ np.log(Pop1831)+Suicides+Donations",data=df).fit()')
274 // Execstr('model = smf.ols("Lottery ~ Wealth+Literacy+ Suicides+Commerce+Donations",data=df).fit()');

maXbox5 C:\maxbox\maxbox5\examples\1417_statsmodels_64_delphi_python3.12.4debug130_EKON29.txt Ct:02/10/2025 17:54:44 Mem:67% Row: 273-Col: 19 s:1030! M!

=====
                OLS Regression Results
=====
Dep. Variable:                Lottery    R-squared:                0.492
Model:                        OLS        Adj. R-squared:           0.461
Method:                        Least Squares    F-statistic:             15.51
Date:                        Thu, 02 Oct 2025    Prob (F-statistic):       1.20e-10
Time:                        17:54:49        Log-Likelihood:          -369.10
No. Observations:            86            AIC:                    750.2
Df Residuals:                80            BIC:                    764.9
Df Model:                    5
Covariance Type:              nonrobust
=====
                coef    std err          t      P>|t|      [0.025    0.975]
-----
Intercept                180.2691     35.830     5.031     0.000    108.965    251.573
Wealth                   0.1715      0.094     1.833     0.070    -0.015     0.358
Literacy                 -0.2409      0.126    -1.911     0.060    -0.492     0.010
np.log(Pop1831)         -25.1121      5.699    -4.407     0.000   -36.453   -13.771
Suicides                 0.0002     7.37e-05    3.323     0.001    9.82e-05    0.000
Donations               0.0005      0.000     1.490     0.140    -0.000     0.001
=====
Omnibus:                   6.163    Durbin-Watson:           1.665
Prob(Omnibus):             0.046    Jarque-Bera (JB):        5.537
Skew:                     -0.594    Prob(JB):                0.0628
Kurtosis:                  3.363    Cond. No.                8.85e+05
=====

Notes:
[1] Standard Errors assume that the covariance matrix of the errors is correctly specified.
[2] The condition number is large, 8.85e+05. This might indicate that there are
strong multicollinearity or other numerical problems.
('version:', '3.13.3 (tags/v3.13.3:6280bb5, Apr 8 2025, 14:47:33) [MSC v.1943 64 bit (AMD64)]')
dept Region Department Crime_pers Crime_prop Literacy Donations Infants Suicides MainCity Wealth Commerce Clergy

```

R2 of 0.492

```

<>

=====
                OLS Regression Results
=====
Dep. Variable:                Lottery    R-squared:                0.492
Model:                        OLS        Adj. R-squared:           0.461
Method:                        Least Squares    F-statistic:             15.51
Date:                        Thu, 02 Oct 2025    Prob (F-statistic):       1.20e-10
Time:                        17:54:49        Log-Likelihood:          -369.10
No. Observations:            86            AIC:                    750.2
Df Residuals:                80            BIC:                    764.9
Df Model:                    5
Covariance Type:              nonrobust
=====
                coef    std err          t      P>|t|      [0.025    0.975]
-----
Intercept                180.2691     35.830     5.031     0.000    108.965    251.573
Wealth                   0.1715      0.094     1.833     0.070    -0.015     0.358
Literacy                 -0.2409      0.126    -1.911     0.060    -0.492     0.010
np.log(Pop1831)         -25.1121      5.699    -4.407     0.000   -36.453   -13.771
Suicides                 0.0002     7.37e-05    3.323     0.001    9.82e-05    0.000
Donations               0.0005      0.000     1.490     0.140    -0.000     0.001
=====
Omnibus:                   6.163    Durbin-Watson:           1.665
Prob(Omnibus):             0.046    Jarque-Bera (JB):        5.537
Skew:                     -0.594    Prob(JB):                0.0628
Kurtosis:                  3.363    Cond. No.                8.85e+05
=====

Notes:
[1] Standard Errors assume that the covariance matrix of the errors is correctly specified.
[2] The condition number is large, 8.85e+05. This might indicate that there are
strong multicollinearity or other numerical problems.
('version:', '3.13.3 (tags/v3.13.3:6280bb5, Apr 8 2025, 14:47:33) [MSC v.1943 64 bit (AMD64)]')
dept Region Department Crime_pers Crime_prop Literacy Donations Infants Suicides MainCity Wealth Commerce Clergy Crime_parents
Infanticide Donation_clergy Lottery Desertion Instruction Prostitutes Distance Area Pop1831

```

Statsmodels Code

- We download the Guerry dataset, a collection of historical data used in support of Andre-Michel Guerry's 1833 Essay on the Moral Statistics of France. The data set is hosted
- online in comma-separated values format (CSV) by the Rdatasets repository. We could download the file locally and then load it using `read_csv`, but pandas takes care of all of this automatically for us:

```
Execstr('model = smf.ols("Lottery ~ Wealth + Literacy + np.log(Pop1831)", data=df).fit()');
```

```
1 | Execstring('import statsmodels.api as sm; import numpy as np');
2 |
3 | Execstr('model = smf.ols("Lottery ~ Wealth + Literacy + np.log(Pop1831)",
4 | execstr('print(model.summary())');
5 | execstr('sm.graphics.plot_partregress_grid(model)');
```

Code Behind Dataframe

To transform the CSV data from file to matrix and dataframe you need 4 steps:

```
1 | S:= TStringList.Create;
2 |   try
3 |     //S.StrictDelimiter := True;
4 |     S.LineBreak := #10;
5 |     //S1.Delimiter := ',';
6 |     s.loadfromfile(exepath+'\examples\1417_export_dataframe.csv');
7 |     writ('size: '+itoa(s.count));
8 |     SetMatrixLength(mData, 86, 6);
9 |     TStringListToMatrix(s, mData);
```

Input:

The `StringList` contains rows of data as strings, separated commas.

Parsing:

Each string is split into columns using `CommaText` of a temporary `TStringList`.

Matrix Population:

The parsed values are stored in a 2D array (`Matrix`).

Output: The matrix is printed to verify the conversion.

P4D Primer

Python Solution


```

1  procedure STDDev_PySolution(loc: string);
2  begin
3      with TPythonEngine.Create(nil) do begin
4          //pythonhome:= PYHOME64;
5          loaddll;
6          autofinalize:= false;
7          try
8              Execstring('from math import sqrt');
9              Execstr('import io, sys');
10             //Execstring('import plotly.express as px');
11             Execstr(DEFSD);
12             execstr('output = io.StringIO()')
13             execstr('sys.stdout = output')
14             execstr('sd.sum = sd.sum2 = sd.n = 0 '+LF+
15                 'for value in (2,4,4,4,5,5,7,9):'+LF+
16                 '    print (value, sd(value))');
17             println(stringreplace(evalstr('output.getvalue().strip()'),
18                                     #10,#13#10,[rfReplaceAll, rfIgnoreCase]));
19         except
20             raiseError;
21         finally
22             UnloadDll;
23             Free;
24         end;
25     end;
26 end;

```

EdgeView2 SDK for Stats

- McJson use a Simple Object-Pascal native code using TList as internal data structure with a Single-pass string parser and is just one unit (McJSON) and just one class(TMcJsonItem) integrated in maXbox or Lazarus.
- RAD Studio 10.4 Sydney brings support for working with web content through the Chromium-based Edge WebView2 browser control in VCL applications via the new TEdgeBrowser component.
- Demo: *1324_weatherbox_regex_64_maincities.txt*

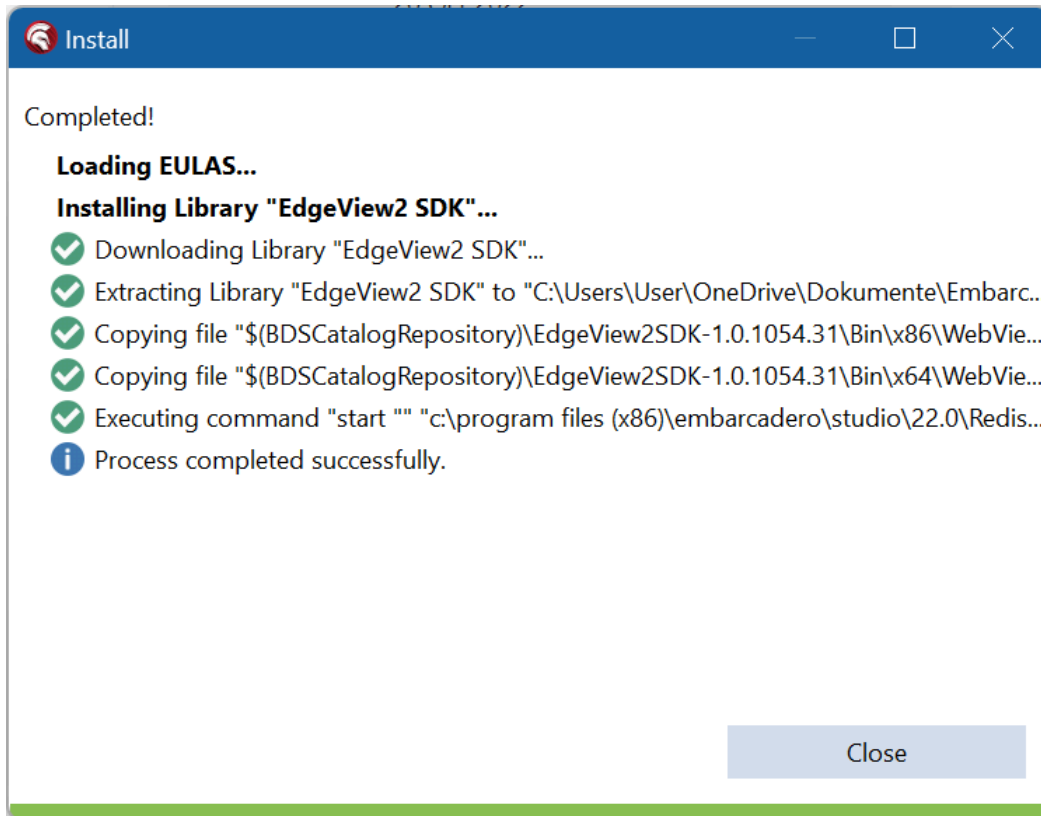

https://sourceforge.net/projects/maxbox5/files/binaries/WebView2Loader_2739.dll/download
https://sourceforge.net/projects/maxbox5/files/binaries/WebView2Loader_2739.dll/download

JS-Pas-Solution

- These projects have been selected based on their popularity, technical significance, and impact on the Delphi development community. They represent a mix of developer tools, frameworks, and components.
- Integrate dynamic, interactive, custom maps, statistic data and geospatial data into your apps by embedding JS:
- Weather, Navigation or Traffic Data uses huge statistical data with representation

```

48  const
49  HTMLStr: String = //i put The code for the web page page wich load the google maps in
50  '<html> ' +
51  '<head> ' +
52  '<meta name="viewport" content="initial-scale=1.0, user-scalable=yes" /> ' +
53  '<script type="text/javascript" src="http://maps.google.com/maps/api/js?sensor=true">
54  '<script type="text/javascript"> ' +
55  '' +
56  '//Declare the globals vars to be used in the javascript functions
57  '  var geocoder; ' +
58  '  var map; ' +
59  '  var trafficLayer; ' +
60  '  var bikeLayer; ' +
61  '' +

```

1312_API_Demo64_5_javascript_maps.txt

Other Packages

Several statistical packages and libraries are available for Delphi, ranging from commercial solutions to open-source and freeware options.

Package	Core Features	Licensing	Advanced Methods
MtxVec + Stats Master	Broad stats, regression, ANOVA, PCA	Commercial	Multivariate, design of exp.
TMS Analytics Pack	Math expression parsing, stats, ODE	Commercial	Symbolic, numeric, physics
sqsBasicStats	Basic real-time statistics	Freeware/VCL	Focus on simplicity
DataLab	Statistical tool (end user app)	Application	Data editing, visualization
Python4Delphi (pandas)	Uses Python's stats libraries	FOSS/Hybrid	All Python-supported methods

These packages support a wide range of statistical computations, from basic descriptive statistics to advanced multivariate analysis.

Tops & Flops Stats

- o ****1. Awesome Delphi****
- o ****2. Delphi IDE Theme Editor****
- o ****3. DelphiMVCFramework (DMVCFramework)****
- o ****4. Delphi REST Client API****
- o ****5. Virtual-TreeView****
- o ****6. Delphi-OpenCV****
- o ****7. DUnitX****
- o ****8. Delphi IDE Colorizer****
- o ****9. CEF4Delphi****
- o ****10. OmniThreadLibrary****

<https://github.com/maxkleiner/maXbox/blob/master/objectdetector3.ipynb>
(<https://github.com/maxkleiner/maXbox/blob/master/objectdetector3.ipynb>)

These projects have been selected based on their popularity, technical significance, and impact on the Delphi development community. They represent a mix of developer tools, frameworks, and components (perplexity,chatgpt,gemini prompts).

Tops & Flops Explain

<https://github.com/maxkleiner/maXbox/blob/master/objectdetector3.ipynb>
(<https://github.com/maxkleiner/maXbox/blob/master/objectdetector3.ipynb>)

****1. Virtual-TreeView****

A highly flexible and powerful tree view control, Virtual-TreeView has become a staple in both open-source and commercial Delphi applications. Its performance and extensibility have set the standard for advanced UI components in Delphi, making it one of the most influential libraries in the ecosystem[1].

****2. OmniThreadLibrary****

This threading library greatly simplified the development of multi-threaded applications in Delphi. Its ease of use and robust feature set have made it the go-to solution for Delphi developers needing parallelism and concurrency, ensuring Delphi apps remain competitive on modern multi-core hardware[1].

****3. DelphiMVCFramework (DMVCFramework)****

As web development became critical, DMVCFramework provided Delphi developers with a modern, powerful framework for building RESTful web applications and APIs. Its adoption has helped keep Delphi relevant in server-side and web API development[1].

****4. CEF4Delphi****

By enabling the embedding of Chromium-based browsers in Delphi applications, CEF4Delphi has allowed developers to integrate modern web technologies and content directly into native apps, bridging the gap between desktop and web[1].

****5. DUnitX****

Unit testing is essential for modern software development, and DUnitX brought advanced, NUnit-inspired testing capabilities to Delphi. Its adoption has fostered better software quality and test-driven development practices in the Delphi community[1].

****6. Delphi-OpenCV****

This project brought the power of the OpenCV computer vision library to Delphi developers, opening up new possibilities in image processing and AI within the Delphi ecosystem[1].

****7. Delphi REST Client API****

As RESTful APIs became the backbone of modern applications, this library enabled Delphi developers to easily consume web services, ensuring Delphi's continued viability for connected applications[1].

****8. Awesome Delphi****

While not a library or component, this curated list of high-quality Delphi resources has become an essential starting point for developers, helping to foster community and knowledge sharing[1].

****9. Delphi IDE Theme Editor & Delphi IDE Colorizer****

These tools have modernized the developer experience, allowing for extensive customization and theming of the Delphi IDE, which has contributed to the productivity and satisfaction of Delphi programmers[1].

Flops

- o ****1. Delphi 8 and Delphi 2005 Releases****
- o ****2. Dreaded Sorts (THSorts) Demo****
- o ****3. Component Colossus Projects****
- o ****4. Projects Stuck on Old Delphi Versions****
- o ****5. Projects Dependent on Discontinued Technologies****
- o ****6. DLL Hell Projects****
- o ****7. Over-Componentized "Flavor of the Month" Projects****
- o ****8. Projects Broken by Unicode Transition****
- o ****9. Projects with Inflexible Architectures****
- o ****10. "Reinventing the Wheel" Projects****

Conclusion

- o <https://softwareschule.code.blog/2025/02/20/7-data-science-statistical-methods/> (<https://softwareschule.code.blog/2025/02/20/7-data-science-statistical-methods/>)
- o **Config and spec features of DMath, SKLearn, Statsmodels, mrMath library**
- o **Troubleshooting: Typical miscalculations and their solutions with cleaned data**
- o **Typical Features of these Packages**
- o **Descriptive stats: mean, median, mode, variance, percentiles**
- o **Probability distributions (PDF, CDF, inverse CDF)**
- o **Random number generation**
- o **Hypothesis testing (t-tests, chi-squared, ANOVA)**
- o **Regression (linear, logistic, ridge, Poisson, non-linear)**

- Multivariate techniques (PCA, factor analysis)
- Data visualization, function approximation
- Check the statistic package like TEE in feature-matrix
- <https://www.embarcadero.com/docs/rad-studio-feature-matrix.pdf> (<https://www.embarcadero.com/docs/rad-studio-feature-matrix.pdf>)

<https://raw.githubusercontent.com/breitsch2/maXbox4/master/assets/graph3.html>
(<https://raw.githubusercontent.com/breitsch2/maXbox4/master/assets/graph3.html>)

Method: Correlation

Plot: List or Matrix

View: Form or Browser

Many Thanks for coming!


Many Thanks for coming!

Materials:

http://www.softwareschule.ch/download/maxbox_starter140.pdf
(http://www.softwareschule.ch/download/maxbox_starter140.pdf)

http://www.softwareschule.ch/download/maxbox_starter149.pdf
(http://www.softwareschule.ch/download/maxbox_starter149.pdf)

<https://blogs.embarcadero.com/why-a-data-scientist-chooses-delphi-for-powerful-real-world-visualizations/> (<https://blogs.embarcadero.com/why-a-data-scientist-chooses-delphi-for-powerful-real-world-visualizations/>)

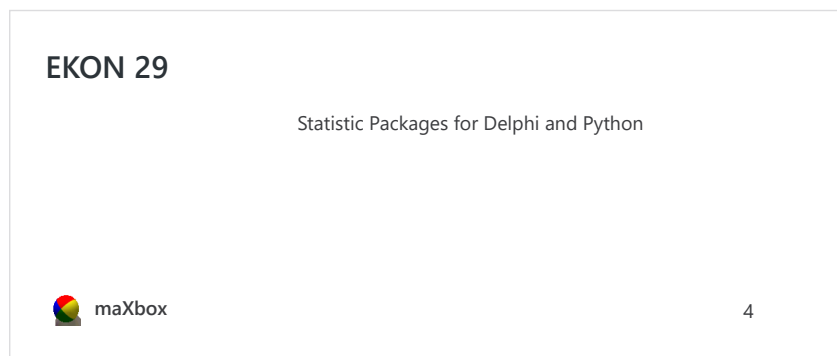

Dienstag, 28. Oktober 2025

11:45 – 12:45, Max Kleiner

<https://sourceforge.net/projects/maxbox5/files/EKON29/> (<https://sourceforge.net/projects/maxbox5/files/EKON29/>)

Origin Slides:

[Click to access maxbox_starter157.pdf \(http://www.softwareschule.ch/download/maxbox_starter157.pdf\)](http://www.softwareschule.ch/download/maxbox_starter157.pdf)

<https://de.scribd.com/document/925708175/Maxbox-Starter157-EKON29-Statistic-Packages-2sign>
(<https://de.scribd.com/document/925708175/Maxbox-Starter157-EKON29-Statistic-Packages-2sign>)



Train Brain





Posted in [#Scripting](#), [Algorithm](#), [Conference](#), [EKON](#), [Machine Learning](#), [math](#), [maXbox](#), [Python](#), [Teaching](#) Tagged [ai](#), [Analysis](#), [artificial-intelligence](#), [data-science](#), [Machine Learning](#), [Statistics](#), [technology](#). [Leave a comment](#)

[Blog at WordPress.com.](#)

maXbox4exe

Digitally signed by
maXbox4exe
Date: 2025.10.02 19:00:20
+02'00'