

Anchovy User Guide



Copyright © 2009 - 2026 Maxprograms

Table of Contents

Introduction	1
Anchovy	1
Supported Platforms	1
Language Codes	1
Supported Formats	1
GlossML: Glossary Markup Language	1
Comma Separated Values (CSV)	2
TBX: TermBase eXchange	2
TMX: Translation Memory eXchange	2
User Interface	3
Anchovy GUI	3
Common Tasks	4
Create Glossary	4
Edit an Existing Glossary	5
View Glossary Properties	5
Search and Replace	6
Change Language	7
Extract Terms From a Document	7
Bilingual Term Extraction	8
Convert TMX File to GlossML Format	9
Convert TBX File to GlossML Format	10
Convert CSV File to GlossML Format	11
Convert Excel File to GlossML Format	12
Convert GlossML File to Other Formats	12
Export Glossary as HTML	13
Export Glossary as TMX	13
Export Glossary as TBX	13
Export Glossary as CSV	13
Export Glossary as Excel	14
Settings and Updates	15
Set Preferences	15
Check for Updates	15
Subscriptions	17
First Registration - Evaluation Request	17
Subscription Renewal	18
Licenses	20
Licenses	20
Glossary	i

Introduction

Anchovy

Anchovy is a cross-platform glossary editor based on the open GlossML (Glossary Markup Language) format.

Anchovy simplifies glossary data exchange. It imports CSV, Excel, TMX and TBX files and exports glossaries in CSV, Excel, HTML, TMX and TBX formats, the most common ones used in the localization industry.

Anchovy also extracts term candidates from monolingual documents and from translated XLIFF files, helping you build glossaries quickly from existing material.

Supported Platforms

Anchovy works on these Operating Systems:

- Microsoft Windows 10 and 11
- macOS Monterey (12.0), Ventura (13.0), Sonoma (14.0), Sequoia (15.0) and Tahoe (26.0)
- Linux for 64-bit x86 (Intel/AMD) processors

Anchovy installers for Linux are built and tested on Ubuntu 24.04 LTS. The installers are not tested on other distributions.

Language Codes

Standard language codes from [BCP 47](#) are used in all operations.

When you create a glossary or add a term or definition column, you select the language from a list of standard language codes included in the program.

If you need to correct the language assigned to an existing glossary, use the [Change Language](#) task to replace one language code with another throughout the open glossary.

Supported Formats

GlossML: Glossary Markup Language

GlossML is an XML-based vocabulary specifically designed for containing glossaries that can be used for storing monolingual and multilingual lists of terms and, optionally, their definitions.

A distinctive aspect of GlossML vocabulary is its extreme simplicity. It only has 6 elements and 4 attributes. This is possible because it focuses solely on holding glossary data. It is not intended for terminology exchange.

The GlossML specification and related materials (XML Schema and examples) are licensed under the Creative Commons Attribution-No Derivative Works 3.0 Unported License. This means that anyone can use and distribute the GlossML format without paying royalties of any kind.

GlossML specification is available at <https://www.maxprograms.com/glossml/glossml.pdf>.

Comma Separated Values (CSV)

A comma-separated values (CSV) file is used for the digital storage of data structured in a table of lists form, where each associated item (member) in a group is in association with others also separated by the commas of its set. Each line in the CSV file corresponds to a row in the table. Within a line, fields are separated by commas, each field belonging to one table column.

Since it is a common and simple file format, CSV files are often used for moving tabular data between two different computer programs, for example between a database program and a spreadsheet program.

Very often, characters other than commas are used to separate columns. Also, it's also often necessary to enclose column data in special delimiters when they contain the characters used as column separators.

TBX: TermBase eXchange

Term Base eXchange (TBX) is the open, XML-based standard for exchanging structured terminological data that has been approved as an international standard by LISA and ISO. It is also known as ISO 30042 standard.

TBX is a framework that allows custom definition of terminology databases. It requires two files per terminology database: one file that defines the constraints and data categories to be used (the XCS file) and a second file containing the actual data (the TBX file).

TBX is available in two flavors:

TBX

The official version released by ISO and LISA together. This version is based on two DTDs with a large set of XML elements and attributes. An extremely rich set of data categories is included in the default XCS file, designed to support multiple subjects through a large number of available fields.

TBX Basic

A limited subset of TBX, which intends to simplify the complex set of options included in the standard one. This separate version published only by LISA has its own DTD and official data categories defined in a separate XCS file.

Additional information about TBX is available at <https://www.tbxinfo.net>

TMX: Translation Memory eXchange

TMX (Translation Memory eXchange) is the vendor-neutral open XML standard for the exchange of Translation Memory (TM) data created by Computer Aided Translation (CAT) and localization tools.

The purpose of TMX is to allow easier exchange of translation memory data between tools and/or translation vendors with little or no loss of critical data during the process.

TMX specification is available at <http://www.ttt.org/oscarStandards/tmx/tmx14b.html>.

User Interface

Anchovy GUI

The main window displays the currently open glossary as a table, with a toolbar at the top that provides quick access to the most frequently used commands.

The following picture portrays Anchovy:



Each row in the table holds a glossary entry. Columns can be of three types: comment, term and definition. Term and definition columns are associated with a language.

Common Tasks

Common tasks performed with Anchovy are:

-  Create Glossary
- Edit an Existing Glossary
-  View Glossary Properties
-  Search and Replace
-  Change Language
-  Extract Terms From a Document
-  Bilingual Term Extraction
- Convert TMX File to GlossML Format
- Convert TBX File to GlossML Format
- Convert CSV File to GlossML Format
- Convert Excel File to GlossML Format
- Convert GlossML File to Other Formats


Create Glossary

Follow these steps to create a new glossary in GlossML format.

Procedure

1. Select **File** → **New Glossary** ([Ctrl+N] on Windows/Linux, [Cmd+N] on macOS) from the main menu or click the  button on the toolbar.

The **New Glossary** dialog is displayed:

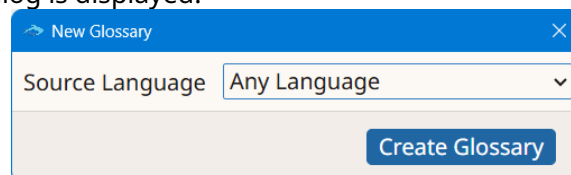

2. Select the source language for the new glossary from the **Source Language** drop-down list.

The list contains the most common languages that are valid according to [BCP 47](#). The first entry, **Any Language**, is a valid GlossML source language, stored with the code `*all*` as in the TMX standard. It means that any of the languages included in the glossary can be considered the source language.

3. Click the **Create Glossary** button.
4. Add content to the glossary and save it with **File** → **Save Glossary** ([Ctrl+S] on Windows/Linux, [Cmd+S] on macOS).

Results

A new glossary with columns for terms and definitions in the selected source language is created and displayed in Anchovy.

Edit an Existing Glossary

Follow these steps to modify the content of an existing glossary in GlossML format.

Procedure

1. Select **File** → **Open Glossary** ([Ctrl+O] on Windows/Linux, [Cmd+O] on macOS) from the main menu or click the  button on the toolbar, then locate and open the glossary to modify.
2. Select a cell and modify its content, or use one of the following commands from the **Edit** menu or their equivalent toolbar buttons.

Option	Description
 Search/Replace Text	Search for a cell containing the specified text and optionally replace it. See Search and Replace .
 Add Row	Add a new blank row in which to insert a new glossary term.
 Delete Row	Delete a row from the glossary, removing a term, its definition and its translations.
 Add Column	Add a new column to the glossary. Available column types are: Comment Column A column for comments about a term. When present, it is the first column on the left. Term Column A column for terms in the language selected when the column is added. Definition Column A column for the definition of the associated term in the language selected when the column is added.
 Delete Column	Delete the selected column from the glossary.

3. Save your changes with **File** → **Save Glossary**. Use **File** → **Save Glossary As...** to save under a different name.


View Glossary Properties

Follow these steps to review the properties of the open glossary and edit its comment.

Procedure

1. Select **File** → **Glossary Properties** from the main menu or click the  button on the toolbar.

The **Glossary Information** dialog is displayed, showing the source language, the languages present, the number of terms and the glossary comment:

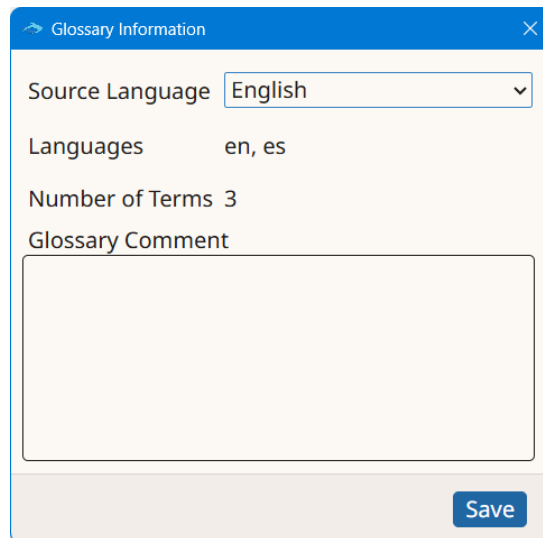

2. Optionally, change the source language using the **Source Language** drop-down list.

The list contains the most common languages that are valid according to [BCP 47](#). The first entry, **Any Language**, is a valid GlossML source language, stored with the code `*all*` as in the TMX standard. It means that any of the languages included in the glossary can be considered the source language.

3. Optionally, edit the text in the **Glossary Comment** box.
4. Click the **Save** button to store your changes.


Search and Replace

Follow these steps to search for text in the open glossary and optionally replace it.

Procedure

1. Select **Edit** → **Search/Replace Text** ([Ctrl+F] on Windows/Linux, [Cmd+F] on macOS) from the main menu or click the  button on the toolbar.

The **Search and Replace** dialog is displayed:

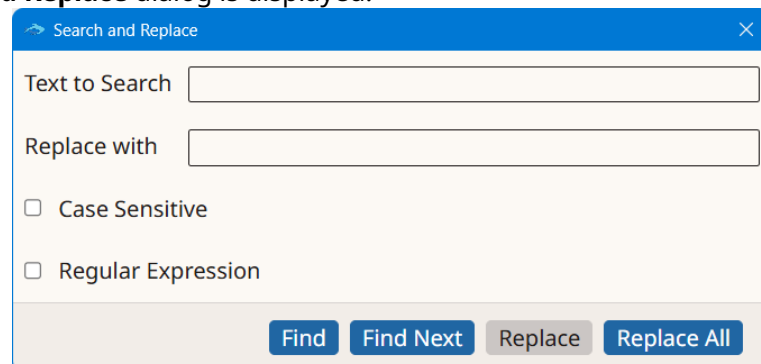

2. Type the text to search for in the **Text to Search** box.
3. Type the replacement text in the **Replace with** box.
4. Optionally, select the **Case Sensitive** checkbox to match only text with the exact letter case entered.

5. Optionally, select the **Regular Expression** checkbox to treat the search text as a regular expression.
6. Click **Find** to search from the beginning of the glossary, or **Find Next** to search from the currently selected cell.

When a match is found, the cell that contains the text is opened for editing and the matching text is selected.

7. Click **Replace** to replace the current match, or **Replace All** to replace every match in the glossary.

The **Replace** button is disabled until a match has been found with **Find** or **Find Next**.

Change Language

Follow these steps to replace one language code with another throughout the open glossary.


About this task

Use this task to correct the language assigned to a glossary, for example when a column was created with the wrong language code.

Procedure

1. Select **Tasks** → **Change Language** from the main menu or click the  button on the toolbar.

The **Change Language** dialog is displayed:

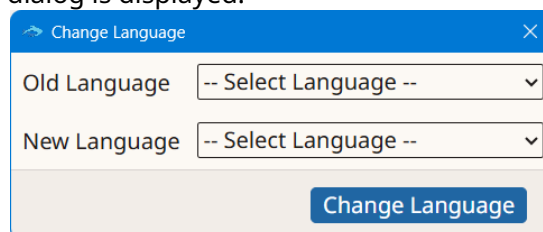

2. Select the language currently used in the glossary from the **Old Language** drop-down list.
3. Select the language to use instead from the **New Language** drop-down list.
4. Click the **Change Language** button.

Results

Every term and definition column that used the old language is reassigned to the new language.

Extract Terms From a Document

Follow these steps to extract term candidates from a monolingual document into a glossary.

Procedure

1. Select **Tasks** → **Term Extraction** from the main menu or click the  button on the toolbar.

The **Term Extraction** dialog is displayed:

2. Type the name of the document to analyze in the **Source File** box or click the **Browse...** button next to it to select it from the file system.
3. Type the name of the glossary to create in the **GlossML File** box or click the **Browse...** button next to it to select a name and location.
4. Select the language of the document from the **Source Language** drop-down list.
5. Select the format of the document from the **File Type** drop-down list, or accept the type automatically detected by the program.
6. Select the character set of the document from the **Character Set** drop-down list, or accept the one automatically detected by the program.
7. Indicate in the **Minimum Frequency** selector the minimum number of times a candidate term must appear in the document.
8. Indicate in the **Maximum Term Length** selector the maximum number of words a candidate term can contain.
9. Click the **Extract Candidates** button.

The document is analyzed and the list of candidate terms is displayed in the **Term Candidates** dialog:



10. Review the list of candidates. Select the candidates you want to discard and click the **Remove Selected** button.
11. Optionally, select the **Open generated glossary** checkbox to open the new glossary in Anchovy after saving.
12. Click the **Save Glossary** button to store the remaining candidates in the glossary.

Results

A glossary containing the selected term candidates is created and, optionally, opened in Anchovy.

Bilingual Term Extraction

Follow these steps to extract bilingual term candidates from a translated XLIFF file into a glossary.


About this task

Bilingual term extraction reads a translated XLIFF file and pairs source and target term candidates in a bilingual glossary.

Procedure

1. Select **Tasks** → **Bilingual Term Extraction** from the main menu or click the  button on the toolbar.

The **Bilingual Term Extraction** dialog is displayed:

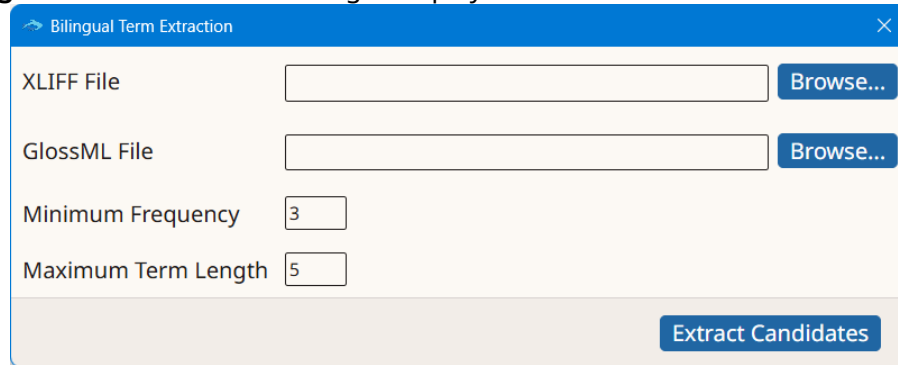

2. Type the name of the translated document in the **XLIFF File** box or click the **Browse...** button next to it to select it from the file system.
3. Type the name of the glossary to create in the **GlossML File** box or click the **Browse...** button next to it to select a name and location.
4. Indicate in the **Minimum Frequency** selector the minimum number of times a candidate term must appear.
5. Indicate in the **Maximum Term Length** selector the maximum number of words a candidate term can contain.
6. Click the **Extract Candidates** button.

The file is analyzed and the list of candidate terms is displayed in the **Bilingual Term Candidates** dialog:



7. Review the list of candidates. Select the candidates you want to discard and click the **Remove Selected** button.
8. Optionally, select the **Open generated glossary** checkbox to open the new glossary in Anchovy after saving.
9. Click the **Save Glossary** button to store the remaining candidates in the glossary.

Results

A bilingual glossary containing the selected term candidates is created and, optionally, opened in Anchovy.


Convert TMX File to GlossML Format

Follow these steps to convert a TMX file to a GlossML glossary.

Procedure

1. Select **Tasks** → **Convert TMX to GlossML** from the main menu.

The **Convert TMX to GlossML** dialog is displayed:

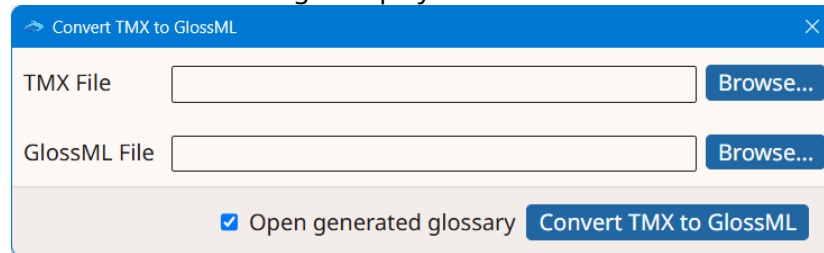

2. Type the name of the TMX file in the **TMX File** box or click the **Browse...** button next to it to select an existing TMX file from the file system.
3. Type the name of the glossary to create in the **GlossML File** box or click the **Browse...** button next to it to select a name and location.
4. Optionally, select the **Open generated glossary** checkbox to open the new glossary in Anchovy after conversion.
5. Click the **Convert TMX to GlossML** button.

Results

A new glossary is created and stored in the selected location.


Convert TBX File to GlossML Format

Follow these steps to convert a TBX file to a GlossML glossary.

Procedure

1. Select **Tasks** → **Convert TBX to GlossML** from the main menu.

The **Convert TBX to GlossML** dialog is displayed:

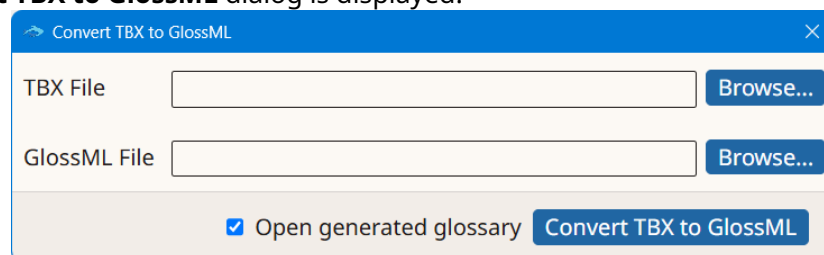

2. Type the name of the TBX file in the **TBX File** box or click the **Browse...** button next to it to select an existing TBX file from the file system.
3. Type the name of the glossary to create in the **GlossML File** box or click the **Browse...** button next to it to select a name and location.
4. Optionally, select the **Open generated glossary** checkbox to open the new glossary in Anchovy after conversion.
5. Click the **Convert TBX to GlossML** button.

Results

A new glossary is created and stored in the selected location.

Convert CSV File to GlossML Format

Follow these steps to convert a CSV or other delimited file to a GlossML glossary.

Procedure

1. Select **Tasks** → **Convert CSV to GlossML** from the main menu.

The **Convert CSV to GlossML** dialog is displayed:

2. Type the name of the CSV file in the **CSV File** box or click the **Browse...** button next to it to select an existing file from the file system.
3. Type the name of the glossary to create in the **GlossML File** box or click the **Browse...** button next to it to select a name and location.
4. Select the default language of the terms from the **Source Language** drop-down list.
5. Adjust the **Character Set**, **Column Separator** and **Text Delimiter** drop-down lists until the data is correctly displayed in the preview. To use a character that is not in the lists, select **Custom Separator** or **Custom Delimiter** and type the character.
6. Optionally, select the **First row contains column headers** checkbox. When selected, Anchovy uses the header row to guess the type of each column.
7. In the preview, set the type of each column by choosing **Skip**, **Comment**, **Term** or **Definition**. For term and definition columns, select the language of the column.
8. Optionally, select the **Open generated glossary** checkbox to open the new glossary in Anchovy after conversion.
9. Click the **Convert CSV to GlossML** button.

Results

A new glossary is created and stored in the selected location.


Convert Excel File to GlossML Format

Follow these steps to convert an Excel workbook to a GlossML glossary.

Procedure

1. Select **Tasks** → **Convert Excel to GlossML** from the main menu.

The **Convert Excel to GlossML** dialog is displayed:

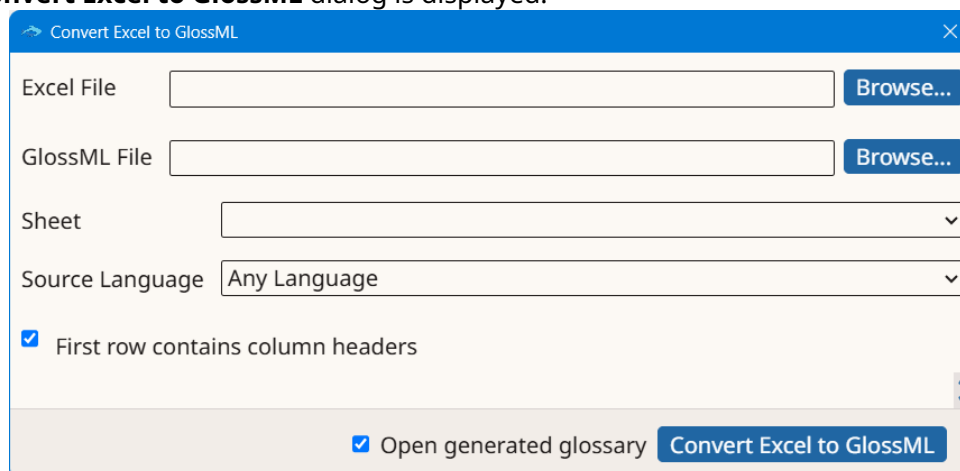

2. Type the name of the Excel file in the **Excel File** box or click the **Browse...** button next to it to select an existing workbook from the file system.
3. Type the name of the glossary to create in the **GlossML File** box or click the **Browse...** button next to it to select a name and location.
4. Select the worksheet to convert from the **Sheet** drop-down list.
5. Select the default language of the terms from the **Source Language** drop-down list.
6. Optionally, select the **First row contains column headers** checkbox. When selected, Anchovy uses the header row to guess the type of each column.
7. In the preview, set the type of each column by choosing **Skip**, **Comment**, **Term** or **Definition**. For term and definition columns, select the language of the column.
8. Optionally, select the **Open generated glossary** checkbox to open the new glossary in Anchovy after conversion.
9. Click the **Convert Excel to GlossML** button.

Results

A new glossary is created and stored in the selected location.

Convert GlossML File to Other Formats

Anchovy facilitates data exchange by allowing easy conversion of GlossML files to other formats.

The content of an open GlossML file can be exported to HTML, TMX, TBX, CSV and Excel. Conversions are performed directly by Anchovy, so no external processors or stylesheets are required.

Export to HTML, TMX, TBX and Excel is automatic: Anchovy only asks for the name and location of the file to create. Export to CSV produces a file with comma-separated columns and fields delimited by double quotes.

-  Export Glossary as HTML
-  Export Glossary as TMX
-  Export Glossary as TBX
-  Export Glossary as CSV
-  Export Glossary as Excel

Export Glossary as HTML

Follow these steps to export the open glossary to an HTML file.

Procedure

1. With the glossary open, select **File** → **Export as HTML** from the main menu or click the  button on the toolbar.
2. Select a name and location for the HTML file and confirm.

Results

An HTML file is generated and saved in the selected location.

Export Glossary as TMX

Follow these steps to export the open glossary to a TMX file.

Procedure

1. With the glossary open, select **File** → **Export as TMX** from the main menu or click the  button on the toolbar.
2. Select a name and location for the TMX file and confirm.

Results

A TMX file is generated and saved in the selected location.

Export Glossary as TBX

Follow these steps to export the open glossary to a TBX file.

Procedure

1. With the glossary open, select **File** → **Export as TBX** from the main menu or click the  button on the toolbar.
2. Select a name and location for the TBX file and confirm.

Results

A TBX file is generated and saved in the selected location.

Export Glossary as CSV

Follow these steps to export the open glossary to a CSV file.

Procedure

1. With the glossary open, select **File** → **Export as CSV** from the main menu or click the  button on the toolbar.
2. Select a name and location for the CSV file and confirm.

Results

A CSV file is generated in the selected location. Columns are separated by commas and fields are delimited with double quotes.

Export Glossary as Excel

Follow these steps to export the open glossary to an Excel file.

Procedure

1. With the glossary open, select **File** → **Export as Excel** from the main menu or click the  button on the toolbar.
2. Select a name and location for the Excel file and confirm.

Results

An Excel file is generated and saved in the selected location.

Settings and Updates

Set Preferences

Follow these steps to configure the application language, the system catalog and the interface theme.

About this task


Anchovy needs to know how to locate the grammar rules (DTDs and Schemas) declared in the XML files it processes, such as TMX and TBX documents. XML catalogs that follow the specification published by [OASIS](#) are used to resolve the location of those DTDs and Schemas.

Anchovy includes a complete XML catalog, inherited from OpenXLIFF Filters, that supports the most common XML grammars. Advanced users who work with custom grammars can select their own catalog file to handle their XML files.

Procedure

1. Open the Preferences dialog. On Windows and Linux, select **Settings** → **Preferences**. On macOS, select **Anchovy** → **Settings**.

The **Preferences** dialog is displayed:

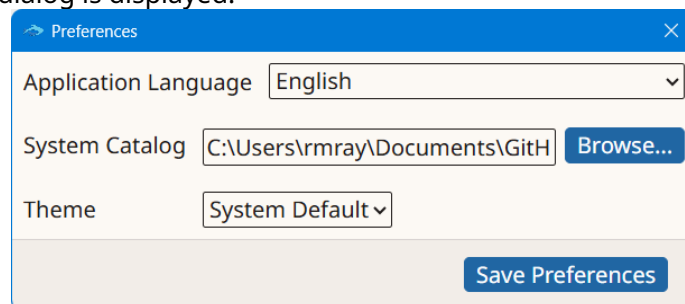

2. Select the language of the user interface from the **Application Language** drop-down list.
3. To use a custom XML catalog, type its location in the **System Catalog** box, or click the **Browse...** button next to it to select a catalog file from the file system. Leave the default value to use the catalog included with Anchovy.
4. Select the interface theme from the **Theme** drop-down list: **System Default**, **Dark**, **Light** or **High Contrast**.
5. Click the **Save Preferences** button.

Results

The selected preferences are applied. A change of application language takes effect the next time Anchovy is started.

Check for Updates

Follow these steps to check whether a newer version of Anchovy is available.

Procedure

1. Select **Help** → **Check for Updates...** from the main menu.

If an update is available, the **Software Updates** dialog shows the installed version and the latest version:



2. Click **View Release History** to see the list of changes, or **Download Update** to download the new version.

Subscriptions

Anchovy is available in two modes:

- Source Code
- Yearly Subscriptions for installers and support

Source Code

Source code of Anchovy is free. Anyone can download the source code from [GitHub.com](https://github.com), compile, modify and use it at no cost in compliance with the accompanying license terms.

Subscriptions

The version of Anchovy included in the official installers from the [Maxprograms Download Page](#) can be used at no cost for 7 days requesting a free Evaluation Key.

Personal Subscription Keys are available at the [Maxprograms Online Store](#). Subscription Keys cannot be shared or transferred to different machines.

The subscription version includes direct email support at tech@maxprograms.com.


Differences Summary

	Source Code	Subscription Based
Ready to Use Installers	No	Yes
Notarized macOS launcher	No	Yes
Signed launcher and installer for Windows	No	Yes
Restricted Features	None	None
Technical Support	• Peer support at Groups.io	• Direct email at tech@maxprograms.com • Peer support at Groups.io

First Registration - Evaluation Request

Procedure

1. When you open Anchovy from subscription installers for the first time, or when the Subscription Key is not registered, the **Register Subscription** dialog is displayed:

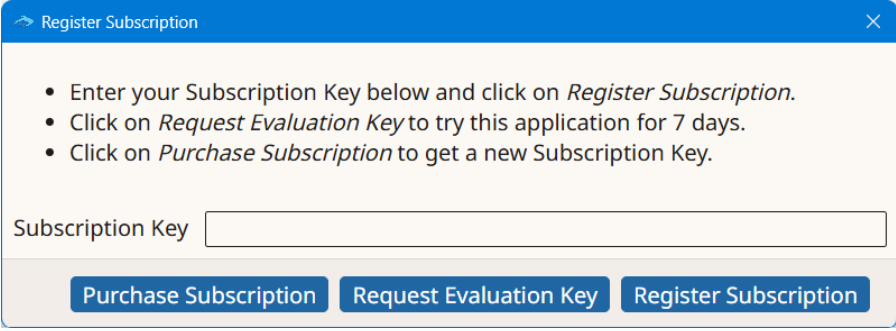

Register Subscription

- Enter your Subscription Key below and click on *Register Subscription*.
- Click on *Request Evaluation Key* to try this application for 7 days.
- Click on *Purchase Subscription* to get a new Subscription Key.

Subscription Key


Purchase Subscription Request Evaluation Key Register Subscription

2. If you have a Subscription Key, type it in the **Subscription Key** text box and click the **Register Subscription** button.

On registration success, the main editing screen is presented.

3. If you don't have a Subscription Key and wish to test the program for 7 days, click the **Request Evaluation Key** button.

The **Request Evaluation Key** dialog appears:

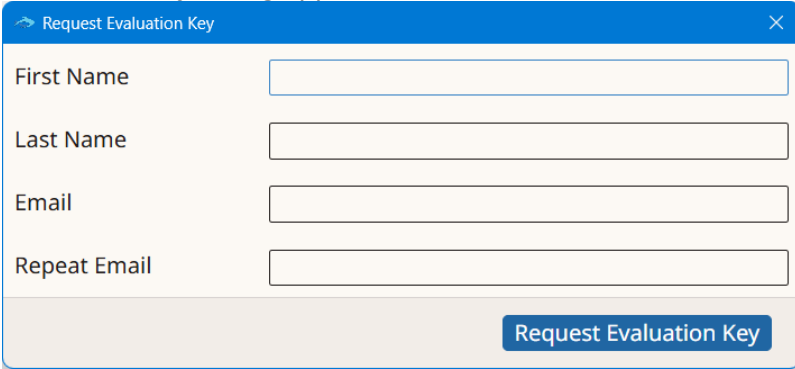

Request Evaluation Key

First Name

Last Name

Email

Repeat Email

Request Evaluation Key

4. Enter the requested data and click the **Request Evaluation Key** button.

On success, an email with the requested Evaluation Key is sent to the indicated address. Check your email and register the Evaluation Key using the instructions shown above.

Subscription Renewal


About this task

You can register a new Subscription Key before your existing subscription expires.

Procedure

1. Select **Help** → **Register Subscription...** from the main menu.

The **Register Subscription** dialog appears:

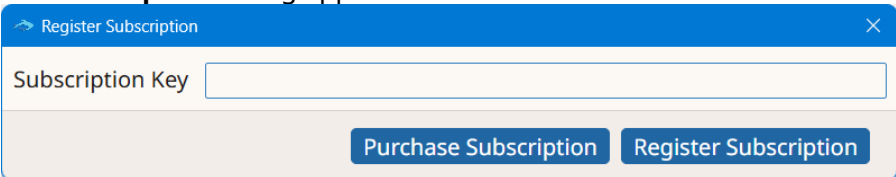

Register Subscription

Subscription Key

Purchase Subscription Register Subscription

2. If you don't have a Subscription Key yet, click the **Purchase Subscription** button to open the [Maxprograms Online Store](#) in your internet browser.
3. If you have a Subscription Key, type it in the **Subscription Key** text box and click the **Register Subscription** button.

On registration success, a confirmation dialog is displayed.

Licenses

Licenses

Anchovy is built with the following tools and components:

Anchovy

- Available from <https://maxprograms.com/products/anchovy.html>
- Published under [Eclipse Public License 1.0](#)

Electron

- Available from <https://www.electronjs.org/>
- Published under [MIT License](#)

Java SE

- Available from <https://adoptium.net/>
- Published under [GPL2 with the Classpath Exception](#)

OpenXLIFF Filters

- Available from <https://www.maxprograms.com/products/openxliff.html>
- Published under [Eclipse Public License 1.0](#)

XMLJava

- Available from <https://github.com/maxprograms-com/XMLJava>
- Published under [Custom License](#)

BCP47J

- Available from <https://github.com/maxprograms-com/BCP47J>
- Published under [Custom License](#)

TypesBCP47

- Available from <https://github.com/maxprograms-com/TypesBCP47>
- Published under [Eclipse Public License 1.0](#)

TypesXML

- Available from <https://github.com/maxprograms-com/TypesXML>
- Published under [Eclipse Public License 1.0](#)

TypesXLIFF

- Available from <https://github.com/maxprograms-com/TypesXLIFF>
- Published under [Eclipse Public License 1.0](#)

TypesExcel

- Available from <https://github.com/maxprograms-com/TypesExcel>
- Published under [Eclipse Public License 1.0](#)

TypesTerms

- Available from <https://github.com/maxprograms-com/TypesTerms>
- Published under [Eclipse Public License 1.0](#)
- Term extraction filters candidates using stop words. The stop-word lists, covering 25 languages, are extracted from the [stop-words project](#) by [Alireza Savand](#).

Glossary

Character Set

A character set (sometimes referred to as code page) is a collection of characters that are associated with a sequence of natural numbers in order to facilitate the storage of text in computers and the transmission of text through telecommunication networks.

Column Delimiter

Character used to delimit the content of a data column in CSV files. Double quotes are frequently used as delimiters. Delimiters are required whenever the column text contains the character used as Column Separator.

Column Separator

Character used to separate data columns in a CSV file. Usually a comma.

CSV

CSV (Comma Separated Values) is a standard file format used to store tabular data.

Excel

Excel is the spreadsheet application from Microsoft. Its workbooks, stored in the .xlsx format, hold data in rows and columns across one or more sheets. Anchovy imports terms from and exports glossaries to Excel workbooks.

GlossML

Glossary Markup Language ([GlossML](#)) is an XML vocabulary specifically designed for containing glossaries used in translation/localization industry.

Stop Words

Stop words are words which are filtered out prior to, or after, processing of natural language data (text).

TBX

TBX (TermBase eXchange) is the open, XML-based standard for exchanging structured terminological data. First released by LISA in May, 2002, TBX was submitted to the International Organization for Standardization (ISO) on February 21, 2007, for adoption as an ISO standard.

TML

Terminological Markup Language (TML) is an XML framework for describing a terminological data collection. In the case of a TBX TML, the framework consists of two files: a DTD that specifies the elements and attributes to use in the XML container for terminology data and an XCS file for describing the data categories and constraints.

TMX

Translation Memory eXchange (TMX) is an open standard originally published by LISA (Localization Industry Standards Association). The purpose of TMX is to allow easier exchange of translation memory data between tools and/or translation vendors with little or no loss of critical data during the process.

XCS

XCS (eXtensible Constraint Specification) is an XML vocabulary that defines the data categories and their constraints for a specific TBX TML.

XLIFF

XLIFF (XML Localization Interchange File Format) is the open, XML-based standard for exchanging localization data between tools during a translation project. Anchovy uses translated XLIFF files as the source for bilingual term extraction.