

Anchovy User Guide



Copyright © 2009 - 2026 Maxprograms

Table of Contents

Introduction	1
Supported Platforms	1
Language Codes	1
Supported Formats	1
GlossML: Glossary Markup Language	1
Comma Separated Values (CSV)	2
TBX: TermBase eXchange	2
TMX: Translation Memory eXchange	2
The Main Window	2
Getting Started	5
Common Tasks	6
Create Glossary	6
Edit an Existing Glossary	7
View Glossary Properties	7
Search and Replace	8
Change Language	9
Convert TMX File to GlossML Format	9
Convert TBX File to GlossML Format	10
Convert CSV File to GlossML Format	11
Convert Excel File to GlossML Format	13
Convert GlossML File to Other Formats	14
Export Glossary as HTML	15
Export Glossary as TMX	15
Export Glossary as TBX	15
Export Glossary as CSV	16
Export Glossary as Excel	16
Term Extraction	17
Extract Terms From a Document	17
Bilingual Term Extraction	19
Settings and Updates	21
Set Preferences	21
Check for Updates	21
Subscriptions	23
First Registration - Evaluation Request	23
Subscription Renewal	24
Licenses	26
Glossary	i

Introduction

Anchovy is a cross-platform glossary editor based on the open [GlossML](#) (Glossary Markup Language) format.

Anchovy simplifies glossary data exchange. It imports [CSV](#), [Excel](#), [TMX](#) and [TBX](#) files and exports glossaries in CSV, Excel, HTML, TMX and TBX formats, the most common ones used in the localization industry.

Anchovy also extracts term candidates from monolingual documents and from translated [XLIFF](#) files, a quick way to build glossaries from existing material.

Supported Platforms

Anchovy works on these Operating Systems:

- Microsoft Windows 10 and 11
- macOS Monterey (12.0), Ventura (13.0), Sonoma (14.0), Sequoia (15.0) and Tahoe (26.0)
- Linux for 64-bit x86 (Intel/AMD) processors



Note

Anchovy installers for Linux are built and tested on Ubuntu 24.04 LTS. The installers are not tested on other distributions.

Language Codes

Standard language codes from [BCP 47](#) are used in all operations.

When a glossary is created or a term or definition column is added, the language is selected from a list of standard language codes included in the program.

To correct the language assigned to an existing glossary, use the [Change Language](#) task to replace one language code with another throughout the open glossary.

Supported Formats

GlossML: Glossary Markup Language

GlossML is an XML-based vocabulary specifically designed for containing glossaries that can be used for storing monolingual and multilingual lists of terms and, optionally, their definitions.

A distinctive aspect of GlossML vocabulary is its extreme simplicity. It only has 6 elements and 4 attributes. This is possible because it focuses solely on holding glossary data. It is not intended for terminology exchange.

The GlossML specification and related materials (XML Schema and examples) are licensed under the Creative Commons Attribution-No Derivative Works 3.0 Unported License. This means that anyone can use and distribute the GlossML format without paying royalties of any kind.

GlossML specification is available at <https://maxprograms.com/glossml/glossml.pdf>.

Comma Separated Values (CSV)

A comma-separated values (CSV) file is used for the digital storage of data structured in a table of lists form, where each associated item (member) in a group is in association with others also separated by the commas of its set. Each line in the CSV file corresponds to a row in the table. Within a line, fields are separated by commas, each field belonging to one table column.

Since it is a common and simple file format, CSV files are often used for moving tabular data between two different computer programs, for example between a database program and a spreadsheet program.

Very often, characters other than commas are used to separate columns. Also, it's also often necessary to enclose column data in special delimiters when they contain the characters used as column separators.

TBX: TermBase eXchange

Term Base eXchange (TBX) is the open, XML-based standard for exchanging structured terminological data.

TBX exists in two versions:

TBX 2.0

Published jointly by LISA and ISO in 2008 as ISO 30042:2008.

TBX 3.0

Released by ISO in 2019 as ISO 30042:2019.

TBX is a framework that allows custom definition of terminology databases. The constraints and data categories to be used are defined in an [XCS](#) file.

Anchovy converts both TBX 2.0 and TBX 3.0 files to GlossML, and exports glossaries as TBX 3.0.

Additional information about TBX is available at <https://www.tbxinfo.net>.

TMX: Translation Memory eXchange

TMX (Translation Memory eXchange) is the vendor-neutral open XML standard for the exchange of Translation Memory (TM) data created by Computer Aided Translation (CAT) and localization tools.

The purpose of TMX is to allow easier exchange of translation memory data between tools and/or translation vendors with little or no loss of critical data during the process.

TMX specification is available at <http://www.ttt.org/oscarStandards/tmx/tmx14b.html>.

The Main Window

The main window shows the open glossary as a table, with a toolbar for the most common commands.

The following picture portrays Anchovy:

#	Term (English)	Definition (English)	Term (Spanish)
19	XLIFF file		archivo XLIFF
20	Remove		Eliminar
21	TMX	TMX (Translation Memory eXchange) is an open XML standard designed to let translation tools exchange translation memory data reliably.	TMX
22	target	The target language is the destination language of a translation job.	destino
23	list		lista
24	JSON	JSON (JavaScript Object Notation) is a text-based, language-independent data-interchange format used to store and transmit structured data	JSON
25	XML		XML
26	appears		aparece
27	configuration file	A configuration file is a plain-text or serialized file that stores settings, parameters, and preferences that control how software, operating systems, or infrastructure components behave.	archivo de configuración
28	Command		Línea
29	DITA	DITA (Darwin Information Typing Architecture) is an XML-based, topic-oriented documentation architecture designed for writing, structuring, and publishing technical manuals and other complex documentation.	DITA
30	can		Puede

Glossary Table

The glossary is displayed as a table that fills most of the window. Each row holds one glossary entry. Columns can be of three types:

Comment

Holds comments about the entry. When present, it is the first column on the left.

Term

Holds terms in an associated language.

Definition

Holds the definition of the associated term in a language.

Anchovy arranges the columns automatically:

- When the glossary has comments, the comment column is shown first, on the left.
- The term and definition columns of the same language are shown together, with the term column followed by its definition column.
- Languages are ordered by their language code, so en is shown before fr.

Toolbar

The toolbar at the top of the window gives one-click access to the most common commands:

- New Glossary, Open Glossary, Save Glossary and Glossary Properties.
- Search and Replace, Add Row, Delete Row, Add Column and Delete Column. See [Edit an Existing Glossary](#).
- Term Extraction and Bilingual Term Extraction.
- Export the glossary as HTML, TMX, TBX, CSV or Excel.

-  [Change Language](#) and  Anchovy User Guide.

Getting Started

Only a few steps are needed to build and share glossaries with Anchovy.

The basic workflow for working with glossaries in Anchovy is:

1. [Create or open a glossary](#)
2. [Add and edit terms](#)
3. [Build a glossary from existing files](#) (optional)
4. [Export or convert the glossary](#)

**Note**

The first time Anchovy is opened, it asks for a Subscription Key or a free evaluation request. See [First Registration - Evaluation Request](#).

Step 1: Create or Open a Glossary

A glossary is a table of terms and, optionally, their definitions and comments, stored in [GlossML](#) format.

- To start from scratch, follow the steps in [Create Glossary](#).
- To work on an existing glossary, open it as described in [Edit an Existing Glossary](#).

Step 2: Add and Edit Terms

Fill the glossary with content. Rows can be added for new entries, columns for more languages, comments or definitions, and the language of the glossary corrected when needed.

- Edit cells and manage rows and columns as described in [Edit an Existing Glossary](#).
- Find and replace text across the glossary with [Search and Replace](#).
- Reassign a language throughout the glossary with [Change Language](#).

Step 3: Build a Glossary from Existing Files

Existing material can be reused instead of typing everything by hand.

- Extract term candidates from documents or translations. See [Term Extraction](#).
- Convert a [TMX](#), [TBX](#), [CSV](#) or [Excel](#) file into a glossary.

Step 4: Export or Convert the Glossary

When the glossary is ready, it can be shared in the format other tools need. Anchovy exports to HTML, TMX, TBX, CSV and Excel. See [Convert GlossML File to Other Formats](#).

Common Tasks

Common tasks performed with Anchovy are:

-  Create Glossary
- Edit an Existing Glossary
-  View Glossary Properties
-  Search and Replace
-  Change Language
-  Extract Terms From a Document
-  Bilingual Term Extraction
- Convert TMX File to GlossML Format
- Convert TBX File to GlossML Format
- Convert CSV File to GlossML Format
- Convert Excel File to GlossML Format
- Convert GlossML File to Other Formats


Create Glossary

Follow these steps to create a new glossary in GlossML format.

Procedure

1. Select **File** → **New Glossary** ([Ctrl+N] on Windows/Linux, [Cmd+N] on macOS) from the main menu or click the  button on the toolbar.

The **New Glossary** dialog is displayed:

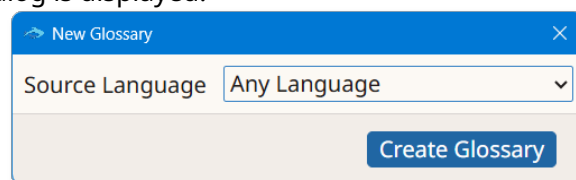

2. Select the source language for the new glossary from the **Source Language** drop-down list.
The list contains the most common languages that are valid according to [BCP 47](#). The first entry, **Any Language**, is a valid [GlossML](#) source language, stored with the code `*all*` as in the [TMX](#) standard. It means that any of the languages included in the glossary can be considered the source language.
3. Click the **Create Glossary** button.
4. Add content to the glossary and save it with **File** → **Save Glossary** ([Ctrl+S] on Windows/Linux, [Cmd+S] on macOS), or click the  button on the toolbar.

Results

A new glossary with columns for terms and definitions in the selected source language is created and displayed in Anchovy.

Edit an Existing Glossary

Follow these steps to modify the content of an existing glossary in GlossML format.

Procedure

1. Select **File** → **Open Glossary** ([Ctrl+O] on Windows/Linux, [Cmd+O] on macOS) from the main menu or click the  button on the toolbar, then locate and open the glossary to modify.
2. Select a cell and modify its content, or use one of the following commands from the **Edit** menu or their equivalent toolbar buttons.

Option	Description
 Search/Replace Text	Search for a cell containing the specified text and optionally replace it. See Search and Replace .
 Add Row	Add a new blank row in which to insert a new glossary term.
 Delete Row	Delete a row from the glossary, removing a term, its definition and its translations.
 Add Column	Add a new column to the glossary. Available column types are: Comment Column A column for comments about a term. When present, it is the first column on the left. Term Column A column for terms in the language selected when the column is added. Definition Column A column for the definition of the associated term in the language selected when the column is added.
 Delete Column	Delete the selected column from the glossary.

3. Save the changes with **File** → **Save Glossary** ([Ctrl+S] on Windows/Linux, [Cmd+S] on macOS), or click the  button on the toolbar. Use **File** → **Save Glossary As...** ([Ctrl+Shift+S] on Windows/Linux, [Cmd+Shift+S] on macOS) to save under a different name.


View Glossary Properties

Follow these steps to review the properties of the open glossary and edit its comment.

Procedure

1. Select **File** → **Glossary Properties** from the main menu or click the  button on the toolbar.

The **Glossary Information** dialog is displayed, showing the source language, the languages present, the number of terms and the glossary comment:

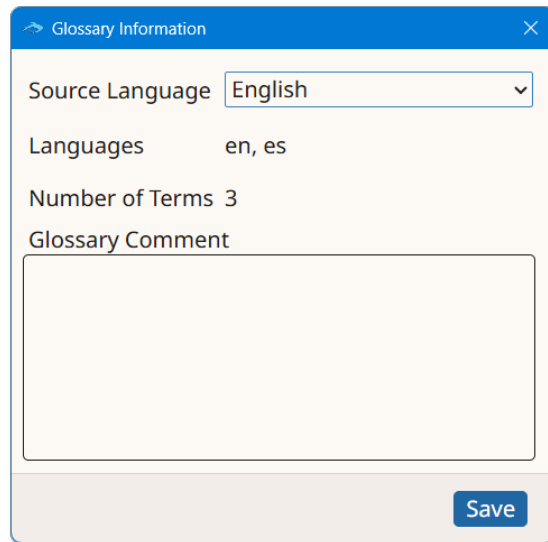

2. Optionally, change the source language using the **Source Language** drop-down list.

The list contains the most common languages that are valid according to [BCP 47](#). The first entry, **Any Language**, is a valid [GlossML](#) source language, stored with the code `*all*` as in the [TMX](#) standard. It means that any of the languages included in the glossary can be considered the source language.

3. Optionally, edit the text in the **Glossary Comment** box.
4. Click the **Save** button to store the changes.


Search and Replace

Follow these steps to search for text in the open glossary and optionally replace it.

Procedure

1. Select **Edit** → **Search/Replace Text** ([Ctrl+F] on Windows/Linux, [Cmd+F] on macOS) from the main menu or click the  button on the toolbar.

The **Search and Replace** dialog is displayed:

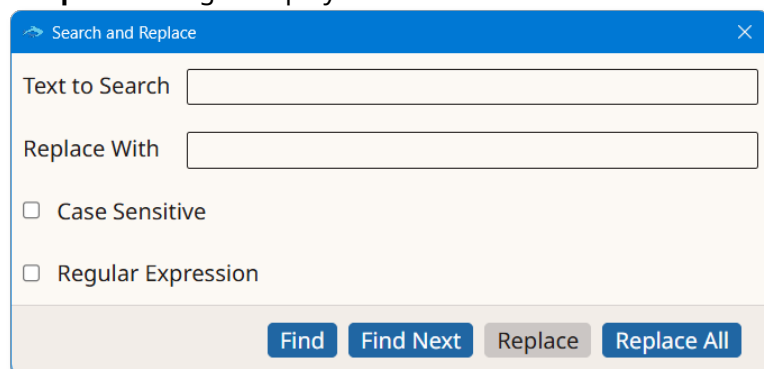

2. Type the text to search for in the **Text to Search** box.
3. Type the replacement text in the **Replace With** box.

4. Optionally, select the **Case Sensitive** checkbox to match only text with the exact letter case entered.
5. Optionally, select the **Regular Expression** checkbox to treat the search text as a regular expression.
6. Click **Find** to search from the beginning of the glossary, or **Find Next** to search from the currently selected cell.

When a match is found, the cell that contains the text is opened for editing and the matching text is selected.

7. Click **Replace** to replace the current match, or **Replace All** to replace every match in the glossary.

The **Replace** button is disabled until a match has been found with **Find** or **Find Next**.

Change Language

Follow these steps to replace one language code with another throughout the open glossary.


About this task

Use this task to correct the language assigned to a glossary, for example when a column was created with the wrong language code.

Procedure

1. Select **Tasks** → **Change Language** from the main menu or click the  button on the toolbar.

The **Change Language** dialog is displayed:

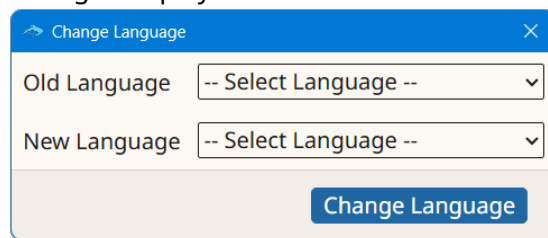

2. Select the language currently used in the glossary from the **Old Language** drop-down list.
3. Select the language to use instead from the **New Language** drop-down list.
4. Click the **Change Language** button.

Results

Every term and definition column that used the old language is reassigned to the new language.

Convert TMX File to GlossML Format

Follow these steps to convert a TMX file to a GlossML glossary.


About this task

Use this task to reuse the terms stored in a [TMX](#) translation memory as the starting point for a glossary.

Procedure

1. Select **Tasks** → **Convert TMX to GlossML** from the main menu.

The **Convert TMX to GlossML** dialog is displayed:

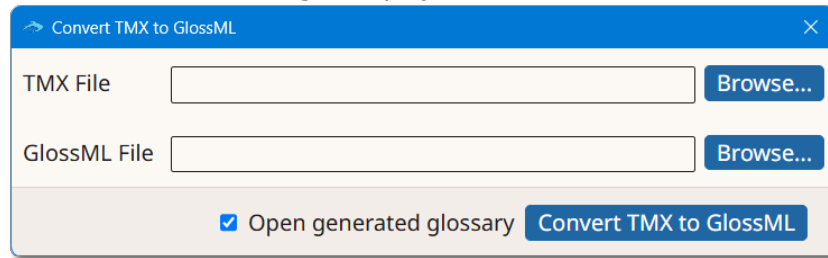

2. Type the name of the TMX file in the **TMX File** box or click the **Browse...** button next to it to select an existing TMX file from the file system.
3. Type the name of the glossary to create in the **GlossML File** box or click the **Browse...** button next to it to select a name and location.
4. Optionally, select the **Open generated glossary** checkbox to open the new glossary in Anchovy after conversion.
5. Click the **Convert TMX to GlossML** button.

Results

A new glossary is created and stored in the selected location.

Convert TBX File to GlossML Format

Follow these steps to convert a TBX file to a GlossML glossary.


About this task

Use this task to bring terminology stored in [TBX](#) format into an editable [GlossML](#) glossary.

Procedure

1. Select **Tasks** → **Convert TBX to GlossML** from the main menu.

The **Convert TBX to GlossML** dialog is displayed:

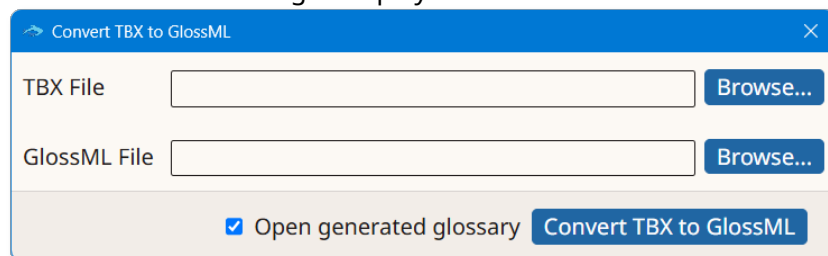

2. Type the name of the TBX file in the **TBX File** box or click the **Browse...** button next to it to select an existing TBX file from the file system.
3. Type the name of the glossary to create in the **GlossML File** box or click the **Browse...** button next to it to select a name and location.

4. Optionally, select the **Open generated glossary** checkbox to open the new glossary in Anchovy after conversion.
5. Click the **Convert TBX to GlossML** button.

Results

A new glossary is created and stored in the selected location.

Convert CSV File to GlossML Format

Follow these steps to convert a CSV or other delimited file to a GlossML glossary.


About this task

Use this task to turn a spreadsheet saved as [CSV](#), or any delimited list of terms, into a glossary.

Procedure

1. Select **Tasks** → **Convert CSV to GlossML** from the main menu.

The **Convert CSV to GlossML** dialog is displayed:

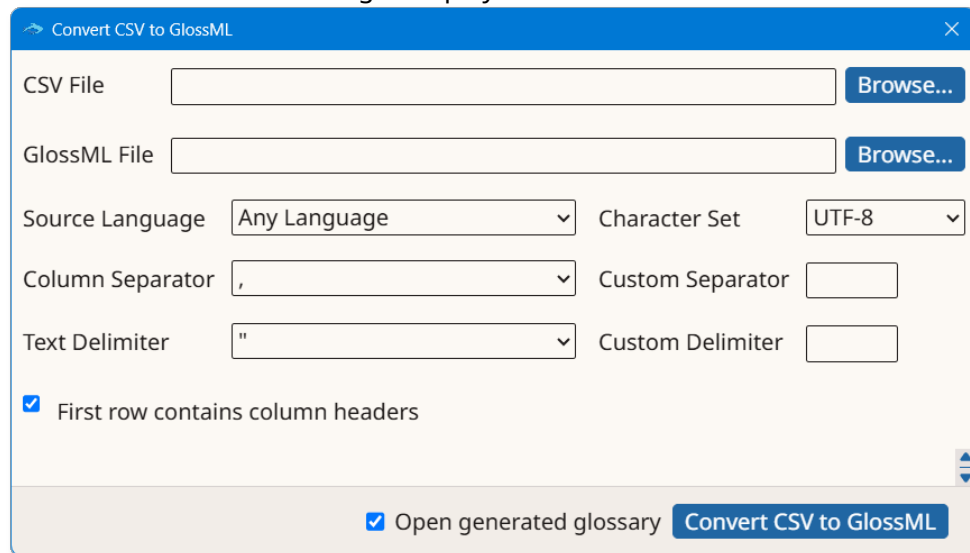

2. Type the name of the CSV file in the **CSV File** box or click the **Browse...** button next to it to select an existing file from the file system.
3. Type the name of the glossary to create in the **GlossML File** box or click the **Browse...** button next to it to select a name and location.
4. Select the default language of the terms from the **Source Language** drop-down list.
5. Adjust the **Character Set**, **Column Separator** and **Text Delimiter** drop-down lists until the data is correctly displayed in the preview. To use a character that is not in the lists, select **Custom Separator** or **Custom Delimiter** and type the character.

Character Set

The encoding used to store the text in the file, such as UTF-8. If it does not match the file, accented and non-Latin characters appear corrupted in the preview.

Column Separator

The character that separates one column from the next, usually a comma.

Text Delimiter

The character that encloses the text of a column, usually a double quote. It is needed when the text itself contains the character used as column separator.

- Optionally, select the **First row contains column headers** checkbox.

If the file was previously exported by Anchovy, selecting this option recognizes Anchovy's own header row and assigns each column's type and language automatically, which makes round-tripping a glossary easy. Anchovy does not interpret headers from files produced by other programs; for those, the column types must be assigned manually in the preview.

- The preview table at the bottom of the dialog shows the data split into columns. Set the type of each column using the selector in its header.

Option	Description
Skip	The column is ignored and not imported.
Comment	The column holds comments about the entry. Only one column can be mapped as Comment.
Term	The column holds terms. At least one column must be mapped as Term.
Definition	The column holds definitions.

For **Term** and **Definition** columns, also select the language of the column. The **Source Language** is used as the default.

The preview reflects the assigned column types:

Convert CSV to GlossML

CSV File

GlossML File

Source Language Character Set

Column Separator Custom Separator

Text Delimiter Custom Delimiter

☒ First row contains column headers

Column 1	Column 2	Column 3
Term	Definition	Term
English	English	Spanish
Term (English)	Definition (English)	Term (Spanish)
project		proyecto
file		archivo

☒ Open generated glossary

- Optionally, select the **Open generated glossary** checkbox to open the new glossary in Anchovy after conversion.
- Click the **Convert CSV to GlossML** button.

Results

A new glossary is created and stored in the selected location.

Convert Excel File to GlossML Format

Follow these steps to convert an Excel workbook to a GlossML glossary.


About this task

Use this task to turn terms kept in an [Excel](#) workbook into a glossary.

Procedure

- Select **Tasks** → **Convert Excel to GlossML** from the main menu.

The **Convert Excel to GlossML** dialog is displayed:

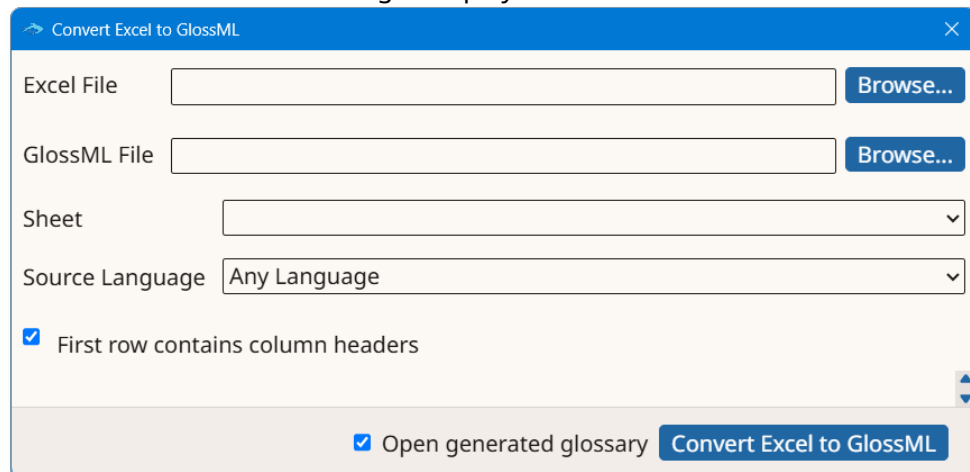

- Type the name of the Excel file in the **Excel File** box or click the **Browse...** button next to it to select an existing workbook from the file system.
- Type the name of the glossary to create in the **GlossML File** box or click the **Browse...** button next to it to select a name and location.
- Select the worksheet to convert from the **Sheet** drop-down list.
- Select the default language of the terms from the **Source Language** drop-down list.
- Optionally, select the **First row contains column headers** checkbox.

If the file was previously exported by Anchovy, selecting this option recognizes Anchovy's own header row and assigns each column's type and language automatically, which makes round-tripping a glossary easy. Anchovy does not interpret headers from files produced by other programs; for those, the column types must be assigned manually in the preview.

- The preview table at the bottom of the dialog shows the data of the selected sheet split into columns. Set the type of each column using the selector in its header.

Option	Description
Skip	The column is ignored and not imported.
Comment	The column holds comments about the entry. Only one column can be mapped as Comment.
Term	The column holds terms. At least one column must be mapped as Term.
Definition	The column holds definitions.

For **Term** and **Definition** columns, also select the language of the column. The **Source Language** is used as the default.

The preview reflects the assigned column types:

Convert Excel to GlossML

Excel File: C:\Users\rmray\Documents\GitHub\FluentaPRO\Localization\fl Browse...

GlossML File: C:\Users\rmray\Documents\GitHub\FluentaPRO\Localization\fl Browse...

Sheet: Glossary

Source Language: Any Language

☒ First row contains column headers

A	B	C
Term	Definition	Term
English	English	Spanish
Term (English)	Definition (English)	Term (Spanish)
project		proyecto
file		archivo
XLIFF		XLIFF

☒ Open generated glossary Convert Excel to GlossML

- Optionally, select the **Open generated glossary** checkbox to open the new glossary in Anchovy after conversion.
- Click the **Convert Excel to GlossML** button.

Results

A new glossary is created and stored in the selected location.

Convert GlossML File to Other Formats

Anchovy facilitates data exchange by allowing easy conversion of **GlossML** files to other formats.

The content of an open GlossML file can be exported to **HTML**, **TMX**, **TBX**, **CSV** and **Excel**. Conversions are performed directly by Anchovy, so no external processors or stylesheets are required.

Export to HTML, TMX, TBX and Excel is automatic: Anchovy only asks for the name and location of the file to create. Export to CSV produces a file with comma-separated columns and fields delimited by double quotes.

-  Export Glossary as HTML
-  Export Glossary as TMX
-  Export Glossary as TBX
-  Export Glossary as CSV
-  Export Glossary as Excel

Export Glossary as HTML

Follow these steps to export the open glossary to an HTML file.

Procedure

1. With the glossary open, select **File** → **Export as HTML** from the main menu or click the  button on the toolbar.
2. Select a name and location for the HTML file and confirm.

Results

An HTML file is generated and saved in the selected location.

Export Glossary as TMX

Follow these steps to export the open glossary to a TMX file.

Procedure

1. With the glossary open, select **File** → **Export as TMX** from the main menu or click the  button on the toolbar.
2. Select a name and location for the TMX file and confirm.

Results

A TMX file is generated and saved in the selected location.

Export Glossary as TBX

Follow these steps to export the open glossary to a TBX file.

Procedure

1. With the glossary open, select **File** → **Export as TBX** from the main menu or click the  button on the toolbar.
2. Select a name and location for the TBX file and confirm.

Results

A TBX file is generated and saved in the selected location.

Export Glossary as CSV

Follow these steps to export the open glossary to a CSV file.

Procedure

1. With the glossary open, select **File** → **Export as CSV** from the main menu or click the  button on the toolbar.
2. Select a name and location for the CSV file and confirm.

Results

A CSV file is generated in the selected location. Columns are separated by commas and fields are delimited with double quotes.

Export Glossary as Excel

Follow these steps to export the open glossary to an Excel file.

Procedure

1. With the glossary open, select **File** → **Export as Excel** from the main menu or click the  button on the toolbar.
2. Select a name and location for the Excel file and confirm.

Results

An Excel file is generated and saved in the selected location.

Term Extraction

Anchovy extracts term candidates from documents to build glossaries quickly.

Anchovy uses the [TypesTerms](#) library for both monolingual [term extraction](#) and [bilingual term extraction](#). In both cases, extraction is performed on [XLIFF](#) files.

TypesTerms identifies term candidates using the YAKE (Yet Another Keyword Extractor) algorithm, described in the paper *YAKE! Keyword extraction from single documents using multiple local features* by Ricardo Campos, Vítor Mangaravite, Arian Pasquali, Alípio Jorge, Célia Nunes and Adam Jatowt.

For monolingual extraction, a document in any of the supported formats is selected. Anchovy internally calls [OpenXLIFF](#) to convert the document to XLIFF before extracting the term candidates, so no manual conversion is required.

For bilingual extraction, a translated XLIFF 2.x file must be provided. Anchovy pairs the source and target term candidates found in it into a bilingual glossary.

Term Extraction Tasks

-  [Extract Terms From a Document](#)
-  [Bilingual Term Extraction](#)

Extract Terms From a Document

Follow these steps to extract term candidates from a monolingual document into a glossary.


About this task

Term extraction scans a document and proposes frequently occurring word sequences as candidate terms, which are reviewed before being saved to a glossary. Common words are filtered out automatically using [stop words](#). For background, see [Term Extraction](#).

Procedure

1. Select **Tasks** → **Term Extraction** from the main menu or click the  button on the toolbar.

The **Term Extraction** dialog is displayed:

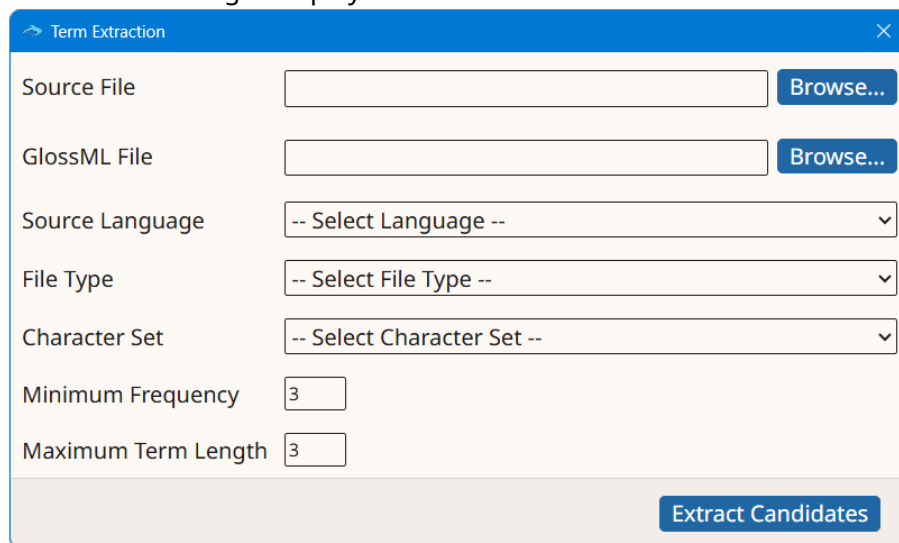

The screenshot shows the 'Term Extraction' dialog box with the following fields and controls:

- Source File:** A text input field with a 'Browse...' button to its right.
- GlossML File:** A text input field with a 'Browse...' button to its right.
- Source Language:** A dropdown menu with the text '-- Select Language --' and a downward arrow.
- File Type:** A dropdown menu with the text '-- Select File Type --' and a downward arrow.
- Character Set:** A dropdown menu with the text '-- Select Character Set --' and a downward arrow.
- Minimum Frequency:** A text input field containing the value '3'.
- Maximum Term Length:** A text input field containing the value '3'.
- Extract Candidates:** A blue button at the bottom right of the dialog.

2. Type the name of the document to analyze in the **Source File** box or click the **Browse...** button next to it to select it from the file system.
3. Type the name of the glossary to create in the **GlossML File** box or click the **Browse...** button next to it to select a name and location.
4. Select the language of the document from the **Source Language** drop-down list.
5. If necessary, correct the format in the **File Type** drop-down list.

Anchovy uses [OpenXLIFF](#) to detect the file type and character set automatically, so they usually do not need to be changed. Manual selection is only needed when the format is ambiguous, as with plain text files. The list contains the document formats supported by OpenXLIFF, such as office documents, HTML and XML files.

6. If necessary, correct the character set in the **Character Set** drop-down list.
7. Indicate in the **Minimum Frequency** selector the minimum number of times a candidate term must appear in the document.


A higher value keeps only terms that appear often, producing fewer but more reliable candidates. A lower value surfaces more candidates, including infrequent ones.

8. Indicate in the **Maximum Term Length** selector the maximum number of words a candidate term can contain.

Term length is measured in words. Set it to 1 to extract only single words, or to a higher value to also capture multi-word phrases.

9. Click the **Extract Candidates** button.

The document is analyzed and the list of candidate terms is displayed in the **Term Candidates** dialog:

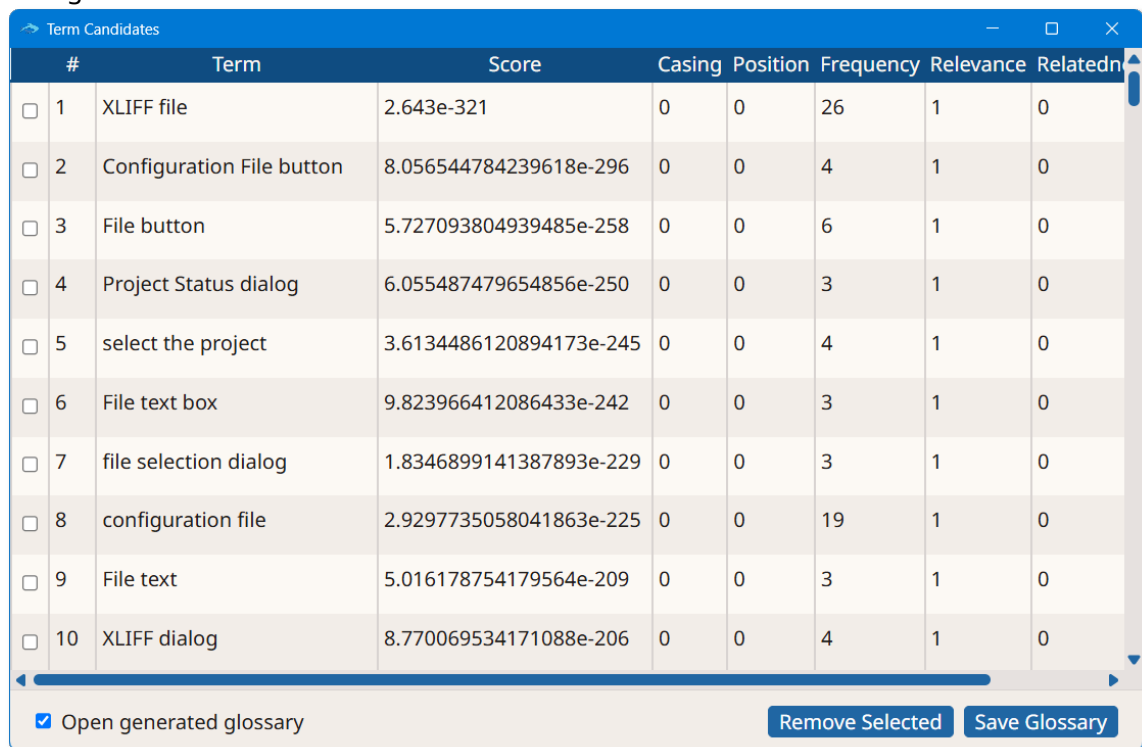

#	Term	Score	Casing	Position	Frequency	Relevance	Relatedness
☐ 1	XLIFF file	2.643e-321	0	0	26	1	0
☐ 2	Configuration File button	8.056544784239618e-296	0	0	4	1	0
☐ 3	File button	5.727093804939485e-258	0	0	6	1	0
☐ 4	Project Status dialog	6.055487479654856e-250	0	0	3	1	0
☐ 5	select the project	3.6134486120894173e-245	0	0	4	1	0
☐ 6	File text box	9.823966412086433e-242	0	0	3	1	0
☐ 7	file selection dialog	1.8346899141387893e-229	0	0	3	1	0
☐ 8	configuration file	2.9297735058041863e-225	0	0	19	1	0
☐ 9	File text	5.016178754179564e-209	0	0	3	1	0
☐ 10	XLIFF dialog	8.770069534171088e-206	0	0	4	1	0

☒ Open generated glossary

Remove Selected **Save Glossary**

10. Review the list of candidates. Select the candidates to discard and click the **Remove Selected** button.

Besides the candidate term, the list shows a **Score** and the values used to calculate it: **Casing**, **Position**, **Frequency**, **Relevance**, **Relatedness** and **Different**. These are statistically relevant for deciding what to propose, but they do not need to be interpreted. Read the candidate terms and keep or discard each one using professional judgement.

11. Optionally, select the **Open generated glossary** checkbox to open the new glossary in Anchovy after saving.
12. Click the **Save Glossary** button to store the remaining candidates in the glossary.

Results

A glossary containing the selected term candidates is created and, optionally, opened in Anchovy.

Bilingual Term Extraction

Follow these steps to extract bilingual term candidates from a translated XLIFF file into a glossary.


About this task

Bilingual term extraction reads a translated **XLIFF** file and pairs source and target term candidates in a bilingual glossary.

Procedure

1. Select **Tasks** → **Bilingual Term Extraction** from the main menu or click the  button on the toolbar.

The **Bilingual Term Extraction** dialog is displayed:

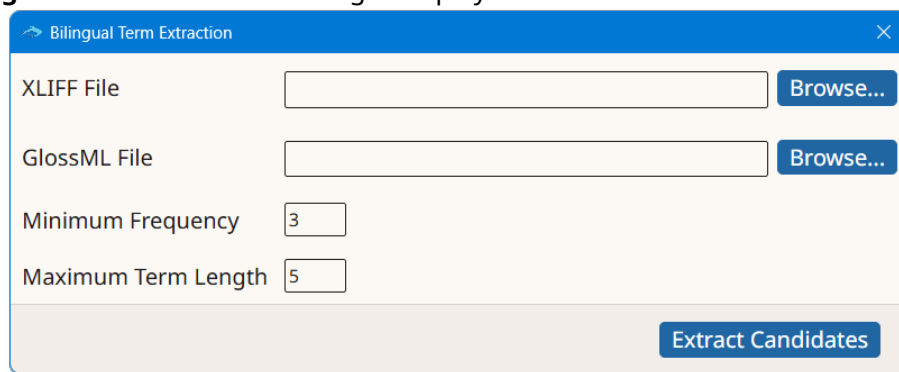

2. Type the name of the translated document in the **XLIFF File** box or click the **Browse...** button next to it to select it from the file system.
3. Type the name of the glossary to create in the **GlossML File** box or click the **Browse...** button next to it to select a name and location.
4. Indicate in the **Minimum Frequency** selector the minimum number of times a candidate term must appear.


A higher value keeps only terms that appear often, producing fewer but more reliable candidates. A lower value surfaces more candidates, including infrequent ones.

- Indicate in the **Maximum Term Length** selector the maximum number of words a candidate term can contain.

Term length is measured in words. Set it to 1 to extract only single words, or to a higher value to also capture multi-word phrases.

- Click the **Extract Candidates** button.

The file is analyzed and the list of candidate terms is displayed in the **Bilingual Term Candidates** dialog:

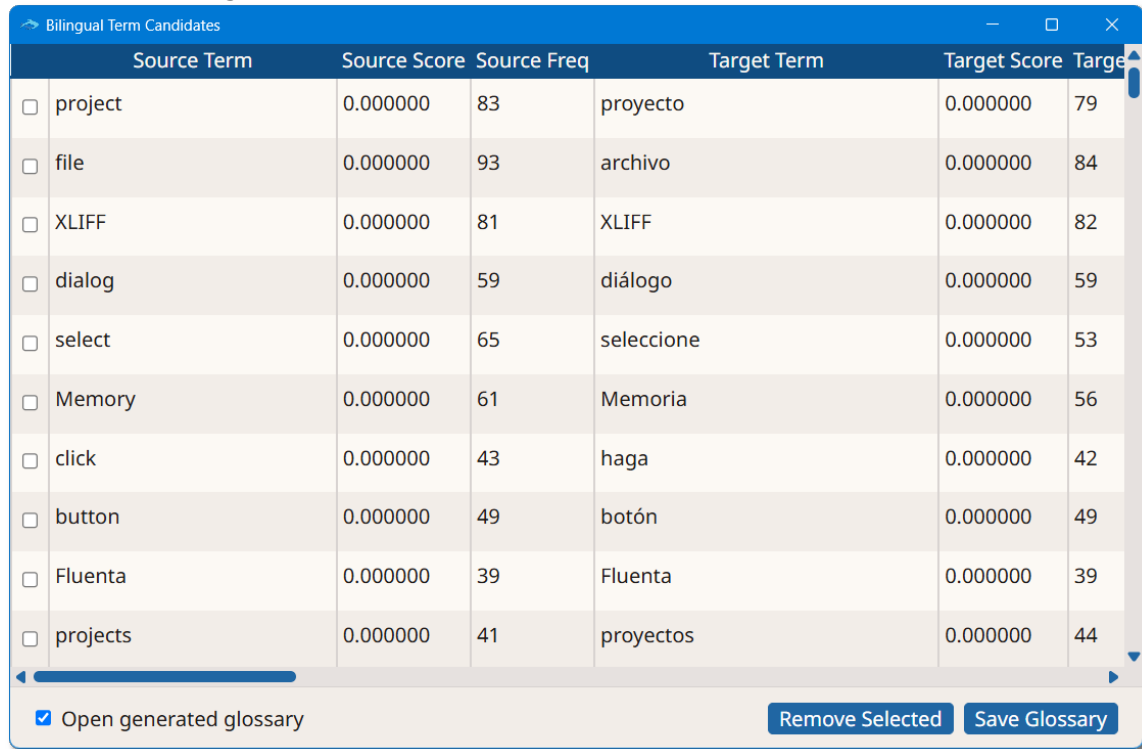

	Source Term	Source Score	Source Freq	Target Term	Target Score	Target Freq
☐	project	0.000000	83	proyecto	0.000000	79
☐	file	0.000000	93	archivo	0.000000	84
☐	XLIFF	0.000000	81	XLIFF	0.000000	82
☐	dialog	0.000000	59	diálogo	0.000000	59
☐	select	0.000000	65	seleccione	0.000000	53
☐	Memory	0.000000	61	Memoria	0.000000	56
☐	click	0.000000	43	haga	0.000000	42
☐	button	0.000000	49	botón	0.000000	49
☐	Fluenta	0.000000	39	Fluenta	0.000000	39
☐	projects	0.000000	41	proyectos	0.000000	44

☒ Open generated glossary

Remove Selected Save Glossary

- Review the list of candidates. Select the candidates to discard and click the **Remove Selected** button.

Each candidate pair is shown with a **Source Term** and a **Target Term**, each with its own **Score** and **Frequency**. These are statistically relevant for deciding what to propose, but they do not need to be interpreted. Read the candidate terms and keep or discard each pair using professional judgement.

- Optionally, select the **Open generated glossary** checkbox to open the new glossary in Anchovy after saving.
- Click the **Save Glossary** button to store the remaining candidates in the glossary.

Results

A bilingual glossary containing the selected term candidates is created and, optionally, opened in Anchovy.

Settings and Updates

Set Preferences

Follow these steps to configure the application language, the system catalog and the interface theme.

About this task


Anchovy needs to know how to locate the grammar rules (DTDs and Schemas) declared in the XML files it processes, such as [TMX](#) and [TBX](#) documents. XML catalogs that follow the specification published by [OASIS](#) are used to resolve the location of those DTDs and Schemas.

Anchovy includes a complete XML catalog, inherited from [OpenXLIFF](#), that supports the most common XML grammars. Advanced users who work with custom grammars can select their own catalog file to handle their XML files.

Procedure

1. Open the Preferences dialog. On Windows and Linux, select **Settings** → **Preferences**. On macOS, select **Anchovy** → **Settings**.

The **Preferences** dialog is displayed:

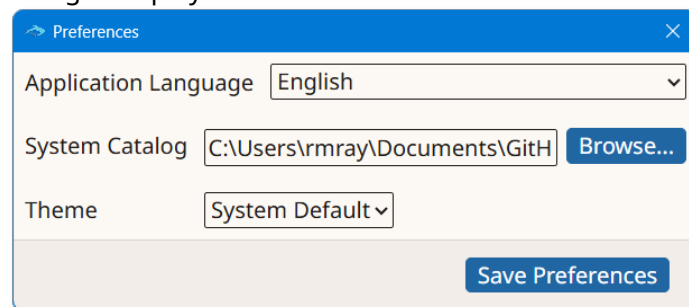

2. Select the language of the user interface from the **Application Language** drop-down list.
3. To use a custom XML catalog, type its location in the **System Catalog** box, or click the **Browse...** button next to it to select a catalog file from the file system. Leave the default value to use the catalog included with Anchovy.
4. Select the interface theme from the **Theme** drop-down list: **System Default**, **Dark**, **Light** or **High Contrast**.
5. Click the **Save Preferences** button.

Results

The selected preferences are applied. A change of application language takes effect the next time Anchovy is started.

Check for Updates

Follow these steps to check whether a newer version of Anchovy is available.


About this task

Anchovy checks for updates automatically and silently every time it starts. If a newer version is available, the **Software Updates** dialog is shown. Updates can also be checked manually at any time.

Procedure

1. Select **Help** → **Check for Updates...** from the main menu.

If an update is available, the **Software Updates** dialog shows the installed version and the latest version:

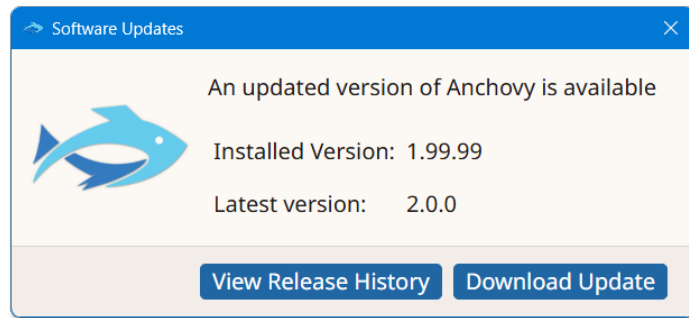

2. Click **View Release History** to see the list of changes, or **Download Update** to download the new version.

Subscriptions

Anchovy is available in two modes:

- Source Code
- Yearly Subscriptions for installers and support

Source Code

Source code of Anchovy is free. Anyone can download the source code from [GitHub.com](https://github.com), compile, modify and use it at no cost in compliance with the accompanying license terms.

Subscriptions

The version of Anchovy included in the official installers from the [Maxprograms Download Page](#) can be used at no cost for 7 days requesting a free Evaluation Key.

Personal Subscription Keys are available at the [Maxprograms Online Store](#). Subscription Keys cannot be shared or transferred to different machines.

The subscription version includes direct email support at tech@maxprograms.com.

Differences Summary


	Source Code	Subscription Based
Ready to use installers	No	Yes
Notarized macOS launcher	No	Yes
Signed launcher and installer for Windows	No	Yes
Restricted Features	None	None
Technical Support	• Peer support at Groups.io	• Direct email at tech@maxprograms.com • Peer support at Groups.io

First Registration - Evaluation Request

Register a Subscription Key or request a free 7-day evaluation the first time Anchovy is opened.

Procedure

1. When Anchovy is opened from subscription installers for the first time, or when the Subscription Key is not registered, the **Register Subscription** dialog is displayed:

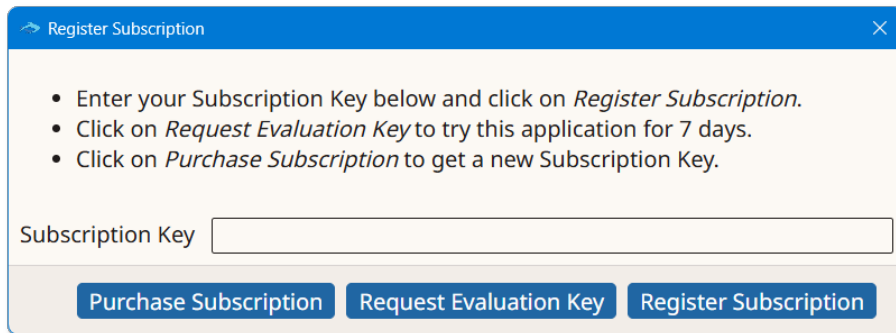

2. If a Subscription Key is available, type it in the **Subscription Key** text box and click the **Register Subscription** button.

On registration success, the main editing screen is presented.

3. To test the program for 7 days without a Subscription Key, click the **Request Evaluation Key** button.

The **Request Evaluation Key** dialog appears:

4. Enter the requested data and click the **Request Evaluation Key** button.

On success, an email with the requested Evaluation Key is sent to the indicated address.
Register the Evaluation Key as described above.

Subscription Renewal

Register a new Subscription Key before the current subscription expires.


About this task

A new Subscription Key can be registered before the existing subscription expires.

Procedure

1. Select **Help** → **Register Subscription...** from the main menu.

The **Register Subscription** dialog appears:

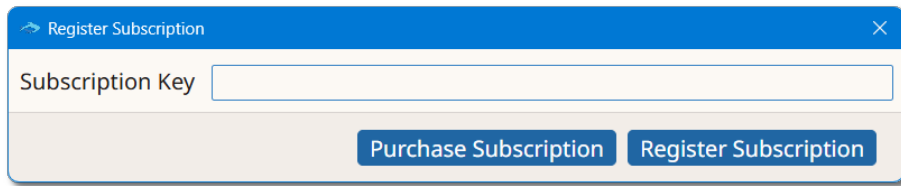

2. If a Subscription Key is not available yet, click the **Purchase Subscription** button to open the [Maxprograms Online Store](#) in an internet browser.
3. If a Subscription Key is available, type it in the **Subscription Key** text box and click the **Register Subscription** button.

On registration success, a confirmation dialog is displayed.

Licenses

Anchovy is built with the following tools and components:

Anchovy

- Available from <https://maxprograms.com/products/anchovy.html>
- Published under [Eclipse Public License 1.0](#)

Electron

- Available from <https://www.electronjs.org/>
- Published under [MIT License](#)

OpenXLIFF

- Available from <https://maxprograms.com/products/openxliff.html>
- Published under [Eclipse Public License 1.0](#)

XMLJava

- Available from <https://github.com/maxprograms-com/XMLJava>
- Published under a [Custom License](#)

BCP47J

- Available from <https://github.com/maxprograms-com/BCP47J>
- Published under a [Custom License](#)

TypesBCP47

- Available from <https://github.com/maxprograms-com/TypesBCP47>
- Published under [Eclipse Public License 1.0](#)

TypesXML

- Available from <https://github.com/maxprograms-com/TypesXML>
- Published under [Eclipse Public License 1.0](#)

TypesXLIFF

- Available from <https://github.com/maxprograms-com/TypesXLIFF>
- Published under [Eclipse Public License 1.0](#)

TypesExcel

- Available from <https://github.com/maxprograms-com/TypesExcel>
- Published under [Eclipse Public License 1.0](#)

TypesTerms

- Available from <https://github.com/maxprograms-com/TypesTerms>
- Published under [Eclipse Public License 1.0](#)
- Term extraction filters candidates using [stop words](#). The stop-word lists, covering 25 languages, are extracted from the [stop-words project](#) by Alireza Savand.

Glossary

Bilingual Term Extraction

Bilingual term extraction is the automated identification of candidate terms and their translations from a translated document, such as a translated XLIFF file. The source and target candidates are paired to build a bilingual glossary.

Character Set

A character set (sometimes referred to as code page) is a collection of characters that are associated with a sequence of natural numbers in order to facilitate the storage of text in computers and the transmission of text through telecommunication networks.

Column Delimiter

Character used to delimit the content of a data column in CSV files. Double quotes are frequently used as delimiters. Delimiters are required whenever the column text contains the character used as Column Separator.

Column Separator

Character used to separate data columns in a CSV file. Usually a comma.

CSV

CSV (Comma Separated Values) is a standard file format used to store tabular data.

Excel

Excel is the spreadsheet application from Microsoft. Its workbooks, stored in the .xlsx format, hold data in rows and columns across one or more sheets. Anchovy imports terms from and exports glossaries to Excel workbooks.

GlossML

Glossary Markup Language ([GlossML](#)) is an XML vocabulary specifically designed for containing glossaries used in translation/localization industry.

Stop Words

Stop words are words which are filtered out prior to, or after, processing of natural language data (text).

TBX

TBX (TermBase eXchange) is the open, XML-based standard for exchanging structured terminological data. Published jointly by LISA and ISO as TBX 2.0 (ISO 30042:2008), its current version is TBX 3.0 (ISO 30042:2019), released by ISO in 2019.

Term Extraction

Term extraction is the automated identification of candidate terms in a document, based on how frequently word sequences occur. The candidates are reviewed and stored in a glossary for later use in translation and terminology work.

TMX

Translation Memory eXchange (TMX) is an open standard originally published by LISA (Localization Industry Standards Association). The purpose of TMX is to allow easier exchange of translation memory data between tools and/or translation vendors with little or no loss of critical data during the process.

XCS

XCS (eXtensible Constraint Specification) is an XML vocabulary that defines the data categories and their constraints for a specific TBX TML.

XLIFF

XLIFF (XML Localization Interchange File Format) is the open, XML-based standard for exchanging localization data between tools during a translation project. Anchovy uses translated XLIFF files as the source for bilingual term extraction.