


Specifications


Model		MX20U
Operating Weight		1950 kg
Bucket Capacity		0.05 m ³
System Pressure		25 MPa
Dimensions (Overall LxWxH Cab Top)		3460×950/1280×2440 mm
Engine	Model	Yanmar 3TNV74F (Euro V)
	Output @rpm	20.5HP/15KW@2200
	Displacement	993 cc
	Gradeability	30°
Drive System	Travel Speed (Low/High)	2.1/4.2 km/h
	Track Length	1530 mm
	Track Shoe Width	230 mm
Unit Swing Speed	Central Swing	10 rpm
Boom Swing Angle	Lift/Right	45°/45°

Working Range

	Unit:	mm
A	Max.Digging Height	3690
B	Max.Dumping Height	2630
C	Max.Digging Depth	2200
D	Max.Vertical Digging Depth	1775
E	Max.Digging Radius	3810
H	Tail Turning Radius (Zero-tail)	650
	Max.Dozer Blade Lifting Distance	
	Max.Dozer Blade Cutting Distance	



Dimensions

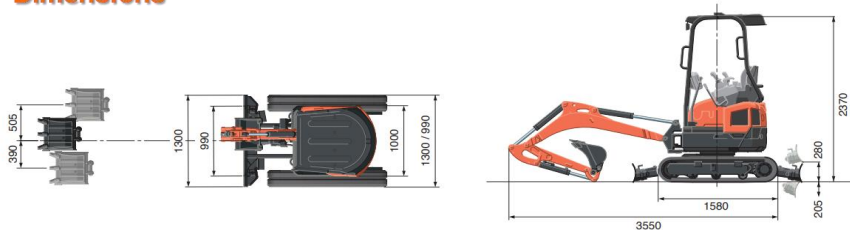

Materials and specifications are subject to change without notice.
 Featured machines in photos may include additional equipment. Contact your dealer for available options.
 ©2026 TigerTech Corporation, All Rights Reserved.

www.TIGER2GO.com

TigerTech Machinery Limited



TIGER

Smart Tiger By Tech
www.Tiger2go.com

**ZERO-TAIL
 COMPACT
 EXCAVATOR**

MX20U

Designed for various environments Zero tail swing excavator with reliable strength and versatility working as a real onsite tiger will show you advanced performance and flexibility.



Engine: Yanmar 3TNV74F
 HorsePower: 20.5HP@2200rpm
 Operating Weight: 1970kg
 Bucket Capacity: 0.05m³

SUPERIOR PERFORMANCE



TigerTech new generation Zero-tail swing excavator can work safely in tight work site. Is smart **tiger** can provide you outstanding performance with the powerful digging force, smoother travel, and higher working efficiency.

Extraordinary Stability & Capacity

An integrated quality casting body with counterweight ensures superior the digger stability. Meanwhile give you lower center of gravity delivering safe and efficient operation especially working to the side with hydraulic attachments lifting heavy objects.

AUX1 & AUX2 Available

Two auxiliary circuits (AUX1 & AUX2) come standard on this machine. This new feature provides more variety of work for you.

Steel Hood-Enclosed Cylinders

The boom, arm and bucket cylinders are enclosed by steel hoods to protect against falling objects and material spilling from the bucket.

Quick Coupler and Thumb Clamp

To adapt to various tasks and boost productivity, bucket quick couplers and thumb clamps are essential. This machine comes standard with these features, delivering superior efficiency and performance for versatile operation.

Two-speed Travel

One pedal lets you easily switch between high and low travel speeds. Simply depress the pedal for high speed model, or release it for low speed. This feature delivers a maximum travel speed of 2.1 km/h (low) and 4.2 km/h (high), respectively. The tigers really hit productivity to new heights.

Foldable Dozer Blade

This machine is fitted with a foldable dozer blade with an axle and pin at each of the two ends. It offers different width options to suit various on-site working conditions.

Outstanding Reliability Engine

MX20U is powered by impressive Yanmar's Original 3TNV74F Direct Injection Diesel. Engineered with the power to maximize digging and lifting performance, it also delivers minimized noise, vibration, and fuel consumption. It also complies with the latest engine emission regulation of the EU and EPA.

Smart Hydraulic System

TigerTech has applied a Load-sensitive Hydraulic System with world-class premium hydraulic swash plate piston pumps and motors, ensuring smooth compound operations of digging, lifting, swinging and traveling. This system optimizes energy efficiency by adjusting flow rates based on the actual load, which significantly reduces fuel consumption, ensures long hours of operation and faster working speeds, and enhances durability and productivity.

Zero-tail Swing

It means you'll never worry about what is to side or behind you while you work. Zero-tail swing always keeps the tail within the width of the tracks, also ensures excellent balance, stability and fast operation. It makes this tiger ideal for jobs in congested urban areas.

Concealed Motors and Hoses

All the tiger's travel motors and hoses are enclosed within the track frame with reinforced plate armor for enhanced protection. This is a premium feature for mini diggers of the class.

Variable Track Gauge

This tiger's track gauge can be expanded to a maximum of 1280mm and retracted to 950mm by different task and condition. Either adjustment can be made in just seconds by operating the track gauge lever.



WORK IN COMFORT AND SAFETY



TigerTech's premium operator space is enhanced to ensure optimal comfort and efficiency throughout the entire workday. All controls are ergonomically positioned for faster, more intuitive operation. Most importantly, safety features are a top priority, ensuring safe and reliable operation at all times.

Robust ROPS Cabin/Canopy

For enhanced safety, all TigerTech machines are equipped with high-level safety systems that protect against falling debris and unintended rollovers.

Smart Damping Boom Cylinder

TigerTech has adopted advanced damping cylinder technology for the boom, which delivers superior shock absorption compared to conventional equipment, ensuring a more comfortable working experience.

Engine Safety Start

This system prevents accidental engine startup when control levers are in the lowered position. It eliminates unexpected machine and attachment movement during startup.

Fully Flat Floor

The latest design gives you spacious legroom, increased by 39mm from former model, you will have a comfort feeling while digging.

Wrist Rests

Thoughtfully designed wrist rests enhance control precision and reduce operator fatigue.

Semi-Suspension Seat

Designed for better fit and comfort for long hours of work. TigerTech standard semi-suspension seat minimizes strain and operating fatigue by accommodating individual posture and weight.

New LED Boom Work Light

Bright LED boom work light provides ample illumination for nighttime and dark-area work, enabling safer, more efficient operation.

Hydraulic Pilot as Standard

Hydraulic pilot controls deliver smooth, efficient operation, reducing operator fatigue throughout the workday. All machine joysticks feature hydraulic pilot control as standard.

Dozer Blade Lever

The dozer blade control lever is located on the right armrest, making it easy to operate. Lifting and lowering the dozer blade is relaxed.

Engine Starter Switch and Throttle

The engine starter switch and throttle lever are located behind the right armrest, arranged neatly for easy operation.



EASY MAINTENANCE

TigerTech has simplified routine maintenance by consolidating key engine components on one side for easy access. Engine and other critical components can be inspected and serviced quickly and easily.



Dual element air cleaner



Fuel filter



Hydraulic oil filter

Obviously, **TigerTech's** attention to user-friendliness can be found in the engine layout. Additionally, the full-opening steel rear and side hoods provide extra durability and easy access for repairs.



Versatile Attachments

Standard Equipment

Safety systems

- ✓ Engine start safety system
- ✓ Travel motor with disc brake
- ✓ Swing motor with disc brake

Hydraulic System

- ✓ Hydraulic pilot and joystick
- ✓ AUX1 via foot pedal control
- ✓ AUX1 piping with diverter valve

Undercarriage

- ✓ 230mm rubber tracks
- ✓ 2-speed travel shift by pedal
- ✓ Variable Track Gauge

Optional Equipment

- ✓ 230mm Steel tracks
- ✓ Cab with A/C
- ✓ Sun and rain protection cover

Working Equipment

- ✓ 1 x Boom-mounted LED work light
- ✓ Manual Bucket Quick Coupler
- ✓ Swing Boom with Joystick Button Control
- ✓ Thumb Clamp with pipes
- ✓ Dozer blade

Operator Station

- ✓ ROPS/FOPS Canopy/Cabin
- ✓ Semi-suspension seat
- ✓ Hydraulic pilot control levers
- ✓ wrist rests

Attachments



Hydraulic Breaker



Ripper



Hydraulic Auger



Quick Coupler



Bucket thumb



Compactor