



<h1>




Share



New File 

 assets

README.md

index.html 

Status 

Tools 

```
1 <!DOCTYPE html>
2 <html>
3   <head>
4
5   </head>
6   <body>
7     |
8   </body>
9 </html>
```



Change URL





Sign In



Share



New File 

 assets

README.md

index.html 

Status 

Tools 

```
1 <!DOCTYPE html>
2 <html>
3   <head>
4
5   </head>
6   <body>
7     |
8   </body>
9 </html>
```



Change URL





Share



New File

- assets
- README.md
- index.html**

Status

Tools

```
1 <!DOCTYPE html>
2 <html>
3   <head>
4
5   </head>
6   <body>
7
8   </body>
9 </html>
```




Change URL






Let's write an `<h1>`, in between our body tags!

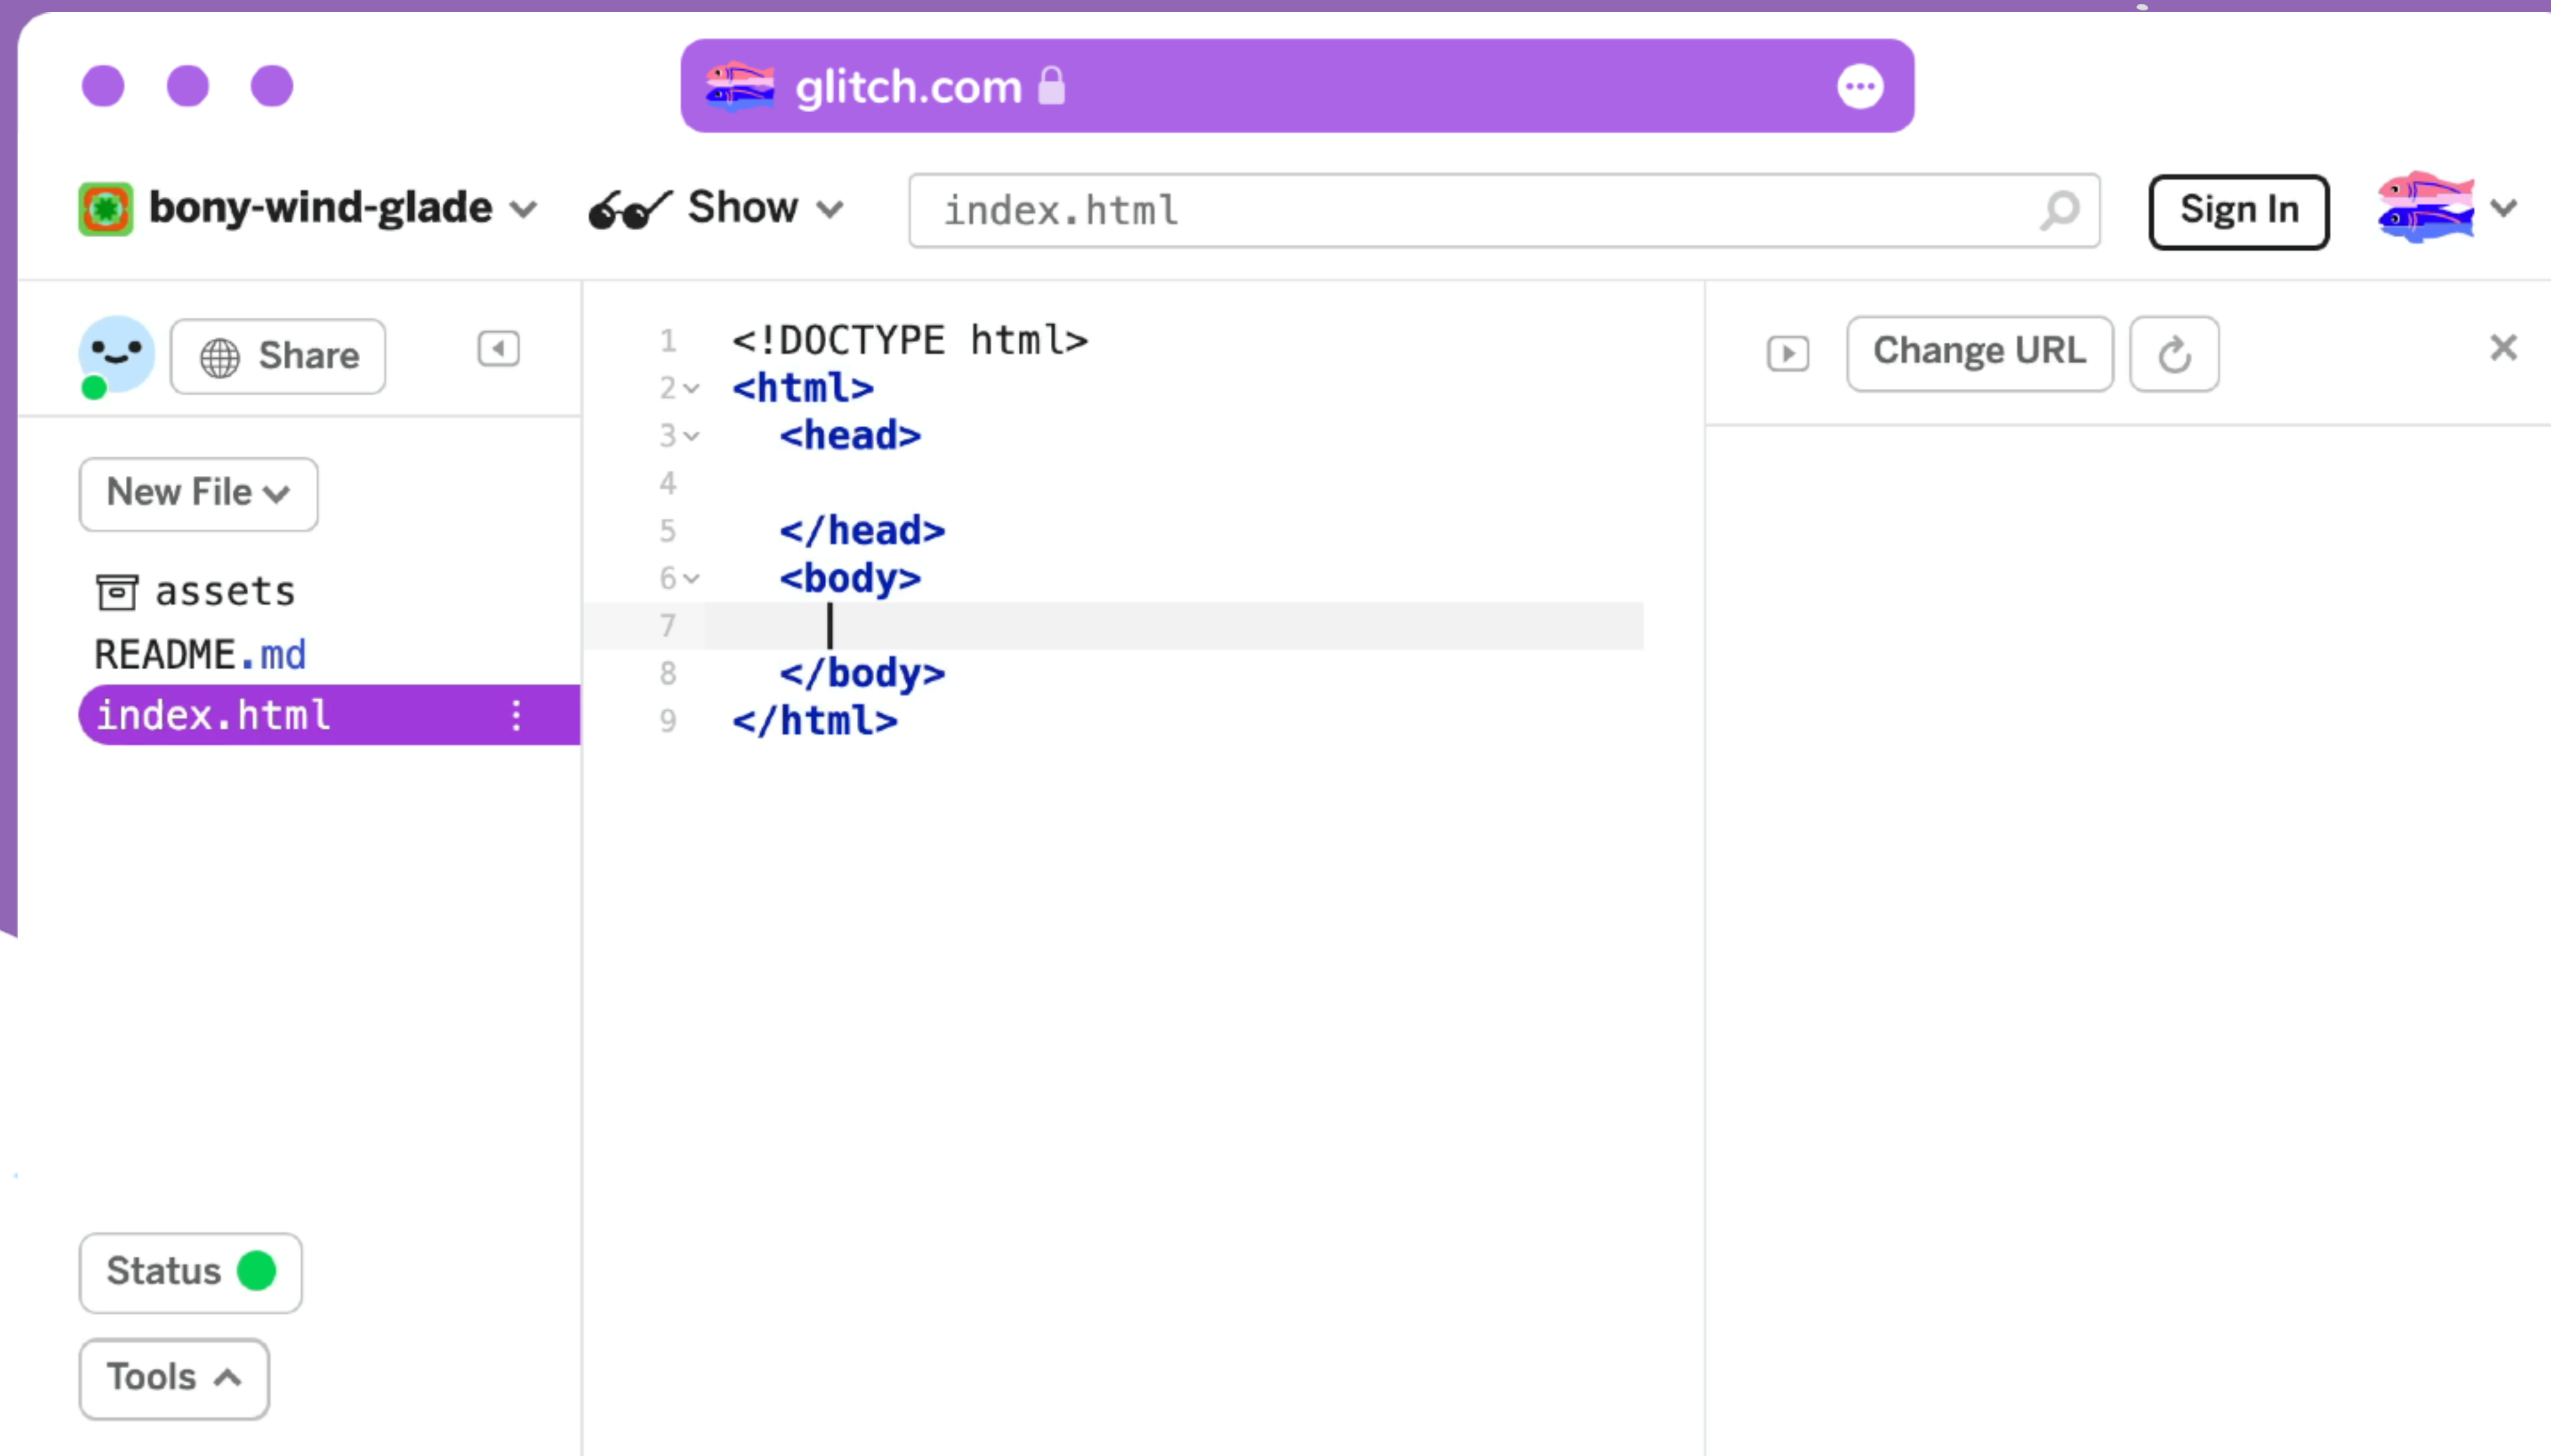

To give a description of Orpheus,
we want to use the `<p>` paragraph tag.

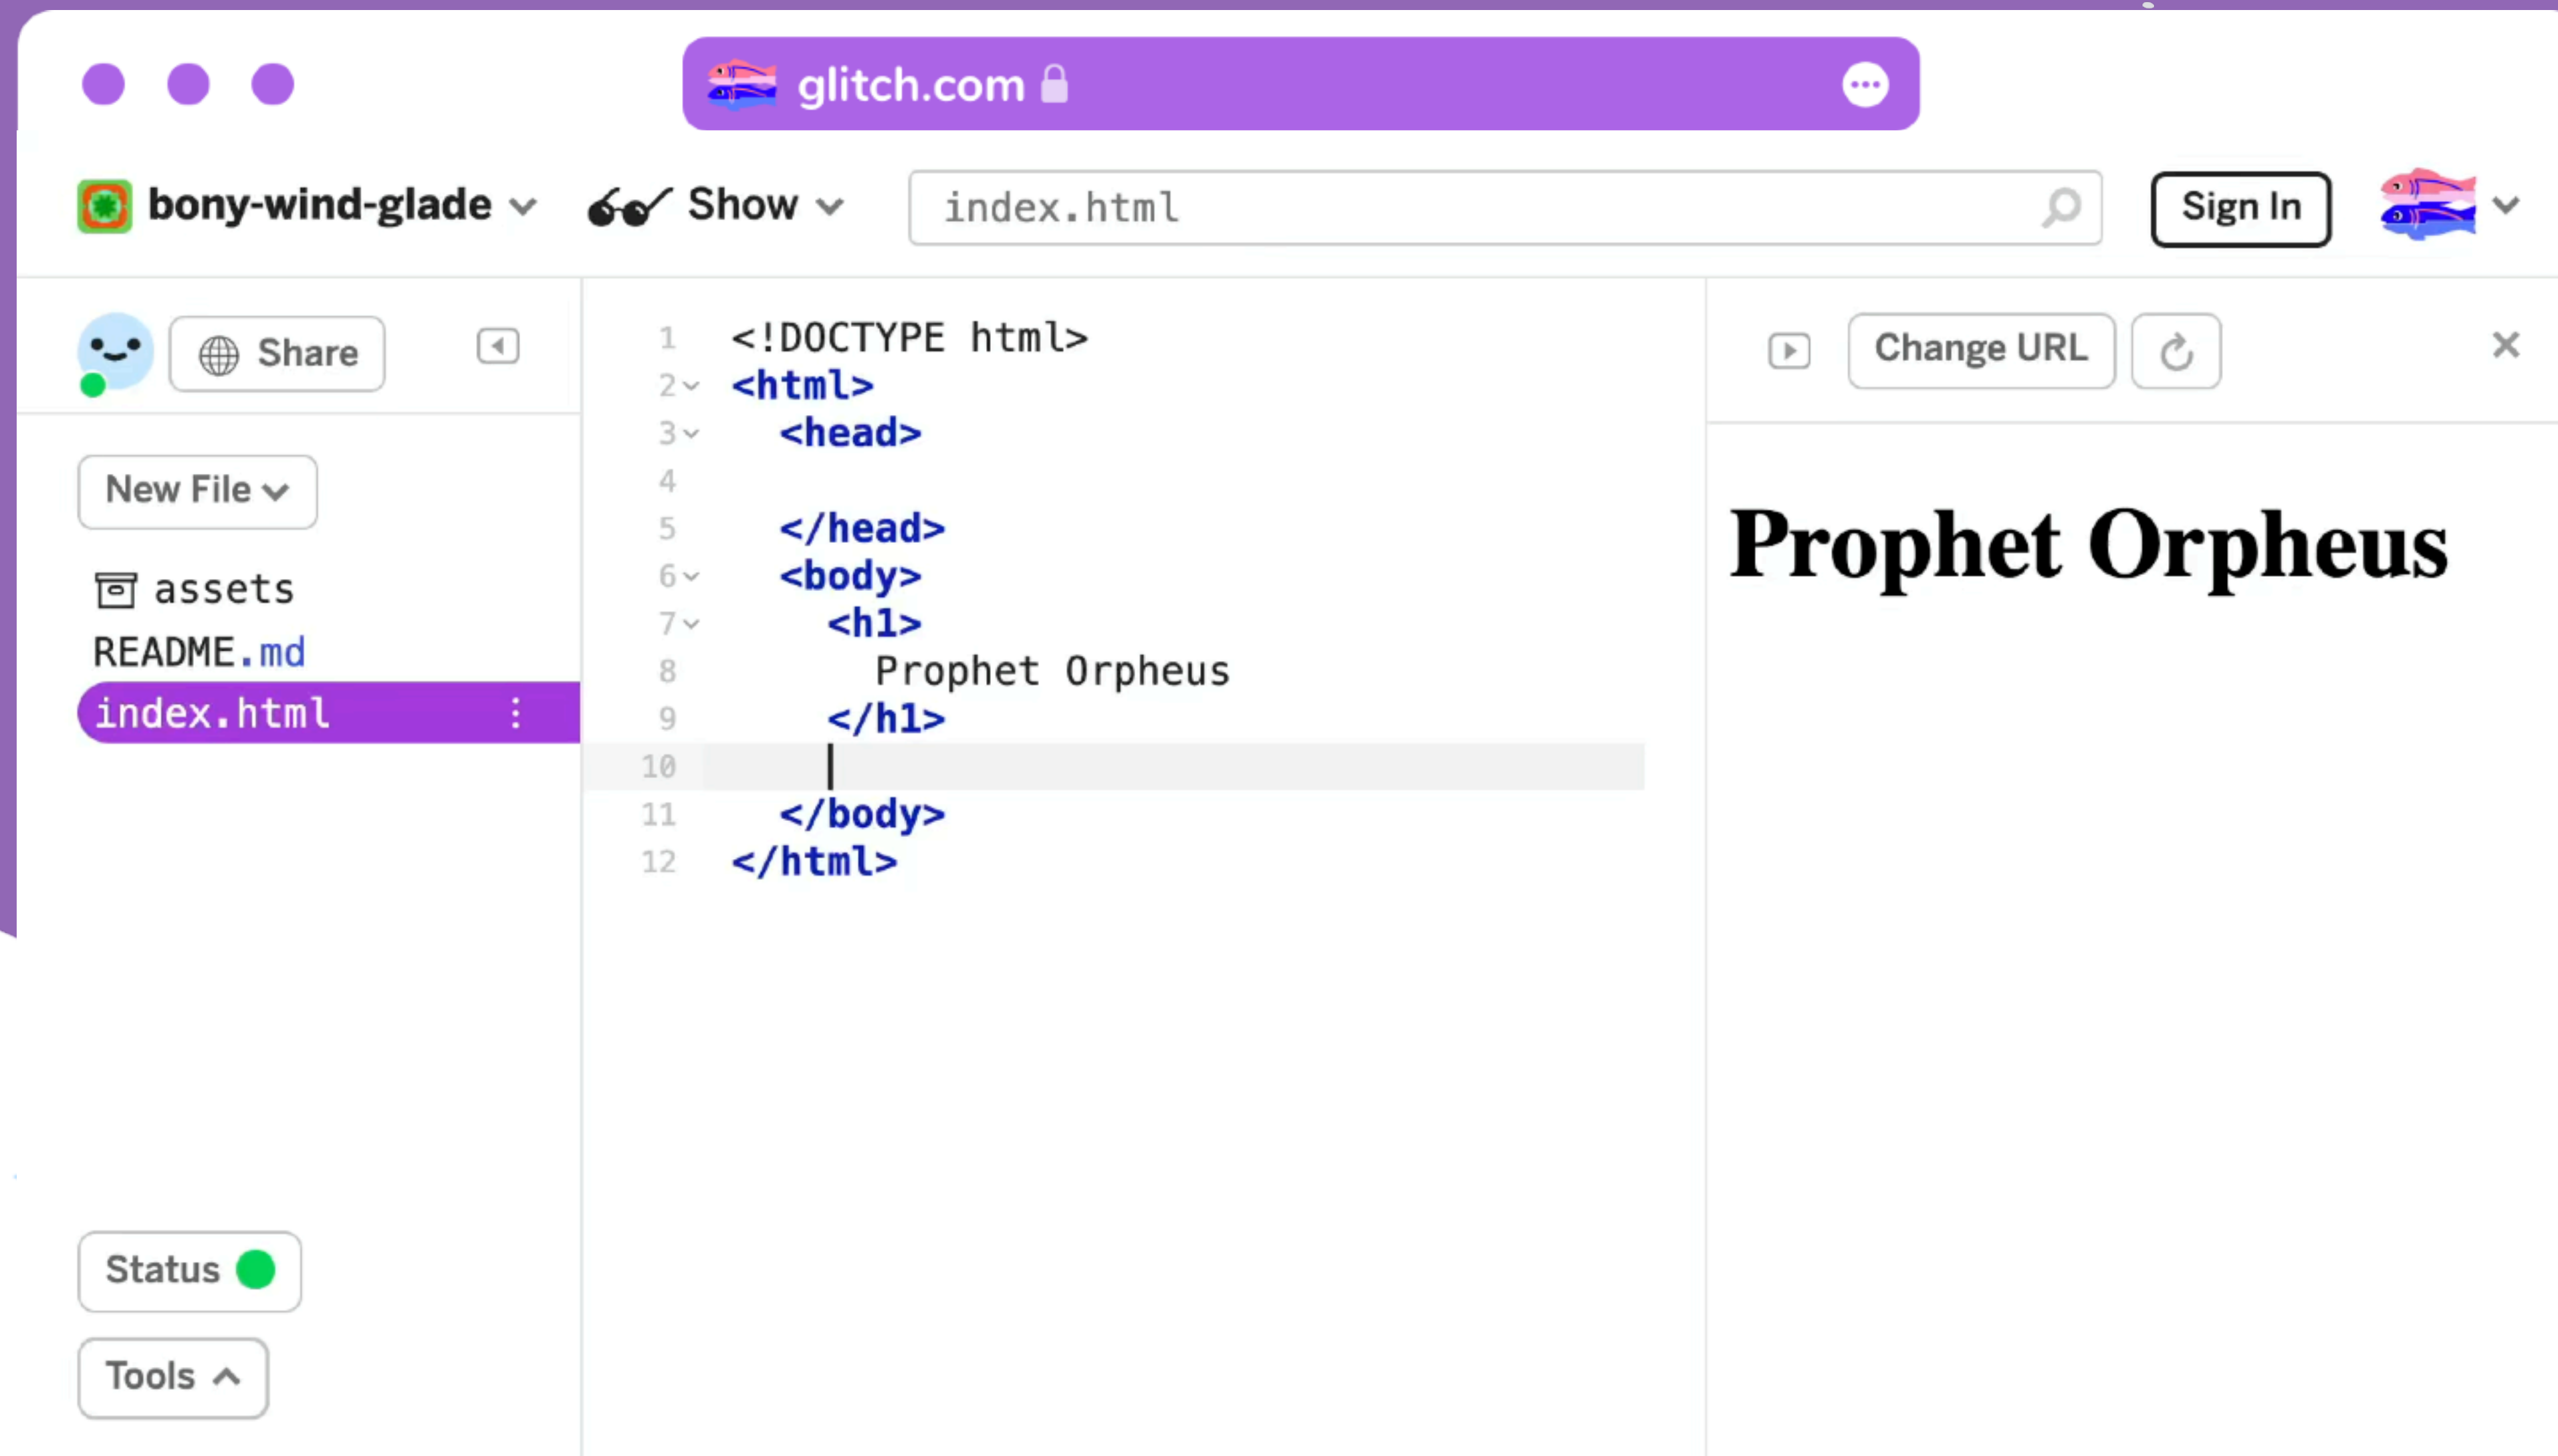

The screenshot displays the Glitch.com web editor interface. The browser's address bar shows 'glitch.com'. The user's profile is 'bony-wind-glade'. The file 'index.html' is selected in the file explorer on the left. The code editor shows the following HTML structure:

```
1 <!DOCTYPE html>
2 <html>
3   <head>
4
5   </head>
6   <body>
7     <h1>
8       Prophet Orpheus
9     </h1>
10
11   </body>
12 </html>
```

The rendered preview on the right shows the heading 'Prophet Orpheus' in a large, bold, black serif font.