Certified Tsirelson bounds for 238 tight bipartite Bell inequalities

(Dated: 10 November 2026)

The maximal quantum violations of the tight bipartite Bell inequalities with up to five binary settings per party, catalogued by Brunner and Gisin, Pál and Vértesi, and Ito, Imai and Avis, were tabulated from floating-point computations. Rational upper-bound certificates existed only for the Ito–Imai–Avis list. We give certified windows for 238 of these 239 inequalities. Each window consists of an exact quantum strategy, whose violation is a rational number, and an exact sum-of-squares certificate in the algebra of projectors. A rigorously bounded diagonal shift makes the certificate valid for all commuting-operator strategies. 225 windows are narrower than 10^{-7} and 147 are narrower than 10^{-8}. Among the inequalities that Pál and Vértesi left open, J^{97}_{4422} is closed to a tolerance of 2.2×10^{-8}. Its window starts at its two-qubit value, but optimality of that value is not proved. I^{20}_{4422}, J^{34}_{4422} and A_{65}, previously closed only numerically, are closed rigorously to within 5×10^{-9}, and A_{67} and A_{80} to within 7×10^{-8}. The windows of J^{73}_{4422}, J^{62}_{4422}, J^{30}_{4422} and J^{48}_{4422} shrink by factors of 10, 11, 6 and 3. Real strategies in local dimension 26–31 raise the best lower bounds of A_{68}, A_{89}, A_{62} and A_{82}. The best strategies for J^{73}_{4422} and J^{62}_{4422} form ladders of nearly degenerate Schmidt pairs. The gain in violation from each added pair decreases geometrically. For J^{62}_{4422} this supports Pál and Vértesi's expectation that I_{3322} is not the only inequality whose maximum requires infinite dimension, and we conjecture the same for J^{73}_{4422}. We also find that the published maximum of A_{19} is 4.4×10^{-7} too low. The candidates were found by a multi-agent language-model system working against a frozen exact verifier. All certificates are released together with the catalog, the verifier and a script that replays every window exactly.

I. INTRODUCTION

A Bell inequality bounds the correlations of local hidden-variable models [1, 2]. Its quantum maximum, the Tsirelson bound [3], measures how far quantum mechanics exceeds that limit. Tsirelson bounds are needed for device-independent protocols, dimension witnesses and self-testing [4]. Computing them is hard in general. Lower bounds come from explicit strategies, found by optimization over states and measurements in a fixed dimension [5, 6]. Upper bounds come from the Navascués–Pironio–Acín (NPA) hierarchy of semidefinite relaxations [7–9]. Both sides are usually computed in floating point. An SDP solver's output is not a proof: its dual can be slightly infeasible, and its reported bound can lie below the true maximum. Naceur, Wang, Magron and Acín recently showed how often this happens. For the 86 inequalities of the Ito–Imai–Avis list that need relaxation order 2 or higher, 32 floating-point NPA bounds lay below the reference values of Refs. [12, 13]. Those reference values are strategy values, so such a bound is invalid. (A reference value can itself be too low; Sec. V D gives an example.) They also showed how to turn solver output into exact rational upper bounds [10].

Their certificates cover the upper side of the 88 inequalities A_2–A_{89} of the Ito–Imai–Avis list at relaxation orders 1–3. The certified bounds are reported in aggregate form; we found no per-inequality values in the paper or in its repository. To our knowledge, no lower-bound certificates were published. Before the present work, therefore, every lower bound in the tables of Refs. [11–13] came from a numerical strategy, and every upper bound outside the A list from a floating-point NPA computation. Our catalog has 239 inequalities. 87 of them are in the A list (CHSH, I_{3322} and I^1_{4422} are A_2, A_3 and A_7 [12]), and 152 are not: the other 19 Brunner–Gisin inequalities, $\mathrm{AS}_{1,2}$, $\mathrm{AII}_{1,2}$ and the 129 J inequalities. We certify both sides, the lower side by exact strategies. For seven 4422 inequalities the relaxation goes beyond level 3. Unlike Ref. [10], our upper certificates do not need the rounded dual to be positive semidefinite. They pay instead a penalty $N\tau$ (Sec. III), whose cost we quantify in Sec. III D.

Here we certify both sides for a whole catalog. Brunner and Gisin listed 26 tight inequalities with four binary settings per party (the 4422 scenario) [11]; the complete list has 175 classes [19]. Pál and Vértesi added 129 more (their J list) and computed lower and upper bounds for all 241 tight inequalities then known with up to five settings [12]. For all but 20 the two bounds met numerically. In a follow-up they studied I_{3322} in infinite dimension, raised eleven lower bounds with an iterative method in local dimension up to 25, and closed four more cases numerically [13]. The numerical windows that remain are listed in Table I. I_{3322} itself has since been settled rigorously: its supremum is not attained in finite dimension [16–18], and its value is known to 55 digits [20]. Two later works touch individual cases of Table I, both in floating point. Araújo *et al.* reproduced the closure of I^{20}_{4422} at NPA level 4, and at level 3 with first-order optimality conditions [14]. Hsu *et al.* tabulate minimal Hilbert-space dimensions for symmetric four-setting inequalities: 2 for J^{97}_{4422} and 4 for I^{20}_{4422}, while that of J^{62}_{4422} "remains unknown" [15]. We checked the citation records of Refs. [12, 13] (INSPIRE, 10 November 2026) and found no other work that reports a bound for an inequality of Table I.

We report three results. First, a certified table: 238 of the 239 inequalities in our catalog have an exact strategy and an exact upper-bound certificate, and 225 of these windows are narrower than 10^{-7} (Table II, Appendix A). Second, progress on the open cases: one closed to a tolerance of 2.2×10^{-8}, four closed rigorously that were closed

only numerically, one more (A_{80}) closed at full level 3, four narrowed by factors 3–11, and four lower bounds raised (Table I). Third, structure. The best strategies for the hardest cases are ladders of Schmidt pairs whose gains decrease geometrically with dimension (Fig. 1). This suggests, but does not prove, that their maxima are approached only in infinite dimension, as Pál and Vértesi expected for one of them [13]. And one published "tight" value turns out to be wrong (Sec. V D). Throughout, a window is *closed* if it is narrower than 10^{-7}, the precision of the published tables. A closed window is a certified interval, not an exact value. All certificates are released with an exact replay script (Data availability).

The work was done by a multi-agent system of language-model agents that searched for candidates and submitted them to a frozen verifier. The verifier was written and tested before any search began and revised once during the first run. Only its verdicts count, and every final result was checked again by separately written code (Sec. VI).

II. SETTING

Alice measures one of m_A two-outcome observables and Bob one of m_B. In the Collins–Gisin form used by Pál and Vértesi [12, 21], an inequality reads

$$\sum_x b_x^A\, p(A_x) + \sum_y b_y^B\, p(B_y) + \sum_{x,y} b_{xy}^{AB}\, p(A_x B_y) \le b_0, \quad (1)$$

where $p(A_x)$ is the probability that Alice's setting x gives outcome 1, and similarly for Bob and for the joint outcome. In a quantum strategy, $p(A_x) = \langle\psi|A_x \otimes \mathbb{1}|\psi\rangle$ and $p(A_xB_y) = \langle\psi|A_x \otimes B_y|\psi\rangle$, with orthogonal projectors A_x, B_y. Projective measurements and pure states suffice [22]. We write W for the Bell operator and call $\langle\psi|W|\psi\rangle - b_0$ the violation. All quantities below are violations. Every inequality in our catalog has local bound $b_0 = 0$ in the form used, except I^7_{4422} ($b_0 = 1$).

The catalog has 239 inequalities: CHSH; I_{3322}; the 20 Brunner–Gisin inequalities I^k_{4422} together with A_5, A_6, $\mathrm{AS}_{1,2}$ and $\mathrm{AII}_{1,2}$ from the same appendix [11]; the 129 Pál–Vértesi inequalities J^k_{4422} [12]; and 82 further inequalities of the Ito–Imai–Avis A list [23, 24], taken from the repository of Ref. [10]. This is Pál and Vértesi's set of 241 inequalities without the three 3422 inequalities of Collins and Gisin [21], plus CHSH. The three 3422 inequalities are missing because their coefficients are not in the tables from which the four-setting part of the catalog was built, and the A-list file of the second one (A_4) was not imported. The catalog is hash-pinned for the verifier, so we did not add them afterwards. None of them is an open case: Pál and Vértesi report qubit optima that meet the NPA bound at level 2 plus $aa'b$ or below [12]. We checked every entry exactly. Its local bound, computed by enumerating the deterministic strategies, equals b_0, and the deterministic points that saturate it span a facet. One repository file (A_{10}) uses the opposite sign convention from the rest, and this test caught it. As a check of the coefficients, seesaw optimization reproduces the published violation to 10^{-7} for all A-list inequalities whose published optimum lies in local dimension at most 3, and for A_{10} in dimension 5. For the 4422 inequalities the certified windows of Sec. V provide the same check.

Our reference values are the windows of Pál and Vértesi [12, 13], printed to seven decimals. Both ends are floating-point results. No rigorous upper bound with a published value exists for the open cases: Ref. [10] certifies bounds for the A list at orders 1–3 but does not tabulate them. Its repository contains a benchmark file without a header. For eleven A-list cases of Table I we read two of its columns as numerical NPA values at relaxation orders 3 and 4. This reading is ours. It is supported by the order-3 entries of the two 4522 cases, A_{14} and A_{21}, which agree to the printed seven decimals with Pál and Vértesi's level-3 values and with our level-3 certificates (Table I); the order-3 entries of A_{67} and A_{80} agree with our level-3 certificates in the same way. The order-4 entries are nowhere above the 2010 upper bounds. They are not in the paper and are not certified, and the introduction recalls how often such values are invalid. We list them in Table I for orientation only and never combine them with a certified bound. During the runs they served as the bar that an upper-bound submission had to beat (Sec. VI).

III. CERTIFICATES

A. Lower bounds

A lower-bound certificate is a strategy with exact entries. Each projector is given by linearly independent spanning vectors with rational or Gaussian-rational entries, collected as the columns of V. The verifier forms $P = V(V^\dagger V)^{-1}V^\dagger$ in exact arithmetic, so P is an orthogonal projector by construction. It also checks $P = P^\dagger = P^2$. With an exact state vector ψ, the violation $\langle\psi|W|\psi\rangle/\langle\psi|\psi\rangle - b_0$ is a rational number. It is computed twice. The first computation uses the reduced-state formula $\langle\psi|P \otimes Q|\psi\rangle = \mathrm{Tr}(P\,R\,Q^T R^\dagger)$, where $R_{ab} = \psi_{ad_B+b}$. The second uses an entrywise Kronecker sum (for $d_A d_B \le 64$) or the formula reduced on Bob's side instead, and the two results must agree. Strategies found numerically are rationalized to denominators of order 10^{12}. The projector is rebuilt exactly from the rounded vectors, so the exact value is a valid lower bound whatever the rounding. Near a stationary point the rounding changes the value only at second order.

B. Upper bounds

Let $\mathcal{P}$ be the universal $*$-algebra generated by self-adjoint idempotents $p_1, \ldots, p_{m_A}$ and $q_1, \ldots, q_{m_B}$ with $p_x q_y = q_y p_x$. The reduced words (α, β), where α is a

string over Alice's letters and β one over Bob's, both without equal neighbors, form a linear basis of $\mathcal{P}$. An upper-bound certificate consists of words $w_1, \ldots, w_N$, a rational symmetric matrix Y and the identity

$$\sum_{i,j=1}^{N} Y_{ij}\, w_i^* w_j = \lambda \mathbb{1} - W \quad \text{in } \mathcal{P}. \tag{2}$$

The verifier reduces every product $w_i^* w_j$ to normal form and checks Eq. (2) coefficient by coefficient in integer arithmetic. The value of λ is read off as the coefficient of $\mathbb{1}$. If $Y \succeq 0$, Eq. (2) is a sum of squares and λ is an upper bound. This is the dual of the NPA relaxation with moment basis $\{w_i\}$ [8, 9, 25]. A rational Y obtained by rounding a numerical dual is rarely positive semidefinite, however, because the optimal dual is singular. Instead of insisting on exactness [10, 26] we pay for the defect.

Theorem 1. *Suppose Eq. (2) holds and $Y + \tau\mathbb{1} \succeq 0$ for some $\tau \geq 0$. Then every commuting-operator strategy (projectors A_x, B_y with $[A_x, B_y] = 0$ on any Hilbert space, unit vector ψ) satisfies $\langle\psi|W|\psi\rangle \leq \lambda + N\tau$. In particular this holds for every finite-dimensional tensor-product strategy.*

Proof. The strategy defines a $*$-representation of $\mathcal{P}$. Let $\Gamma_{ij} = \langle w_i\psi, w_j\psi\rangle$. Then Γ is Hermitian and positive semidefinite, and $\Gamma_{ii} = \|w_i\psi\|^2 \leq 1$ because each w_i is a product of projectors. Taking the expectation of Eq. (2) gives $\lambda - \langle\psi|W|\psi\rangle = \sum_{ij} Y_{ij}\Gamma_{ij} = \operatorname{Tr}[(Y+\tau\mathbb{1})\bar{\Gamma}] - \tau \operatorname{Tr}\Gamma \geq -\tau N$, since $\bar{\Gamma} \succeq 0$. □

The verifier finds a small τ with a rigorous proof. For a shift σ it computes a floating-point Cholesky factor L of $Y + \sigma\mathbb{1}$. It then encloses the residual $F = Y + \sigma\mathbb{1} - LL^T$ entrywise by interval arithmetic, rounding each operation to nearest and widening it by one unit in the last place in each direction. Then $\tau = \sigma + f$ with $f \geq \|F\|_F$ works, since $Y + \tau\mathbb{1} = LL^T + (F + f\mathbb{1}) \succeq 0$. This is the residual argument used in verified positive-definiteness tests [27]. The factor L needs no rigor: any real lower-triangular matrix gives a valid proof. An earlier version used interval Cholesky factorization. It overestimated badly for the nearly singular matrices that optimal duals produce: it needed $\tau \sim 10^{-5}$ where 10^{-10} suffices. The verifier searches σ on a geometric ladder and reports the certified bound $\lambda + N\tau - b_0$. Because the certificate is a sum of squares in $\mathcal{P}$, the bound holds for the commuting-operator value. Each window therefore brackets both that value and the tensor-product supremum.

C. Trust assumptions and exact replay

The enclosure of F is valid under assumptions that we state explicitly. The release tests each of them (Data availability). (i) *Conversion.* Y has integer entries over a common denominator D. Each entry Y_{ij}/D is replaced by the smallest binary64 interval containing it. Its endpoints are the correctly rounded quotient, from Python's exact integer division, and the neighbor on the side of the exact value, chosen by an exact rational comparison. An entry outside the binary64 range invalidates the certificate. (ii) *Arithmetic.* The kernel needs IEEE 754 binary64 arithmetic with round-to-nearest, evaluation in binary64 (`FLT_EVAL_METHOD` = 0, no extended precision) and a correctly rounded square root. Under round-to-nearest the exact result of each operation lies between the two neighbors of the computed result. This also holds in the subnormal range, provided underflow is gradual, so flush-to-zero modes must be off. (iii) *Overflow.* An infinite or undefined value in the factor or in the accumulated residual makes the check fail. It never yields a bound. (iv) *Operation order, fusion and compiler settings.* Each operation is enclosed separately, so the enclosure holds whatever the order in which the loops accumulate. What it does not tolerate is a compiler that fuses a product into a later addition or reassociates enclosed quantities. Every product passes through `nextafter` before it is used, and the kernel is compiled with `-O2 -ffp-contract=off -fno-fast-math`. A self-test compiled with the same flags checks binary64 evaluation, the rounding mode, gradual underflow, the absence of fusion, `nextafter`, the square root and overflow. Built with `-ffp-contract=fast` on hardware with fused multiply-add (arm64), the self-test reports the fusion, so the test can fail.

These assumptions can be removed. Because any L gives a valid proof, L may be rounded to the grid 2^{-120}. Then MF can be computed exactly in integers, where M is a common denominator, and $f = \lceil M(\sum_{ij} F_{ij}^2)^{1/2}\rceil/M$ obtained from an integer square root. Floating point then only proposes L. The release replays every upper certificate this way, at the shift σ stated in its report, with L computed by the same loop as the kernel. For all 238 certificates the exact shift $\sigma + f$ is at most the stated τ, so $Y + \tau\mathbb{1} \succeq 0$ holds at the stated τ without any floating-point assumption. For the 135 certificates with $N \leq 120$, the replay also proves $Y + \tau\mathbb{1} \succ 0$ at the stated τ by exact fraction-free (Bareiss) elimination [28]. (During the runs the verifier proved only $Y + 2\tau\mathbb{1} \succ 0$ by Bareiss elimination, as a cross-check. That check alone would not validate the bound $\lambda + N\tau$.) Negative controls show that each check can fail, and fails when it should:

- a tampered identity and a tampered λ;
- a perturbation of Y along a direction that leaves Eq. (2) unchanged but makes Y indefinite;
- an understated shift that exact elimination proves false;
- tampered strategies, coefficients, printed windows and files;
- indefinite and overflowing inputs to the kernel.

A randomized battery of 900 matrices with singular, indefinite, subnormal and large entries found no unsound acceptance. Every shift the kernel accepted was reproved by exact elimination.

D. Cost of the shift

For the 238 final upper certificates the penalty $N\tau$ lies between 1.3×10^{-13} and 8.7×10^{-8}, with median 2.6×10^{-9}. It dominates the closed windows. For the 225 windows below 10^{-7} it makes up a median 96% of the exact width, that is, of the exact bound minus the exact strategy value. In 18 of them $\lambda - b_0$ itself lies below the exact strategy value, so the whole width comes from the penalty. Without the penalty the median width would be 1.9×10^{-10} instead of 4.7×10^{-9}. An exact rounding that keeps the dual positive semidefinite [10, 26] would remove this cost. We accepted it because it lets the certificate be read directly off the output of any solver.

E. Verification protocol

The verifier is about 800 lines of Python using only the standard library, plus a 77-line C program for the residual bound. Its sources, the inequality catalog and the reference values are frozen and hash-pinned. A submission is frozen before it is checked, and the verifier, not the submitter, records the verdict. Its tests reproduce the published values, exercise every verdict path, reject malformed input, and compare against independent implementations on random instances: a separate Bell-value evaluation, a string-rewriting implementation of the word algebra, and the shift search applied to matrices of exactly known spectrum, built from Cayley-rational orthogonal matrices. During the runs an auditing agent re-checked every result with separately written code. For the release, all 476 certificates behind the table in Appendix A were replayed from the release folder alone, outside the project repository. Each was checked by the frozen verifier and by a second exact checker written separately from it (by the same system, with the same method, sharing no code). The second checker has its own exact Gaussian-rational strategy evaluation, its own word reduction and identity check, and the exact-integer proof of $Y + \tau \mathbb{1} \succeq 0$ at the stated shift (Sec. III C). All 476 passed, the Appendix table regenerated from the certificates' manifest is identical to the one printed here, and no certified lower bound exceeds a certified upper bound.

IV. FINDING THE CERTIFICATES

A. Strategies

Seesaw optimization alternates three steps [5, 6]: the top eigenvector of W, and for each projector the positive spectral part of its effective operator. From random starts it mostly finds qubit optima, as Pál and Vértesi noted [12]. Their 2010 method keeps the state in Schmidt form $\sum_i \lambda_i |ii\rangle$, so each step involves only $n \times n$ matrices [13]. Two extensions produced our new lower bounds.

Bulk-cell insertion. The best strategies for J_{4422}^{73} and J_{4422}^{62} have Schmidt coefficients in nearly degenerate pairs that decay geometrically, and projectors that couple neighboring pairs, like an open chain. Basin hopping in local dimension 12–16 finds a short chain; for J_{4422}^{73} it has six pairs and violation 1.1217770. In the Schmidt basis we then duplicate one bulk pair together with its coupling block, add a small random perturbation, and re-optimize. This adds one pair (or several) at a time up to the verifier's limit of local dimension 32 (16 pairs). For J_{4422}^{62} the dimension-32 strategy came from inserting several pairs into an eight-pair chain at once. Only 14 of its 16 pairs carry weight (Appendix B).

Ancilla doubling. For the five-setting A-list inequalities we embed an optimum as $A_x \otimes \mathbb{1}_2$, $B_y \otimes \mathbb{1}_2$, $\psi \otimes |\Phi_2\rangle$, which keeps the value. A random perturbation breaks the twofold degeneracy, and re-optimizing climbs to a new branch. We also doubled only the K Schmidt levels of smallest weight, and compressed each strategy to its active rank. Repeating these steps from local dimension 5–6 gave the A_{68}, A_{89}, A_{62} and A_{82} strategies in dimension 26–31. The same procedure reproduces Pál and Vértesi's $\mathbb{R}^{17}$ optimum for J_{4422}^{30} (0.4363842240) from a real 7-dimensional optimum. It saturates there: partial doublings and complex deformations found nothing higher.

B. Dual certificates

Level 3 of the hierarchy for four settings per party has 217 words in our basis, and level 4 has 865. In the 4522 and 5522 scenarios of the A list, level 3 has 318 and 436 words, and level 4 has 1486 and 2276. Level 2 plus the words $aa'b$ and abb', the level used for five settings in Ref. [13], has 276 words in the 5522 scenario. Off-the-shelf first-order solvers were too inaccurate for certificates, and interior-point solvers needed too much memory on the available machine. The agents therefore wrote a primal–dual interior-point method with the HKM search direction [29–31]. It forms the Schur complement panel by panel in half-vectorized storage and uses the sparsity of each constraint, whose matrix has only a few nonzero rows. Every Schur solve is iteratively refined against the exact operator, which keeps the primal infeasibility near 10^{-10}. Moment matrices with $N \approx 450$ words needed 2.6–2.9 GB and 15–40 minutes

per warm-started round. A cold start at full level 3 for five settings (436 words) needed 3.3 GB and about 2.3 hours.

Words beyond level 3 were chosen mainly by column generation. Given the primal moment matrix Γ of the current optimum, a candidate word u is scored by

$$s(u) = d - c_K^T \left(\Gamma_{KK} + \epsilon \mathbb{1}\right)^{-1} c_K, \tag{3}$$

where K indexes the current words w_i for which $w_i^* u$ reduces to a known moment, c_i is that moment, and d is the moment of u^*u. A negative score means the current moment matrix cannot be extended by a row for u, so adding u cuts off the current optimum. Each round added the 10–60 most negative words of degree up to 4 and dropped words of low weight. Simpler heuristics based on the diagonal of the moment matrix supplemented the pricing. Scores were computed at $\epsilon = 10^{-8}$ to 10^{-9}; at 10^{-6} no candidate had a negative score. The dual was rounded to a dyadic denominator (2^{46} or 2^{47}). The residual of each moment class in Eq. (2) was spread evenly over the class's entries or placed on a single entry.

For the catalog, a batch pipeline computed a seesaw strategy at the published dimension and an NPA dual at the published level, with Clarabel [32] for $N \lesssim 100$ and the custom solver above that. It raised the level until the window closed.

V. RESULTS

A. The catalog

Table II summarizes the certified table. All 129 inequalities of the J list and all 20 of the Brunner–Gisin list are certified on both sides, with windows below 10^{-7} except for the four open J cases. Of the 238 certified lower bounds, 193 come from qubit strategies (148 real, 45 complex), 34 from local dimension 3–5, and 11 from local dimension 8–32. The upper certificates use between 9 and 454 words (median 97). The closed windows have median width 4.7×10^{-9} and maximum 8.7×10^{-8}. Only I_{3322} has no two-sided certificate. It is settled elsewhere [20].

Thirteen two-sided windows are wider than 10^{-7}: the four open J cases and nine A-list cases (Table I). For these nine, the upper certificates are rigorous versions of the bounds of Ref. [13] at the same levels: full level 3 (318 words) for the two 4522 inequalities A_{14} and A_{21}, and level 2 plus $aa'b$ and abb' (276 words) for the seven 5522 inequalities. They agree with the 2010 values to within 10^{-7} and do not improve on them. Full level 3 in the 5522 scenario has 436 words and 27 555 distinct moments. In our dense solver its Schur complement takes 3.0 GB, and one certificate took about 2.3 hours on the shared laptop. We computed it for A_{67} and A_{80}, where it closes the window. For the other seven 5522 cases it would not: the numerical order-3 entries of the repository file lie above the best known lower bounds by 2×10^{-6} or more. Level 4 has 2276 words, beyond what a dense solver can do on this machine.

Two certified lower bounds lie below published strategy values. For A_{14} we certify 0.4758457381 in local dimension 5, against 0.4759513 in $\mathbb{R}^{20}$ [13]. For A_{84} we certify 0.6352044080 in dimension 14, against 0.6352087 in $\mathbb{R}^{18}$. Our searches did not find these two strategies of Pál and Vértesi. For these two inequalities the best known lower bounds therefore remain theirs, and they are numerical. In the other direction, A_{67} needed local dimension 8 in our search, where they report $\mathbb{R}^5$.

The certified windows also test the published values. For every closed inequality except A_{19}, the printed value lies within 5×10^{-8} above or 10^{-7} below our window. In eight cases (J^{63}_{4422}, J^{81}_{4422}, J^{103}_{4422}, J^{106}_{4422}, J^{124}_{4422}, A_{38}, A_{52}, A_{81}) it lies 5–7 $\times 10^{-8}$ below the window, more than rounding to seven decimals allows. Truncation, or a slightly suboptimal strategy, would explain this. A_{19} is discussed in Sec. V D.

B. Open cases

Table I compares the literature windows with ours.

J^{97}_{4422}. Pál and Vértesi found a two-qubit strategy with violation 1.1583626 and an upper bound 1.4×10^{-4} higher at level 3. They reported that a level-3-plus-$aa'bb'$ computation gave a value below their lower bound, which signals inaccuracy, and concluded that the qubit strategy is very probably optimal [13]. Our certificate with 300 words (full level 3 plus 83 selected words) proves ≤ 1.1583625755. An exact real-qubit strategy reaches 1.1583625533, so the window has width 2.2×10^{-8}. (The printed lower bound 1.1583626 is rounded up.) J^{97}_{4422} is therefore closed to tolerance. This does not show that the qubit strategy is optimal. It shows that no strategy, in any dimension, exceeds it by more than 2.2×10^{-8}. The raw sum-of-squares value is $\lambda = 1.1583625531$, just below the strategy value, so the whole width comes from the penalty $N\tau$. Proving exact optimality of the qubit value would need an exact certificate. Hsu *et al.* list J^{97}_{4422} with minimal dimension 2 and quantum bound 1.1584 [15]. Our window agrees with that assignment and sharpens the numerical evidence for it to eight digits.

I^{20}_{4422}, J^{34}_{4422}, A_{65}, A_{67} and A_{80}. The first four were closed numerically in 2010, and I^{20}_{4422} again in Ref. [14]. Exact strategies in local dimension 4 and certificates with 277 words close the first two to 5×10^{-9}. The dimension agrees with the minimal dimension 4 listed for I^{20}_{4422} in Ref. [15]. A strategy in dimension 5 and a certificate with 276 words close A_{65} to 1.2×10^{-9}. For A_{67}, a strategy in dimension 8 and a certificate at full level 3 (436 words) give a window of 7.6×10^{-9}. A_{80} was open in 2010, with a gap of 2.6×10^{-4} at level 2 plus $aa'b$ and abb'. A strategy in dimension 4 and a level-3 certificate with 436 words close it to 6.9×10^{-8}. The numerical order-3 entry of the repository file of Ref. [10] had suggested this closure.

J^{73}_{4422} and J^{62}_{4422}. Both sides move. The lower bounds

TABLE I. Windows on the maximal quantum violation for the inequalities that Pál and Vértesi left open [12, 13]. Columns 2–3: their lower bound and upper bound (lower bound plus the gap at their deepest NPA level) from Ref. [13], Table I, printed to 10^{-7}; both are floating-point results. §Closed numerically there (for I^{20}_{4422} and J^{34}_{4422} at level 3 plus a quarter of the $aa'bb'$ words). Column 4: entry of the benchmark file in the repository of Ref. [10] that we read as a numerical NPA value at order 4. It is not certified and is shown for orientation only (Sec. II). Columns 5–7: this work. Exact strategy and exact sum-of-squares certificate, verified as in Sec. III and rounded outward to 10^{-10}; the width is the certified upper bound minus the certified lower bound. *Improves on the value of Ref. [13] by more than 10^{-7}. †Below the published strategy value: we did not reproduce the strategy of Ref. [13].

	Ref. [13] (numerical)		order 4	this work (certified)		
inequality	lower	upper	(numerical)	lower	upper	width
J^{97}_{4422}	1.1583626	1.1585051	–	1.1583625533	1.1583625755*	2.2×10^{-8}
I^{20}_{4422}	0.4676794	0.4676794§	–	0.4676793861	0.4676793911	5.0×10^{-9}
J^{34}_{4422}	0.4492657	0.4492657§	–	0.4492657413	0.4492657466	5.3×10^{-9}
A_{65}	0.3688996	0.3688996§	–	0.3688995748	0.3688995760	1.2×10^{-9}
J^{73}_{4422}	1.1223170	1.1225579	–	1.1223870369*	1.1224104368*	2.3×10^{-5}
J^{62}_{4422}	0.7500755	0.7500921	–	0.7500885544*	0.7500900835*	1.5×10^{-6}
J^{30}_{4422}	0.4363842	0.4372629	–	0.4363842240	0.4365201856*	1.4×10^{-4}
J^{48}_{4422}	0.7516220	0.7516340	–	0.7516219860	0.7516256937*	3.7×10^{-6}
A_{68}	0.4025522	0.4050329	0.4050294	0.4028002584*	0.4050328983	2.2×10^{-3}
A_{89}	0.3035637	0.3058212	0.3054510	0.3039223061*	0.3058212221	1.9×10^{-3}
A_{62}	0.4065268	0.4068725	0.4066728	0.4065717137*	0.4068725020	3.0×10^{-4}
A_{82}	0.4708838	0.4709179	0.4709172	0.4709112502*	0.4709179063	6.7×10^{-6}
A_{84}	0.6352087	0.6352834	0.6352107	0.6352044080†	0.6352834065	7.9×10^{-5}
A_{21}	0.3260601	0.3261777	0.3260654	0.3260600674	0.3261777341	1.2×10^{-4}
A_{14}	0.4759513	0.4778466	0.4768133	0.4758457381†	0.4778466056	2.0×10^{-3}
A_{47}	0.4608544	0.4629391	0.4615622	0.4608543948	0.4629391646	2.1×10^{-3}
A_{64}	0.3900890	0.3914768	0.3905074	0.3900890509	0.3914768581	1.4×10^{-3}
A_{67}	0.3990671	0.3990671§	0.3990671	0.3990671029	0.3990671105	7.6×10^{-9}
A_{80}	0.3769863	0.3772420	0.3769863	0.3769863185	0.3769863880*	6.9×10^{-8}

TABLE II. Certified windows across the catalog. Columns: number of inequalities, number certified on both sides, and number with certified window below 10^{-7} and below 10^{-8}. The rows partition the catalog by name. A_5 and A_6, which also appear in the Brunner–Gisin appendix, are counted in the A-list row. Three further members of the A list are counted elsewhere: $I^1_{4422} = A_7$ in the Brunner–Gisin row, CHSH $= A_2$ and $I_{3322} = A_3$ in the last row. The full table is in Appendix A.

family	all	both	$< 10^{-7}$	$< 10^{-8}$
Pál–Vértesi J list (4422)	129	129	125	68
Brunner–Gisin I_{4422} list	20	20	20	12
Ito–Imai–Avis A list (up to 5522)	84	84	75	64
CHSH, I_{3322}, $AS_{1,2}$, $AII_{1,2}$	6	5	5	3
total	239	238	225	147

are the ladders of Fig. 1. Already at local dimension 20 the J^{73}_{4422} ladder gives 1.1223367, above Pál and Vértesi's 1.1223170 in the same dimension. At dimension 32 it gives 1.1223870369. The upper bounds come from column generation with 420 and 311 words. The windows shrink from 2.4×10^{-4} to 2.3×10^{-5} and from 1.7×10^{-5} to 1.5×10^{-6}.

J^{30}_{4422} and J^{48}_{4422}. The upper bounds fall by 7.4×10^{-4} and 8.3×10^{-6}, with 454 and 442 words. The lower bounds are Pál and Vértesi's real optima in dimensions 17 and 12, re-derived and certified exactly. Pál and Vértesi expected the J^{30}_{4422} lower bound not to be optimal [13]. Our ladder constructions saturate at their value. The window for J^{30}_{4422} is therefore still 1.4×10^{-4} wide.

A list. Ancilla doubling raises the lower bounds of A_{68} (by 2.5×10^{-4}, real dimension 26), A_{89} (3.6×10^{-4}, dimension 31), A_{62} (4.5×10^{-5}, dimension 27) and A_{82} (2.7×10^{-5}, dimension 26). On the upper side our certificates stay at the levels of Ref. [13], so the certified windows shrink only through the lower bounds. For A_{82} the certified window is 6.7×10^{-6} wide, against 3.4×10^{-5} in 2010. The numerical order-3 and order-4 entries of the repository file lie below our certified upper bounds for the 5522 cases (Table I). They indicate what a certified relaxation at those orders would gain, but they are not bounds. A certified five-setting relaxation at order 4

remains to be done.

C. Ladders and infinite dimension

The ladder values in Fig. 1 grow monotonically with dimension, and their increments decay with a nearly constant ratio, 0.52–0.59 for J^{73}_{4422} (least-squares fit 0.545). The raw values, dimension by dimension, are listed in Appendix B and, with those of the J^{48}_{4422}, J^{30}_{4422} and A-list constructions, in the release. Some rungs are certified: dimensions 20 and 32 for J^{73}_{4422}, and 8, 12 and 32 for J^{62}_{4422}. The others are floating-point seesaw values. The pattern matches the construction of Pál and Vértesi for I_{3322} [13], whose supremum is now known not to be attained in finite dimension [16, 17]. For J^{62}_{4422} the conjecture that follows is Pál and Vértesi's. From the dependence of their upper bounds on the level they were "almost sure" that for J^{30}_{4422}, J^{62}_{4422}, A_{47}, A_{62}, A_{64}, A_{82} and A_{89} the upper bound would not come down to their lower bound, so that better strategies exist, and they added that I_{3322} is probably not the only inequality that requires infinite-dimensional systems [13]. Our results confirm the first part of this expectation for four of the seven: the lower bounds of J^{62}_{4422}, A_{62}, A_{82} and A_{89} rise (Table I). For J^{30}_{4422}, A_{47} and A_{64} we found nothing above their values. The minimal dimension of J^{62}_{4422} is still listed as unknown [15]. J^{73}_{4422} is not in their list, and its ladder is the new case here. With them, we conjecture that the maximal violation of J^{62}_{4422} is approached only as the local dimension grows without bound, and we conjecture the same for J^{73}_{4422}. The data do not establish this, for three reasons. They concern one family of constructions. A different family may do better in a fixed dimension. And a fitted geometric tail is neither a lower nor an upper bound.

Summing the fitted tails gives ≈ 1.1223884 for J^{73}_{4422} and about 0.7500886 for J^{62}_{4422} (its dimension-32 value is 0.7500885544). These lie 2.2×10^{-5} and 1.5×10^{-6} below the certified upper bounds. So either the hierarchy converges slowly for these inequalities, or a different family of strategies does better. Settling the question would need one of two things. The first is a certified upper bound that reaches the limit, together with a proof that no finite-dimensional strategy attains the supremum, as was given for I_{3322} [16–18]. The second is a finite-dimensional strategy above the extrapolated limit, which would refute the conjecture. For J^{30}_{4422} and J^{48}_{4422} the analogous constructions saturate at Pál and Vértesi's values.

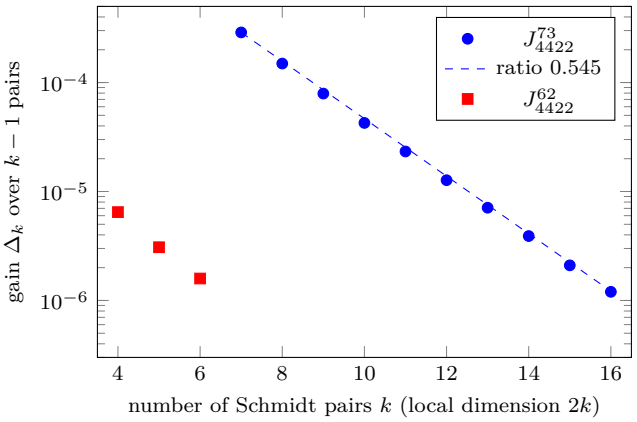


FIG. 1. Ladder strategies. Gain in violation from adding one Schmidt pair by bulk-cell insertion, for J^{73}_{4422} (from six pairs, 1.1217770, to sixteen pairs, 1.1223870) and J^{62}_{4422} (from Pál and Vértesi's three-pair $\mathbb{R}^6$ optimum). For J^{73}_{4422} the gains decrease geometrically. For J^{62}_{4422} only three single-pair increments are available (ratios 0.48 and 0.52). Summing the fitted geometric tail of the J^{73}_{4422} series gives ≈ 1.1223884, 2.2×10^{-5} below the certified upper bound. This extrapolation is a conjecture, not a bound. Raw data are in Appendix B.

D. A published value that is too low

A_{19} is the Ito–Imai–Avis inequality with, in the form of Eq. (1),

$$b^A = (0,-1,-2,0), \qquad b^B = (-3,-3,0,0,0),$$

$$b^{AB} = \begin{pmatrix} 2 & 1 & -1 & -1 & 0 \\ 2 & 1 & 1 & 0 & -1 \\ 2 & 1 & 0 & 1 & 1 \\ -2 & 2 & 0 & 0 & 0 \end{pmatrix},$$

and $b_0 = 0$. These coefficients are minus the polynomial in the repository of Ref. [10]. With this sign the local bound is 0, as we checked by enumerating the 512 deterministic strategies. Pál and Vértesi report violation 0.6226300 from a complex qubit strategy with rank-one projectors, together with a level-2a NPA bound equal to it [12, Table II]. The benchmark file in the repository of Ref. [10] lists the same number as the reference value and again in the column that we read as the numerical order-3 bound (Sec. II).

Our exact certificates give the following.

- A complex-qubit strategy gives 0.6226299744, the published strategy value to the printed precision.
- A real strategy in local dimension 4, with all nine projectors of rank 2, gives 0.6226304433.
- An SOS certificate with 202 words (level 2 plus the words aab and abb) bounds the maximum by 0.6226304553.

- One with 318 words (full level 3) bounds it by 0.6226304480, with $\sigma = 0$ and $\tau = 2.8 \times 10^{-13}$. The exact replay gives 7.1×10^{-15}.

Hence the maximal violation v satisfies $0.6226304433 \leq v \leq 0.6226304480$. The lower end is 4.4×10^{-7} above the published value, far beyond what rounding to seven decimals allows. Every NPA level bounds the maximum from above, so the published level-2a value cannot be correct and must reflect solver inaccuracy. The same applies to the order-3 entry of the repository file, if we read it correctly. The certified order-3 bound of Ref. [10] for A_{19} is not tabulated there. It must be at least 0.6226304433, which gives an independent test of our claim. The published maximum is the complex-qubit local optimum. The release contains the four certificates, the coefficients, the source rows of both references and a script that checks all of them (`case_studies/A19`). This is a small but concrete example of why floating-point "tight" values need certificates.

VI. HOW THE RESULTS WERE FOUND

The work used two four-hour runs of a multi-agent system of language-model agents (Claude Sonnet 5.5, Anthropic), run as non-interactive coding sessions in 40-minute shifts on one laptop with ten cores and 16 GB of memory. A supervising session (Claude Opus 5.5) built the verifier, the catalog and the reference values before the first run. It also coordinated the agents and audited their results. The agents shared a message board and could not modify the verifier, the data or the board software. The board recorded 550 verified submissions (the release contains an export of its submission table). 481 came from the catalog certification and 64 improved on the reference values in force at the time. Two of these were revoked when the 2010 table superseded the 2009 one. The other five, by the auditing agent, re-derived published optima or were calibration runs.

First run. Two agents searched for strategies, one for dual certificates, and one audited. Three minutes after launch, a complex strategy in local dimension 5 beat the 2009 value for J^{30}_{4422}. Within seven minutes the auditor found Ref. [13], which had already superseded the 2009 windows. The reference values were rebuilt from the 2010 table, the verifier was re-frozen, and two early wins were revoked as superseded. Later in the run the verifier was revised once: the cap on the local dimension was raised from 16 to 32, and a faster second evaluation was added for large strategies. It was re-tested and re-frozen. The certificate agent found that a first-order solver could not deliver certificate accuracy and wrote the interior-point method of Sec. IV. Its first improvement (J^{97}_{4422}) came 38 minutes after launch, and the closure of J^{97}_{4422} after 3 hours 11 minutes. A strategy agent found the ladder structure of J^{62}_{4422} and J^{73}_{4422} within 75 minutes.

Second run. The reference values were raised to the certified results of the first run. Five agents took part: two for dual certificates, one for strategies, one for the catalog certification, and the auditor, who began with a citation search. That search found Ref. [10], whose repository supplied the A-list coefficients. The supervising session re-fetched and parsed them independently, checked them against the published values, and added them to the frozen catalog 38 minutes after launch. The first raises of the four A-list lower bounds followed within two hours, by ancilla doubling, and the values in Table I within four.

After the runs. Ten upper certificates of the five-setting part of the A list were computed later, during the revision of this manuscript, by a single session (Claude Fable 5.2) with the solver of Sec. IV: A_{14}, A_{67} and A_{80} at full level 3, and seven 5522 cases with 276 words. The frozen verifier and the replay checked them like all the others. They were not submitted to the board, and the release marks them accordingly.

Each mid-run change of reference values followed a literature finding by the auditing agent. The auditor also re-checked every improvement independently, spot-checked the catalog certificates, and red-teamed the verifier with several hundred random and adversarial inputs. None was wrongly accepted.

VII. DISCUSSION

Certified windows turn a table of numerical estimates into a table of theorems. For most of the catalog the maximal violation is now known rigorously to eight or nine digits. The method rests on two ingredients that are cheap to trust. The first is exact rational linear algebra. The second is one rigorous bound on the smallest eigenvalue of an explicit matrix (Theorem 1), which the release re-proves in exact integer arithmetic at the stated shift. The cost is the penalty $N\tau$. It is at most 8.7×10^{-8} here, but a median 96% of the width of the closed windows (Sec. III D). Unlike exact rounding schemes [10, 26], the method needs no facial reduction and does not require the rounded matrix to remain positive semidefinite, so it works directly with solver output.

Three limitations remain. The windows are not exact values. Proving that a maximum equals an algebraic number, for example the qubit value of J^{97}_{4422}, would need exact certificates over a number field. For the open five-setting cases our upper certificates stop at the levels of 2010. The limit is the dense interior-point method. Its Schur complement grows with the square of the number of distinct moments: 3.0 GB and about 2.3 hours per certificate at level 3, where the numerical values say that these windows do not close, and level 4 has five times as many words. Symmetry reduction or term sparsity [10] are natural next steps. Finally, two lower bounds of Table I remain numerical, because we could not reproduce the published strategies for A_{14} and A_{84}.

Several questions are open. Do J^{62}_{4422}, as Pál and Vértesi expected [13], and J^{73}_{4422} require infinite dimen-

sion? A proof along the lines of Refs. [16, 17] might be within reach. Is the lower bound of J^{30}_{4422} optimal, contrary to Pál and Vértesi's expectation? And which of the A-list windows close at order 5?

ACKNOWLEDGMENTS

We thank Y. Naceur, J. Wang, V. Magron and A. Acín for publishing the A-list coefficients and benchmark data under an open license (MIT). The strategies and certificates were found by an autonomous multi-agent system built on Claude Sonnet 5.5 (Anthropic). The verification software, the exact J^{97}_{4422} strategy, the analysis and the text of this manuscript were produced with Claude Opus 5.5 (Anthropic), as described in Sec. VI. The revision of 10 November 2026 and the ten certificates computed after the runs were produced with Claude Fable 5.2 (Anthropic).

DATA AVAILABILITY

The artifact release (version `tsirelson-bounds-v3`) is at https://github.com/maxxfan/aixmathxphysics/tree/tsirelson-bounds-v3/papers/tsirelson-bounds/artifacts. It contains:

- all 476 certificates behind Appendix A as exact JSON files: 238 strategies, with the spanning vectors of every projector and the state, and 238 SOS certificates, with the words, the rational matrix Y and λ;
- a manifest indexed to Appendix A, which lists for every inequality its coefficients, the printed window, and for each certificate its SHA-256 hash, its exact violation or its exact λ, N, σ, τ and bound;
- the inequality catalog, with its sources and the script that generates it from them;
- the frozen verifier with its tests;
- a separately written exact checker, the floating-point self-test and the negative controls;
- the A19 case study, the raw ladder data, the search programs, and an export of the board's submission table;
- a replay script that, from a fresh copy of the folder, re-checks every advertised window, the counts in the paper, Table I and Appendix A.

The replay needs only Python and a C compiler. The same files are in the project repository, in the folder `problems/p05-tsirelson-bounds/release`.

Appendix A: Certified table

For each inequality we list the published maximal violation (Pál and Vértesi; for the open cases the 2010 lower bound) and the best certified lower and upper bounds, rounded outward to 10^{-10}. Widths are computed from these rounded values.

TABLE III: Certified windows for all 239 inequalities of the catalog. Names: Jk = J^k_{4422} (Pál–Vértesi), Ik = I^k_{4422} (Brunner–Gisin), Ak = Ito–Imai–Avis; "pub." is the published maximal violation (for open cases the 2010 lower bound; for CHSH, Tsirelson's value).

ineq.	pub.	lower	upper	width	ineq.	pub.	lower	upper	width
CHSH	0.2071068	0.2071067811	0.2071067813	2.0×10^{-10}	J99	0.8990726	0.8990725717	0.8990725901	1.8×10^{-8}
I3322	0.2508754	–	–	–	J100	1.2675376	1.2675376399	1.2675376458	5.9×10^{-9}
I1	0.2878683	0.2878683045	0.2878683229	1.8×10^{-8}	J101	1.0296105	1.0296104781	1.0296104908	1.3×10^{-8}
I2	0.6213712	0.6213711737	0.6213711757	2.0×10^{-9}	J102	0.6650865	0.6650865119	0.6650865360	2.4×10^{-8}
I3	0.4142136	0.4142135623	0.4142135644	2.1×10^{-9}	J103	1.0520136	1.0520136544	1.0520136560	1.6×10^{-9}
I4	0.4142136	0.4142135623	0.4142135670	4.7×10^{-9}	J104	1.5875885	1.5875885171	1.5875885447	2.8×10^{-8}
I5	0.4364917	0.4364916731	0.4364916737	6.0×10^{-10}	J105	1.0742228	1.0742228124	1.0742228126	2.0×10^{-10}
I6	0.4494897	0.4494897427	0.4494897472	4.5×10^{-9}	J106	0.8382498	0.8382498540	0.8382498625	8.5×10^{-9}
I7	0.4548373	0.4548373063	0.4548373168	1.1×10^{-8}	J107	0.9339703	0.9339702504	0.9339702628	1.2×10^{-8}
I8	0.4877681	0.4877681239	0.4877681290	5.1×10^{-9}	J108	0.9676411	0.9676410648	0.9676410678	3.0×10^{-9}
I9	0.4616842	0.4616841752	0.4616842329	5.8×10^{-8}	J109	1.7260512	1.7260512223	1.7260512230	7.0×10^{-10}
I10	0.6139456	0.6139455921	0.6139455965	4.4×10^{-9}	J110	0.9457465	0.9457465079	0.9457465106	2.7×10^{-9}
I11	0.6383543	0.6383543206	0.6383543213	7.0×10^{-10}	J111	0.7575890	0.7575890486	0.7575890518	3.2×10^{-9}
I12	0.6188142	0.6188142246	0.6188142346	1.0×10^{-8}	J112	0.6247585	0.6247585341	0.6247585423	8.2×10^{-9}
I13	0.4348553	0.4348553293	0.4348553636	3.4×10^{-8}	J113	0.8483764	0.8483764114	0.8483764371	2.6×10^{-8}
I14	0.4794103	0.4794102632	0.4794102730	9.8×10^{-9}	J114	1.0653155	1.0653155114	1.0653155129	1.5×10^{-9}
I15	0.4348553	0.4348553293	0.4348553420	1.3×10^{-8}	J115	1.0098044	1.0098043801	1.0098043909	1.1×10^{-8}
I16	0.4142136	0.4142135623	0.4142135625	2.0×10^{-10}	J116	0.7651941	0.7651940887	0.7651941373	4.9×10^{-8}
I17	0.6714085	0.6714085444	0.6714085482	3.8×10^{-9}	J117	0.9721185	0.9721184718	0.9721184749	3.1×10^{-9}
I18	0.6429670	0.6429670025	0.6429670214	1.9×10^{-8}	J118	0.5283248	0.5283247658	0.5283247675	1.7×10^{-9}
I19	0.4971707	0.4971706561	0.4971707174	6.1×10^{-8}	J119	0.8986088	0.8986088257	0.8986088263	6.0×10^{-10}
I20	0.4676794	0.4676793861	0.4676793911	5.0×10^{-9}	J120	0.9333181	0.9333180866	0.9333180894	2.8×10^{-9}
J1	0.4554438	0.4554438200	0.4554438222	2.2×10^{-9}	J121	0.5970802	0.5970801934	0.5970801939	5.0×10^{-10}
J2	0.6140029	0.6140029009	0.6140029051	4.2×10^{-9}	J122	0.7931031	0.7931030684	0.7931030740	5.6×10^{-9}
J3	0.8106306	0.8106305805	0.8106305886	8.1×10^{-9}	J123	1.0640930	1.0640929688	1.0640929700	1.2×10^{-9}
J4	0.6861985	0.6861985109	0.6861985115	6.0×10^{-10}	J124	0.9409648	0.9409648534	0.9409648733	2.0×10^{-8}
J5	0.6520359	0.6520358928	0.6520359510	5.8×10^{-8}	J125	1.0000000	0.9999999999	1.0000000031	3.2×10^{-9}

ineq.	pub.	lower	upper	width	ineq.	pub.	lower	upper	width
J6	0.4461508	0.4461507712	0.4461507727	1.5×10^{-9}	J126	0.8023577	0.8023576521	0.8023576563	4.2×10^{-9}
J7	0.6057263	0.6057263191	0.6057263350	1.6×10^{-8}	J127	0.6718972	0.6718971603	0.6718971632	2.9×10^{-9}
J8	0.4772413	0.4772413037	0.4772413307	2.7×10^{-8}	J128	1.0096066	1.0096065872	1.0096066267	4.0×10^{-8}
J9	0.5000000	0.4999999999	0.5000000263	2.6×10^{-8}	J129	1.0522569	1.0522568555	1.0522568770	2.1×10^{-8}
J10	0.6938425	0.6938424637	0.6938424675	3.8×10^{-9}	A5	0.4353342	0.4353342463	0.4353342472	9.0×10^{-10}
J11	0.4684758	0.4684758078	0.4684758099	2.1×10^{-9}	A6	0.3003638	0.3003638383	0.3003638395	1.2×10^{-9}
J12	0.7261971	0.7261970814	0.7261970866	5.2×10^{-9}	A8	0.5916501	0.5916500663	0.5916500761	9.8×10^{-9}
J13	0.6926870	0.6926870296	0.6926870324	2.8×10^{-9}	A9	0.4652428	0.4652428455	0.4652428487	3.2×10^{-9}
J14	0.6317469	0.6317469144	0.6317469257	1.1×10^{-8}	A10	0.4158004	0.4158004469	0.4158004496	2.7×10^{-9}
J15	0.7808500	0.7808499742	0.7808499864	1.2×10^{-8}	A11	0.4561079	0.4561079332	0.4561079346	1.4×10^{-9}
J16	0.5674133	0.5674132998	0.5674133222	2.2×10^{-8}	A12	0.4877093	0.4877092778	0.4877092918	1.4×10^{-8}
J17	0.6379629	0.6379629132	0.6379629179	4.7×10^{-9}	A13	0.4252330	0.4252330452	0.4252330474	2.2×10^{-9}
J18	1.0130080	1.0130080047	1.0130080051	4.0×10^{-10}	A14	0.4759513	0.4758457381	0.4778466056	2.0×10^{-3}
J19	0.6742346	0.6742346141	0.6742346312	1.7×10^{-8}	A15	0.4496279	0.4496279430	0.4496279449	1.9×10^{-9}
J20	0.5932470	0.5932469972	0.5932470324	3.5×10^{-8}	A16	0.4571068	0.4571067811	0.4571067825	1.4×10^{-9}
J21	0.7017468	0.7017468424	0.7017468573	1.5×10^{-8}	A17	0.3754473	0.3754473439	0.3754473442	3.0×10^{-10}
J22	0.8156179	0.8156179275	0.8156179320	4.5×10^{-9}	A18	0.3843551	0.3843551338	0.3843551353	1.5×10^{-9}
J23	0.6090289	0.6090288648	0.6090288859	2.1×10^{-8}	A19	0.6226300	0.6226304433	0.6226304480	4.7×10^{-9}
J24	0.6942505	0.6942504595	0.6942504760	1.6×10^{-8}	A20	0.6022398	0.6022398259	0.6022398311	5.2×10^{-9}
J25	0.5147829	0.5147829042	0.5147829175	1.3×10^{-8}	A21	0.3260601	0.3260600674	0.3261777341	1.2×10^{-4}
J26	0.6402494	0.6402493792	0.6402493819	2.7×10^{-9}	A22	0.6234571	0.6234570835	0.6234570956	1.2×10^{-8}
J27	0.9642857	0.9642857142	0.9642857145	3.0×10^{-10}	A23	0.5460735	0.5460734856	0.5460734859	3.0×10^{-10}
J28	0.7500000	0.7499999999	0.7500000123	1.2×10^{-8}	A24	0.6047986	0.6047985728	0.6047985820	9.2×10^{-9}
J29	1.0245760	1.0245760143	1.0245760179	3.6×10^{-9}	A25	0.6033789	0.6033789232	0.6033789290	5.8×10^{-9}
J30	0.4363842	0.4363842240	0.4365201856	1.4×10^{-4}	A26	0.5275550	0.5275549713	0.5275550044	3.3×10^{-8}
J31	0.4772413	0.4772413037	0.4772413055	1.8×10^{-9}	A27	0.6483073	0.6483073083	0.6483073218	1.4×10^{-8}
J32	0.5901592	0.5901592141	0.5901592219	7.8×10^{-9}	A28	0.6403143	0.6403143403	0.6403143404	1.0×10^{-10}
J33	0.6150642	0.6150641795	0.6150641976	1.8×10^{-8}	A29	0.4920635	0.4920635075	0.4920635103	2.8×10^{-9}
J34	0.4492657	0.4492657413	0.4492657466	5.3×10^{-9}	A30	0.5698209	0.5698209396	0.5698209479	8.3×10^{-9}
J35	0.6932503	0.6932503121	0.6932503141	2.0×10^{-9}	A31	0.5738173	0.5738172956	0.5738172971	1.5×10^{-9}
J36	0.6706462	0.6706462343	0.6706462406	6.3×10^{-9}	A32	0.4135530	0.4135530286	0.4135530303	1.7×10^{-9}
J37	0.4864826	0.4864826234	0.4864826245	1.1×10^{-9}	A33	0.6226313	0.6226312693	0.6226312705	1.2×10^{-9}
J38	0.9295153	0.9295153311	0.9295153363	5.2×10^{-9}	A34	0.5350117	0.5350117257	0.5350117269	1.2×10^{-9}
J39	0.8264535	0.8264534944	0.8264534953	9.0×10^{-10}	A35	0.6249079	0.6249078573	0.6249078581	8.0×10^{-10}
J40	0.9208907	0.9208906711	0.9208906793	8.2×10^{-9}	A36	0.4388685	0.4388685039	0.4388685047	8.0×10^{-10}
J41	0.7596044	0.7596043867	0.7596043876	9.0×10^{-10}	A37	0.4868868	0.4868868202	0.4868868210	8.0×10^{-10}
J42	0.6722257	0.6722256558	0.6722256599	4.1×10^{-9}	A38	0.4699126	0.4699126549	0.4699126558	9.0×10^{-10}
J43	0.4685939	0.4685938833	0.4685938859	2.6×10^{-9}	A39	0.6172035	0.6172034826	0.6172035172	3.5×10^{-8}
J44	0.4144533	0.4144532761	0.4144533354	5.9×10^{-8}	A40	0.6078638	0.6078638262	0.6078638382	1.2×10^{-8}
J45	0.7705600	0.7705599645	0.7705599760	1.1×10^{-8}	A41	0.4785634	0.4785634179	0.4785634189	1.0×10^{-9}
J46	0.9716836	0.9716836271	0.9716836603	3.3×10^{-8}	A42	0.6198655	0.6198655036	0.6198655293	2.6×10^{-8}
J47	0.7644749	0.7644749219	0.7644749489	2.7×10^{-8}	A43	0.6107654	0.6107654035	0.6107654110	7.5×10^{-9}
J48	0.7516220	0.7516219860	0.7516256937	3.7×10^{-6}	A44	0.5364942	0.5364942157	0.5364942161	4.0×10^{-10}
J49	0.8156923	0.8156923336	0.8156923392	5.6×10^{-9}	A45	0.5372394	0.5372393811	0.5372393837	2.6×10^{-9}
J50	0.8555932	0.8555932318	0.8555932323	5.0×10^{-10}	A46	0.4590108	0.4590108470	0.4590108489	1.9×10^{-9}
J51	0.6750341	0.6750340746	0.6750341128	3.8×10^{-8}	A47	0.4608544	0.4608543948	0.4629391646	2.1×10^{-3}
J52	1.0999033	1.0999032950	1.0999033674	7.2×10^{-8}	A48	0.4631707	0.4631707404	0.4631707412	8.0×10^{-10}
J53	0.8093253	0.8093252883	0.8093253136	2.5×10^{-8}	A49	0.4666943	0.4666942750	0.4666942757	7.0×10^{-10}
J54	0.5194497	0.5194496955	0.5194497554	6.0×10^{-8}	A50	0.5182900	0.5182899837	0.5182899863	2.6×10^{-9}
J55	0.8283881	0.8283880914	0.8283881365	4.5×10^{-8}	A51	0.6607809	0.6607809402	0.6607809440	3.8×10^{-9}
J56	0.8192037	0.8192036987	0.8192036993	6.0×10^{-10}	A52	0.6218611	0.6218611548	0.6218611570	2.2×10^{-9}
J57	0.8609885	0.8609884906	0.8609885652	7.5×10^{-8}	A53	0.6386102	0.6386102120	0.6386102158	3.8×10^{-9}
J58	0.8814481	0.8814480649	0.8814480651	2.0×10^{-10}	A54	0.5936813	0.5936812986	0.5936813002	1.6×10^{-9}
J59	0.6379629	0.6379629132	0.6379629144	1.2×10^{-9}	A55	0.6213203	0.6213203435	0.6213203751	3.2×10^{-8}
J60	0.5922714	0.5922713726	0.5922713739	1.3×10^{-9}	A56	0.6893124	0.6893123503	0.6893123573	7.0×10^{-9}
J61	0.8175538	0.8175538005	0.8175538208	2.0×10^{-8}	A57	0.6603444	0.6603444166	0.6603444193	2.7×10^{-9}
J62	0.7500755	0.7500885544	0.7500900835	1.5×10^{-6}	A58	0.6488905	0.6488904507	0.6488904509	2.0×10^{-10}
J63	0.6078543	0.6078543740	0.6078543991	2.5×10^{-8}	A59	0.4488256	0.4488256417	0.4488256420	3.0×10^{-10}
J64	0.9167082	0.9167081796	0.9167082661	8.7×10^{-8}	A60	0.3940032	0.3940031953	0.3940032019	6.6×10^{-9}
J65	1.1110314	1.1110313940	1.1110314027	8.7×10^{-9}	A61	0.4019248	0.4019248079	0.4019248088	9.0×10^{-10}
J66	0.6186278	0.6186277769	0.6186277846	7.7×10^{-9}	A62	0.4065268	0.4065717137	0.4068725020	3.0×10^{-4}
J67	0.7212948	0.7212948125	0.7212948168	4.3×10^{-9}	A63	0.4894164	0.4894164301	0.4894164320	1.9×10^{-9}
J68	1.0178506	1.0178506212	1.0178506417	2.1×10^{-8}	A64	0.3900890	0.3900890509	0.3914768581	1.4×10^{-3}
J69	0.5081419	0.5081418854	0.5081418891	3.7×10^{-9}	A65	0.3688996	0.3688995748	0.3688995760	1.2×10^{-9}
J70	0.9538824	0.9538823982	0.9538823984	2.0×10^{-10}	A66	0.4877093	0.4877092778	0.4877092801	2.3×10^{-9}
J71	0.5822872	0.5822871551	0.5822872048	5.0×10^{-8}	A67	0.3990671	0.3990671029	0.3990671105	7.6×10^{-9}
J72	0.7878251	0.7878251303	0.7878251389	8.6×10^{-9}	A68	0.4025522	0.4028002584	0.4050328983	2.2×10^{-3}
J73	1.1223170	1.1223870369	1.1224104368	2.3×10^{-5}	A69	0.6096103	0.6096103211	0.6096103263	5.2×10^{-9}
J74	0.4348553	0.4348553293	0.4348553797	5.0×10^{-8}	A70	0.6052228	0.6052228085	0.6052228926	8.4×10^{-8}
J75	0.6270262	0.6270261912	0.6270261914	2.0×10^{-10}	A71	0.4490163	0.4490162651	0.4490162666	1.5×10^{-9}
J76	0.8291077	0.8291077045	0.8291077048	3.0×10^{-10}	A72	0.6962822	0.6962821908	0.6962821911	3.0×10^{-10}
J77	0.8406242	0.8406241785	0.8406241943	1.6×10^{-8}	A73	0.8831381	0.8831380531	0.8831380538	7.0×10^{-10}
J78	0.8937709	0.8937708980	0.8937709029	4.9×10^{-9}	A74	0.6890694	0.6890694094	0.6890694134	4.0×10^{-9}
J79	1.0156152	1.0156152324	1.0156152363	3.9×10^{-9}	A75	0.6051510	0.6051510348	0.6051510359	1.1×10^{-9}
J80	0.9051257	0.9051256536	0.9051257015	4.8×10^{-8}	A76	0.4898631	0.4898630974	0.4898630983	9.0×10^{-10}
J81	0.5995871	0.5995871500	0.5995871635	1.4×10^{-8}	A77	0.6655582	0.6655581944	0.6655581952	8.0×10^{-10}
J82	0.7308078	0.7308078152	0.7308078161	9.0×10^{-10}	A78	0.8927018	0.8927017674	0.8927017677	3.0×10^{-10}

ineq.	pub.	lower	upper	width	ineq.	pub.	lower	upper	width
J83	0.6691786	0.6691785966	0.6691786001	3.5×10^{-9}	A79	0.6243153	0.6243152878	0.6243152908	3.0×10^{-9}
J84	1.0669560	1.0669560027	1.0669560063	3.6×10^{-9}	A80	0.3769863	0.3769863185	0.3769863880	6.9×10^{-8}
J85	0.9762793	0.9762792520	0.9762792708	1.9×10^{-8}	A81	0.6690099	0.6690099536	0.6690099556	2.0×10^{-9}
J86	0.7558762	0.7558761808	0.7558762162	3.5×10^{-8}	A82	0.4708838	0.4709112502	0.4709179063	6.7×10^{-6}
J87	0.6848726	0.6848725982	0.6848726370	3.9×10^{-8}	A83	0.6961664	0.6961664112	0.6961664125	1.3×10^{-9}
J88	0.6159879	0.6159878918	0.6159879144	2.3×10^{-8}	A84	0.6352087	0.6352044080	0.6352834065	7.9×10^{-5}
J89	1.0035502	1.0035501556	1.0035502426	8.7×10^{-8}	A85	0.6411408	0.6411408410	0.6411408436	2.6×10^{-9}
J90	0.8398157	0.8398156462	0.8398156531	6.9×10^{-9}	A86	0.8004425	0.8004425430	0.8004425460	3.0×10^{-9}
J91	1.2992769	1.2992769151	1.2992769352	2.0×10^{-8}	A87	0.7562471	0.7562470649	0.7562470699	5.0×10^{-9}
J92	1.0648162	1.0648161983	1.0648162008	2.5×10^{-9}	A88	0.4142136	0.4142135623	0.4142136010	3.9×10^{-8}
J93	0.9627261	0.9627261088	0.9627261240	1.5×10^{-8}	A89	0.3035637	0.3039223061	0.3058212221	1.9×10^{-3}
J94	0.5944550	0.5944549695	0.5944549807	1.1×10^{-8}	AII1	0.6055543	0.6055542992	0.6055543099	1.1×10^{-8}
J95	1.0014114	1.0014114009	1.0014114251	2.4×10^{-8}	AII2	0.5000000	0.4999999999	0.5000000250	2.5×10^{-8}
J96	0.9416515	0.9416514703	0.9416514979	2.8×10^{-8}	AS1	0.5412415	0.5412414523	0.5412414553	3.0×10^{-9}
J97	1.1583626	1.1583625533	1.1583625755	2.2×10^{-8}	AS2	0.8784928	0.8784927944	0.8784927998	5.4×10^{-9}
J98	1.1496911	1.1496910757	1.1496911407	6.5×10^{-8}					

Each row of this table is indexed in the release manifest by the inequality name. The manifest gives the coefficients, the certificate files with their SHA-256 hashes, and the exact values behind the printed decimals. The release regenerates the table from the manifest. The result is identical to the table printed here.

Appendix B: Ladder data

Table IV lists the violations of the ladder strategies of Sec. V C, by number of Schmidt pairs k and local dimension d. Certified rungs are exact strategies, checked by the frozen verifier and by the replay, with values rounded down to 10^{-10}. The other rungs are floating-point seesaw values recorded during the search and are not certified. The release (`ladders/ladders.tsv`) gives the same data, together with the J^{48}_{4422}, J^{30}_{4422} and A-list sequences, the certificates of the certified rungs, and the agents' notebooks from which the numerical values were taken.

TABLE IV. Ladder strategies by bulk-cell insertion (Fig. 1). For J^{62}_{4422} the last rung came from inserting several pairs at once into the eight-pair chain.

inequality	k	d	violation	certified
J^{73}_{4422}	6	12	1.1217769903	no
J^{73}_{4422}	7	14	1.1220655	no
J^{73}_{4422}	8	16	1.1222149	no
J^{73}_{4422}	9	18	1.1222941	no
J^{73}_{4422}	10	20	1.1223367271	yes
J^{73}_{4422}	11	22	1.1223600	no
J^{73}_{4422}	12	24	1.1223727	no
J^{73}_{4422}	13	26	1.1223798	no
J^{73}_{4422}	14	28	1.1223837	no
J^{73}_{4422}	15	30	1.1223858	no
J^{73}_{4422}	16	32	1.1223870369	yes
J^{62}_{4422}	3	6	0.7500755575	no
J^{62}_{4422}	4	8	0.7500820287	yes
J^{62}_{4422}	5	10	0.7500851064	no
J^{62}_{4422}	6	12	0.7500866993	yes
J^{62}_{4422}	8	16	0.7500880076	no
J^{62}_{4422}	16 (14 active)	32	0.7500885544	yes

[1] J. S. Bell, On the Einstein Podolsky Rosen paradox, Physics **1**, 195 (1964).

[2] J. F. Clauser, M. A. Horne, A. Shimony, and R. A. Holt, Proposed experiment to test local hidden-variable theories, Phys. Rev. Lett. **23**, 880 (1969).

[3] B. S. Cirel'son, Quantum generalizations of Bell's inequality, Lett. Math. Phys. **4**, 93 (1980).

[4] N. Brunner, D. Cavalcanti, S. Pironio, V. Scarani, and S. Wehner, Bell nonlocality, Rev. Mod. Phys. **86**, 419 (2014).

[5] R. F. Werner and M. M. Wolf, Bell inequalities and entanglement, Quantum Inf. Comput. **1**, 1 (2001).

[6] Y.-C. Liang and A. C. Doherty, Bounds on quantum correlations in Bell-inequality experiments, Phys. Rev. A **75**, 042103 (2007).

[7] M. Navascués, S. Pironio, and A. Acín, Bounding the set of quantum correlations, Phys. Rev. Lett. **98**, 010401 (2007).

[8] M. Navascués, S. Pironio, and A. Acín, A convergent hierarchy of semidefinite programs characterizing the set of quantum correlations, New J. Phys. **10**, 073013 (2008).

[9] A. C. Doherty, Y.-C. Liang, B. Toner, and S. Wehner, The quantum moment problem and bounds on entangled multi-prover games, in *Proc. 23rd IEEE Conference on Computational Complexity* (IEEE, 2008), p. 199.

[10] Y. Naceur, J. Wang, V. Magron, and A. Acín, Certified bounds on optimization problems in quantum theory, Quantum **10**, 2254 (2026), arXiv:2512.17713; code and benchmark data at https://github.com/nininaceur/CertifiedQuantumBounds (commit `c5c3b60`, January 2026).

[11] N. Brunner and N. Gisin, Partial list of bipartite Bell inequalities with four binary settings, Phys. Lett. A **372**, 3162 (2008), arXiv:0711.3362.

[12] K. F. Pál and T. Vértesi, Quantum bounds on Bell inequalities, Phys. Rev. A **79**, 022120 (2009), arXiv:0810.1615.

[13] K. F. Pál and T. Vértesi, Maximal violation of a bipartite three-setting, two-outcome Bell inequality using infinite-dimensional quantum systems, Phys. Rev. A **82**, 022116 (2010), arXiv:1006.3032.

[14] M. Araújo, I. Klep, A. J. P. Garner, T. Vértesi, and M. Navascués, First-order optimality conditions for non-commutative optimization problems, Found. Comput. Math. (2026), doi:10.1007/s10208-026-09761-x, arXiv:2311.18707.

[15] H.-Y. Hsu, G. N. M. Tabia, K.-S. Chen, M.-E. Liu, T. Vértesi, N. Brunner, and Y.-C. Liang, Trading symmetry for Hilbert-space dimension in Bell-inequality violation, Quantum Sci. Technol. **11**, 035003 (2026), arXiv:2601.02893.

[16] J. Pauwels, The quantum supremum of the I_{3322} Bell inequality is not attained in finite dimension, arXiv:2608.29734 (2026).

[17] A. Coladangelo, The I_{3322} Bell inequality requires infinite dimensions, arXiv:2609.06038 (2026).

[18] S. Douglas, The I_{3322} quantum value is attained spatially but not in finite dimension, arXiv:2609.05555 (2026).

[19] E. Zambrini Cruzeiro and N. Gisin, Complete list of tight Bell inequalities for two parties with four binary settings, Phys. Rev. A **99**, 022104 (2019), arXiv:1811.11820.

[20] A. Krohn-Grimberghe, Certified exact identification of the I_{3322} quantum value, arXiv:2609.29693 (2026).

[21] D. Collins and N. Gisin, A relevant two qubit Bell inequality inequivalent to the CHSH inequality, J. Phys. A **37**, 1775 (2004).

[22] R. Cleve, P. Høyer, B. Toner, and J. Watrous, Consequences and limits of nonlocal strategies, in *Proc. 19th IEEE Conference on Computational Complexity* (IEEE, 2004), p. 236.

[23] D. Avis, H. Imai, T. Ito, and Y. Sasaki, Two-party Bell inequalities derived from combinatorics via triangular elimination, J. Phys. A **38**, 10971 (2005), arXiv:quant-ph/0505060.

[24] T. Ito, H. Imai, and D. Avis, Bell inequalities stronger than the Clauser-Horne-Shimony-Holt inequality for three-level isotropic states, Phys. Rev. A **73**, 042109 (2006).

[25] J. W. Helton, "Positive" noncommutative polynomials are sums of squares, Ann. Math. **156**, 675 (2002).

[26] H. Peyrl and P. A. Parrilo, Computing sum of squares decompositions with rational coefficients, Theor. Comput. Sci. **409**, 269 (2008).

[27] S. M. Rump, Verification of positive definiteness, BIT Numer. Math. **46**, 433 (2006).

[28] E. H. Bareiss, Sylvester's identity and multistep integer-preserving Gaussian elimination, Math. Comp. **22**, 565 (1968).

[29] C. Helmberg, F. Rendl, R. J. Vanderbei, and H. Wolkowicz, An interior-point method for semidefinite programming, SIAM J. Optim. **6**, 342 (1996).

[30] M. Kojima, S. Shindoh, and S. Hara, Interior-point methods for the monotone semidefinite linear complementarity problem in symmetric matrices, SIAM J. Optim. **7**, 86 (1997).

[31] R. D. C. Monteiro, Primal-dual path-following algorithms for semidefinite programming, SIAM J. Optim. **7**, 663 (1997).

[32] P. J. Goulart and Y. Chen, Clarabel: An interior-point solver for conic programs with quadratic objectives, arXiv:2405.12762 (2024).