Flight Delay Prediction via Gradient Boosting: Phase 1 — Machine Learning

Asad Ali, Divyansh Bhartia, Vikrant Yadav, Mayank Pillai, Prashant Raj
CSAI Project 21
Applied Machine Learning

Abstract—Flight delays cost airlines and passengers time and money. We predict whether a flight will arrive 15 or more minutes late using only information available before departure: the schedule (with cyclic encoding of the hour and day of week), carrier, route, scheduled airport congestion and the recent delay history of the carrier, airports and route. We use the 2013 New York City flights dataset (327,346 completed flights), remove all post-departure fields to avoid data leakage, and split the data by date (train: January–August, validation: September–October, test: November–December). We compare Logistic Regression with XGBoost tuned by expanding-window time-series validation. XGBoost reaches a test PR AUC of 0.391 (random baseline 0.258) and ROC AUC of 0.656, against 0.376 and 0.645 for Logistic Regression; at 50% precision it recalls 11.1% of delayed flights versus 5.9%. Isotonic calibration lowers the Brier score of both models from about 0.22–0.23 to 0.19. The scheduled departure hour and the carrier's recent delay rate are the most informative features.

Index Terms—flight delay prediction, gradient boosting, XGBoost, logistic regression, calibration, data leakage

I. Introduction

Delays are a persistent problem in air transport: they disrupt passengers' plans, force airlines to re-plan crews and aircraft, and spread through the network as late aircraft cause later flights to be late. If the risk of a delay is known in advance, an airline can, for example, schedule spare aircraft or crews, or move a flight to a less risky time slot.

This project (Phase 1) predicts, before departure, whether a flight will arrive at least 15 minutes late. The 15-minute threshold is the standard definition established by the US Bureau of Transportation Statistics (BTS). Our contributions are:

- a leakage-free feature set built only from the schedule and from past days;
- a date-based evaluation that mimics real use, with time-series tuning of the model;
- a comparison of Logistic Regression and XGBoost on PR AUC, ROC AUC, recall at a fixed precision and calibration.

Phase 2 will add a deep learning model with learned embeddings for carriers and airports.

II. Literature Review

Flight delay prediction. Earlier work on flight delay prediction uses statistical, probabilistic, network-based and machine learning approaches, and machine learning methods, particularly tree-based models like XGBoost, are increasingly used. Delays at one airport depend on the recent state of the network, which motivates our recent delay-rate features.

Gradient boosting. Gradient boosting machines fit an additive model of decision trees by following the gradient of a loss function. XGBoost adds a second-order approximation of the loss, explicit tree regularisation and efficient, sparse-aware training, and is a strong default for tabular data.

Evaluation on imbalanced data. Precision–recall (PR) curves are more informative than ROC curves when the positive class is rare, because they focus on how well the rare class is found. We therefore use PR AUC as the main metric.

Calibration. Boosted trees and other models often produce distorted probabilities, which Platt scaling or isotonic regression can correct. The same problem is known for neural networks, which is relevant for Phase 2.

Leakage and temporal validation. Features that would not be available at prediction time inflate results. For time-ordered data, random cross-validation mixes past and future, so we use an expanding-window scheme instead.

III. Dataset and Exploratory Data Analysis

A. Dataset

We use the Flights 2013 dataset (nycflights13), which contains all 336,776 flights that departed from JFK, LGA and EWR in 2013. Each record has the date, scheduled and actual departure and arrival times, delays, carrier, flight number, tail number, origin, destination, air time and distance.

B. Data quality

There are no duplicate rows. 8,255 flights have no departure time (cancelled) and 9,430 have no arrival delay (cancelled or diverted). Because the target needs the arrival delay, we remove these flights, leaving 327,346. The target is $y = 1$ if the arrival delay is at least 15 minutes; 24.5% of flights are delayed, so the classes are imbalanced (Fig. 1).

C. Exploratory analysis

Fig. 2 shows the delay rate over time. December, July and June are the worst months (over 30% delayed) and

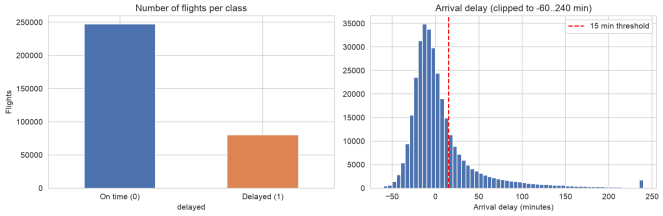


Fig. 1. Class balance (left) and distribution of arrival delays (right).



Fig. 2. Delay rate by month, day of week and scheduled departure hour.

September–November the calmest (under 20%). Saturday has the lowest delay rate. The clearest pattern is the hour of the day: about 10% of 5 a.m. flights are delayed, rising to about 37% at 9 p.m., as delays build up through the network during the day. The delay rate also varies strongly by carrier, from 13% (HA) to 39% (F9), and EWR is the most delayed of the three airports (26%).

IV. Methodology

A. Preventing data leakage

We assume the prediction is made before the flight departs, for example on the morning of the flight day. All columns known only after departure are removed: actual departure and arrival times, departure and arrival delay (the arrival delay is used only to build the target) and air time. We also drop the tail number (aircraft can be swapped and it has about 4,000 values), the flight number and redundant date/time columns.

B. Features

- Calendar/schedule: weekend flag, distance, and the day of week and scheduled departure and arrival hour with cyclic encoding: each value t with period P ($P = 24$ for hours, $P = 7$ for days) becomes $\sin(2\pi t/P)$ and $\cos(2\pi t/P)$, so that hour 23 is close to hour 0 and Sunday is close to Monday.
- Categorical: carrier, origin and destination (one-hot encoded).
- Congestion: number of flights scheduled to leave the same airport in the same hour and on the same day. These counts use the full schedule, including flights that were later cancelled: counting only completed flights would leak information, since bad-weather days have many cancellations.
- Route and history: the route is the origin–destination pair (223 routes, e.g. JFK–LAX). For the carrier, origin, destination and route we compute the share of delayed flights over the previous seven calendar days. Daily counts of delayed and total flights are summed over a 7-day window that is shifted by one day, so a flight never sees its own day or the future. Missing values (no history yet) are filled with the training mean.

The month is not used as a feature because the test months never appear in the training data.

C. Data split

The data are split by date: train January–August (217,727 flights, 26.4% delayed), validation September–October (55,628, 15.7%) and test November–December (53,991, 25.8%). The test set is used once.

D. Models

Logistic Regression models the conditional probability $P(y = 1 \mid x) = \sigma(w^\top x + b)$ by minimising the L2-regularised log loss. All input features (numeric and one-hot) are standardised to zero mean and unit variance with a scaler fitted on the training split, and the classes are weighted inversely proportional to their class frequencies (class_weight='balanced') to address class imbalance.

XGBoost builds an ensemble $\hat{y}(x) = \sum_k f_k(x)$ of regression trees. Each new tree minimises a second-order approximation of the loss plus a penalty $\Omega(f) = \gamma T + \frac{1}{2}\lambda\|w\|^2$ on the number of leaves T and leaf weights w. We use learning rate 0.05, row and column subsampling of 0.8, minimum child weight 50, and scale_pos_weight equal to the ratio of negative to positive training examples.

Tuning. Because delay patterns change with the season, a single validation period is a noisy guide. We therefore use expanding-window time-series validation with three folds (train Jan–Apr/validate May–Jun, Jan–Jun/Jul–Aug, Jan–Aug/Sep–Oct) and choose the tree depth $\in \{3, 4, 6\}$ and number of trees $\in \{100, 300\}$ with the best mean PR AUC. The best setting was depth 3 with 100 trees (mean PR AUC 0.377); larger models did worse on future months. The final model is trained on the training set.

E. Evaluation and calibration

We report PR AUC (average precision), ROC AUC, recall at precision ≥ 0.5 (the highest recall on the test precision–recall curve where precision is at least 0.5) and the Brier score $\frac{1}{N}\sum_i (p_i - y_i)^2$. Class weighting makes the raw probabilities too high, so we fit an isotonic regression from model scores to outcomes on the validation set and apply it to the test set.

V. Results

Table I and Fig. 3 summarise the test results. Both models are clearly better than random. XGBoost has the best PR AUC and ROC AUC, and its advantage is largest at high precision: when 50% of alerts must be real delays, it finds 11.1% of all delayed flights compared with 5.9% for Logistic Regression.

TABLE I
Test set results (November–December 2013)

Model	PR AUC	ROC AUC	Rec@P0.5	Brier
Random guess	0.258	0.500	–	–
Log. Regression	0.376	0.645	0.059	0.228
XGBoost	0.391	0.656	0.111	0.219

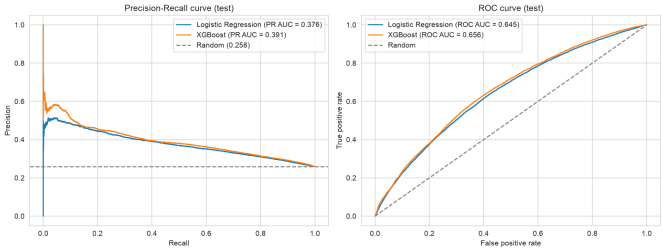


Fig. 3. Precision–recall and ROC curves on the test set.

Calibration. Before calibration both models overestimate the delay probability (Fig. 4). After isotonic calibration the Brier score falls to 0.190 (Logistic Regression) and 0.188 (XGBoost). The calibrated models under-estimate delays because the calibration months were calmer than the test months. A constant prediction of the test delay rate would score 0.192, so the calibrated probabilities are reliable but only somewhat sharper than the average.

Feature importance. The cyclic encodings of the scheduled departure and arrival hours are the most important XGBoost features, followed by the carrier's recent delay rate, the number of flights scheduled from the origin that day, the route's recent delay rate and specific carriers (e.g. EV) (Fig. 5). The largest standardised Logistic Regression coefficients agree: the sine of the departure hour has a large negative weight (it is negative for afternoon and evening hours, so later flights get a higher risk), while daily scheduled flights at the origin and the recent delay rates of the route and carrier have positive weights. In short, later, busier and recently delayed flights are more often late.

VI. Discussion and Limitations

Predicting delays before departure is hard: most delays are caused by weather, air traffic control and knock-on effects from earlier flights, none of which are fully known in advance. An ROC AUC around 0.65 is therefore expected for schedule-based features. Other limitations are that the data cover only New York airports in 2013; that the test period (November–December) differs from the training months, which affects both tuning and calibration; and that no weather data were used.

VII. Conclusion and Future Work

Using only pre-departure information and a strict date-based evaluation, XGBoost predicts arrival delays better

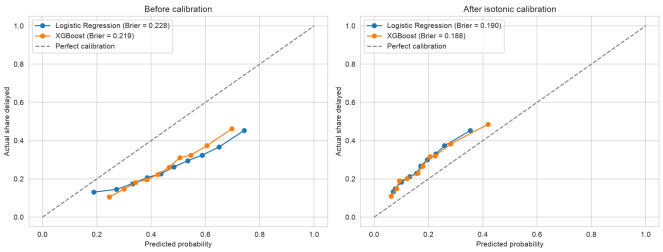


Fig. 4. Reliability diagrams on the test set before and after isotonic calibration.

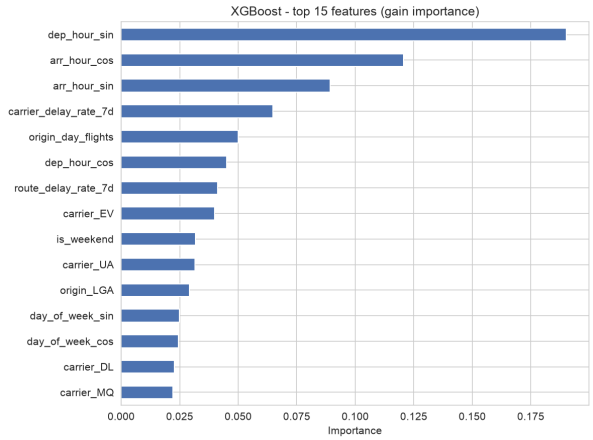


Fig. 5. Top 15 XGBoost features by gain.

than Logistic Regression, especially at high precision, and isotonic calibration gives reliable probabilities. The time of day and the recent delay history of the carrier are the strongest signals. In Phase 2 we will train a neural network with learned embeddings for carriers, origins and destinations and compare it with these baselines under the same split and metrics. Adding forecast weather at the origin airport is another natural extension.