NetREx Network-based Rice Expression Analysis

Reference Manual

April 2, 2022

Sanchari Sircar, Mayank Musaddi, Nita Parekh,

Centre for Computational Natural Sciences and Bioinformatics, International Institute of Information Technology-Hyderabad, India

Contents

| Feature Overview3 | |
|----------------------------|---|
| Query Option | |
| 3.1Query Form4 | |
| 3.2Validation Page | |
| 3.3 Ortholog Network Query | |
| | |
| 4.1View | |
| 4.2Options | |
| 4.3 | |
| Expression Viewer | |
| Browse | |
| 6.1 | |
| 6.2 | |
| 6.3. Pathway Wise | |
| Datasets | 7 |

1. About App

NetREx is a Network-based Rice Expression Analysis Server hosted as a web application (**Figure 1**). It allows users to compare and visualize relationships among genes under different abiotic stress conditions/hormone treatments for the *Oryza Sativa L*. cultivar.

One can explore the genes that are differentially co-expressed across four different stress conditions (drought, cold, flood and osmosis) and two hormone treatments (abscisic acid, jasmonic acid) in root and shoot tissues. The correlation between the genes is depicted by the Pearson correlation coefficient and to reduce the complexity of the network, the highest reciprocal rank network, HRR100, is constructed by considering top 100 ranked correlations of a gene as its neighbours.

Tissue-specific weighted gene co-expression network is constructed by considering differentially expressed genes across various stress/treatment conditions. Hierarchical clustering of these signed networks resulted in co-expressed modules that are enriched with up- or down-regulated genes. Thus, GO enrichment of the modules provides information regarding biological processes/pathways that are activated or repressed under stress conditions. Integrating information like the module membership, fold change across different time-points and involvement in KEGG pathways, augment the network visualization experience making it an integral tool in the analysis of multi-stress tolerance in the rice crop.

Link of the application: bioinf.iiit.ac.in/netrex/

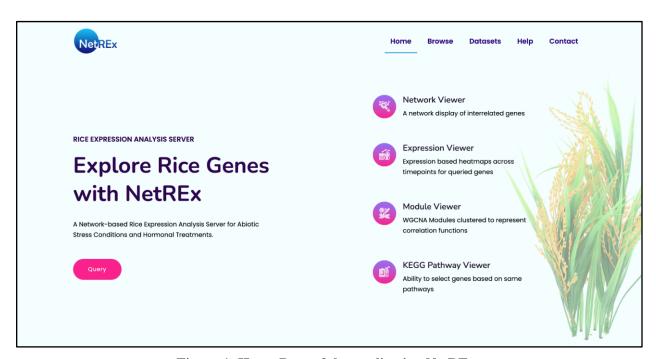


Figure 1: Home Page of the application NetREx.

2. Feature Overview

All the tools and visualization features are divided into two categories, Query and Browse.

a) Query

Using this option, users can explore interactions between the query genes and their neighbourhood genes, their module membership, associated pathways, and their differential expression across different time-points. The following visualizers provide the above-mentioned features: Network Viewer, Network Neighborhood Viewer, and the Expression Viewer.

b) Browse

This allows the users to browse and visualize the complete data in NetREx. This feature can be accessed from the navigation bar on the Home Page in Figure 1 by using the dropdown menu under the 'Browse' heading. It provides three different options to browse through the application — Module-wise, Condition-wise and Pathway-wise, the details of which are discussed in Section 6 below.

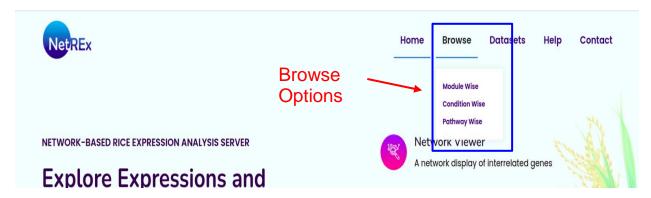


Figure 2: Accessing Browse options in NetREx.

3. Query Option

3.1. Query Form

To access the network viewers and the expression viewer, the user needs to provide the following information using the drop-down menu as shown in **Figure 3**:

a) Species

(Oryza Sativa / Arabidopsis Thaliana / Triticum aestivum / Zea mays / Hordeum vulgare / Sorghum bicolor)

b) Tissue Type

(Root / Shoot)

c) Condition

(Abiotic Stress: Drought / Cold / Flood / Osmosis, Phytohormone Treatment: ABA / JA)

d) Gene List

A comma-separated list or a file containing RAPDB Gene IDs of Rice crop or Ensemble Stable Gene IDs of other crops may be provided. If the species selected is other than rice, the rice orthologs of the query genes will be fetched from Ensembl Plants Database for querying NetREx.

Alternatively, to explore the features of the application, one can click on the **Load Example** button which will autofill an example set of query genes.

Pressing on the 'Send' button will lead to the validation/visualizer page.

Pressing on the 'Reset' button will clear the Gene List entered.


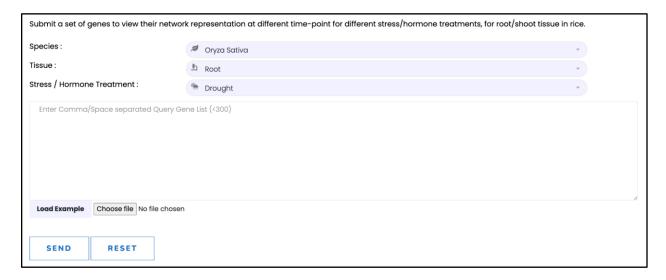


Figure 3: Query Form to submit the genes

3.2. Validation Page

On submitting the query genes, the user is directed to the validation page which displays the Species, Tissue, and Condition selected by the user along with a set of filtered list of genes and invalid genes (**Figure 4**).

A gene is classified as filtered if it is differentially expressed in at least 2 time-points for a given stress condition. Otherwise, it is termed invalid. In all the viewers, only the Filtered list of genes are considered for display the interactions for the chosen stress/treatment and tissue conditions. One may access the viewers by clicking on the corresponding buttons provided at the top.

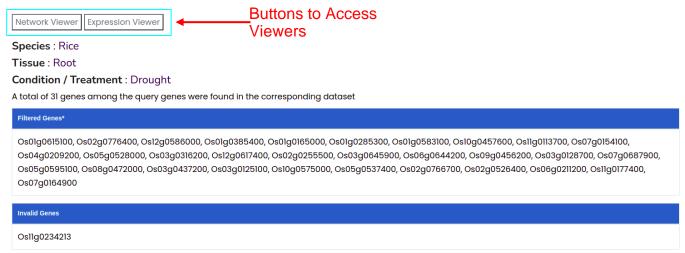

* Filtered Genes – are DEGs in the chosen tissue-specific network and treatment condition

Figure 4: Validation Page

3.3. Ortholog Network Query

To investigate the involvement of genes in other crops under abiotic stress and phytohormone treatments an option is provided to query the interaction networks of their orthologs in rice. To access this feature the same query form as specified in section 3.1 is to be used. The appropriate species should be specified from the dropdown menu and a comma separated list of Ensembl Stable Gene IDs to be queried should be provided (**Figure 5**). The genes are mapped to the corresponding rice orthologs based on the Ensembl Plants database. Upon submission, the validation page opens displaying information of the orthologous mapping and the unmapped genes (**Figure 6**).

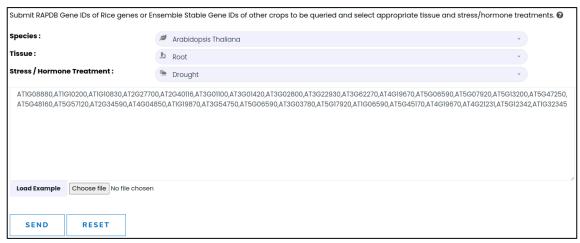


Figure 5: Example Query for Ortholog Network Query

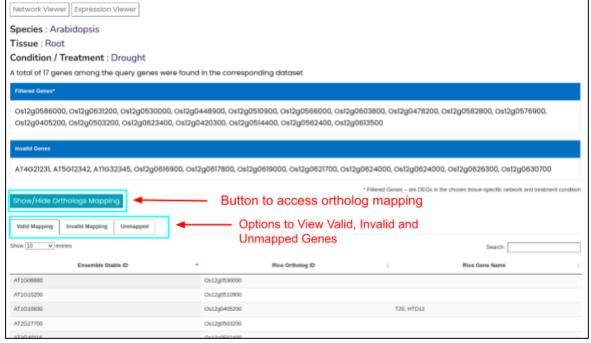


Figure 6: Validation Page displaying information of Ortholog Gene Mapping for other crops

4. Network Viewers

The users can access two viewers:

- 1. **Network Viewer:** It displays the interactions between the filtered set of queried genes, extracted from the HRR network of differentially expressed genes for the selected tissue and stress/treatment condition, shown in **Figure 7**. The nodes correspond to the genes and the edge represents a correlation between the two genes if they have a similar expression profile across time points. It can be accessed by clicking the Network Viewer button on the validation page (**Figure 4**).
- 2. **Network Neighborhood Viewer:** It displays the connections between the queried genes and their top 50 neighbours (default, max=100), selected based on the top k_{total} values among all the neighbours of the queried genes. It can be accessed from the Network Viewer options panel on the right as shown in **Figure 7**.

The network viewers consist of mainly three panels (**Figure 7**):

- 1. **View:** Main Panel displaying the network of genes.
- 2. **Options:** Located to the right of the View panel. It contains options and button triggers to access and toggle through various features of the network.
- 3. **Table:** Accessible through the 'Show/Hide Table' button below the View panel. It gives detailed information of the nodes and edges that constitute the network.



Figure 7: Network Viewer

4.1. View

The network of interacting genes is displayed in the View panel. It allows the user to interact with it, such as zooming, repositioning, and hovering over genes. The nodes in the network correspond to the filtered genes after validation and the interactions between them is extracted from HR100. However, for network neighbourhood viewer, apart from the filtered genes, their top 50 neighbours (max=100) are also shown.

4.1.1. Visuals

Various visual and interaction aspects of these two networks are discussed below.

Layout

The layout of the network is defined by the ForceAtlas2 algorithm, a force-directed algorithm that tends to make connected nodes cluster together and disconnected nodes drift apart.

Size

The size of the gene nodes is proportional to their overall degree in the complete HRR network for the given tissues and condition.

Colour

Various options are provided to toggle the colour of gene nodes in the Options panel. By default, the deepness of the colour is proportional to its degree in the complete HRR Network.

In Network Neighborhood Viewer, the query genes are encircled by Lime green colour.

Shape

Genes are represented by filled circles while, transcription factors are represented by filled triangles. The edges are curved shaped for better visibility (**Figure 8**).

Node Label

To avoid overcrowding and improve readability in the network, the labels of all the nodes are not shown all at once. The labels of only those nodes that cross a certain node size threshold across different zoom levels are displayed.

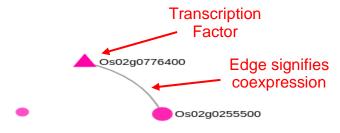


Figure 8: Visualization features of the network

4.1.2. Interaction

The different interactable features are described in this section.

Panning the complete network

Click and drag with the mouse at the stage area of the graph (i.e., the part where there are no nodes and edges present) to pan the network.

Zoom

Double click or scroll to change the zoom level. Zooming also resets the hover highlighted nodes.

Hover

On hovering over a particular node, its label and its first neighbours get highlighted (**Figure 9**).

Move a Node

Clicking over a node and then dragging it moves it relative to the network layout.

Expand ()

For a bigger view, the expand button could be clicked to hide the Options Panel and increase the view size.

Reset ()

If any node is highlighted through hover, or coloured differently using Options Panel, or zoom level has been changed, the reset button can be clicked to go back to the default settings.

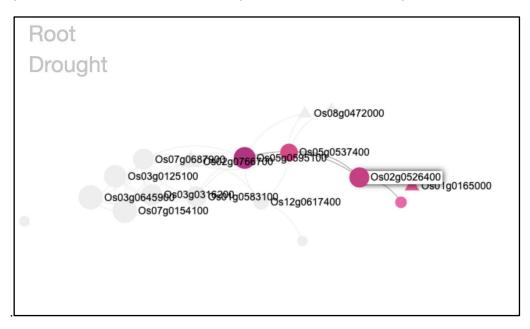


Figure 9: Hovering over a node shown.

4.2. Options

The Options Panel provides a set of features for network visualization such as view genes differentially expressed at different time-points, colouring of nodes, etc. It is placed to the right of the View Panel (**Figure** 7) and its appearance can be toggled by clicking on the expand button in the top right corner of the view panel.

Colouring Switches

The nodes in the graph can be coloured with three different schemes upon toggling the corresponding switches.

Default View

By default, the nodes in the graph are shaded based on their degree in the complete network. A darker shade corresponds to a higher degree and vice versa.

• Up/Down DEGs

This feature allows the user to view the genes that are up- and down-regulated at different time-points. From the drop-down menu, the user can select the time-point and switch on the button to enable the colouring. Nodes coloured 'Red' indicates up-regulated genes while those coloured 'Blue' indicates down-regulated genes.

Module Membership

This feature allows the user to view the genes based on their WGCNA module membership. Genes that are co-regulated and belong to the same module are likely to be part of the same biological process.

KEGG Pathways

Using this feature the user can highlight genes that belong to a specific KEGG pathway. From the drop-down menu the user can select the KEGG pathway. On selecting this option, genes that belong to the selected pathway remain coloured while others are greyed out. This option can be used along with the colouring switches to understand the up/down regulation or module membership in a particular KEGG pathway. However, the colour switches should be toggled before the selection of the pathway.

Stress / Treatment

Using this feature the user can see the network of the queried genes under other stress condition/hormone treatment. From the drop-down menu, the condition can be selected by clicking on the right arrow button. The network for the new stress/treatment condition is loaded in a new tab for comparison.

View Neighborhood

This feature is only provided in the Options Panel of the Network Viewer. In the text box enter the number of neighbours of the queried genes (default = 50) the user wishes to see. Clicking on the right arrow button next to the text box loads the neighbourhood viewer (in the same tab).

Download

The user can download the network in the View Panel as a jpg image by clicking the Download Image button.

4.3. Table

The table corresponding to the network could be expanded and collapsed using the "Show/Hide Button" below the View Panel. This table consists of information about the genes in the network view and their interactions, which are listed under the categories, Nodes and Edges.

Edges

Each row corresponds to an edge specifying the source and target gene as well as its PCC and HRR value.

Nodes

The node section consists of information about the gene nodes displayed in the network. This information has been further divided into three sections for better visibility.

• Description

Consists of Gene Name, Transcription Factor (TF) Labelling, Module Name, General Description, MSU_ID , k_{total} and link to IC4R Expression.

- On clicking over a module name, the complete network of the corresponding module (Module Viewer) gets loaded in a new tab.
- On clicking the "Click!" button under IC4R Expression, the IC4R expression profile of that gene gets loaded in a new tab.

• Function

It provides functional annotations from GO, Mapman, and KEGG pathway.

• Fold Change

Fold change and p-values across different time-points is provided here.

Hover

Upon hovering over a row in the Node Section, the corresponding node and its first neighbours get highlighted in the network in the view panel.

One can hover over a particular row in the table to select the corresponding gene. Then move the cursor outside the table panel and scroll up to the view panel to see the selected node and its neighbour.

Search

A search bar is provided on the top right part of the table. A textual search of the entered text is done across all sections and only those rows which match the search are displayed.

Download Table

The complete table can be downloaded in different formats (Copy / Excel / CSV / PDF) by selecting the corresponding button at the end of the table.

5. Expression Viewer

The Expression Viewer is a heat map-based visualization of the expression profile of queried genes across different time points. It is accessed by clicking on the Expression Viewer button on the Validation Page (**Figure 4**). Two heatmaps are shown, one for fold-change expression values and the other for *p*-values (**Figure 10**). It is built using ClustergrammerJS plugin and comes with a range of functionalities which are given below.

Sorting

On double-clicking the row or column headers, the heatmap can be sorted based on the expression values of the corresponding row or column.

Zoom

By scrolling up/down over the heatmap, the user can zoom in and out respectively.

Pan

When in a zoomed state, the user can click and drag to pan the heatmap.

Hover

On hovering over a tile in the heatmap, the fold-change value of the respective tile can be seen.

Snapshot ()

To save the image of the heatmap, the user can click on the snapshot button.

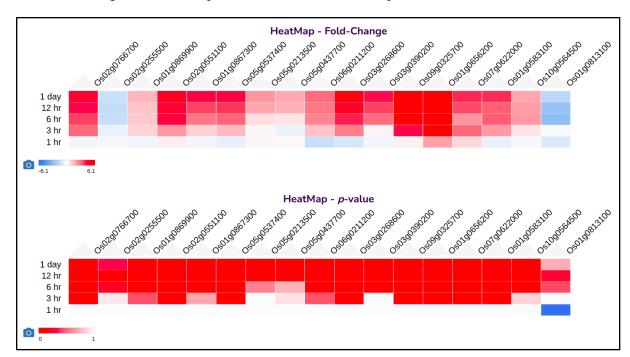


Figure 10: Expression Viewer

6. Browse

The user can browse the complete data in NetREx using the three different Browse Options which can be accessed from the Navigation bar on the Home page of the application (**Figure 2**).

6.1. Module Wise

In this option, the user can select and view tissue-specific WGCNA modules (top 100 genes) using the Module viewer option. The GO enrichment, node and edge attributes of these genes in a tabular format is also displayed which can be viewed by clicking the respective buttons shown in **Figure 11**. The user needs to select the tissue (*Root / Shoot*) and module colour name as input. On clicking the Module Viewer button, the network of the top 100 genes of the selected module can be viewed. Apart from the nodes and edges, the table also contains GO information about the corresponding module which can be accesses through the buttons depicted in **Figure 2**.

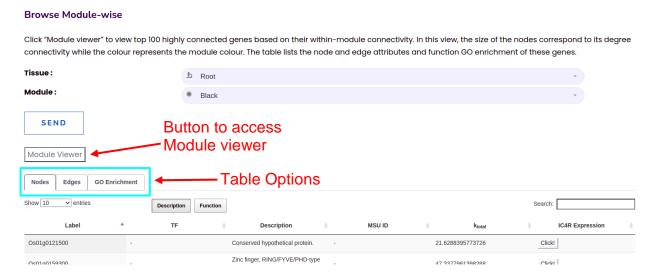


Figure 11: Module-wise browse page.

6.2. Condition Wise

In this option, the user can obtain complete details of all the genes differentially expressed in the chosen stress/hormone treatment and tissue in the table format, *viz.*, gene information, gene function and fold-change and p-values at various time-points. The user needs to select for input, the tissue (*Root / Shoot*), and the stress/hormone treatment for the species *Oryza Sativa*. This displays a table containing the complete list of differentially expressed genes for the chosen tissue and stress/hormone treatment. Three tables providing gene information, functional annotation and fold-change values at different time-points is provided.

6.3. Pathway Wise

In this option, the user can select KEGG pathways from the expandable list and visualize the network of differentially expressed genes in the chosen tissue and stress/treatment condition of the selected pathway. The user needs to select for input, the tissue (*Root / Shoot*), and the stress/hormone treatment for the species *Oryza Sativa*. A multi-select tree showing the hierarchically arranged KEGG pathways and the associated

genes are displayed. The checkboxes provided next to each pathway, sub pathways and genes may be ticked by the user for selection. Upon selection, the genes from the chosen pathways (max = 100) are displayed in the right-hand side panel (**Figure 12**). On submitting the selected genes, these are sent as query to the network and expression viewers and the user can analyze these genes as discussed above for any set of user-defined genes. A search bar option is also provided for keyword search for KEGG pathways. Thus, this feature allows the user to view genes of the select pathway(s) and their representation in the chosen tissue and stress/treatment condition.

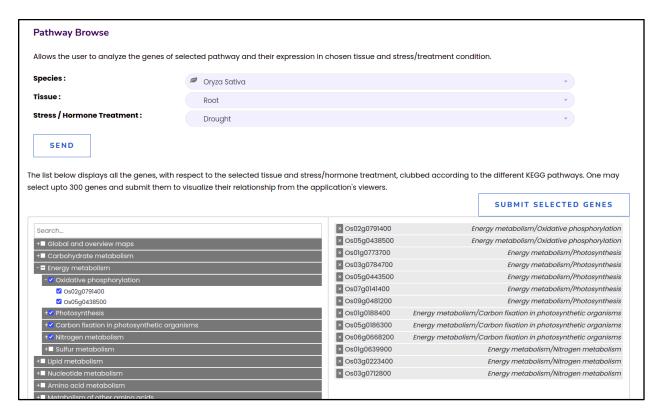


Figure 12: Selecting genes Pathway-wise.

7. Datasets

The complete raw datasets which have been used for constructing NetREx can be downloaded by the user from the Navigation Bar on the Home page in **Figure 2**. It contains data of the Node Lists for Root and Shoot tissues for various stress conditions/hormone treatments along with the fold-change values for different time-points as shown in **Figure 13**.

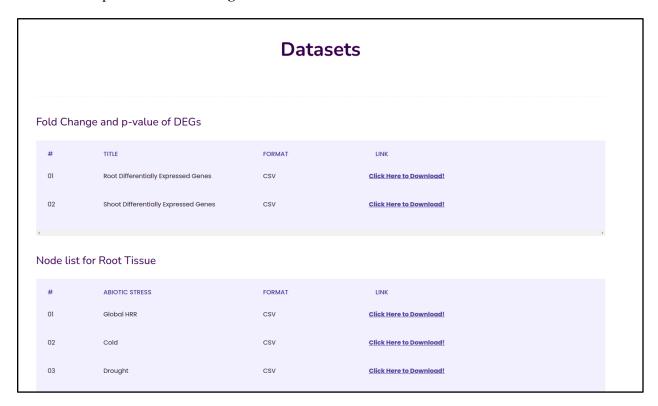


Figure 13: Dataset download Page