

KFCKU Apps

Execution Environment

Host name	Ahadian Rifky - NKC-23
Local OS	Windows 10 64bit
Katalon version	8.5.5.208
Browser	null

Summary

ID	Test Suites/Production/KFCKU Apps		
Description			
Total	22		
Passed	0	Failed	22
Error	0	Incomplete	0
Skipped	0		
Start	2023-07-11 14:35:50	End	2023-07-11 14:41:19
Elapsed	5m - 28.607s		

#	ID	Description	Status
1	Test Cases/Production/Login KFCKU Apps/Login Failed - Empty Phone Number and Password		FAILED
2	Test Cases/Production/Login KFCKU Apps/Login Failed - Phone Number Not Registered		FAILED
3	Test Cases/Production/Login KFCKU Apps/Login Failed - Wrong Password		FAILED
4	Test Cases/Production/Login KFCKU Apps/Login Social Media		FAILED
5	Test Cases/Production/Login KFCKU Apps/Login Phone Number		FAILED
6	Test Cases/Production/Home Page/Promotion		FAILED
7	Test Cases/Production/My Order/Order Detail HMD - My Order		FAILED
8	Test Cases/Production/My Order/Order Detail PNP - My Order		FAILED
9	Test Cases/Production/My Order/View All Status Order - My Order		FAILED
10	Test Cases/Production/Create Order/PNP/Dine In/Dine In - Debit Card		FAILED
11	Test Cases/Production/Create Order/PNP/Take Away/Take Away - Credit Card		FAILED
12	Test Cases/Production/Create Order/HMD/HMD - QR		FAILED
13	Test Cases/Production/Re-Buy/Rebuy		FAILED
14	Test Cases/Production/Profile/Personal Info/User Profile		FAILED
15	Test Cases/Production/Profile/Personal Info/Setting - Personal Info		FAILED

KFCKU Apps

#	ID	Description	Status
16	Test Cases/Production/Profile/General/Change Language		FAILED
17	Test Cases/Production/Profile/General/Customer Service		FAILED
18	Test Cases/Production/Profile/General/Privacy Policy		FAILED
19	Test Cases/Production/Profile/General/Term and Condition		FAILED
20	Test Cases/Production/Profile/Device/Linked Account		FAILED
21	Test Cases/Production/Profile/Device/App Version		FAILED
22	Test Cases/Production/Profile/Device/Logout		FAILED

Login Failed - Empty Phone Number and Password

Information

ID	Test Cases/Production/Login KFCKU Apps/Login Failed - Empty Phone Number and Password		
Description			
Tag			
Start	2023-07-11 14:35:51	End	2023-07-11 14:36:19
Elapsed	28.910s		
Status	FAILED		

Details

#	Description	Elapsed	Status
1	startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE) Starting app with application ID: 'com.kfc.mobile'	23.015s	PASSED
2	delay(5, STOP_ON_FAILURE) Delayed 5 second(s)	5.048s	PASSED

Login Failed - Empty Phone Number and Password

#	Description	Elapsed	Status
3	<p>tap(findTestObject("Productions/Menu/Profile"), 5)</p> <p>Failed to tap on element 'Object Repository/Productions/Menu/Profile' (Root cause: org.openqa.selenium.WebDriverException: An unknown server-side error occurred while processing the command. Original error: 'GET /window/current/size' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: com.kms.katalon.core.appium.driver.SwipeableAndroidDriver Capabilities {appActivity: com.kfc.mobile.presentation..., appPackage: com.kfc.mobile, autoGrantPermissions: true, automationName: uiautomator2, chromedriverPort: 57262, databaseEnabled: false, desired: {appActivity: com.kfc.mobile.presentation..., appPackage: com.kfc.mobile, autoGrantPermissions: true, automationName: uiautomator2, chromedriverPort: 57262, deviceId: , deviceName: OPPO CPH1803 (Android 8.1.0), newCommandTimeout: 1800, noReset: true, platform: ANDROID, platformName: android, platformVersion: 8.1.0, systemPort: 8249, udid: cefdc881}, deviceApiLevel: 27, deviceId: , deviceManufacturer: OPPO, deviceModel: CPH1803, deviceName: cefdc881, deviceScreenDensity: 320, deviceScreenSize: 720x1520, deviceUDID: cefdc881, javascriptEnabled: true, locationContextEnabled: false, networkConnectionEnabled: true, newCommandTimeout: 1800, noReset: true, pixelRatio: 2, platform: ANDROID, platformName: Android, platformVersion: 8.1.0, statBarHeight: 53, systemPort: 8249, takesScreenshot: true, udid: cefdc881, viewportRect: {height: 1467, left: 0, top: 53, width: 720}, warnings: {}, webStorageEnabled: false} Session ID: 64b056d6-23a6-4d47-aa17-48e56317fcbb at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException (W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode (W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode (W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute (HttpCommandExecutor.java:158) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:46) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteWindow.getSize(RemoteWebDriver.java:813) at org.openqa.selenium.WebDriver\$Window\$getSize.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.internal.MobileAbstractKeyword.findElement(MobileAbstractKeyword.groovy:81) at com.kms.katalon.core.mobile.keyword.builtin.TapKeyword.access\$1 (TapKeyword.groovy) at com.kms.katalon.core.mobile.keyword.builtin.TapKeyword\$_tap_closure1.doCall(TapKeyword.groovy:76) at com.kms.katalon.core.mobile.keyword.builtin.TapKeyword\$_tap_closure1.call (TapKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain.runKeyword(MobileKeywordMain.groovy:21)</p>	0.337s	FAILED

Login Failed - Empty Phone Number and Password

#	Description	Elapsed	Status
	<pre>at com.kms.katalon.core.mobile.keyword.builtin.TapKeyword.tap(TapKeyword.groovy:84) at com.kms.katalon.core.mobile.keyword.builtin.TapKeyword.execute(TapKeyword.groovy:68) at com.kms.katalon.core.keyword.internal.KeywordExecutor.executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords.tap(MobileBuiltInKeywords.groovy:1490) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords\$tap\$0.call(Unknown Source) at Login Failed - Empty Phone Number and Password.run(Login Failed - Empty Phone Number and Password:24) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine.java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor.java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor.java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase(TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase(TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase(CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase(TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java:106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java:185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36))</pre>		
4	Start listener action : sampleAfterTestCase	0.022s	PASSED

Login Failed - Phone Number Not Registered

Information

ID	Test Cases/Production/Login KFCKU Apps/Login Failed - Phone Number Not Registered		
Description			
Tag			
Start	2023-07-11 14:36:19	End	2023-07-11 14:36:27
Elapsed	7.189s		
Status	FAILED		

Details

#	Description	Elapsed	Status
---	-------------	---------	--------

Login Failed - Phone Number Not Registered

#	Description	Elapsed	Status
1	<p>startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE)</p> <p>Unable to start app with application ID: 'com.kfc.mobile' (Root cause: org.openqa.selenium.SessionNotCreatedException: Unable to create a new remote session. Please check the server log for more details. Original error: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error: socket hang up Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error: socket hang up at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base-driver\lib\jsonwp-proxy\proxy.js:274:13) at processTicksAndRejections (node:internal/process/task_queues:95:5) at AndroidUiautomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\commands\viewport.js:14:10) at AndroidUiautomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:244:28) at AndroidUiautomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:208) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver</p>	6.823s	FAILED

Login Failed - Phone Number Not Registered

#	Description	Elapsed	Status
	(AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Login Failed - Phone Number Not Registered.run(Login Failed - Phone Number Not Registered:22) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine. java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor. java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor. java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase (TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase (TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor. java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase (CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase (TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java: 106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java: 185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36) Caused by: java.lang.reflect.InvocationTargetException at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:186) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217)		

Login Failed - Phone Number Not Registered

#	Description	Elapsed	Status
	<pre>at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Script1678692716032.run(Script1678692716032.groovy:22) ... 13 more Caused by: org.openqa.selenium.WebDriverException: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error: socket hang up Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing</pre>		

Login Failed - Phone Number Not Registered

#	Description	Elapsed	Status
	<pre>the command. Original error: Could not proxy command to the remote server. Original error: socket hang up at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base- driver\lib\jsonwp-proxy\proxy.js:274:13) at processTicksAndRejections (node:internal/process/task_queues:95:5) at AndroidUiautomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\commands\viewport.js:14:10) at AndroidUiautomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:244:28) at AndroidUiautomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) at org.openqa.selenium.remote.W3CHandshakeResponse. lambda\$errorHandler\$0(W3CHandshakeResponse.java:62) at org.openqa.selenium.remote.HandshakeResponse. lambda\$getResponseFunction\$0(HandshakeResponse.java:30) at org.openqa.selenium.remote.ProtocolHandshake.lambda\$createSession\$0 (ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession (ProtocolHandshake.java:128) ... 41 more)</pre>		
2	Start listener action : sampleAfterTestCase	0.007s	PASSED

Login Failed - Wrong Password

Information

ID	Test Cases/Production/Login KFCKU Apps/Login Failed - Wrong Password		
Description			
Tag			
Start	2023-07-11 14:36:27	End	2023-07-11 14:36:34
Elapsed	7.250s		
Status	FAILED		

Details

#	Description	Elapsed	Status
---	-------------	---------	--------

Login Failed - Wrong Password

#	Description	Elapsed	Status
1	<p>startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE)</p> <p>Unable to start app with application ID: 'com.kfc.mobile' (Root cause: org.openqa.selenium.SessionNotCreatedException: Unable to create a new remote session. Please check the server log for more details. Original error: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base-driver\lib\jsonwp-proxy\proxy.js:274:13) at AndroidUiAutomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\commands\viewport.js:14:10) at AndroidUiAutomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:244:28) at AndroidUiAutomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:208) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24)</p>	6.798s	FAILED

Login Failed - Wrong Password

#	Description	Elapsed	Status
	at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Login Failed - Wrong Password.run(Login Failed - Wrong Password:20) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine. java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor. java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor. java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase (TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase (TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor. java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase (CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase (TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java: 106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java: 185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36) Caused by: java.lang.reflect.InvocationTargetException at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:186) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217)		

Login Failed - Wrong Password

#	Description	Elapsed	Status
	<pre>at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Script1678692716043.run(Script1678692716043.groovy:20) ... 13 more Caused by: org.openqa.selenium.WebDriverException: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver</pre>		

Login Failed - Wrong Password

#	Description	Elapsed	Status
	<pre>remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base- driver\lib\jsonwp-proxy\proxy.js:274:13) at AndroidUiautomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\commands\viewport.js:14:10) at AndroidUiautomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:244:28) at AndroidUiautomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) at org.openqa.selenium.remote.W3CHandshakeResponse. lambda\$errorHandler\$0(W3CHandshakeResponse.java:62) at org.openqa.selenium.remote.HandshakeResponse. lambda\$getResponseFunction\$0(HandshakeResponse.java:30) at org.openqa.selenium.remote.ProtocolHandshake.lambda\$createSession\$0 (ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession (ProtocolHandshake.java:128) ... 41 more)</pre>		
2	Start listener action : sampleAfterTestCase	0.009s	PASSED

Login Social Media

Information

ID	Test Cases/Production/Login KFCKU Apps/Login Social Media		
Description			
Tag			
Start	2023-07-11 14:36:34	End	2023-07-11 14:36:41
Elapsed	7.288s		
Status	FAILED		

Details

#	Description	Elapsed	Status
---	-------------	---------	--------

Login Social Media

#	Description	Elapsed	Status
1	<p>startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE)</p> <p>Unable to start app with application ID: 'com.kfc.mobile' (Root cause: org.openqa.selenium.SessionNotCreatedException: Unable to create a new remote session. Please check the server log for more details. Original error: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base-driver\lib\jsonwp-proxy\proxy.js:274:13) at AndroidUiAutomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\commands\viewport.js:14:10) at AndroidUiAutomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:244:28) at AndroidUiAutomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:208) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24)</p>	6.893s	FAILED

Login Social Media

#	Description	Elapsed	Status
	at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Login Social Media.run(Login Social Media:21) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine. java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor. java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor. java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase (TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase (TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor. java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase (CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase (TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java: 106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java: 185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36) Caused by: java.lang.reflect.InvocationTargetException at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:186) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217)		

Login Social Media

#	Description	Elapsed	Status
	<pre>at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Script1678692716061.run(Script1678692716061.groovy:21) ... 13 more</pre> <p>Caused by: org.openqa.selenium.WebDriverException: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver</p>		

Login Social Media

#	Description	Elapsed	Status
	<pre>remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base- driver\lib\jsonwp-proxy\proxy.js:274:13) at AndroidUiAutomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\commands\viewport.js:14:10) at AndroidUiAutomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:244:28) at AndroidUiAutomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) at org.openqa.selenium.remote.W3CHandshakeResponse. lambda\$errorHandler\$0(W3CHandshakeResponse.java:62) at org.openqa.selenium.remote.HandshakeResponse. lambda\$getResponseFunction\$0(HandshakeResponse.java:30) at org.openqa.selenium.remote.ProtocolHandshake.lambda\$createSession\$0 (ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession (ProtocolHandshake.java:128) ... 41 more)</pre>		
2	Start listener action : sampleAfterTestCase	0.006s	PASSED

Login Phone Number

Information

ID	Test Cases/Production/Login KFCKU Apps/Login Phone Number		
Description			
Tag			
Start	2023-07-11 14:36:41	End	2023-07-11 14:36:54
Elapsed	12.310s		
Status	FAILED		

Details

#	Description	Elapsed	Status
---	-------------	---------	--------

Login Phone Number

#	Description	Elapsed	Status
1	<p>startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE)</p> <p>Unable to start app with application ID: 'com.kfc.mobile' (Root cause: org.openqa.selenium.SessionNotCreatedException: Unable to create a new remote session. Please check the server log for more details. Original error: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base-driver\lib\jsonwp-proxy\proxy.js:274:13) at AndroidUiAutomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\commands\viewport.js:14:10) at AndroidUiAutomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:244:28) at AndroidUiAutomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:208) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24)</p>	12.010s	FAILED

Login Phone Number

#	Description	Elapsed	Status
	at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Login Phone Number.run(Login Phone Number:21) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine. java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor. java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor. java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase (TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase (TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor. java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase (CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase (TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java: 106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java: 185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36) Caused by: java.lang.reflect.InvocationTargetException at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:186) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217)		

Login Phone Number

#	Description	Elapsed	Status
	<pre>at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Script1678692716053.run(Script1678692716053.groovy:21) ... 13 more</pre> <p>Caused by: org.openqa.selenium.WebDriverException: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver</p>		

Login Phone Number

#	Description	Elapsed	Status
	<pre>remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base- driver\lib\jsonwp-proxy\proxy.js:274:13) at AndroidUiAutomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\commands\viewport.js:14:10) at AndroidUiAutomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:244:28) at AndroidUiAutomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) at org.openqa.selenium.remote.W3CHandshakeResponse. lambda\$errorHandler\$0(W3CHandshakeResponse.java:62) at org.openqa.selenium.remote.HandshakeResponse. lambda\$getResponseFunction\$0(HandshakeResponse.java:30) at org.openqa.selenium.remote.ProtocolHandshake.lambda\$createSession\$0 (ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession (ProtocolHandshake.java:128) ... 41 more)</pre>		
2	Start listener action : sampleAfterTestCase	0.007s	PASSED

Promotion

Information

ID	Test Cases/Production/Home Page/Promotion		
Description			
Tag			
Start	2023-07-11 14:36:54	End	2023-07-11 14:37:06
Elapsed	12.152s		
Status	FAILED		

Details

#	Description	Elapsed	Status
---	-------------	---------	--------

Promotion

#	Description	Elapsed	Status
1	<p>startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE)</p> <p>Unable to start app with application ID: 'com.kfc.mobile' (Root cause: org.openqa.selenium.SessionNotCreatedException: Unable to create a new remote session. Please check the server log for more details. Original error: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base-driver\lib\jsonwp-proxy\proxy.js:274:13) at AndroidUiAutomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\commands\viewport.js:14:10) at AndroidUiAutomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:244:28) at AndroidUiAutomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:208) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24)</p>	11.807s	FAILED

Promotion

#	Description	Elapsed	Status
	at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Promotion.run(Promotion:20) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine. java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor. java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor. java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase (TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase (TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor. java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase (CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase (TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java: 106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java: 185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36) Caused by: java.lang.reflect.InvocationTargetException at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:186) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217)		

Promotion

#	Description	Elapsed	Status
	<pre>at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Script1684221059209.run(Script1684221059209.groovy:20) ... 13 more</pre> <p>Caused by: org.openqa.selenium.WebDriverException: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver</p>		

Promotion

#	Description	Elapsed	Status
	<pre>remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base- driver\lib\jsonwp-proxy\proxy.js:274:13) at AndroidUiAutomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\commands\viewport.js:14:10) at AndroidUiAutomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:244:28) at AndroidUiAutomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) at org.openqa.selenium.remote.W3CHandshakeResponse. lambda\$errorHandler\$0(W3CHandshakeResponse.java:62) at org.openqa.selenium.remote.HandshakeResponse. lambda\$getResponseFunction\$0(HandshakeResponse.java:30) at org.openqa.selenium.remote.ProtocolHandshake.lambda\$createSession\$0 (ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession (ProtocolHandshake.java:128) ... 41 more)</pre>		
2	Start listener action : sampleAfterTestCase	0.007s	PASSED

Order Detail HMD - My Order

Information

ID	Test Cases/Production/My Order/Order Detail HMD - My Order		
Description			
Tag			
Start	2023-07-11 14:37:06	End	2023-07-11 14:37:18
Elapsed	12.329s		
Status	FAILED		

Details

#	Description	Elapsed	Status
---	-------------	---------	--------

Order Detail HMD - My Order

#	Description	Elapsed	Status
1	<p>startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE)</p> <p>Unable to start app with application ID: 'com.kfc.mobile' (Root cause: org.openqa.selenium.SessionNotCreatedException: Unable to create a new remote session. Please check the server log for more details. Original error: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base-driver\lib\jsonwp-proxy\proxy.js:274:13) at AndroidUiAutomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\commands\viewport.js:14:10) at AndroidUiAutomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:244:28) at AndroidUiAutomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:208) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24)</p>	12.034s	FAILED

Order Detail HMD - My Order

#	Description	Elapsed	Status
	at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Order Detail HMD - My Order.run(Order Detail HMD - My Order:20) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine. java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor. java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor. java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase (TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase (TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor. java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase (CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase (TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java: 106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java: 185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36) Caused by: java.lang.reflect.InvocationTargetException at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:186) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217)		

Order Detail HMD - My Order

#	Description	Elapsed	Status
	<pre>at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Script1684223337543.run(Script1684223337543.groovy:20) ... 13 more</pre> <p>Caused by: org.openqa.selenium.WebDriverException: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver</p>		

Order Detail HMD - My Order

#	Description	Elapsed	Status
	<pre>remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base- driver\lib\jsonwp-proxy\proxy.js:274:13) at AndroidUiAutomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\commands\viewport.js:14:10) at AndroidUiAutomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:244:28) at AndroidUiAutomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) at org.openqa.selenium.remote.W3CHandshakeResponse. lambda\$errorHandler\$0(W3CHandshakeResponse.java:62) at org.openqa.selenium.remote.HandshakeResponse. lambda\$getResponseFunction\$0(HandshakeResponse.java:30) at org.openqa.selenium.remote.ProtocolHandshake.lambda\$createSession\$0 (ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession (ProtocolHandshake.java:128) ... 41 more)</pre>		
2	Start listener action : sampleAfterTestCase	0.007s	PASSED

Order Detail PNP - My Order

Information

ID	Test Cases/Production/My Order/Order Detail PNP - My Order		
Description			
Tag			
Start	2023-07-11 14:37:18	End	2023-07-11 14:37:30
Elapsed	12.385s		
Status	FAILED		

Details

#	Description	Elapsed	Status
---	-------------	---------	--------

Order Detail PNP - My Order

#	Description	Elapsed	Status
1	<p>startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE)</p> <p>Unable to start app with application ID: 'com.kfc.mobile' (Root cause: org.openqa.selenium.SessionNotCreatedException: Unable to create a new remote session. Please check the server log for more details. Original error: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base-driver\lib\jsonwp-proxy\proxy.js:274:13) at AndroidUiAutomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\commands\viewport.js:14:10) at AndroidUiAutomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:244:28) at AndroidUiAutomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:208) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24)</p>	12.076s	FAILED

Order Detail PNP - My Order

#	Description	Elapsed	Status
	at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Order Detail PNP - My Order.run(Order Detail PNP - My Order:20) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine. java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor. java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor. java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase (TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase (TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor. java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase (CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase (TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java: 106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java: 185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36) Caused by: java.lang.reflect.InvocationTargetException at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:186) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217)		

Order Detail PNP - My Order

#	Description	Elapsed	Status
	<pre>at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Script1684223349647.run(Script1684223349647.groovy:20) ... 13 more Caused by: org.openqa.selenium.WebDriverException: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver</pre>		

Order Detail PNP - My Order

#	Description	Elapsed	Status
	<pre>remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base- driver\lib\jsonwp-proxy\proxy.js:274:13) at AndroidUiAutomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\commands\viewport.js:14:10) at AndroidUiAutomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:244:28) at AndroidUiAutomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) at org.openqa.selenium.remote.W3CHandshakeResponse. lambda\$errorHandler\$0(W3CHandshakeResponse.java:62) at org.openqa.selenium.remote.HandshakeResponse. lambda\$getResponseFunction\$0(HandshakeResponse.java:30) at org.openqa.selenium.remote.ProtocolHandshake.lambda\$createSession\$0 (ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession (ProtocolHandshake.java:128) ... 41 more)</pre>		
2	Start listener action : sampleAfterTestCase	0.005s	PASSED

View All Status Order - My Order

Information

ID	Test Cases/Production/My Order/View All Status Order - My Order		
Description			
Tag			
Start	2023-07-11 14:37:30	End	2023-07-11 14:37:39
Elapsed	8.529s		
Status	FAILED		

Details

#	Description	Elapsed	Status
---	-------------	---------	--------

View All Status Order - My Order

#	Description	Elapsed	Status
1	<p>startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE)</p> <p>Unable to start app with application ID: 'com.kfc.mobile' (Root cause: org.openqa.selenium.SessionNotCreatedException: Unable to create a new remote session. Please check the server log for more details. Original error: The session identified by 18cfe5dd-77f1-4f2b-9c0e-35dae61d8d38 is not known Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: io.appium.uiautomator2.common.exceptions.NoSuchDriverException: The session identified by 18cfe5dd-77f1-4f2b-9c0e-35dae61d8d38 is not known at io.appium.uiautomator2.handler.request.SafeRequestHandler.handle (SafeRequestHandler.java:54) at io.appium.uiautomator2.server.AppiumServlet.handleRequest(AppiumServlet.java:266) at io.appium.uiautomator2.server.AppiumServlet.handleHttpRequest (AppiumServlet.java:260) at io.appium.uiautomator2.http.ServerHandler.channelRead(ServerHandler.java:68) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.handler.codec.MessageToMessageDecoder.channelRead (MessageToMessageDecoder.java:102) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.channel. CombinedChannelDuplexHandler\$DelegatingChannelHandlerContext.fireChannelRead (CombinedChannelDuplexHandler.java:435) at io.netty.handler.codec.ByteToMessageDecoder.fireChannelRead (ByteToMessageDecoder.java:293) at io.netty.handler.codec.ByteToMessageDecoder.channelRead (ByteToMessageDecoder.java:267) at io.netty.channel.CombinedChannelDuplexHandler.channelRead (CombinedChannelDuplexHandler.java:250) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.handler.timeout.IdleStateHandler.channelRead(IdleStateHandler.java:266) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.channel.DefaultChannelPipeline\$HeadContext.channelRead</p>	8.165s	FAILED

View All Status Order - My Order

#	Description	Elapsed	Status
	(DefaultChannelPipeline.java:1294) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.DefaultChannelPipeline.fireChannelRead (DefaultChannelPipeline.java:911) at io.netty.channel.nio.AbstractNioByteChannel\$NioByteUnsafe.read (AbstractNioByteChannel.java:131) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java: 611) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized (NioEventLoop.java:552) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java: 466) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:438) at io.netty.util.concurrent.SingleThreadEventExecutor\$2.run (SingleThreadEventExecutor.java:140) at io.netty.util.concurrent.DefaultThreadFactory\$DefaultRunnableDecorator.run (DefaultThreadFactory.java:144) at java.lang.Thread.run(Thread.java:764) Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:208) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source)		

View All Status Order - My Order

#	Description	Elapsed	Status
	at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at View All Status Order - My Order.run(View All Status Order - My Order:20) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine. java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor. java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor. java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase (TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase (TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor. java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase (CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase (TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java: 106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java: 185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36) Caused by: java.lang.reflect.InvocationTargetException at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:186) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1)		

View All Status Order - My Order

#	Description	Elapsed	Status
131)	<pre>at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Script1684223319185.run(Script1684223319185.groovy:20) ... 13 more Caused by: org.openqa.selenium.NoSuchSessionException: The session identified by 18cfe5dd-77f1-4f2b-9c0e-35dae61d8d38 is not known Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: io.appium.uiautomator2.common.exceptions.NoSuchDriverException: The session identified by 18cfe5dd-77f1-4f2b-9c0e-35dae61d8d38 is not known at io.appium.uiautomator2.handler.request.SafeRequestHandler.handle (SafeRequestHandler.java:54) at io.appium.uiautomator2.server.AppiumServlet.handleRequest(AppiumServlet. java:266) at io.appium.uiautomator2.server.AppiumServlet.handleHttpRequest (AppiumServlet.java:260) at io.appium.uiautomator2.http.ServerHandler.channelRead(ServerHandler.java: 68)</pre>		

View All Status Order - My Order

#	Description	Elapsed	Status
	at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.handler.codec.MessageToMessageDecoder.channelRead (MessageToMessageDecoder.java:102) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.channel. CombinedChannelDuplexHandler\$DelegatingChannelHandlerContext.fireChannelRead (CombinedChannelDuplexHandler.java:435) at io.netty.handler.codec.ByteToMessageDecoder.fireChannelRead (ByteToMessageDecoder.java:293) at io.netty.handler.codec.ByteToMessageDecoder.channelRead (ByteToMessageDecoder.java:267) at io.netty.channel.CombinedChannelDuplexHandler.channelRead (CombinedChannelDuplexHandler.java:250) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.handler.timeout.IdleStateHandler.channelRead(IdleStateHandler.java: 266) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.channel.DefaultChannelPipeline\$HeadContext.channelRead (DefaultChannelPipeline.java:1294) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.DefaultChannelPipeline.fireChannelRead (DefaultChannelPipeline.java:911) at io.netty.channel.nio.AbstractNioByteChannel\$NioByteUnsafe.read (AbstractNioByteChannel.java:131) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java: 611) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized (NioEventLoop.java:552) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java: 466) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:438) at io.netty.util.concurrent.SingleThreadEventExecutor\$2.run (SingleThreadEventExecutor.java:140) at io.netty.util.concurrent.DefaultThreadFactory\$DefaultRunnableDecorator.run (DefaultThreadFactory.java:144)		

View All Status Order - My Order

#	Description	Elapsed	Status
	<pre>at java.lang.Thread.run(Thread.java:764) at org.openqa.selenium.remote.W3CHandshakeResponse. lambda\$errorHandler\$0(W3CHandshakeResponse.java:62) at org.openqa.selenium.remote.HandshakeResponse. lambda\$getResponseFunction\$0(HandshakeResponse.java:30) at org.openqa.selenium.remote.ProtocolHandshake.lambda\$createSession\$0 (ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession (ProtocolHandshake.java:128) ... 41 more)</pre>		
2	Start listener action : sampleAfterTestCase	0.005s	PASSED

Dine In - Debit Card

Information

ID	Test Cases/Production/Create Order/PNP/Dine In/Dine In - Debit Card		
Description			
Tag			
Start	2023-07-11 14:37:39	End	2023-07-11 14:37:55
Elapsed	15.794s		
Status	FAILED		

Details

#	Description	Elapsed	Status
---	-------------	---------	--------

Dine In - Debit Card

#	Description	Elapsed	Status
1	<p>startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE)</p> <p>Unable to start app with application ID: 'com.kfc.mobile' (Root cause: org.openqa.selenium.SessionNotCreatedException: Unable to create a new remote session. Please check the server log for more details. Original error: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error: socket hang up Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error: socket hang up at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base-driver\lib\jsonwp-proxy\proxy.js:274:13) at processTicksAndRejections (node:internal/process/task_queues:95:5) at AndroidUiautomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\commands\viewport.js:14:10) at AndroidUiautomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:244:28) at AndroidUiautomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:208) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver</p>	15.440s	FAILED

Dine In - Debit Card

#	Description	Elapsed	Status
	(AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Dine In - Debit Card.run(Dine In - Debit Card:20) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine. java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor. java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor. java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase (TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase (TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor. java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase (CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase (TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java: 106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java: 185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36) Caused by: java.lang.reflect.InvocationTargetException at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:186) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute		

Dine In - Debit Card

#	Description	Elapsed	Status
	<pre>(AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Script1684306862749.run(Script1684306862749.groovy:20) ... 13 more Caused by: org.openqa.selenium.WebDriverException: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error: socket hang up Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error:</pre>		

Dine In - Debit Card

#	Description	Elapsed	Status
	<pre>socket hang up at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base- driver\lib\jsonwp-proxy\proxy.js:274:13) at processTicksAndRejections (node:internal/process/task_queues:95:5) at AndroidUiautomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\commands\viewport.js:14:10) at AndroidUiautomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:244:28) at AndroidUiautomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) at org.openqa.selenium.remote.W3CHandshakeResponse. lambda\$errorHandler\$0(W3CHandshakeResponse.java:62) at org.openqa.selenium.remote.HandshakeResponse. lambda\$getResponseFunction\$0(HandshakeResponse.java:30) at org.openqa.selenium.remote.ProtocolHandshake.lambda\$createSession\$0 (ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession (ProtocolHandshake.java:128) ... 41 more)</pre>		
2	Start listener action : sampleAfterTestCase	0.007s	PASSED

Take Away - Credit Card

Information

ID	Test Cases/Production/Create Order/PNP/Take Away/Take Away - Credit Card		
Description			
Tag			
Start	2023-07-11 14:37:55	End	2023-07-11 14:37:58
Elapsed	3.645s		
Status	FAILED		

Details

#	Description	Elapsed	Status
---	-------------	---------	--------

Take Away - Credit Card

#	Description	Elapsed	Status
1	<p>startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE)</p> <p>Unable to start app with application ID: 'com.kfc.mobile' (Root cause: org.openqa.selenium.SessionNotCreatedException: Unable to create a new remote session. Please check the server log for more details. Original error: The session identified by 2ca6024f-514e-4d5e-a430-4a5d48f84a38 is not known Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: io.appium.uiautomator2.common.exceptions.NoSuchDriverException: The session identified by 2ca6024f-514e-4d5e-a430-4a5d48f84a38 is not known at io.appium.uiautomator2.handler.request.SafeRequestHandler.handle (SafeRequestHandler.java:54) at io.appium.uiautomator2.server.AppiumServlet.handleRequest(AppiumServlet.java:266) at io.appium.uiautomator2.server.AppiumServlet.handleHttpRequest (AppiumServlet.java:260) at io.appium.uiautomator2.http.ServerHandler.channelRead(ServerHandler.java:68) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.handler.codec.MessageToMessageDecoder.channelRead (MessageToMessageDecoder.java:102) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.channel. CombinedChannelDuplexHandler\$DelegatingChannelHandlerContext.fireChannelRead (CombinedChannelDuplexHandler.java:435) at io.netty.handler.codec.ByteToMessageDecoder.fireChannelRead (ByteToMessageDecoder.java:293) at io.netty.handler.codec.ByteToMessageDecoder.channelRead (ByteToMessageDecoder.java:267) at io.netty.channel.CombinedChannelDuplexHandler.channelRead (CombinedChannelDuplexHandler.java:250) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.handler.timeout.IdleStateHandler.channelRead(IdleStateHandler.java:266) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.channel.DefaultChannelPipeline\$HeadContext.channelRead</p>	3.221s	FAILED

Take Away - Credit Card

#	Description	Elapsed	Status
	(DefaultChannelPipeline.java:1294) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.DefaultChannelPipeline.fireChannelRead (DefaultChannelPipeline.java:911) at io.netty.channel.nio.AbstractNioByteChannel\$NioByteUnsafe.read (AbstractNioByteChannel.java:131) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java: 611) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized (NioEventLoop.java:552) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java: 466) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:438) at io.netty.util.concurrent.SingleThreadEventExecutor\$2.run (SingleThreadEventExecutor.java:140) at io.netty.util.concurrent.DefaultThreadFactory\$DefaultRunnableDecorator.run (DefaultThreadFactory.java:144) at java.lang.Thread.run(Thread.java:764) Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:208) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source)		

Take Away - Credit Card

#	Description	Elapsed	Status
	at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Take Away - Credit Card.run(Take Away - Credit Card:20) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine. java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor. java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor. java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase (TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase (TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor. java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase (CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase (TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java: 106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java: 185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36) Caused by: java.lang.reflect.InvocationTargetException at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:186) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1)		

Take Away - Credit Card

#	Description	Elapsed	Status
131)	<pre>at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Script1684309096509.run(Script1684309096509.groovy:20) ... 13 more Caused by: org.openqa.selenium.NoSuchSessionException: The session identified by 2ca6024f-514e-4d5e-a430-4a5d48f84a38 is not known Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: io.appium.uiautomator2.common.exceptions.NoSuchDriverException: The session identified by 2ca6024f-514e-4d5e-a430-4a5d48f84a38 is not known at io.appium.uiautomator2.handler.request.SafeRequestHandler.handle (SafeRequestHandler.java:54) at io.appium.uiautomator2.server.AppiumServlet.handleRequest(AppiumServlet. java:266) at io.appium.uiautomator2.server.AppiumServlet.handleHttpRequest (AppiumServlet.java:260) at io.appium.uiautomator2.http.ServerHandler.channelRead(ServerHandler.java: 68)</pre>		

Take Away - Credit Card

#	Description	Elapsed	Status
	at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.handler.codec.MessageToMessageDecoder.channelRead (MessageToMessageDecoder.java:102) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.channel. CombinedChannelDuplexHandler\$DelegatingChannelHandlerContext.fireChannelRead (CombinedChannelDuplexHandler.java:435) at io.netty.handler.codec.ByteToMessageDecoder.fireChannelRead (ByteToMessageDecoder.java:293) at io.netty.handler.codec.ByteToMessageDecoder.channelRead (ByteToMessageDecoder.java:267) at io.netty.channel.CombinedChannelDuplexHandler.channelRead (CombinedChannelDuplexHandler.java:250) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.handler.timeout.IdleStateHandler.channelRead(IdleStateHandler.java: 266) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.channel.DefaultChannelPipeline\$HeadContext.channelRead (DefaultChannelPipeline.java:1294) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.DefaultChannelPipeline.fireChannelRead (DefaultChannelPipeline.java:911) at io.netty.channel.nio.AbstractNioByteChannel\$NioByteUnsafe.read (AbstractNioByteChannel.java:131) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java: 611) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized (NioEventLoop.java:552) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java: 466) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:438) at io.netty.util.concurrent.SingleThreadEventExecutor\$2.run (SingleThreadEventExecutor.java:140) at io.netty.util.concurrent.DefaultThreadFactory\$DefaultRunnableDecorator.run (DefaultThreadFactory.java:144)		

Take Away - Credit Card

#	Description	Elapsed	Status
	<pre>at java.lang.Thread.run(Thread.java:764) at org.openqa.selenium.remote.W3CHandshakeResponse. lambda\$errorHandler\$0(W3CHandshakeResponse.java:62) at org.openqa.selenium.remote.HandshakeResponse. lambda\$getResponseFunction\$0(HandshakeResponse.java:30) at org.openqa.selenium.remote.ProtocolHandshake.lambda\$createSession\$0 (ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession (ProtocolHandshake.java:128) ... 41 more)</pre>		
2	Start listener action : sampleAfterTestCase	0.004s	PASSED

HMD - QR

Information

ID	Test Cases/Production/Create Order/HMD/HMD - QR		
Description			
Tag			
Start	2023-07-11 14:37:58	End	2023-07-11 14:38:14
Elapsed	16.031s		
Status	FAILED		

Details

#	Description	Elapsed	Status
---	-------------	---------	--------

HMD - QR

#	Description	Elapsed	Status
1	<p>startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE)</p> <p>Unable to start app with application ID: 'com.kfc.mobile' (Root cause: org.openqa.selenium.SessionNotCreatedException: Unable to create a new remote session. Please check the server log for more details. Original error: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error: socket hang up Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error: socket hang up at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base-driver\lib\jsonwp-proxy\proxy.js:274:13) at processTicksAndRejections (node:internal/process/task_queues:95:5) at AndroidUiautomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\commands\viewport.js:14:10) at AndroidUiautomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:244:28) at AndroidUiautomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:208) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver</p>	15.655s	FAILED

HMD - QR

#	Description	Elapsed	Status
	(AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at HMD - QR.run(HMD - QR:20) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine. java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor. java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor. java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase (TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase (TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor. java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase (CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase (TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java: 106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java: 185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36) Caused by: java.lang.reflect.InvocationTargetException at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:186) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute		

HMD - QR

#	Description	Elapsed	Status
	<pre>(AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Script1684468955837.run(Script1684468955837.groovy:20) ... 13 more Caused by: org.openqa.selenium.WebDriverException: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error: socket hang up Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error:</pre>		

HMD - QR

#	Description	Elapsed	Status
	<pre>socket hang up at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base- driver\lib\jsonwp-proxy\proxy.js:274:13) at processTicksAndRejections (node:internal/process/task_queues:95:5) at AndroidUiautomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\commands\viewport.js:14:10) at AndroidUiautomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:244:28) at AndroidUiautomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) at org.openqa.selenium.remote.W3CHandshakeResponse. lambda\$errorHandler\$0(W3CHandshakeResponse.java:62) at org.openqa.selenium.remote.HandshakeResponse. lambda\$getResponseFunction\$0(HandshakeResponse.java:30) at org.openqa.selenium.remote.ProtocolHandshake.lambda\$createSession\$0 (ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession (ProtocolHandshake.java:128) ... 41 more)</pre>		
2	Start listener action : sampleAfterTestCase	0.004s	PASSED

Rebuy

Information

ID	Test Cases/Production/Re-Buy/Rebuy		
Description			
Tag			
Start	2023-07-11 14:38:14	End	2023-07-11 14:38:27
Elapsed	12.118s		
Status	FAILED		

Details

#	Description	Elapsed	Status
---	-------------	---------	--------

Rebuy

#	Description	Elapsed	Status
1	<p>startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE)</p> <p>Unable to start app with application ID: 'com.kfc.mobile' (Root cause: org.openqa.selenium.SessionNotCreatedException: Unable to create a new remote session. Please check the server log for more details. Original error: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base-driver\lib\jsonwp-proxy\proxy.js:274:13) at AndroidUiAutomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\commands\viewport.js:14:10) at AndroidUiAutomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:244:28) at AndroidUiAutomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:208) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24)</p>	11.778s	FAILED

Rebuy

#	Description	Elapsed	Status
	at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Rebuy.run(Rebuy:20) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine. java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor. java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor. java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase (TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase (TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor. java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase (CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase (TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java: 106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java: 185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36) Caused by: java.lang.reflect.InvocationTargetException at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:186) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217)		

Rebuy

#	Description	Elapsed	Status
	<pre>at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Script1684481777831.run(Script1684481777831.groovy:20) ... 13 more</pre> <p>Caused by: org.openqa.selenium.WebDriverException: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver</p>		

Rebuy

#	Description	Elapsed	Status
	<pre>remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: 'GET /appium/device/pixel_ratio' cannot be proxied to UiAutomator2 server because the instrumentation process is not running (probably crashed). Check the server log and/or the logcat output for more details at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base- driver\lib\jsonwp-proxy\proxy.js:274:13) at AndroidUiAutomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\commands\viewport.js:14:10) at AndroidUiAutomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:244:28) at AndroidUiAutomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) at org.openqa.selenium.remote.W3CHandshakeResponse. lambda\$errorHandler\$0(W3CHandshakeResponse.java:62) at org.openqa.selenium.remote.HandshakeResponse. lambda\$getResponseFunction\$0(HandshakeResponse.java:30) at org.openqa.selenium.remote.ProtocolHandshake.lambda\$createSession\$0 (ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession (ProtocolHandshake.java:128) ... 41 more)</pre>		
2	Start listener action : sampleAfterTestCase	0.004s	PASSED

User Profile

Information

ID	Test Cases/Production/Profile/Personal Info/User Profile		
Description			
Tag			
Start	2023-07-11 14:38:27	End	2023-07-11 14:38:42
Elapsed	15.634s		
Status	FAILED		

Details

#	Description	Elapsed	Status
---	-------------	---------	--------

User Profile

#	Description	Elapsed	Status
1	<p>startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE)</p> <p>Unable to start app with application ID: 'com.kfc.mobile' (Root cause: org.openqa.selenium.SessionNotCreatedException: Unable to create a new remote session. Please check the server log for more details. Original error: An unknown server-side error occurred while processing the command. Original error: The instrumentation process cannot be initialized. Make sure the application under test does not crash and investigate the logcat output. Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: The instrumentation process cannot be initialized. Make sure the application under test does not crash and investigate the logcat output. at getResponseForW3CError (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base-driver\lib\protocol\errors.js:804:9) at asyncHandler (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base-driver\lib\protocol\protocol.js:380:37) Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:208) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory.startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword\$_startApplication_closure1.doCall</p>	15.312s	FAILED

User Profile

#	Description	Elapsed	Status
	(StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at User Profile.run(User Profile:20) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine. java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor. java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor. java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase (TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase (TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor. java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase (CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase (TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java: 106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java: 185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36) Caused by: java.lang.reflect.InvocationTargetException at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:186) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1)		

User Profile

#	Description	Elapsed	Status
131)	<pre>at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Script1684218486765.run(Script1684218486765.groovy:20) ... 13 more Caused by: org.openqa.selenium.WebDriverException: An unknown server-side error occurred while processing the command. Original error: The instrumentation process cannot be initialized. Make sure the application under test does not crash and investigate the logcat output. Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: The instrumentation process cannot be initialized. Make sure the application under test does not crash and investigate the logcat output. at getResponseForW3CError (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base- driver\lib\protocol\errors.js:804:9) at asyncHandler (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base- driver\lib\protocol\protocol.js:380:37) at org.openqa.selenium.remote.W3CHandshakeResponse.</pre>		

User Profile

#	Description	Elapsed	Status
	<pre>lambda\$errorHandler\$0(W3CHandshakeResponse.java:62) at org.openqa.selenium.remote.HandshakeResponse. lambda\$getResponseFunction\$0(HandshakeResponse.java:30) at org.openqa.selenium.remote.ProtocolHandshake.lambda\$createSession\$0 (ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession (ProtocolHandshake.java:128) ... 41 more)</pre>		
2	Start listener action : sampleAfterTestCase	0.006s	PASSED

Setting - Personal Info

Information

ID	Test Cases/Production/Profile/Personal Info/Setting - Personal Info		
Description			
Tag			
Start	2023-07-11 14:38:42	End	2023-07-11 14:38:50
Elapsed	7.463s		
Status	FAILED		

Details

#	Description	Elapsed	Status
---	-------------	---------	--------

Setting - Personal Info

#	Description	Elapsed	Status
1	<p>startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE)</p> <p>Unable to start app with application ID: 'com.kfc.mobile' (Root cause: org.openqa.selenium.SessionNotCreatedException: Unable to create a new remote session. Please check the server log for more details. Original error: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error: socket hang up Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error: socket hang up at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base-driver\lib\jsonwp-proxy\proxy.js:274:13) at processTicksAndRejections (node:internal/process/task_queues:95:5) at AndroidUiautomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\commands\viewport.js:14:10) at AndroidUiautomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:244:28) at AndroidUiautomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:208) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver</p>	7.134s	FAILED

Setting - Personal Info

#	Description	Elapsed	Status
	(AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Setting - Personal Info.run(Setting - Personal Info:20) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine. java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor. java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor. java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase (TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase (TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor. java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase (CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase (TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java: 106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java: 185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36) Caused by: java.lang.reflect.InvocationTargetException at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:186) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute		

Setting - Personal Info

#	Description	Elapsed	Status
	<pre>(AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Script1684218639552.run(Script1684218639552.groovy:20) ... 13 more Caused by: org.openqa.selenium.WebDriverException: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error: socket hang up Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error:</pre>		

Setting - Personal Info

#	Description	Elapsed	Status
	<pre>socket hang up at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base- driver\lib\jsonwp-proxy\proxy.js:274:13) at processTicksAndRejections (node:internal/process/task_queues:95:5) at AndroidUiautomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\commands\viewport.js:14:10) at AndroidUiautomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:244:28) at AndroidUiautomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) at org.openqa.selenium.remote.W3CHandshakeResponse. lambda\$errorHandler\$0(W3CHandshakeResponse.java:62) at org.openqa.selenium.remote.HandshakeResponse. lambda\$getResponseFunction\$0(HandshakeResponse.java:30) at org.openqa.selenium.remote.ProtocolHandshake.lambda\$createSession\$0 (ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession (ProtocolHandshake.java:128) ... 41 more)</pre>		
2	Start listener action : sampleAfterTestCase	0.008s	PASSED

Change Language

Information

ID	Test Cases/Production/Profile/General/Change Language		
Description			
Tag			
Start	2023-07-11 14:38:50	End	2023-07-11 14:38:57
Elapsed	7.377s		
Status	FAILED		

Details

#	Description	Elapsed	Status
---	-------------	---------	--------

Change Language

#	Description	Elapsed	Status
1	<p>startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE)</p> <p>Unable to start app with application ID: 'com.kfc.mobile' (Root cause: org.openqa.selenium.SessionNotCreatedException: Unable to create a new remote session. Please check the server log for more details. Original error: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error: socket hang up Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error: socket hang up at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base-driver\lib\jsonwp-proxy\proxy.js:274:13) at processTicksAndRejections (node:internal/process/task_queues:95:5) at AndroidUiautomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\commands\viewport.js:14:10) at AndroidUiautomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:244:28) at AndroidUiautomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:208) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver</p>	6.848s	FAILED

Change Language

#	Description	Elapsed	Status
	(AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Change Language.run(Change Language:20) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine. java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor. java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor. java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase (TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase (TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor. java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase (CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase (TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java: 106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java: 185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36) Caused by: java.lang.reflect.InvocationTargetException at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:186) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute		

Change Language

#	Description	Elapsed	Status
	<pre>(AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Script1684219606298.run(Script1684219606298.groovy:20) ... 13 more Caused by: org.openqa.selenium.WebDriverException: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error: socket hang up Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error:</pre>		

Change Language

#	Description	Elapsed	Status
	<pre>socket hang up at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base- driver\lib\jsonwp-proxy\proxy.js:274:13) at processTicksAndRejections (node:internal/process/task_queues:95:5) at AndroidUiautomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\commands\viewport.js:14:10) at AndroidUiautomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:244:28) at AndroidUiautomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) at org.openqa.selenium.remote.W3CHandshakeResponse. lambda\$errorHandler\$0(W3CHandshakeResponse.java:62) at org.openqa.selenium.remote.HandshakeResponse. lambda\$getResponseFunction\$0(HandshakeResponse.java:30) at org.openqa.selenium.remote.ProtocolHandshake.lambda\$createSession\$0 (ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession (ProtocolHandshake.java:128) ... 41 more)</pre>		
2	Start listener action : sampleAfterTestCase	0.005s	PASSED

Customer Service

Information

ID	Test Cases/Production/Profile/General/Customer Service		
Description			
Tag			
Start	2023-07-11 14:38:57	End	2023-07-11 14:39:06
Elapsed	8.582s		
Status	FAILED		

Details

#	Description	Elapsed	Status
---	-------------	---------	--------

Customer Service

#	Description	Elapsed	Status
1	<p>startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE)</p> <p>Unable to start app with application ID: 'com.kfc.mobile' (Root cause: org.openqa.selenium.SessionNotCreatedException: Unable to create a new remote session. Please check the server log for more details. Original error: The session identified by 7b45d726-3635-4cf5-8a56-7444a1872909 is not known Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: io.appium.uiautomator2.common.exceptions.NoSuchDriverException: The session identified by 7b45d726-3635-4cf5-8a56-7444a1872909 is not known at io.appium.uiautomator2.handler.request.SafeRequestHandler.handle (SafeRequestHandler.java:54) at io.appium.uiautomator2.server.AppiumServlet.handleRequest(AppiumServlet.java:266) at io.appium.uiautomator2.server.AppiumServlet.handleHttpRequest (AppiumServlet.java:260) at io.appium.uiautomator2.http.ServerHandler.channelRead(ServerHandler.java:68) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.handler.codec.MessageToMessageDecoder.channelRead (MessageToMessageDecoder.java:102) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.channel. CombinedChannelDuplexHandler\$DelegatingChannelHandlerContext.fireChannelRead (CombinedChannelDuplexHandler.java:435) at io.netty.handler.codec.ByteToMessageDecoder.fireChannelRead (ByteToMessageDecoder.java:293) at io.netty.handler.codec.ByteToMessageDecoder.channelRead (ByteToMessageDecoder.java:267) at io.netty.channel.CombinedChannelDuplexHandler.channelRead (CombinedChannelDuplexHandler.java:250) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.handler.timeout.IdleStateHandler.channelRead(IdleStateHandler.java:266) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.channel.DefaultChannelPipeline\$HeadContext.channelRead</p>	8.228s	FAILED

Customer Service

#	Description	Elapsed	Status
	(DefaultChannelPipeline.java:1294) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.DefaultChannelPipeline.fireChannelRead (DefaultChannelPipeline.java:911) at io.netty.channel.nio.AbstractNioByteChannel\$NioByteUnsafe.read (AbstractNioByteChannel.java:131) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java: 611) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized (NioEventLoop.java:552) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java: 466) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:438) at io.netty.util.concurrent.SingleThreadEventExecutor\$2.run (SingleThreadEventExecutor.java:140) at io.netty.util.concurrent.DefaultThreadFactory\$DefaultRunnableDecorator.run (DefaultThreadFactory.java:144) at java.lang.Thread.run(Thread.java:764) Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:208) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source)		

Customer Service

#	Description	Elapsed	Status
	at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Customer Service.run(Customer Service:20) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine. java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor. java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor. java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase (TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase (TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor. java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase (CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase (TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java: 106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java: 185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36) Caused by: java.lang.reflect.InvocationTargetException at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:186) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1)		

Customer Service

#	Description	Elapsed	Status
131)	<pre>at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Script1684220605728.run(Script1684220605728.groovy:20) ... 13 more Caused by: org.openqa.selenium.NoSuchSessionException: The session identified by 7b45d726-3635-4cf5-8a56-7444a1872909 is not known Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: io.appium.uiautomator2.common.exceptions.NoSuchDriverException: The session identified by 7b45d726-3635-4cf5-8a56-7444a1872909 is not known at io.appium.uiautomator2.handler.request.SafeRequestHandler.handle (SafeRequestHandler.java:54) at io.appium.uiautomator2.server.AppiumServlet.handleRequest(AppiumServlet. java:266) at io.appium.uiautomator2.server.AppiumServlet.handleHttpRequest (AppiumServlet.java:260) at io.appium.uiautomator2.http.ServerHandler.channelRead(ServerHandler.java: 68)</pre>		

Customer Service

#	Description	Elapsed	Status
	at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.handler.codec.MessageToMessageDecoder.channelRead (MessageToMessageDecoder.java:102) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.channel. CombinedChannelDuplexHandler\$DelegatingChannelHandlerContext.fireChannelRead (CombinedChannelDuplexHandler.java:435) at io.netty.handler.codec.ByteToMessageDecoder.fireChannelRead (ByteToMessageDecoder.java:293) at io.netty.handler.codec.ByteToMessageDecoder.channelRead (ByteToMessageDecoder.java:267) at io.netty.channel.CombinedChannelDuplexHandler.channelRead (CombinedChannelDuplexHandler.java:250) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.handler.timeout.IdleStateHandler.channelRead(IdleStateHandler.java: 266) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.channel.DefaultChannelPipeline\$HeadContext.channelRead (DefaultChannelPipeline.java:1294) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.DefaultChannelPipeline.fireChannelRead (DefaultChannelPipeline.java:911) at io.netty.channel.nio.AbstractNioByteChannel\$NioByteUnsafe.read (AbstractNioByteChannel.java:131) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java: 611) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized (NioEventLoop.java:552) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java: 466) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:438) at io.netty.util.concurrent.SingleThreadEventExecutor\$2.run (SingleThreadEventExecutor.java:140) at io.netty.util.concurrent.DefaultThreadFactory\$DefaultRunnableDecorator.run (DefaultThreadFactory.java:144)		

Customer Service

#	Description	Elapsed	Status
	<pre>at java.lang.Thread.run(Thread.java:764) at org.openqa.selenium.remote.W3CHandshakeResponse. lambda\$ErrorHandler\$0(W3CHandshakeResponse.java:62) at org.openqa.selenium.remote.HandshakeResponse. lambda\$getResponseFunction\$0(HandshakeResponse.java:30) at org.openqa.selenium.remote.ProtocolHandshake.lambda\$createSession\$0 (ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession (ProtocolHandshake.java:128) ... 41 more)</pre>		
2	Start listener action : sampleAfterTestCase	0.006s	PASSED

Privacy Policy

Information

ID	Test Cases/Production/Profile/General/Privacy Policy		
Description			
Tag			
Start	2023-07-11 14:39:06	End	2023-07-11 14:39:18
Elapsed	12.263s		
Status	FAILED		

Details

#	Description	Elapsed	Status
---	-------------	---------	--------

Privacy Policy

#	Description	Elapsed	Status
1	<p>startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE)</p> <p>Unable to start app with application ID: 'com.kfc.mobile' (Root cause: org.openqa.selenium.SessionNotCreatedException: Unable to create a new remote session. Please check the server log for more details. Original error: The session identified by a4a2f6ca-70de-4229-8698-3a6c6d70836d is not known Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: io.appium.uiautomator2.common.exceptions.NoSuchDriverException: The session identified by a4a2f6ca-70de-4229-8698-3a6c6d70836d is not known at io.appium.uiautomator2.handler.request.SafeRequestHandler.handle (SafeRequestHandler.java:54) at io.appium.uiautomator2.server.AppiumServlet.handleRequest(AppiumServlet.java:266) at io.appium.uiautomator2.server.AppiumServlet.handleHttpRequest (AppiumServlet.java:260) at io.appium.uiautomator2.http.ServerHandler.channelRead(ServerHandler.java:68) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.handler.codec.MessageToMessageDecoder.channelRead (MessageToMessageDecoder.java:102) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.channel. CombinedChannelDuplexHandler\$DelegatingChannelHandlerContext.fireChannelRead (CombinedChannelDuplexHandler.java:435) at io.netty.handler.codec.ByteToMessageDecoder.fireChannelRead (ByteToMessageDecoder.java:293) at io.netty.handler.codec.ByteToMessageDecoder.channelRead (ByteToMessageDecoder.java:267) at io.netty.channel.CombinedChannelDuplexHandler.channelRead (CombinedChannelDuplexHandler.java:250) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.handler.timeout.IdleStateHandler.channelRead(IdleStateHandler.java:266) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.channel.DefaultChannelPipeline\$HeadContext.channelRead</p>	11.957s	FAILED

Privacy Policy

#	Description	Elapsed	Status
	(DefaultChannelPipeline.java:1294) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.DefaultChannelPipeline.fireChannelRead (DefaultChannelPipeline.java:911) at io.netty.channel.nio.AbstractNioByteChannel\$NioByteUnsafe.read (AbstractNioByteChannel.java:131) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java: 611) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized (NioEventLoop.java:552) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java: 466) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:438) at io.netty.util.concurrent.SingleThreadEventExecutor\$2.run (SingleThreadEventExecutor.java:140) at io.netty.util.concurrent.DefaultThreadFactory\$DefaultRunnableDecorator.run (DefaultThreadFactory.java:144) at java.lang.Thread.run(Thread.java:764) Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:208) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source)		

Privacy Policy

#	Description	Elapsed	Status
	at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Privacy Policy.run(Privacy Policy:20) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine. java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor. java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor. java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase (TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase (TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor. java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase (CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase (TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java: 106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java: 185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36) Caused by: java.lang.reflect.InvocationTargetException at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:186) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1)		

Privacy Policy

#	Description	Elapsed	Status
131)	<pre>at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Script1684220524812.run(Script1684220524812.groovy:20) ... 13 more Caused by: org.openqa.selenium.NoSuchSessionException: The session identified by a4a2f6ca-70de-4229-8698-3a6c6d70836d is not known Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: io.appium.uiautomator2.common.exceptions.NoSuchDriverException: The session identified by a4a2f6ca-70de-4229-8698-3a6c6d70836d is not known at io.appium.uiautomator2.handler.request.SafeRequestHandler.handle (SafeRequestHandler.java:54) at io.appium.uiautomator2.server.AppiumServlet.handleRequest(AppiumServlet. java:266) at io.appium.uiautomator2.server.AppiumServlet.handleHttpRequest (AppiumServlet.java:260) at io.appium.uiautomator2.http.ServerHandler.channelRead(ServerHandler.java: 68)</pre>		

Privacy Policy

#	Description	Elapsed	Status
	at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.handler.codec.MessageToMessageDecoder.channelRead (MessageToMessageDecoder.java:102) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.channel. CombinedChannelDuplexHandler\$DelegatingChannelHandlerContext.fireChannelRead (CombinedChannelDuplexHandler.java:435) at io.netty.handler.codec.ByteToMessageDecoder.fireChannelRead (ByteToMessageDecoder.java:293) at io.netty.handler.codec.ByteToMessageDecoder.channelRead (ByteToMessageDecoder.java:267) at io.netty.channel.CombinedChannelDuplexHandler.channelRead (CombinedChannelDuplexHandler.java:250) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.handler.timeout.IdleStateHandler.channelRead(IdleStateHandler.java: 266) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.AbstractChannelHandlerContext.fireChannelRead (AbstractChannelHandlerContext.java:345) at io.netty.channel.DefaultChannelPipeline\$HeadContext.channelRead (DefaultChannelPipeline.java:1294) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:366) at io.netty.channel.AbstractChannelHandlerContext.invokeChannelRead (AbstractChannelHandlerContext.java:352) at io.netty.channel.DefaultChannelPipeline.fireChannelRead (DefaultChannelPipeline.java:911) at io.netty.channel.nio.AbstractNioByteChannel\$NioByteUnsafe.read (AbstractNioByteChannel.java:131) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java: 611) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized (NioEventLoop.java:552) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java: 466) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:438) at io.netty.util.concurrent.SingleThreadEventExecutor\$2.run (SingleThreadEventExecutor.java:140) at io.netty.util.concurrent.DefaultThreadFactory\$DefaultRunnableDecorator.run (DefaultThreadFactory.java:144)		

Privacy Policy

#	Description	Elapsed	Status
	<div>at java.lang.Thread.run(Thread.java:764)</div> <div>at org.openqa.selenium.remote.W3CHandshakeResponse. lambda\$errorHandler\$0(W3CHandshakeResponse.java:62)</div> <div>at org.openqa.selenium.remote.HandshakeResponse. lambda\$getResponseFunction\$0(HandshakeResponse.java:30)</div> <div>at org.openqa.selenium.remote.ProtocolHandshake.lambda\$createSession\$0 (ProtocolHandshake.java:126)</div> <div>at org.openqa.selenium.remote.ProtocolHandshake.createSession (ProtocolHandshake.java:128)</div> <div>... 41 more</div> <div>)</div>		
2	Start listener action : sampleAfterTestCase	0.004s	PASSED

Term and Condition

Information

ID	Test Cases/Production/Profile/General/Term and Condition		
Description			
Tag			
Start	2023-07-11 14:39:18	End	2023-07-11 14:39:47
Elapsed	29.161s		
Status	FAILED		

Details

#	Description	Elapsed	Status
---	-------------	---------	--------

Term and Condition

#	Description	Elapsed	Status
1	<p>startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE)</p> <p>Unable to start app with application ID: 'com.kfc.mobile' (Root cause: org.openqa.selenium.SessionNotCreatedException: Unable to create a new remote session. Please check the server log for more details. Original error: An unknown server-side error occurred while processing the command. Original error: Cannot start the 'com.kfc.mobile' application. Visit https://github.com/appium/appium/blob/master/docs/en/writing-running-appium/android/activity-startup.md for troubleshooting. Original error: Error executing adbExec. Original error: 'Command "C:\Users\Ahadian Rifky\katalon\tools\android_sdk\platform-tools\adb.exe" -P 5037 -s cefdc881 shell am start -W -n com.kfc.mobile/com.kfc.mobile.presentation.splash.SplashActivity -S -a android.intent.action.MAIN -c android.intent.category.LAUNCHER -f 0x10200000' timed out after 20000ms'. Try to increase the 20000ms adb execution timeout represented by 'adbExecTimeout' capability</p> <p>Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53'</p> <p>System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282'</p> <p>Driver info: driver.version: MobileDriverFactory\$startMobileDriver</p> <p>remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: Cannot start the 'com.kfc.mobile' application. Visit https://github.com/appium/appium/blob/master/docs/en/writing-running-appium/android/activity-startup.md for troubleshooting. Original error: Error executing adbExec. Original error: 'Command "C:\Users\Ahadian Rifky\katalon\tools\android_sdk\platform-tools\adb.exe" -P 5037 -s cefdc881 shell am start -W -n com.kfc.mobile/com.kfc.mobile.presentation.splash.SplashActivity -S -a android.intent.action.MAIN -c android.intent.category.LAUNCHER -f 0x10200000' timed out after 20000ms'. Try to increase the 20000ms adb execution timeout represented by 'adbExecTimeout' capability</p> <p>at getResponseForW3CError (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base-driver\lib\protocol\errors.js:804:9)</p> <p>at asyncHandler (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base-driver\lib\protocol\protocol.js:380:37)</p> <p>Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53'</p> <p>System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282'</p> <p>Driver info: driver.version: MobileDriverFactory\$startMobileDriver</p> <p>at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:208)</p> <p>at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217)</p> <p>at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552)</p> <p>at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42)</p> <p>at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1)</p> <p>at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1)</p> <p>at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:131)</p> <p>at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38)</p> <p>at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84)</p>	28.847s	FAILED

Term and Condition

#	Description	Elapsed	Status
	at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Term and Condition.run(Term and Condition:20) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine. java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor. java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor. java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase (TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase (TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor. java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase (CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase (TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java: 106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java: 185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36) Caused by: java.lang.reflect.InvocationTargetException at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession		

Term and Condition

#	Description	Elapsed	Status
	(AppiumCommandExecutor.java:186) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltinKeywords. startExistingApplication(MobileBuiltinKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltinKeywords\$startExistingApplication.call(Unknown Source) at Script1684220410024.run(Script1684220410024.groovy:20) ... 13 more Caused by: org.openqa.selenium.WebDriverException: An unknown server-side error occurred while processing the command. Original error: Cannot start the 'com.kfc.mobile' application. Visit https://github.com/appium/appium/blob/master/docs/en/writing-running-appium/android/activity-startup.md for troubleshooting. Original error: Error executing adbExec. Original error: 'Command "C:\Users\Ahadian Rifky\		

Term and Condition

#	Description	Elapsed	Status
	<pre>katalon\tools\android_sdk\platform-tools\adb.exe' -P 5037 -s cefdc881 shell am start -W -n com.kfc.mobile/com.kfc.mobile.presentation.splash.SplashActivity -S -a android.intent.action.MAIN -c android.intent.category.LAUNCHER -f 0x10200000' timed out after 20000ms'. Try to increase the 20000ms adb execution timeout represented by 'adbExecTimeout' capability Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: Cannot start the 'com.kfc.mobile' application. Visit https://github.com/appium/appium/blob/master/docs/en/writing-running-appium/android/activity-startup.md for troubleshooting. Original error: Error executing adbExec. Original error: 'Command "C:\Users\Ahadian Rifky\katalon\tools\android_sdk\platform-tools\adb.exe' -P 5037 -s cefdc881 shell am start -W -n com.kfc.mobile/com.kfc.mobile.presentation.splash.SplashActivity -S -a android.intent.action.MAIN -c android.intent.category.LAUNCHER -f 0x10200000' timed out after 20000ms'. Try to increase the 20000ms adb execution timeout represented by 'adbExecTimeout' capability at getResponseForW3CError (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base-driver\lib\protocol\errors.js:804:9) at asyncHandler (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base-driver\lib\protocol\protocol.js:380:37) at org.openqa.selenium.remote.W3CHandshakeResponse. lambda\$errorHandler\$0(W3CHandshakeResponse.java:62) at org.openqa.selenium.remote.HandshakeResponse. lambda\$getResponseFunction\$0(HandshakeResponse.java:30) at org.openqa.selenium.remote.ProtocolHandshake.lambda\$createSession\$0(ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:128) ... 41 more)</pre>		
2	Start listener action : sampleAfterTestCase	0.004s	PASSED

Linked Account

Information

ID	Test Cases/Production/Profile/Device/Linked Account		
Description			
Tag			
Start	2023-07-11 14:39:47	End	2023-07-11 14:40:12
Elapsed	25.403s		
Status	FAILED		

Details

#	Description	Elapsed	Status
1	startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE) Starting app with application ID: 'com.kfc.mobile'	13.674s	PASSED
2	delay(5, STOP_ON_FAILURE) Delayed 5 second(s)	5.011s	PASSED
3	tap(findTestObject("Productions/Menu/Profile"), 0) Tapped on element 'Object Repository/Productions/Menu/Profile'	2.269s	PASSED

Linked Account

#	Description	Elapsed	Status
4	<p>tap(findTestObject("Productions/General/Linked Account/Menu - Linked Account"), 3)</p> <p>Failed to tap on element 'Object Repository/Productions/General/Linked Account/Menu - Linked Account' (Root cause: com.kms.katalon.core.exception.StepFailedException: Object Object Repository/Productions/General/Linked Account/Menu - Linked Account not found at com.kms.katalon.core.keyword.internal.KeywordMain.stepFailed(KeywordMain.groovy:50) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain.stepFailed(MobileKeywordMain.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin.TapKeyword\$_tap_closure1.doCall(TapKeyword.groovy:79) at com.kms.katalon.core.mobile.keyword.builtin.TapKeyword\$_tap_closure1.call(TapKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain.runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.builtin.TapKeyword.tap(TapKeyword.groovy:84) at com.kms.katalon.core.mobile.keyword.builtin.TapKeyword.execute(TapKeyword.groovy:68) at com.kms.katalon.core.keyword.internal.KeywordExecutor.executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords.tap(MobileBuiltInKeywords.groovy:1490) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords\$tap\$0.call(Unknown Source) at Linked Account.run(Linked Account:26) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine.java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor.java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor.java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase(TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase(TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase(CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase(TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java:106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java:185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36))</p>	4.182s	FAILED

Linked Account

#	Description	Elapsed	Status
	<div><div><div><div><div>14:40</div><div>📶</div><div>🔊</div><div>🔋</div></div><div><div>←</div><div><div><div>SIGN IN</div><div>To unlock all features</div></div><div><div>KFC</div><div>Jagonye Agam!</div></div></div></div></div><div><div>Phone Number</div><div><div>📞</div><div>Enter your phone number</div></div></div><div><div>Password</div><div><div>🔒</div><div>Type your password</div><div>👁</div></div></div><div><div>Forgot Password</div></div><div><div>Sign In</div></div><div><div>Don't have an account?</div><div>Register here</div></div><div><div>OR SIGN IN WITH</div><div></div></div><div><div><div><div>🌐</div><div>Sign in with Google</div></div></div></div><div><div>By signing in or registering, you agree to our</div><div>Terms & Conditions</div><div>and</div><div>Privacy Policy</div></div></div></div>		

Linked Account

#	Description	Elapsed	Status
5	Start listener action : sampleAfterTestCase	0.004s	PASSED

App Version

Information

ID	Test Cases/Production/Profile/Device/App Version		
Description			
Tag			
Start	2023-07-11 14:40:12	End	2023-07-11 14:41:03
Elapsed	50.355s		
Status	FAILED		

Details


#	Description	Elapsed	Status
1	startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE) Starting app with application ID: 'com.kfc.mobile'	13.786s	PASSED
2	delay(5, STOP_ON_FAILURE) Delayed 5 second(s)	5.018s	PASSED

App Version

#	Description	Elapsed	Status
3	tap(findTestObject("Productions/Menu/Profile"), 0) Failed to tap on element 'Object Repository/Productions/Menu/Profile' (Root cause: com.kms.katalon.core.exception.StepFailedException: Object Object Repository/Productions/Menu/Profile not found at com.kms.katalon.core.keyword.internal.KeywordMain.stepFailed(KeywordMain.groovy:50) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain.stepFailed(MobileKeywordMain.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin.TapKeyword\$_tap_closure1.doCall(TapKeyword.groovy:79) at com.kms.katalon.core.mobile.keyword.builtin.TapKeyword\$_tap_closure1.call(TapKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain.runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.builtin.TapKeyword.tap(TapKeyword.groovy:84) at com.kms.katalon.core.mobile.keyword.builtin.TapKeyword.execute(TapKeyword.groovy:68) at com.kms.katalon.core.keyword.internal.KeywordExecutor.executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords.tap(MobileBuiltInKeywords.groovy:1490) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords\$tap\$0.call(Unknown Source) at App Version.run(App Version:24) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine.java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor.java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor.java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase(TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase(TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase(CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase(TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java:106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java:185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36))	31.261s	FAILED

App Version

#	Description	Elapsed	Status
---	-------------	---------	--------

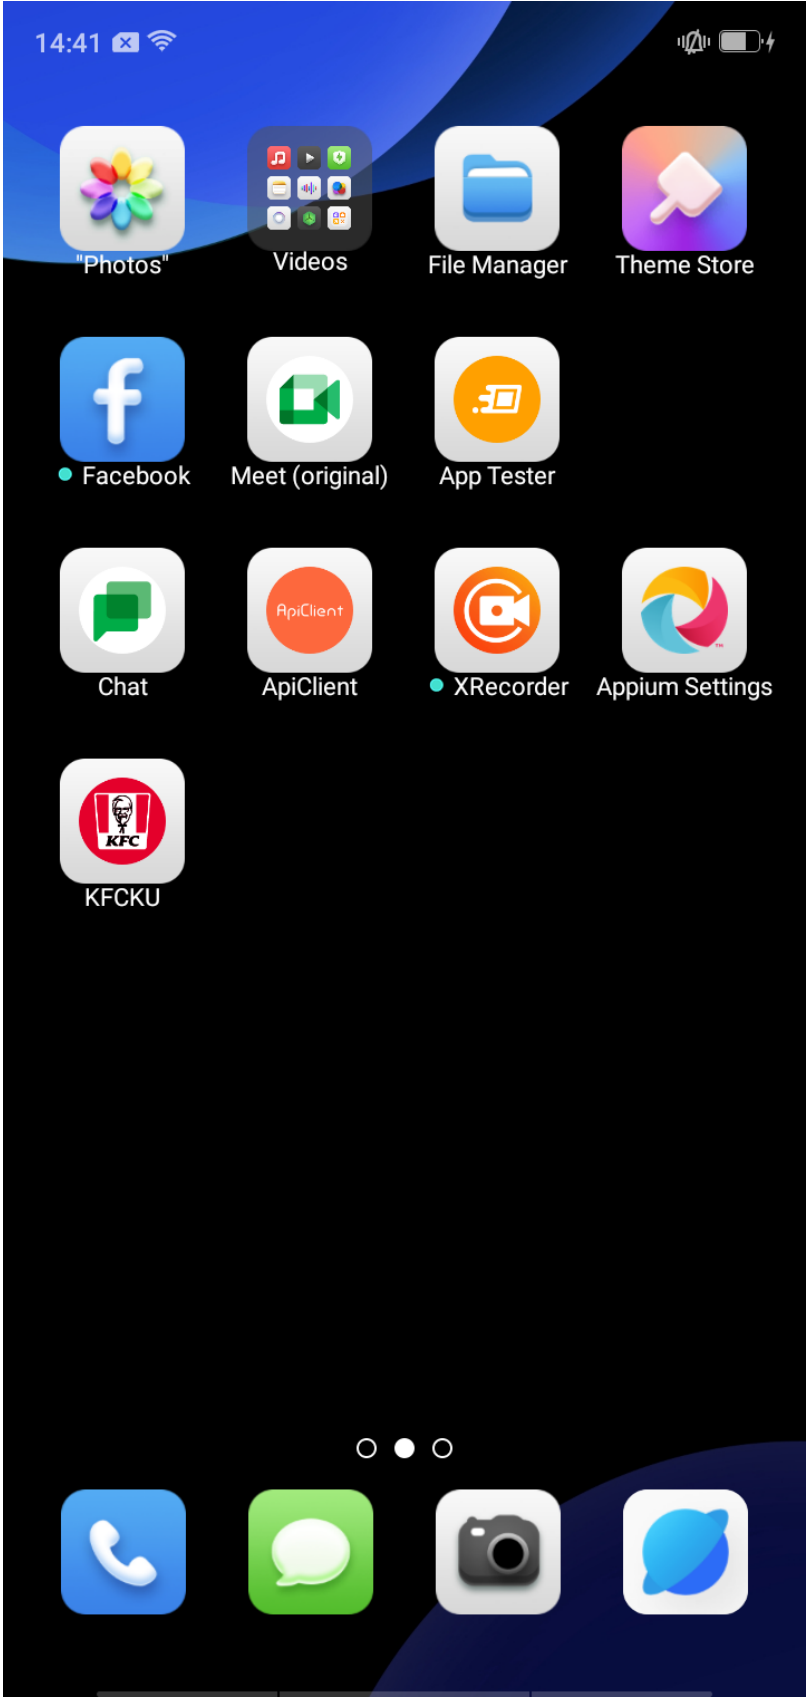

App Version

#	Description	Elapsed	Status
4	Start listener action : sampleAfterTestCase	0.004s	PASSED

Logout

Information

ID	Test Cases/Production/Profile/Device/Logout		
Description			
Tag			
Start	2023-07-11 14:41:03	End	2023-07-11 14:41:19
Elapsed	16.065s		
Status	FAILED		

Details

#	Description	Elapsed	Status
---	-------------	---------	--------

Logout

#	Description	Elapsed	Status
1	<p>startExistingApplication("com.kfc.mobile", STOP_ON_FAILURE)</p> <p>Unable to start app with application ID: 'com.kfc.mobile' (Root cause: org.openqa.selenium.SessionNotCreatedException: Unable to create a new remote session. Please check the server log for more details. Original error: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error: socket hang up Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error: socket hang up at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base-driver\lib\jsonwp-proxy\proxy.js:274:13) at processTicksAndRejections (node:internal/process/task_queues:95:5) at AndroidUiautomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\commands\viewport.js:14:10) at AndroidUiautomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:244:28) at AndroidUiautomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2-driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:208) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute (AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver</p>	15.692s	FAILED

Logout

#	Description	Elapsed	Status
	(AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Logout.run(Logout:20) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine. java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor. java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor. java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase (TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase (TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor. java:285) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase (CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase (TestSuiteExecutor.java:151) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java: 106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java: 185) at com.kms.katalon.core.main.TestCaseMain\$startTestSuite\$0.call(Unknown Source) at TempTestSuite1689060917477.run(TempTestSuite1689060917477.groovy:36) Caused by: java.lang.reflect.InvocationTargetException at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession (AppiumCommandExecutor.java:186) at io.appium.java_client.remote.AppiumCommandExecutor.createSession (AppiumCommandExecutor.java:217) at io.appium.java_client.remote.AppiumCommandExecutor.execute		

Logout

#	Description	Elapsed	Status
	<pre>(AppiumCommandExecutor.java:239) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver. java:552) at io.appium.java_client.DefaultGenericMobileDriver.execute (DefaultGenericMobileDriver.java:42) at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1) at io.appium.java_client.android.AndroidDriver.execute(AndroidDriver.java:1) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.execute (SwipeableAndroidDriver.java:1) at org.openqa.selenium.remote.RemoteWebDriver.startSession (RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java: 131) at io.appium.java_client.DefaultGenericMobileDriver.<init> (DefaultGenericMobileDriver.java:38) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:84) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:85) at com.kms.katalon.core.appium.driver.SwipeableAndroidDriver.<init> (SwipeableAndroidDriver.java:24) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:503) at com.kms.katalon.core.appium.driver.AppiumDriverManager.createMobileDriver (AppiumDriverManager.java:485) at com.kms.katalon.core.mobile.keyword.internal.MobileDriverFactory. startMobileDriver(MobileDriverFactory.java:417) at com.kms.katalon.core.mobile.keyword.internal. MobileDriverFactory\$startMobileDriver.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy:40) at com.kms.katalon.core.mobile.keyword.builtin. StartExistingApplicationKeyword\$_startApplication_closure1.doCall (StartExistingApplicationKeyword.groovy) at com.kms.katalon.core.mobile.keyword.internal.MobileKeywordMain. runKeyword(MobileKeywordMain.groovy:21) at com.kms.katalon.core.mobile.keyword.internal. MobileKeywordMain\$runKeyword.call(Unknown Source) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. startApplication(StartExistingApplicationKeyword.groovy:43) at com.kms.katalon.core.mobile.keyword.builtin.StartExistingApplicationKeyword. execute(StartExistingApplicationKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords. startExistingApplication(MobileBuiltInKeywords.groovy:113) at com.kms.katalon.core.mobile.keyword. MobileBuiltInKeywords\$startExistingApplication.call(Unknown Source) at Script1684220839203.run(Script1684220839203.groovy:20) ... 13 more Caused by: org.openqa.selenium.WebDriverException: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error: socket hang up Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:25:53' System info: host: 'NKC-23', ip: '10.0.41.145', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '1.8.0_282' Driver info: driver.version: MobileDriverFactory\$startMobileDriver remote stacktrace: UnknownError: An unknown server-side error occurred while processing the command. Original error: Could not proxy command to the remote server. Original error:</pre>		

Logout

#	Description	Elapsed	Status
	<pre>socket hang up at UIA2Proxy.command (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-base- driver\lib\jsonwp-proxy\proxy.js:274:13) at processTicksAndRejections (node:internal/process/task_queues:95:5) at AndroidUiautomator2Driver.commands.getDevicePixelRatio (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\commands\viewport.js:14:10) at AndroidUiautomator2Driver.fillDeviceDetails (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:244:28) at AndroidUiautomator2Driver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\node_modules\appium-uiautomator2- driver\lib\driver.js:230:7) at AppiumDriver.createSession (C:\Users\Ahadian Rifky\AppData\Roaming\npm\node_modules\appium\lib\appium.js:387:35) at org.openqa.selenium.remote.W3CHandshakeResponse. lambda\$errorHandler\$0(W3CHandshakeResponse.java:62) at org.openqa.selenium.remote.HandshakeResponse. lambda\$getResponseFunction\$0(HandshakeResponse.java:30) at org.openqa.selenium.remote.ProtocolHandshake.lambda\$createSession\$0 (ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession (ProtocolHandshake.java:128) ... 41 more)</pre>		
2	Start listener action : sampleAfterTestCase	0.007s	PASSED