


❖ CLI Code(Batch server)

- CLI code should be present at.
D:\DBSetup\MonitoringScripts\NetworkMangementTool

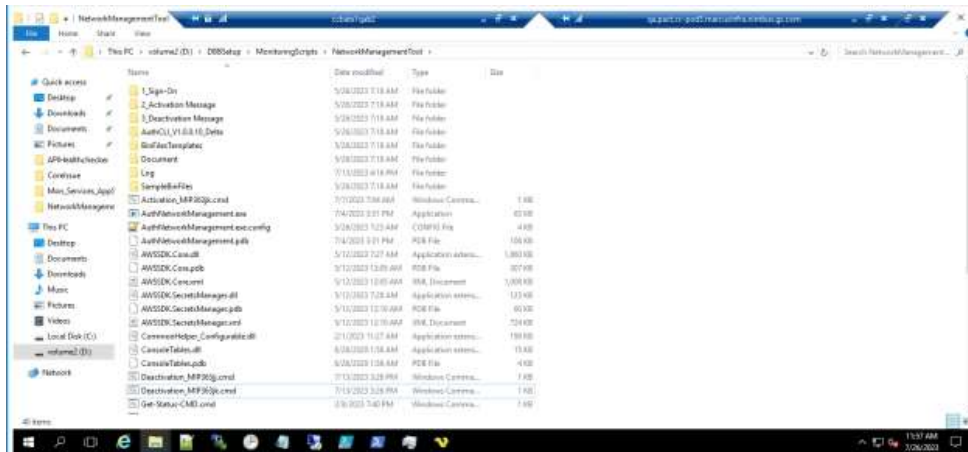

- Update/configure below mentioned files as per environments.

This PC > volume2 (D:) > DBSetup > MonitoringScripts > NetworkMangementTool >

Name	Date modified	Type	Size
JAZZQA-Deactivation_MIP363jk.cmd	7/13/2023 3:26 PM	Windows Comma...	1 KB
JAZZQA-Deactivation_MIP363jj.cmd	7/13/2023 3:26 PM	Windows Comma...	1 KB
JAZZQA-Activation_MIP363jk.cmd	7/7/2023 7:04 AM	Windows Comma...	1 KB
JAZZQA-Activation_MIP363JJ.cmd	7/7/2023 6:09 AM	Windows Comma...	1 KB
AuthNetworkManagement.exe	7/4/2023 3:51 PM	Application	63 KB
AuthNetworkManagement.pdb	7/4/2023 3:51 PM	PDB File	106 KB
AuthNetworkManagement.exe.config	5/26/2023 7:23 AM	CONFIG File	4 KB

- In Activation/Deactivation.cmd files we need to add Source instance MIP group wise with port of 0302_Workflow.

• For Activation-

```
JAZZQA-Activation_MIP363JJ.cmd - Notepad
File Edit Format View Help
AuthNetworkManagement.exe "sessionactivation" "ccsrce1qab1|5543"
pause
```

• For Deactivation-

```
JAZZQA-Deactivation_MIP363jj.cmd - Notepad
File Edit Format View Help
AuthNetworkManagement.exe "sessiondeactivation" "ccsrce1qab1|5543"
pause
```

- In AuthNetworkManagement.exe.config file we need to update below tag as per environments.

```

<appSettings>
  <add key="0302_WorkflowIP_Port" value="" /> <!--10.206.3.116|5543--> <!-- 10.206.3.116|5543,10.206.3.116|5543|256256-->
  <add key="BIN_DE002" value="<GSINUMBER>" />
  <add key="GSI_DE002" value="<GSINUMBER>" />
  <add key="ICA_DE033" value="<ICANUMBER>" />
  <add key="BINSignOn_DE070" value="001" />
  <add key="GSI SignOn_DE070" value="061" />
  <add key="SessionActivation_DE070" value="081" />
  <add key="SessionDeactivation_DE070" value="082" />
  <add key="APIBaseURL" value="https://<WEB_WCF_NLB_DNS>/NetworkManagementAPI/" /> <!-- https://localhost:7179/--> <!--https://localhost:7179/-->
  <!--<add key="DE094" value="013" /> static value so not required -->
  <add key="TimeZone" value="UTC" /> <!-- possible input values "UTC" ,"LOCAL"-->
  <add key="BinFilesTemplateDirectory" value="BinFilesTemplates" />
  <add key="ForceFlag" value="false" />
  <add key="MinimumSource" value="1" />
  <add key="MinimumMip" value="1" />
  <add key="WarningMessage" value="The application is running in force mode.Do you want to continue? (Yes or No) :" />
</appSettings>

```

Note- Update EmailConfiguration/appSettings tags as per environments.

❖ **API Code(Wcf server)**

Prerequisites:-

- IIS should be installed on server.
- Database connectivity should be available from the server where we will be hosting NetworkManagementAPI.
- Install dotnet-hosting-7.0.1-win.exe
- Create log folder.
- Update connection string in appsettings.json file.

- API code should be present at.

D:\WebServer\NetworkManagementAPI

Update connection string in **appsettings.json** file as per environment.

In appsettings.json need to update below tags:-

- LogPath
- DefaultConnection
- CoreAuthConnection
- CoreIssueConnection

```

1  {
2    "Logging": {
3      "LogLevel": {
4        "Default": "Information",
5        "Microsoft.AspNetCore": "Warning"
6      }
7    },
8    "SerialLog": {
9      "LogPath": "D:\LOGS\AuthNetworkManagementAPI"
10   },
11   "AllowedHosts": "*",
12   "ConnectionStrings": {
13     "DefaultConnection": "Server=CCAPPSQLAG1;Database=CCJAZZ_CoreIssue;Trusted_Connection=True;Security=SSPI;Integrated_Security=True;Encrypt=false;MultipleActiveResultSets=true;Connection Timeout=30;",
14     "CoreAuthConnection": "Server=CCAPPSQLAG1;Database=CCJAZZ_CoreAuth;Trusted_Connection=True;Security=SSPI;Integrated_Security=True;Encrypt=false;MultipleActiveResultSets=true;Connection Timeout=30;",
15     "CoreIssueConnection": "Server=CCAPPSQLAG1;Database=CCJAZZ_CoreIssue;Trusted_Connection=True;Security=SSPI;Integrated_Security=True;Encrypt=false;MultipleActiveResultSets=true;Connection Timeout=30;"
16   }
17 }


```

- Create log folder for AuthNetworkManagementAPI.

D:\Logs\AuthNetworkManagementAPI

- Dotnet-hosting exe Installation.

Right click on the hosting exe and select run as administrator.

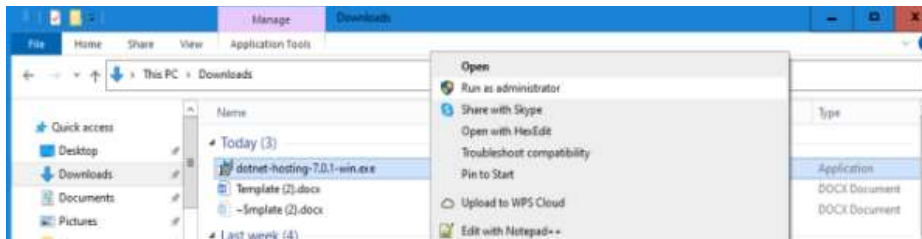

Click on “Yes” in order to allow changes to the device.



Check the check box of terms and conditions license in order to accept the changes made to the device and click install.




Installation completed dialog box appears. Now we are ready to Host application IIS.



- Create Application Pool for NetworkManagementAPI and right click on NetworkManagementAPI and select “Advanced settings”


Reset the following values:-

Create Application pool	NetworkManagementAPI	
Net CLR Version	No Managed Code	Advanced settings
Application Pool Identity	gmsa-app-svc\$	Advanced settings
Enable 32-Bit Applications	False	Advanced settings

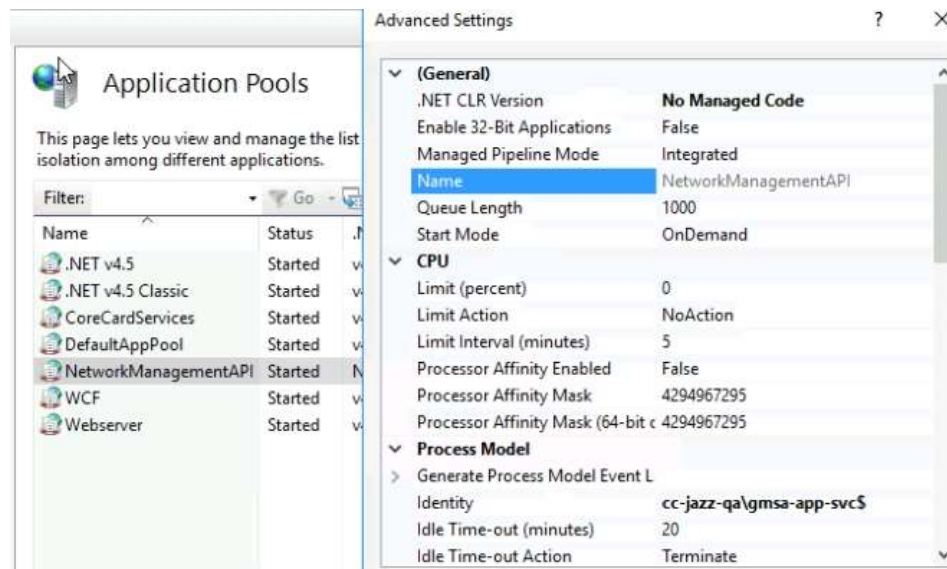

- Create Application NetworkManagementAPI under WCF Website -

Right click on the “Sites” and select “Add Application”

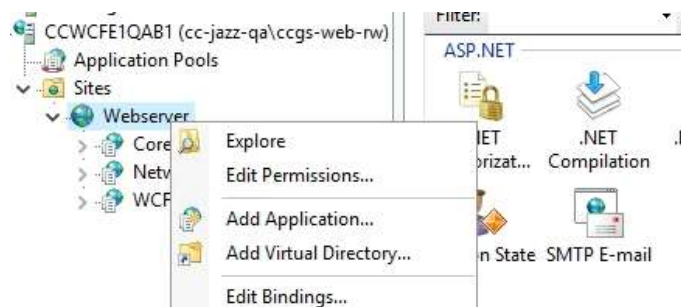

- Following dialog box appears, now fill the details as per the requirement and click ok.
Site Name : NetworkManagementAPI
Physical Path : The physical path of the NetworkManagementAPI(D:\WebServer\NetworkManagementAPI)

Add Application ? X

Site name: Webservice
Path: /

Alias: NetworkManagementAPI Application pool: NetworkManagementAPI Select...

Example: sales

Physical path: D:\WebServer\NetworkManagementAPI ...

Pass-through authentication
Connect as... Test Settings...

☐ Enable Preload

OK Cancel

- Basic Settings of the application should be set to Pass through application.
- Set Anonymous Authentication to Application pool identity.

Select application → NetworkManagementAPI

Select Anonymous Authentication → Edit Anonymous Authentication → Select Application pool identity.

Authentication

Group by: No Grouping

Name	Status	Response Type
Anonymous Authentication	Enabled	

Edit Anonymous Authentication Credentials ? X

Anonymous user identity:

☐ Specific user:
IUSR Set...

☒ Application pool identity

OK Cancel