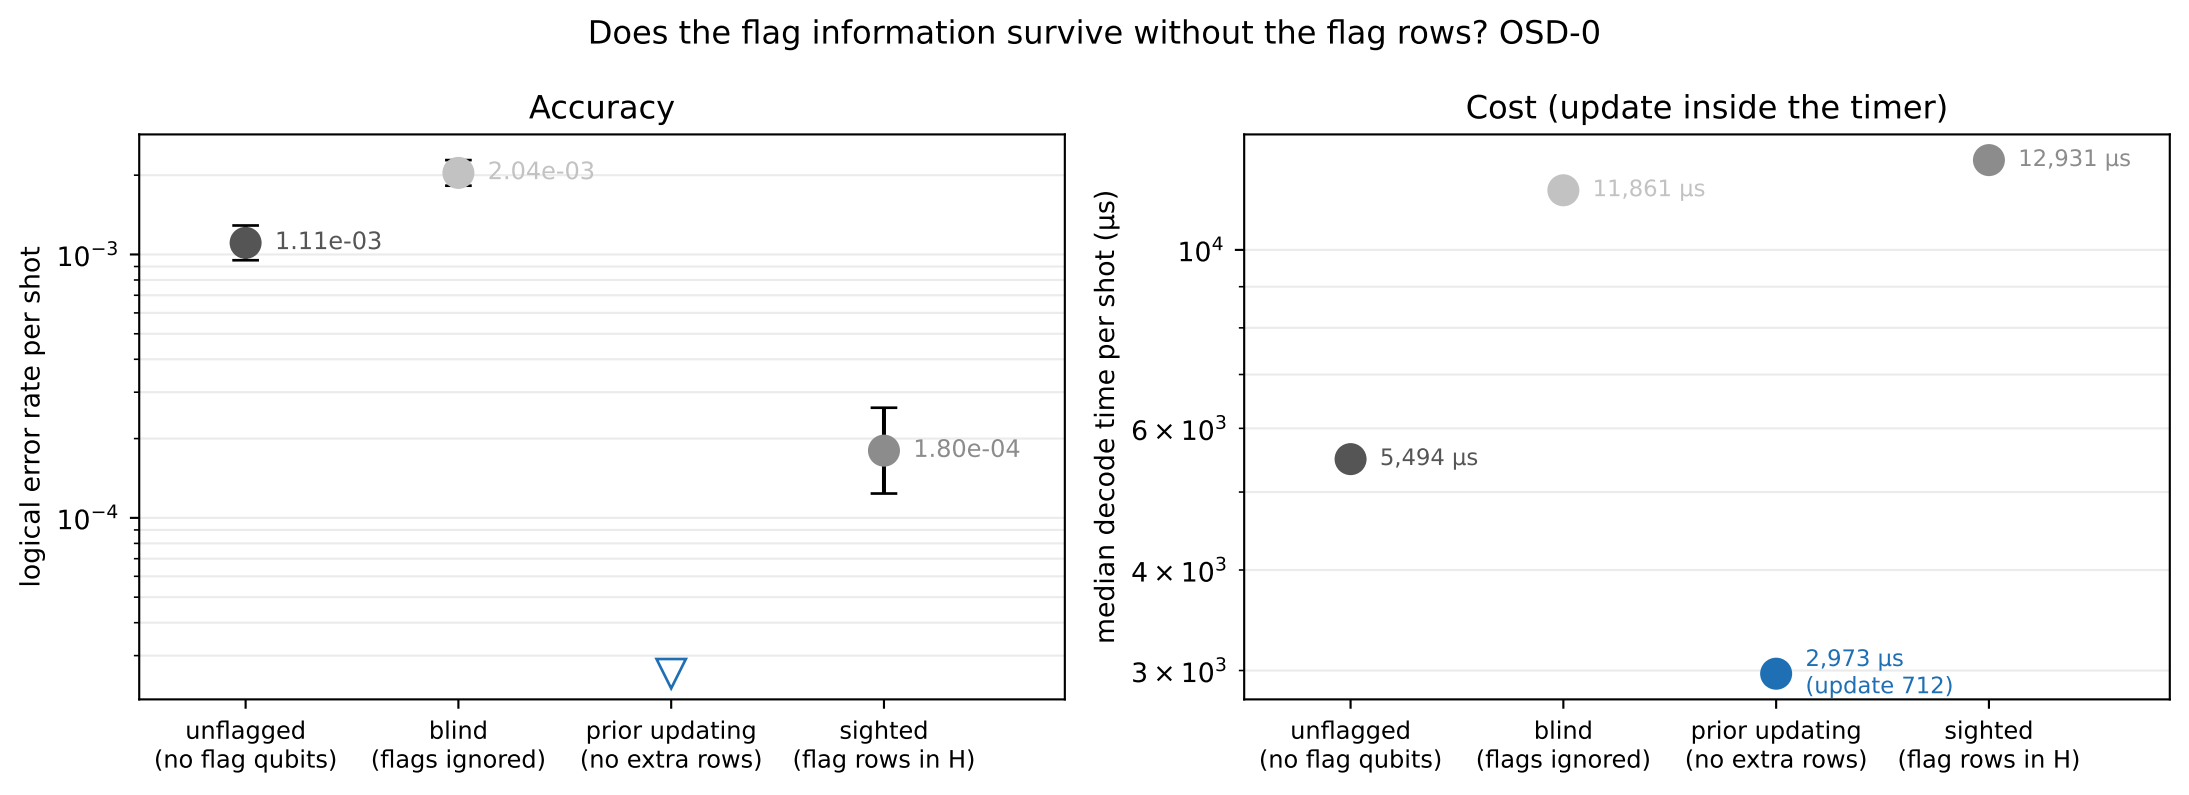
Does the flag information survive without the flag rows? OSD-0
Accuracy
logical error rate per shot
10^{-3}
10^{-4}
1.11e-03
2.04e-03
1.80e-04
unflagged
(no flag qubits)
blind
(flags ignored)
prior updating
(no extra rows)
sighted
(flag rows in H)
Cost (update inside the timer)
median decode time per shot (µs)
10^4
6×10^3
4×10^3
3×10^3
5,494 µs
11,861 µs
12,931 µs
2,973 µs
(update 712)
unflagged
(no flag qubits)
blind
(flags ignored)
prior updating
(no extra rows)
sighted
(flag rows in H)