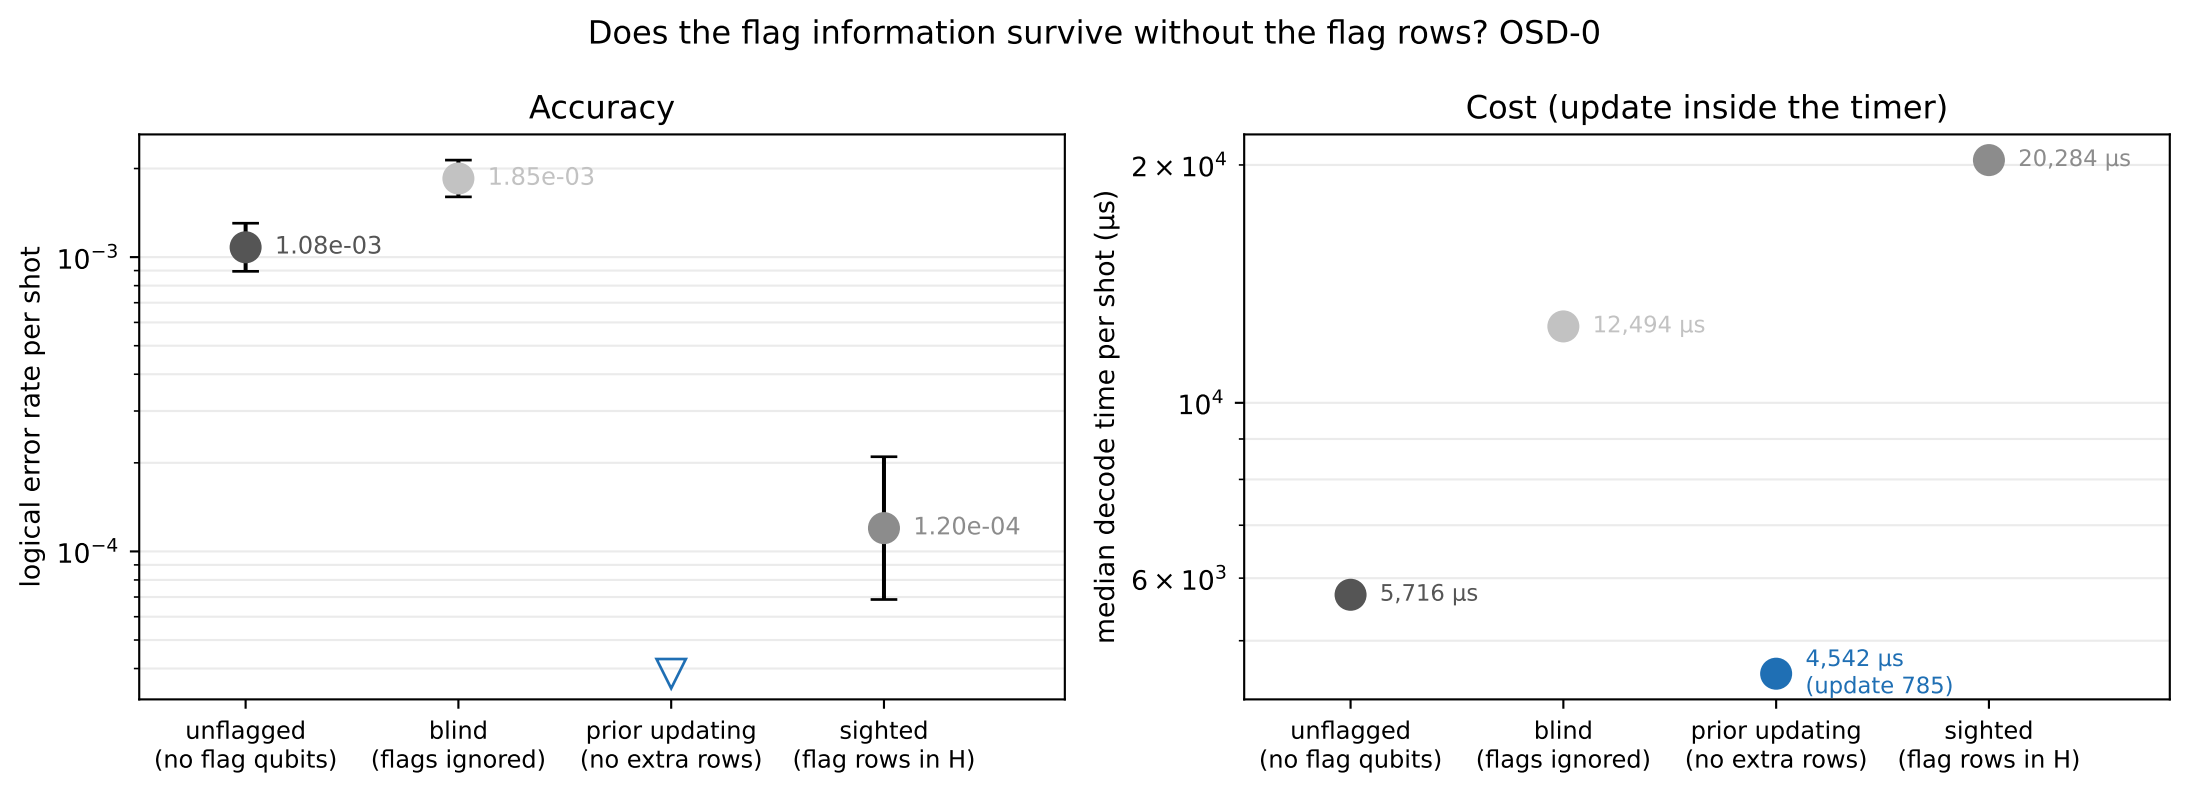
Does the flag information survive without the flag rows? OSD-0
Accuracy
logical error rate per shot
10^{-3}
10^{-4}
1.08e-03
1.85e-03
1.20e-04
unflagged
(no flag qubits)
blind
(flags ignored)
prior updating
(no extra rows)
sighted
(flag rows in H)
Cost (update inside the timer)
median decode time per shot (µs)
2×10^4
10^4
6×10^3
5,716 µs
12,494 µs
20,284 µs
4,542 µs
(update 785)
unflagged
(no flag qubits)
blind
(flags ignored)
prior updating
(no extra rows)
sighted
(flag rows in H)