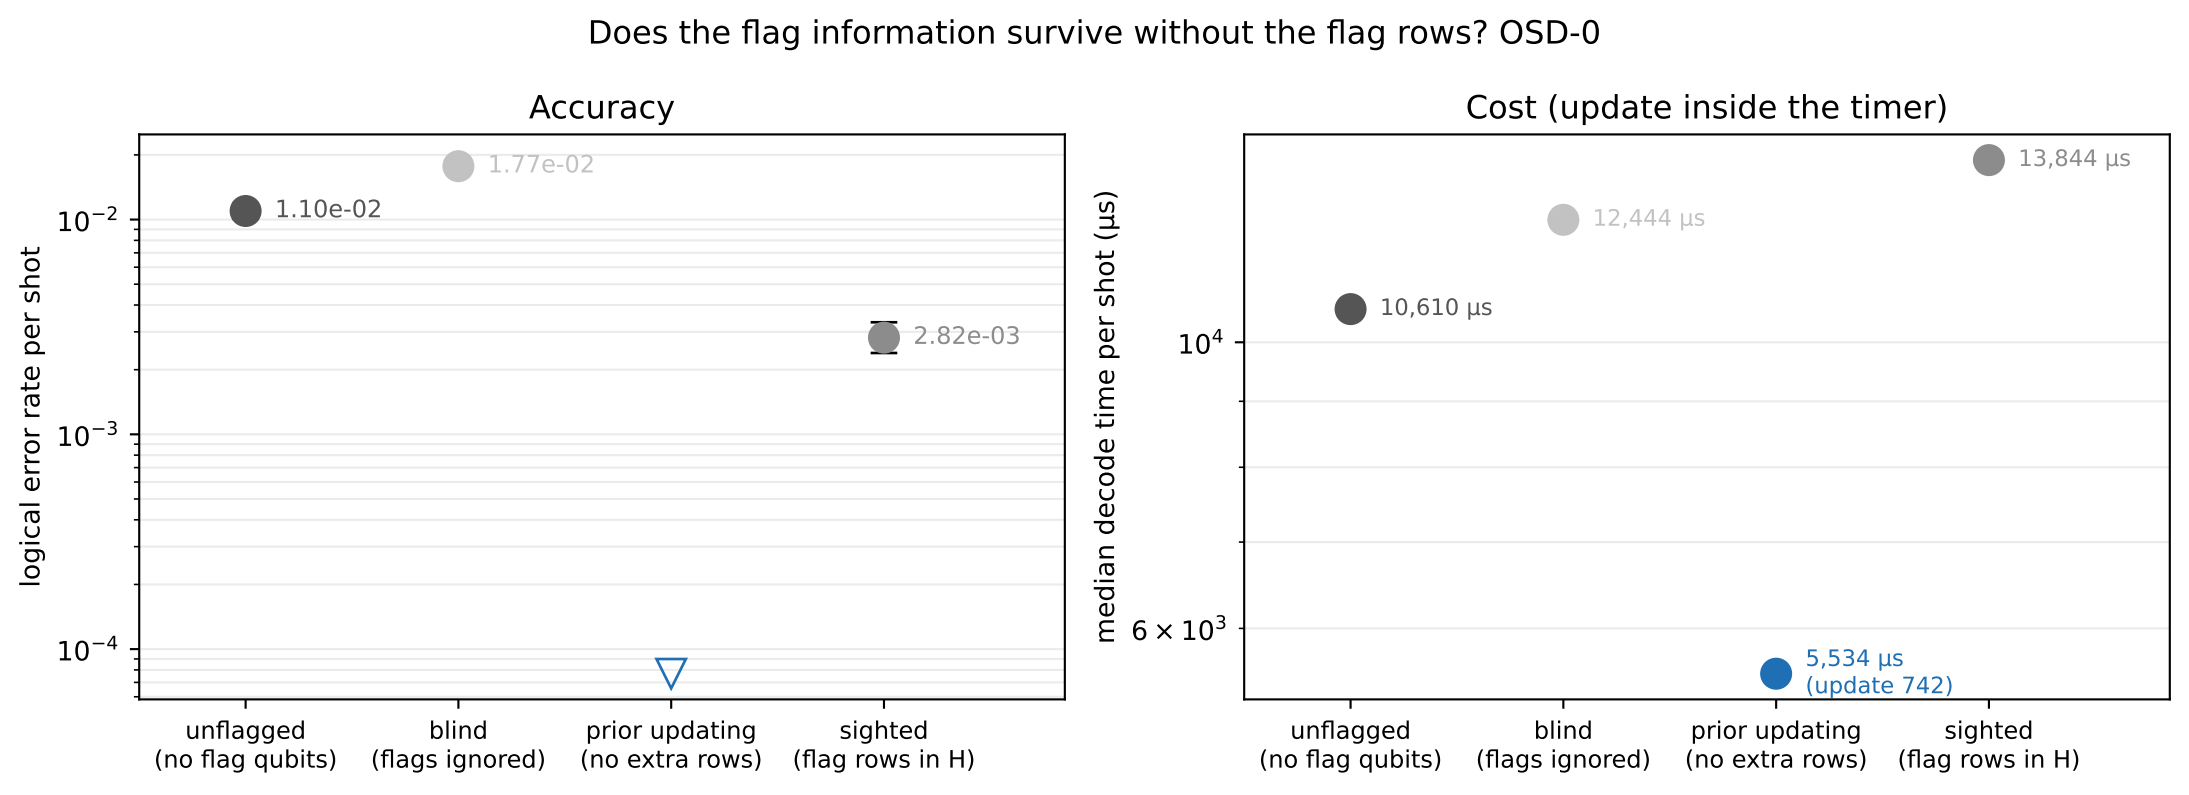
Does the flag information survive without the flag rows? OSD-0
Accuracy
logical error rate per shot
$10^{-2}$
$10^{-3}$
$10^{-4}$
1.10e-02
1.77e-02
2.82e-03
unflagged
(no flag qubits)
blind
(flags ignored)
prior updating
(no extra rows)
sighted
(flag rows in H)
Cost (update inside the timer)
median decode time per shot (µs)
$10^{4}$
$6 \times 10^{3}$
10,610 µs
12,444 µs
13,844 µs
5,534 µs
(update 742)
unflagged
(no flag qubits)
blind
(flags ignored)
prior updating
(no extra rows)
sighted
(flag rows in H)