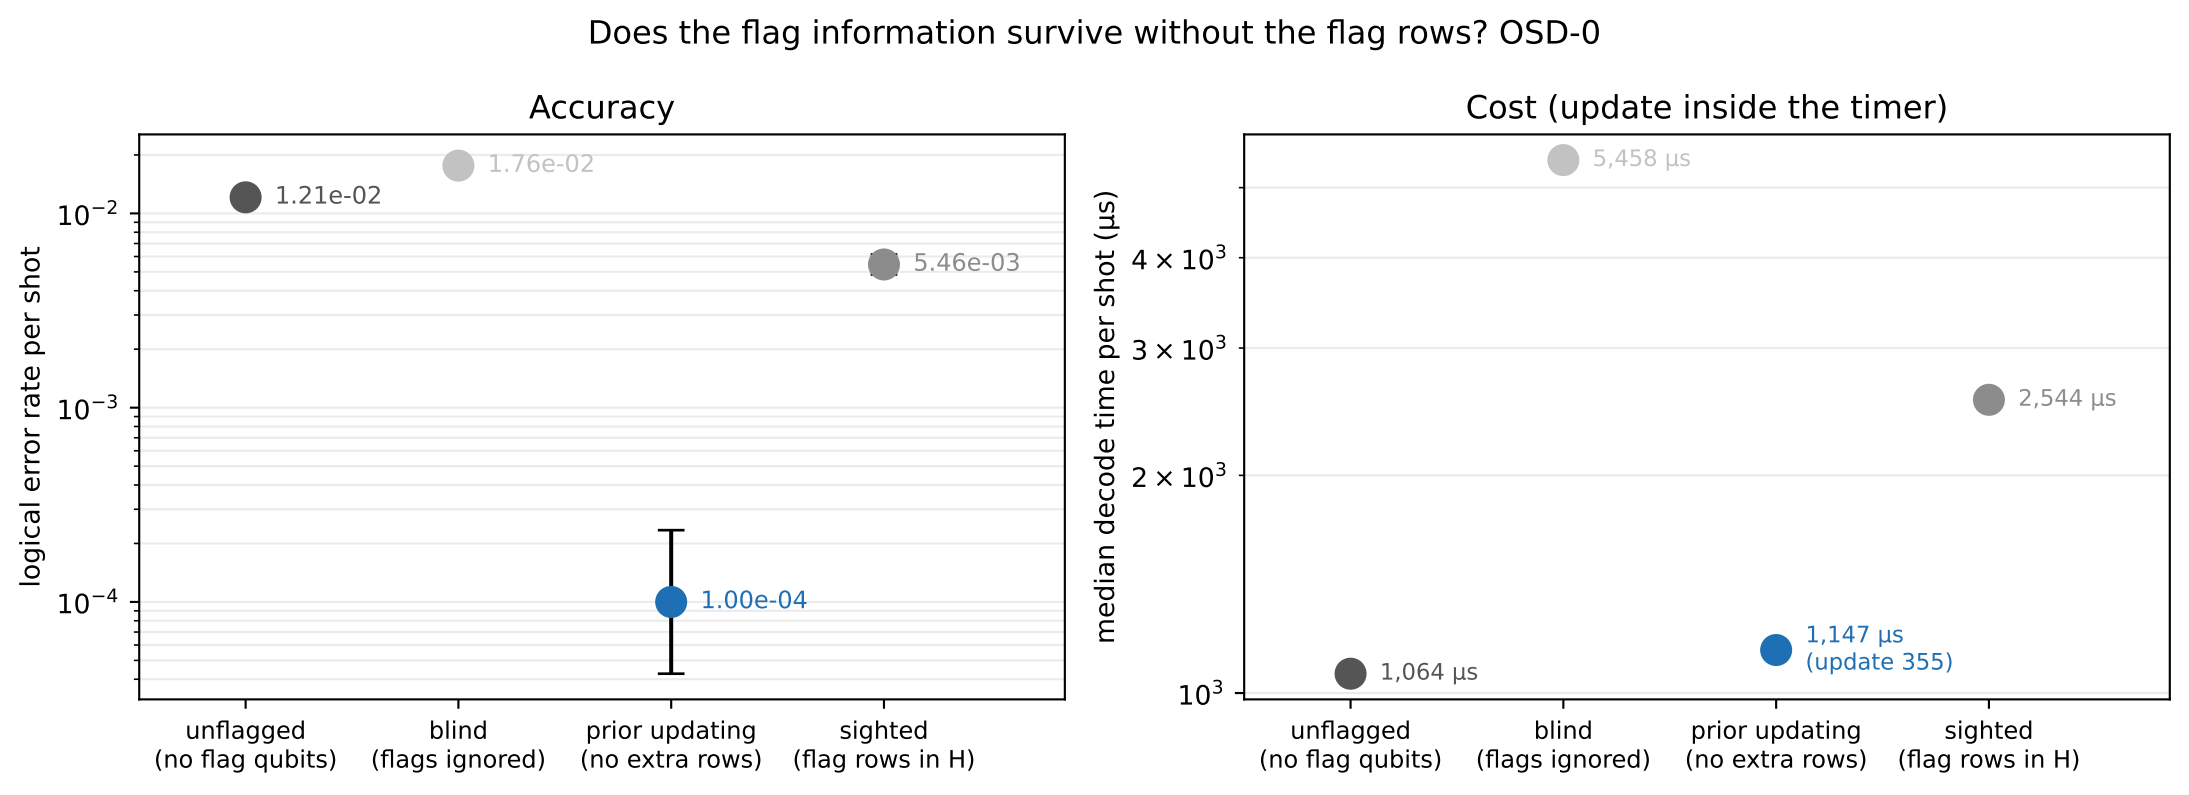
Does the flag information survive without the flag rows? OSD-0
Accuracy
logical error rate per shot
10^{-2}
10^{-3}
10^{-4}
1.21e-02
1.76e-02
5.46e-03
1.00e-04
unflagged
(no flag qubits)
blind
(flags ignored)
prior updating
(no extra rows)
sighted
(flag rows in H)
Cost (update inside the timer)
median decode time per shot (µs)
4×10^3
3×10^3
2×10^3
10^3
5,458 µs
2,544 µs
1,147 µs
(update 355)
1,064 µs
unflagged
(no flag qubits)
blind
(flags ignored)
prior updating
(no extra rows)
sighted
(flag rows in H)