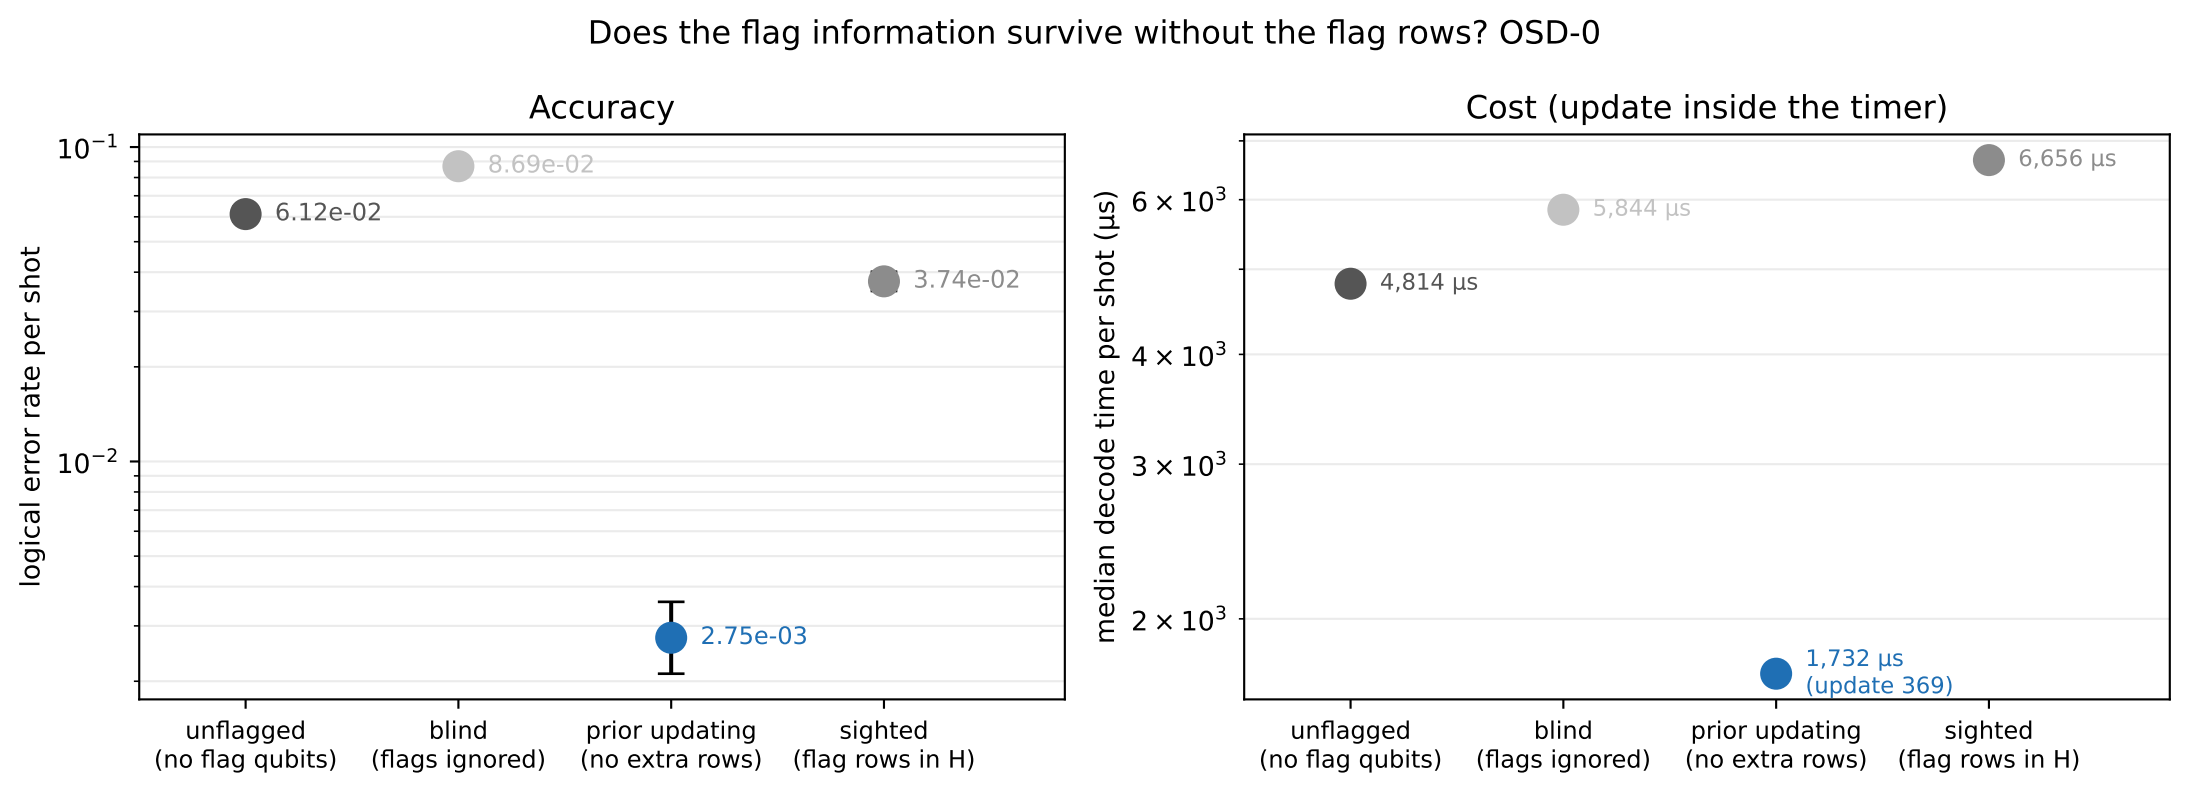
Does the flag information survive without the flag rows? OSD-0
Accuracy
logical error rate per shot
10^{-1}
10^{-2}
6.12e-02
8.69e-02
3.74e-02
2.75e-03
unflagged
(no flag qubits)
blind
(flags ignored)
prior updating
(no extra rows)
sighted
(flag rows in H)
Cost (update inside the timer)
median decode time per shot (µs)
6×10^3
4×10^3
3×10^3
2×10^3
4,814 µs
5,844 µs
6,656 µs
1,732 µs
(update 369)
unflagged
(no flag qubits)
blind
(flags ignored)
prior updating
(no extra rows)
sighted
(flag rows in H)