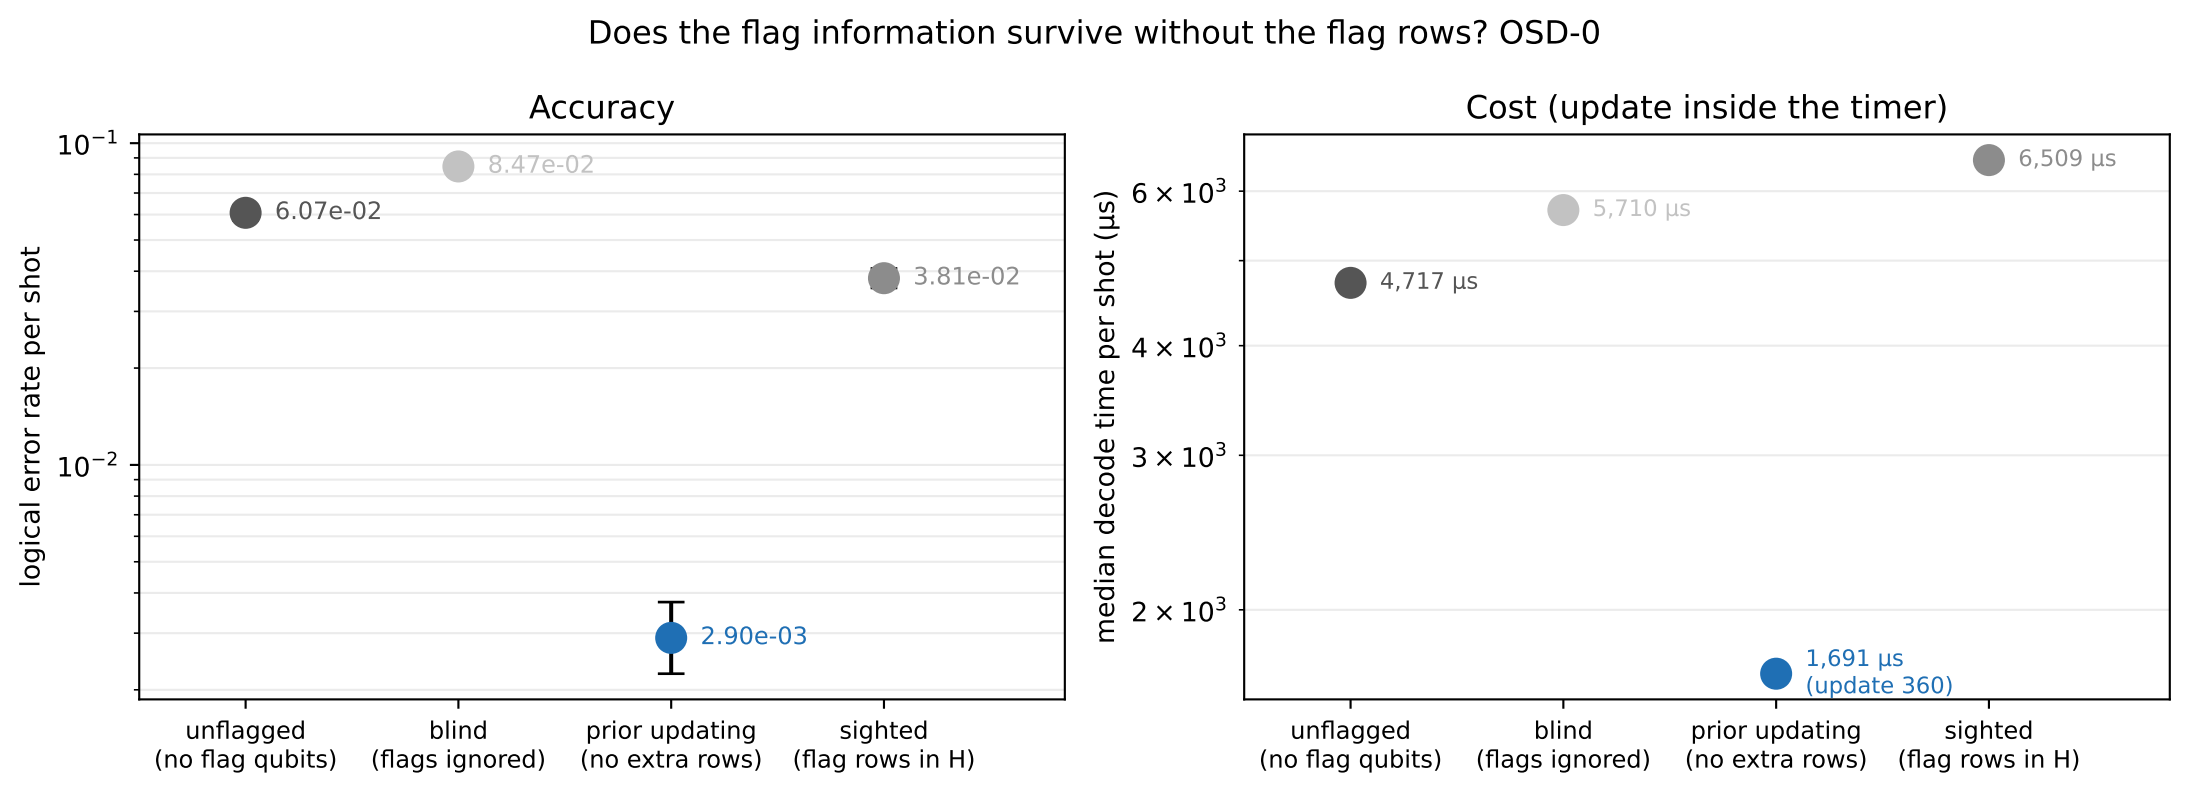
Does the flag information survive without the flag rows? OSD-0
Accuracy
logical error rate per shot
10^{-1}
10^{-2}
6.07e-02
8.47e-02
3.81e-02
2.90e-03
unflagged
(no flag qubits)
blind
(flags ignored)
prior updating
(no extra rows)
sighted
(flag rows in H)
Cost (update inside the timer)
median decode time per shot (µs)
6×10^3
4×10^3
3×10^3
2×10^3
4,717 µs
5,710 µs
6,509 µs
1,691 µs
(update 360)
unflagged
(no flag qubits)
blind
(flags ignored)
prior updating
(no extra rows)
sighted
(flag rows in H)