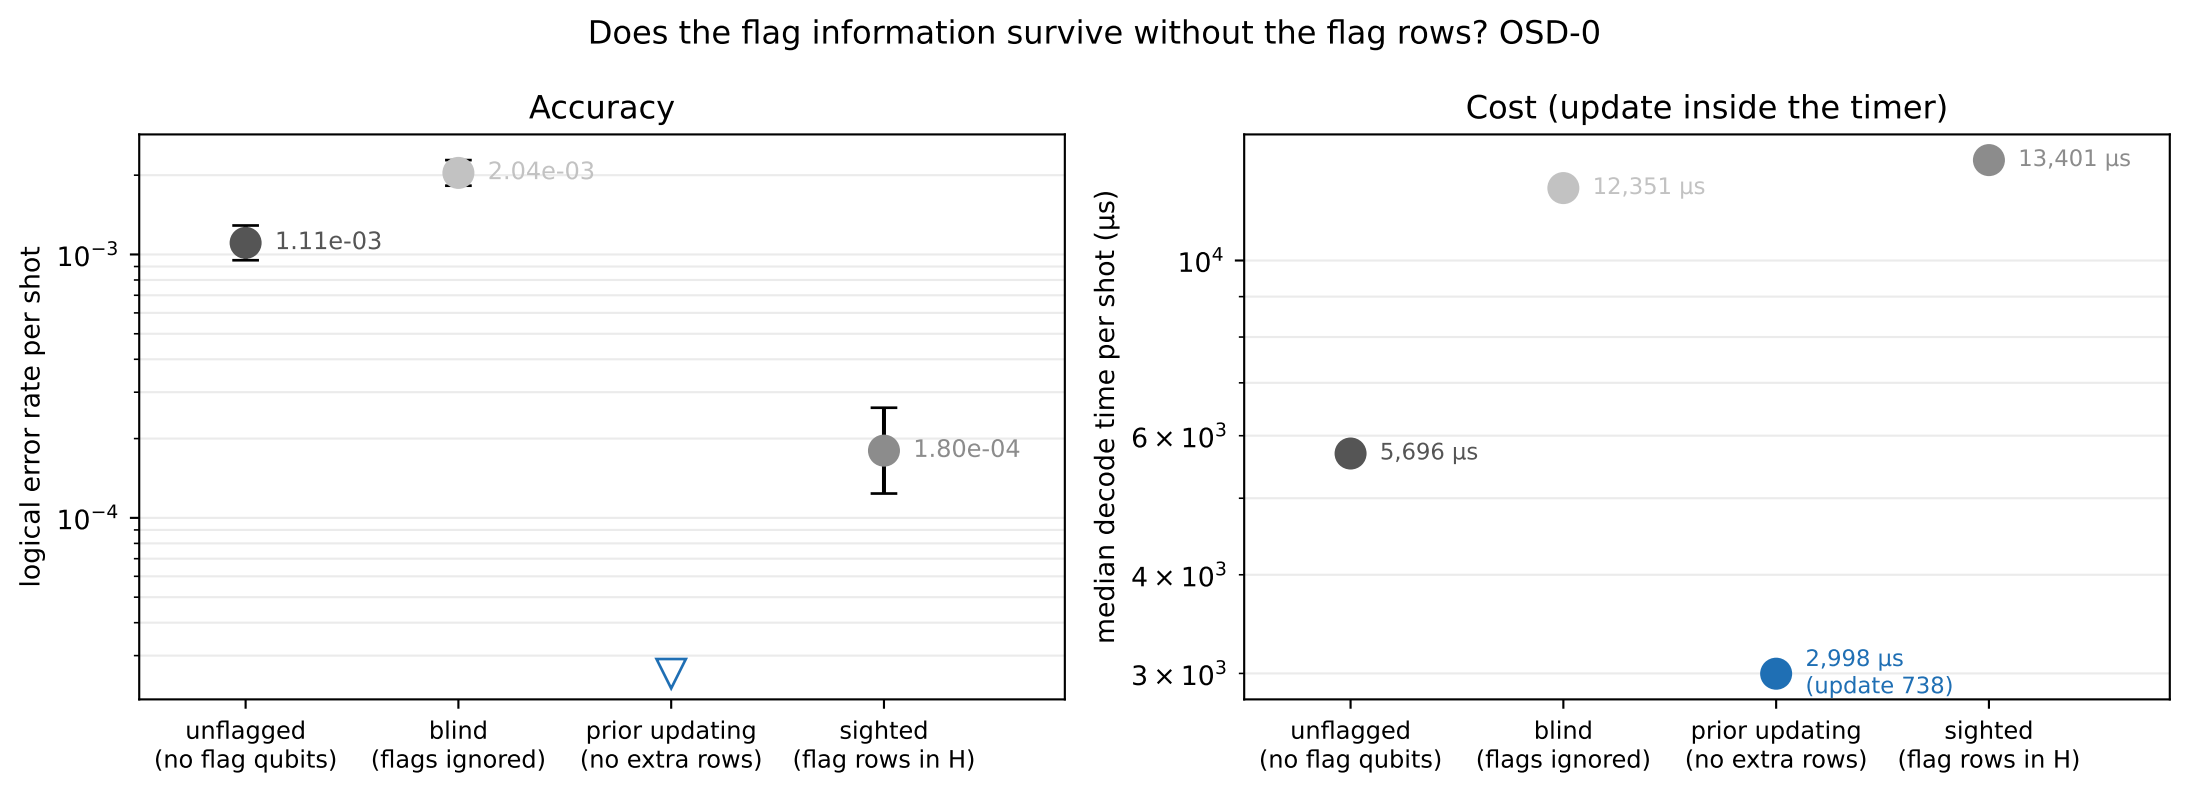
Does the flag information survive without the flag rows? OSD-0
Accuracy
logical error rate per shot
10^{-3}
10^{-4}
1.11e-03
2.04e-03
1.80e-04
unflagged
(no flag qubits)
blind
(flags ignored)
prior updating
(no extra rows)
sighted
(flag rows in H)
Cost (update inside the timer)
median decode time per shot (µs)
10^{4}
6×10^{3}
4×10^{3}
3×10^{3}
5,696 µs
12,351 µs
13,401 µs
2,998 µs
(update 738)
unflagged
(no flag qubits)
blind
(flags ignored)
prior updating
(no extra rows)
sighted
(flag rows in H)