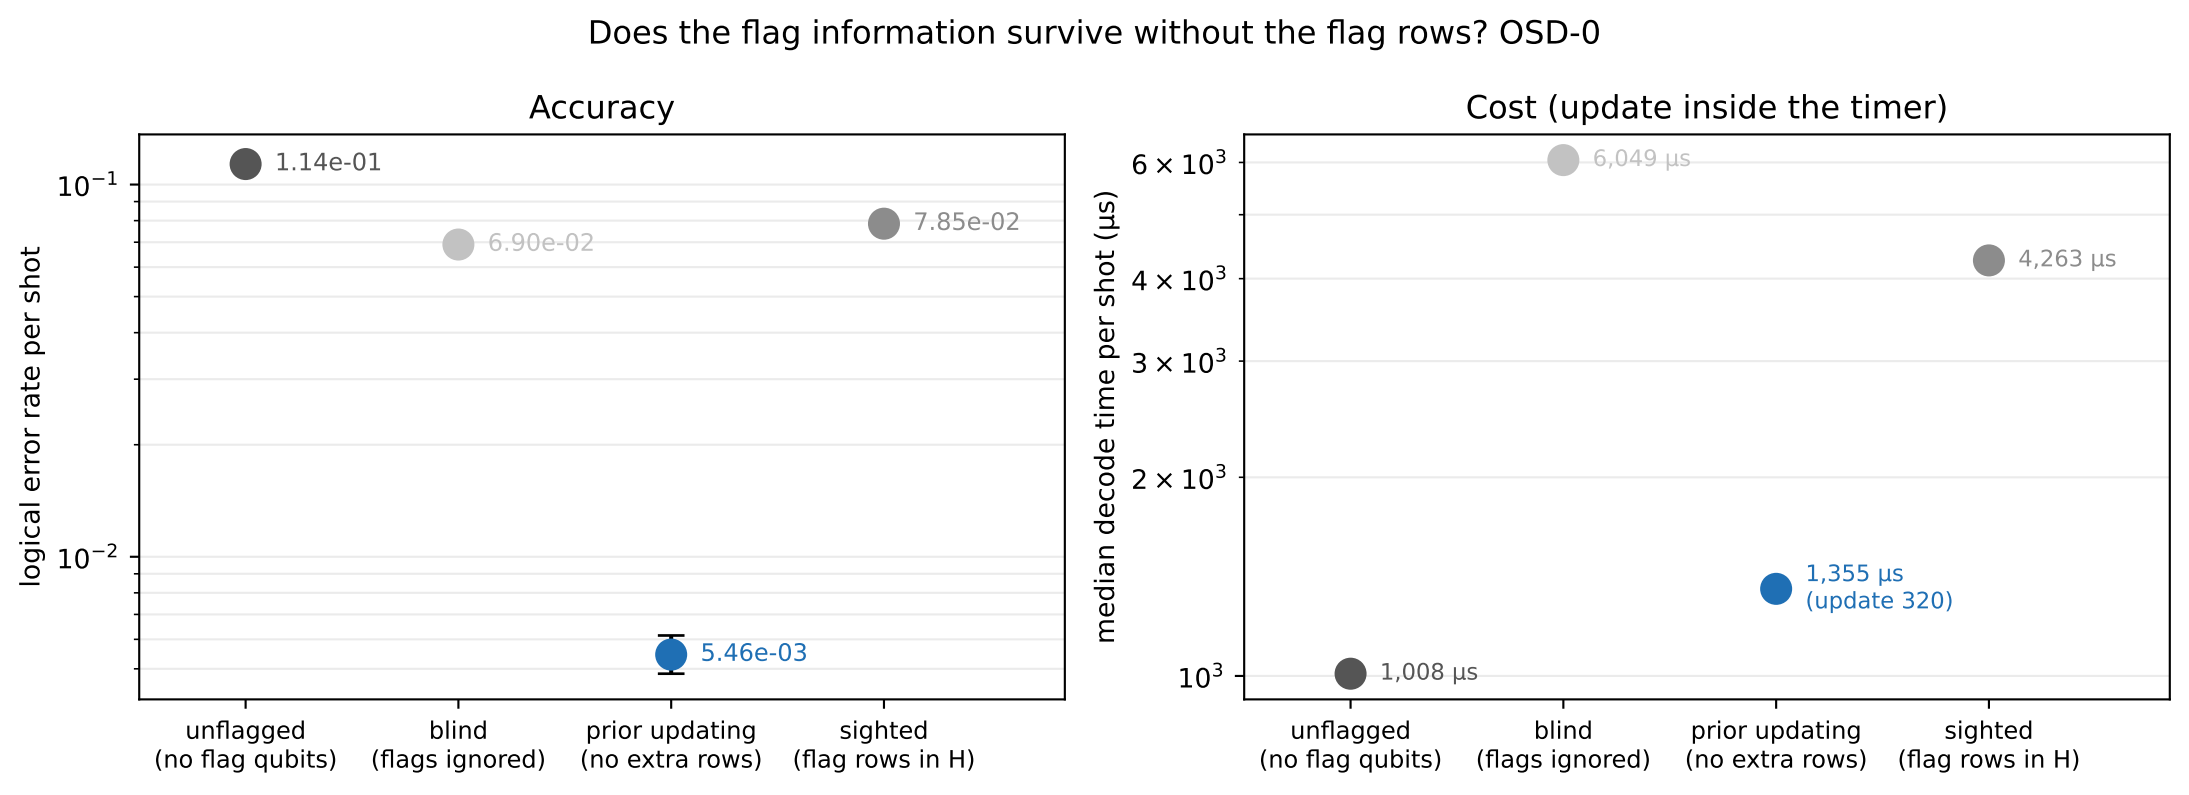
Does the flag information survive without the flag rows? OSD-0
Accuracy
logical error rate per shot
10^{-1}
10^{-2}
1.14e-01
6.90e-02
7.85e-02
5.46e-03
unflagged
(no flag qubits)
blind
(flags ignored)
prior updating
(no extra rows)
sighted
(flag rows in H)
Cost (update inside the timer)
median decode time per shot (µs)
6×10^3
4×10^3
3×10^3
2×10^3
10^3
6,049 µs
4,263 µs
1,355 µs
(update 320)
1,008 µs
unflagged
(no flag qubits)
blind
(flags ignored)
prior updating
(no extra rows)
sighted
(flag rows in H)