



University of Asia Pacific
Department of Computer Science and
Engineering

Compiler Design
(CSE 430)

Submitted By

Mazharul Islam Sourav

ID: 22101133

Section: C-2

Semester: 4-2

Submitted To

Md Shafayatul Haque


Lecturer

Department of Computer Science
and Engineering

University of Asia Pacific

Work 01: Creating a lexical analyzer with Lex.


Verifying Ubuntu -

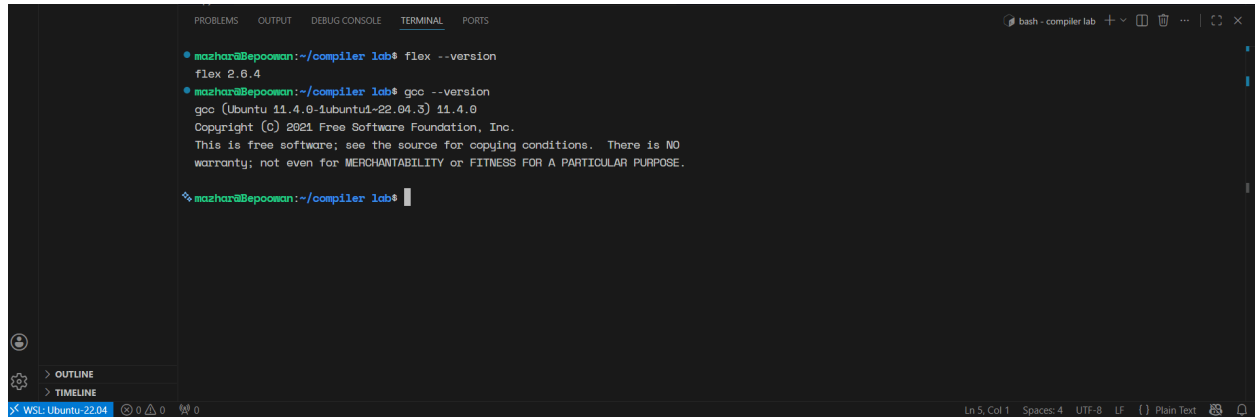

```
mazhar@Bepooman:~/compiler lab$ flex --version
flex 2.6.4
mazhar@Bepooman:~/compiler lab$ gcc --version
gcc (Ubuntu 11.4.0-1ubuntu1~22.04.3) 11.4.0
Copyright (C) 2021 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.


mazhar@Bepooman:~/compiler lab$
```

Input File -

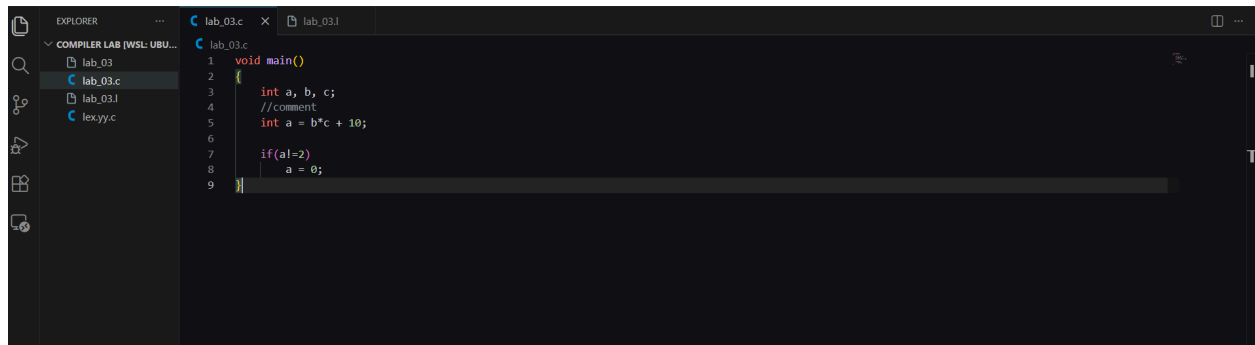

```
1 void main()
2 {
3     int a, b, c;
4     //comment
5     int a = b*c + 10;
6
7     if(a!=2)
8     {
9         a = 0;
```

Output -

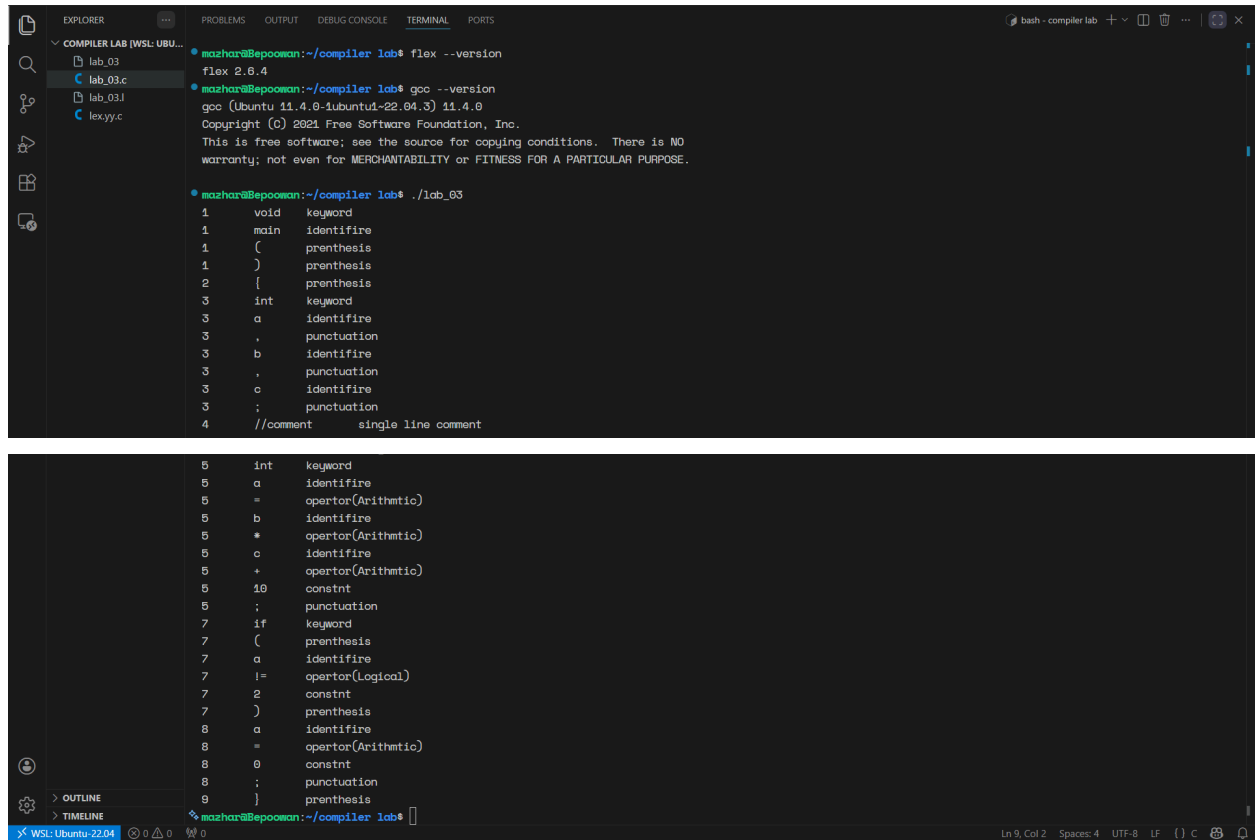

```
EXPLORER  PROBLEMS  OUTPUT  DEBUG CONSOLE  TERMINAL  PORTS
COMPILED LAB [WSL: UBUN...
  lab_03
  lab_03.c
  lab_03.l
  lex.yy.c

mashar@Bepoowan:~/compiler lab$ flex --version
flex 2.6.4

mashar@Bepoowan:~/compiler lab$ gcc --version
gcc (Ubuntu 11.4.0-1ubuntu1-22.04.3) 11.4.0
Copyright (c) 2021 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

mashar@Bepoowan:~/compiler lab$ ./lab_03
1      void      keyword
1      main      identifie
1      (         parenthesis
1      )         parenthesis
2      [         parenthesis
3      int       keyword
3      a         identifie
3      ,         punctuation
3      b         identifie
3      ,         punctuation
3      c         identifie
3      ;         punctuation
4      //comment  single line comment

5      int       keyword
5      a         identifie
5      =         operator(Arithmetic)
5      b         identifie
5      *         operator(Arithmetic)
5      c         identifie
5      +         operator(Arithmetic)
5      10        constnt
5      ;         punctuation
7      if        keyword
7      (         parenthesis
7      a         identifie
7      !=        operator(Logical)
7      2         constnt
7      )         parenthesis
8      a         identifie
8      =         operator(Arithmetic)
8      0         constnt
8      ;         punctuation
9      }         parenthesis

> OUTLINE
> TIMELINE
WSL: Ubuntu-22.04  mashar@Bepoowan:~/compiler lab$
```

Code Link : [GitHub](#)