

Mobile App Development

Lec5: Saving data

Ekarat Rattagan, PhD

Outline

- Saving data as Key-Value Sets
- Saving data in Files
- Saving data in SQL Databases

Outline

- Saving data as Key-Value Sets
- Saving data in Files
- Saving data in SQL Databases

Saving Key-Value Sets

If you have a relatively small collection of key-values that you'd like to save.

Scenarios why we need to save data, e.g.,

- To check the first time use
- To check the latest version
- To save geographical location
- To save session
- To save app's setting

Saving Key-Value Sets

If you have a relatively small collection of key-values that you'd like to save, you should use the **SharedPreferences** APIs.

A **SharedPreferences** object points to a file containing **key-value pairs** and provides simple methods to read and write them. Each **SharedPreferences** file is managed by the framework and can be private or shared.

Get a Handle to a SharedPreferences

- You can create a new shared preference file or access an existing one by calling one of two methods:
 - `getSharedPreferences()` — Use this if you need multiple shared preference files identified by name, which you specify with the first parameter. You can call this from any Context in your app.
 - `getPreferences()` — Use this from an Activity if you need to use only one shared preference file for the activity. Because this retrieves a default shared preference file that belongs to the activity, you don't need to supply a name.

Create SharedPreferences' objects

For example:

- `Context` context = getActivity();
- `SharedPreferences` sharedPref = context.getSharedPreferences(
getString(R.string.preference_file_key), Context.MODE_PRIVATE);

If you need just one shared preference file for your activity

- `SharedPreferences` sharedPref =
getActivity().getPreferences(Context.MODE_PRIVATE);

Write to Shared Preferences

To write to a shared preferences file,

- create a `SharedPreferences.Editor` by calling `edit()` on your `SharedPreferences`.
- Pass the keys and values you want to write with methods such as `putInt()` and `putString()`.
- Then call `commit()` to save the changes.

Write to Shared Preferences

Example:

```
int newHighScore;  
SharedPreferences sharedPref = getActivity().getPreferences  
(Context.MODE_PRIVATE);  
  
SharedPreferences.Editor editor = sharedPref.edit();  
  
editor.putInt("highScore", newHighScore);  
  
editor.commit();
```

Read from Shared Preferences

To retrieve values from a shared preferences file

- call methods such as `getInt()` and `getString()`,
- providing the key for the value you want, and optionally a default value to return if the key isn't present.

Read from Shared Preferences

Example,

```
SharedPreferences sharedPref = getActivity().  
getPreferences(Context.MODE_PRIVATE);
```

```
int defaultValue = 0;
```

```
long highScore = sharedPref.getInt("highScore", defaultValue);
```

Delete Shared Preferences

1. Remove one key

```
Editor editor = shared.edit();  
editor.remove(getString(R.string.saved_high_score));  
editor.commit();
```

2. Remove all data

```
Editor editor = shared.edit();  
editor.clear();  
editor.commit();
```

Case study 1 (Simple)

```
public class SharedPreferencesDemo extends Activity {  
    private static final String MY_PREFS = "my_prefs";  
    @Override  
    public void onCreate(Bundle savedInstanceState) {  
  
        super.onCreate(savedInstanceState);  
        setContentView(R.layout.main);  
  
        SharedPreferences shared =  
        getApplicationContext().getSharedPreferences  
        (MY_PREFS, Context.MODE_PRIVATE);  
    }  
}
```

Case study 1


```
// Write
```

```
Editor editor = shared.edit();  
editor.putString("stringKey", "Ekarat");  
editor.putBoolean("booleanKey", true);  
editor.commit();
```


```
//Read
```

```
String stringValue = shared.getString("stringKey", "not found!");  
boolean booleanValue = shared.getBoolean("booleanKey", false);  
Toast.makeText(this.getApplicationContext(), "name = "+value1+",boolean="+value2,  
Toast.LENGTH_LONG).show();  
} }
```


Case study 2: (Login process)

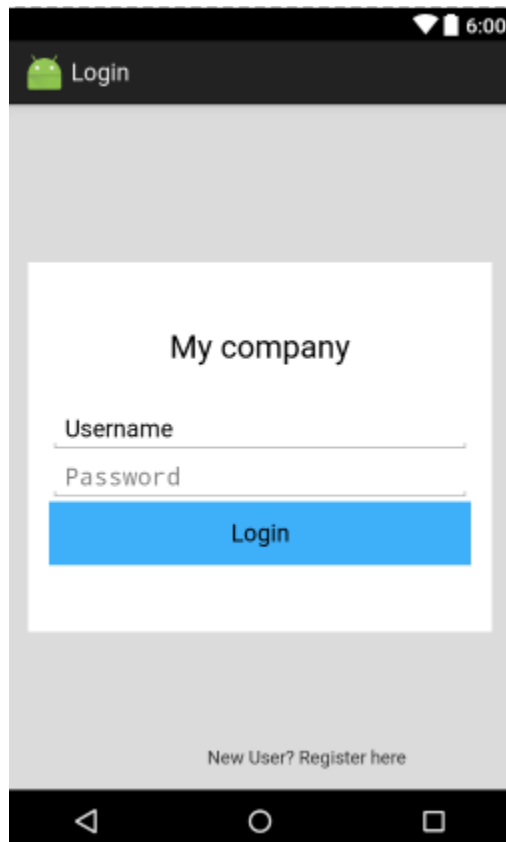

Login UI

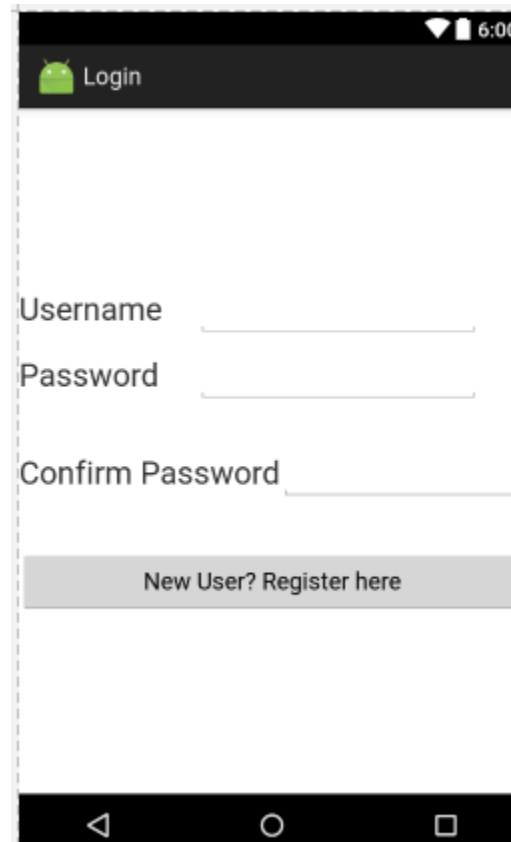

Register UI

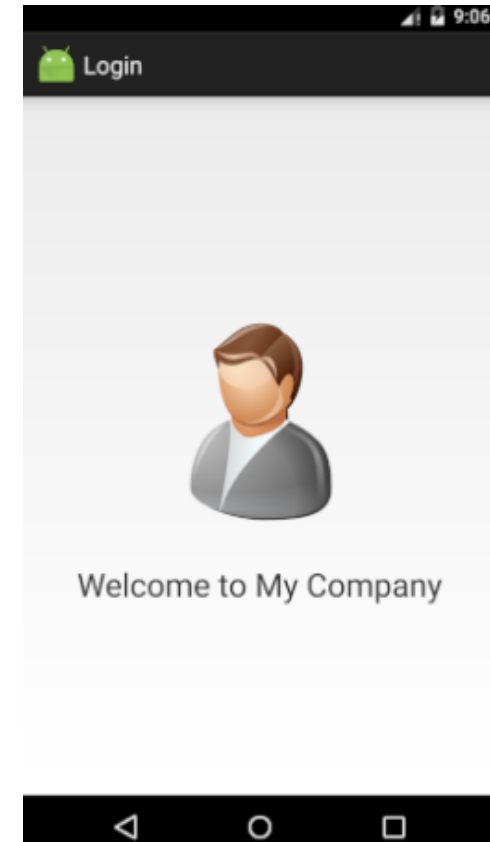

Main UI




Column 1
Column 2
Column 3

Preference (Setting)

Represents the basic Preference UI building block displayed by a **PreferenceActivity** in the form of a **ListView**. Associates with a **SharedPreferences** to store/retrieve the preference data.

Specifying a preference hierarchy in XML, each element can point to a subclass of Preference, similar to the view hierarchy and layouts.

Case study 3: (Setting)

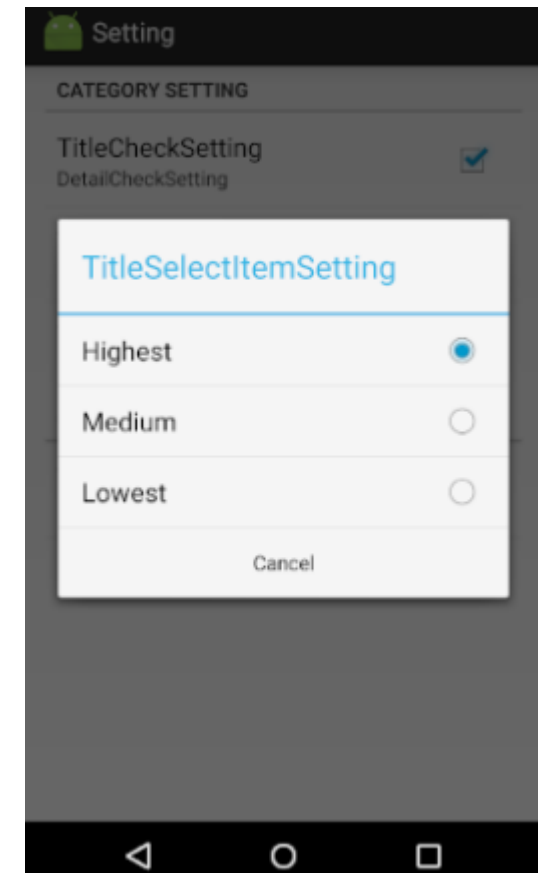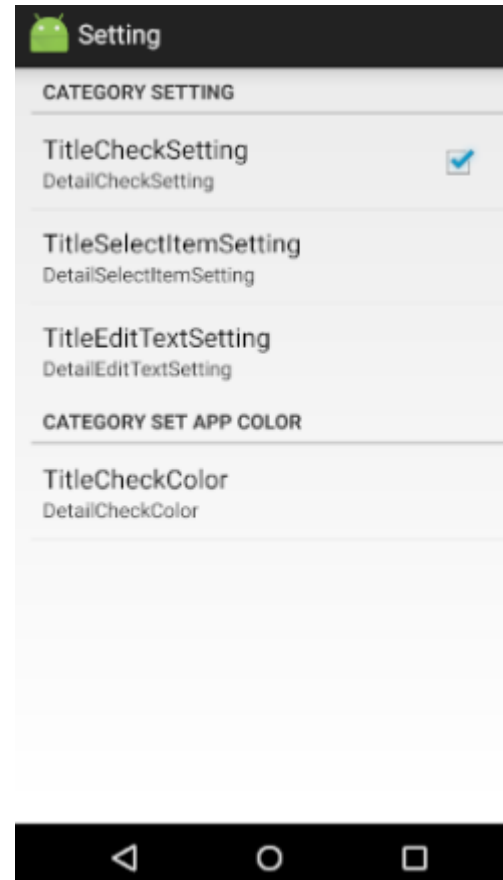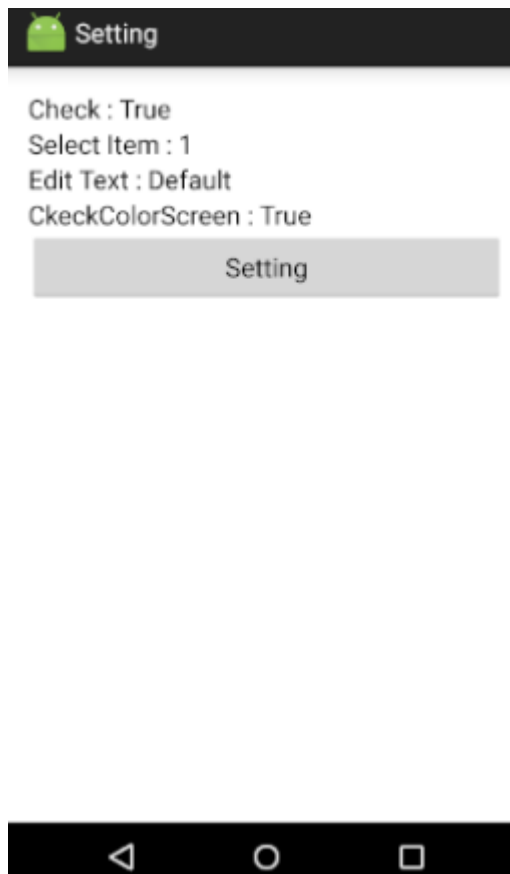

Exercise

1. Create a setting to allow users to change the background colors of your apps.

Resource

- <https://developer.android.com/training/basics/data-storage/shared-preferences.html>
- <https://devahoy.com/posts/android-login-activity-with-sharedpreferences/>
- <http://www.androidcode.in.th/2012/?p=228>