

Table of Contents

- 1. Introduction..... 3
 - 1.1 Purpose..... 3
 - 1.2 Scope..... 4
 - 1.3 Intended Audience..... 4
 - 1.4 Definitions, Acronyms, Abbreviations..... 4
 - 1.5 References..... 5
 - 1.6 Module Numbering Convention..... 5
- 2. Overall Description..... 7
 - 2.1 Product Perspective..... 7
 - 2.2 Product Functions (Summary)..... 7
 - 2.3 User Classes and Characteristics..... 8
 - 2.4 Operating Environment..... 8
 - 2.5 Design and Implementation Constraints..... 8
 - 2.6 Assumptions and Dependencies..... 9
- 3. System Architecture..... 9
 - 3.1 High-Level Architecture..... 9
 - 3.2 Frontend Architecture..... 9
 - 3.3 Backend Architecture & Persistence Model..... 10
 - 3.4 State Synchronization..... 11
 - 3.5 Deployment & Installation..... 11
 - 3.6 Internationalization Architecture..... 11
 - 3.7 Access Control Architecture..... 12
 - 3.8 Retrieval-Augmented Generation (RAG) Architecture..... 12
- 4. Data Model..... 14
 - 4.1 Top-Level State Shape..... 14
 - 4.2 Reference/Catalog Data (Cross-Cutting, Not Nested Per Project)..... 15
 - 4.3 Change Management Project — Field Reference..... 16
 - 4.4 Charter Definitions (M5, Shared Catalog)..... 18

4.5 Entity Relationship Summary.....	19
5. External Interface Requirements.....	19
5.1 User Interface Conventions.....	19
5.2 API Interface.....	20
5.3 Hardware Interfaces.....	28
5.4 Software Interfaces.....	28
6. Functional Requirements.....	29
6.0 Conventions.....	29
6.1 Platform & Governance (M1-M6).....	29
6.2 Change Management Program (M7-M22).....	34
6.3 Cross-Application Query & Retrieval (RAG).....	42
6.4 Platform Extensions (Beyond M1-M22).....	44
7. Cross-Cutting Functional Requirements.....	49
7.1 CSV Export.....	49
7.2 Notification Center (Alerts).....	49
7.3 Justification Governance.....	50
7.4 Permission Matrix.....	50
7.5 AI Governance Tiers.....	51
7.6 Framework-to-Module Mapping.....	51
8. Non-Functional Requirements.....	52
8.1 Performance.....	52
8.2 Security.....	52
8.3 Reliability & Data Integrity.....	53
8.4 Usability & Accessibility.....	54
8.5 Localization.....	54
8.6 Portability / Installability.....	54
8.7 Maintainability / Extensibility.....	54
8.8 Compatibility.....	54
9. Seed / Reference Data Requirements.....	55

9.1 Reference Tenant.....	55
9.2 Demo User / Role Matrix.....	55
9.3 Shared Catalogs.....	55
10. Appendices.....	56
10.1 Glossary.....	56
10.2 Requirement Traceability.....	56
10.3 Known Functional Gaps (Reference Implementation).....	56
10.4 Default Permission Matrix.....	59
10.5 Full i18n String Catalog.....	59
10.6 Full Static Reference/Catalog Data.....	92
10.7 UI Visual Reference.....	117
10.8 Test Plan / Acceptance Criteria.....	130
10.9 Closing Notes.....	144

journi

Software Requirements Specification

Human Change Management Application — Rebuild-Grade Technical Reference

Prepared for POWERACT Consulting

Version 2.0 · September 2026 · Confidential

Version 2.0 adds Configuration Management (Solution Pack selection and per-tenant module/AI-tier gating), Compliance & Security Standards activation, the Template Library, per-process Governance (Alerts, Business Rules, COSO-tagged Controls, KPIs, Reports, Risks & Opportunities), a seeded per-process RAG knowledge base, the “Ask journi” chatbot, and a BPMN 2.0-compliant Process Flow Modeler — see Sections 1.6, 6.3.3, 6.4, 4.1, 5.2, 7.4, 8.2, 8.8, and 10.3–10.4 for what changed.

1. Introduction

1.1 Purpose

This Software Requirements Specification (SRS) documents *journi* — a human change-management web application — at a level of technical and functional detail sufficient for an independent development team to rebuild it from scratch: the same 22 modules, the same data model, the same access-control and localization behavior, and the same installable Windows deployment, without access to the original source code.

It is a companion to, and supersedes for rebuild purposes, the earlier *journi Functional & Module Specification*: that document describes the product’s intent and framework rationale in narrative form; this one adds the missing engineering layers — data

model, API surface, non-functional requirements, and per-module functional requirements with unique identifiers — and corrects two things that changed since it was written: the module numbering (all 22 modules now run in one continuous logical sequence, M1-M22, described in Section 1.6) and the persistence architecture (journi now ships with a real local backend, not a browser-only reference build — Section 3).

1.2 Scope

journi is a standalone, multi-tenant human change-management application. It sits alongside — but does not replace or integrate with — an organization’s project-delivery/PMO tooling, and tracks the people side of a change initiative: individual and cohort readiness (ADKAR), emotional trajectory (Bridges, Kübler-Ross), organizational sponsorship and coalition strength (Kotter), and overall program state (Lewin), layered onto one shared, framework-agnostic data model.

In scope for this document: the full functional behavior of all 22 modules; the organizational hierarchy, role-based access control, and localization architecture; the data model and REST API; the Windows installation and deployment model; the governed AI Use Case Library; and the non-functional requirements (performance, security, portability, usability) the reference implementation satisfies.

In scope, in addition to the above: a full-page screenshot of every module (Section 10.7) as a visual reference alongside the prose UI conventions; the complete i18n string catalog in English/French/Arabic (Section 10.5); the complete content of every shared reference/catalog dataset (Macro Processes, E2E chains, Phase Templates, Charters, Journeys, Touchpoints, AI Use Case prompt templates, alert definitions, and more — Section 10.6); a recommended target REST API design for a rebuild, since the reference build’s own API is a whole-state store not meant to be replicated (Section 5.2.2); and one acceptance test case per functional requirement (Section 10.8).

Out of scope: pixel-level visual design beyond the screenshots in Section 10.7 and the palette tokens in Section 5.1 — the palette is POWERACT Consulting’s own “Brand & Graphical Chart Guide” (v1.0), adopted directly in `journi/tailwind.config.js` and `journi/src/index.css` (Section 5.1) rather than reproduced as a separate artifact; the illustrative seed-data narratives’ full prose form (Section 9 and 10.6 give structured/condensed content; full narratives live in the Master User Guide), and any integration with a specific third-party PMO, HRIS, or LMS system (journi exposes CSV export and a documented API surface as its integration points, but ships no pre-built connector).

1.3 Intended Audience

A development team tasked with rebuilding, extending, or re-platforming journi; a QA team writing test plans against its functional requirements; a solutions architect scoping a production (multi-tenant, cloud-hosted) deployment beyond the reference Windows installation described here.

1.4 Definitions, Acronyms, Abbreviations

Term	Meaning
ADKAR	Prosci’s five-block individual change model: Awareness, Desire, Knowledge, Ability, Reinforcement

Term	Meaning
Bridges	William Bridges' Transition Model: Ending → Neutral Zone → New Beginning
Kübler-Ross	The Change Curve, adapted here for organizational (not grief) sentiment: denial, resistance, exploration, commitment
Kotter	Kotter's 8-Step organizational change process
Lewin	Unfreeze-Change-Refreeze macro-state model
RBAC	Role-Based Access Control
RACSI	Responsible / Accountable / Consulted / Sign-off / Informed — journi's extended RASCI variant
SIPOC	Suppliers-Inputs-Process-Outputs-Customers process-mapping notation
OBS	Organizational Breakdown Structure (Module M3) — the roster of named resources/roles a project draws on
WBS	Work Breakdown Structure (Module M8)
CM	Change Management (as opposed to PM, Project Management)
E2E	End-to-End (process chain, Module M4)
MP	Macro Process — an atomic unit of journi's process model (Module M4)
FR-M n - nn	Functional requirement identifier: module number, then a sequential requirement number within that module
NFR- nn	Non-functional requirement identifier

1.5 References

- *journi Functional & Module Specification* (docs-src/spec/journi_spec.md) — narrative predecessor to this document; module numbers there use the pre-renumbering internal sequence (see the translation table in Section 1.6).
- *journi — The Complete User Guide* (docs-src/master-guide) — worked walkthroughs of every module against a running scenario tenant.
- *WINDOWS_INSTALL.md* (repository root) — end-user installation instructions.
- *journi Gap Analysis* and *Gap Closure Summary* (deliverables/) — historical record of functional gaps identified and closed prior to this SRS.

1.6 Module Numbering Convention

journi's 22 modules are organized into one continuous logical sequence, M1 through M22, running from tenant creation through platform governance, the full change-management project lifecycle, and sustainment. This visible numbering is intentionally decoupled from the source file names (Module<N>Page.jsx) and route paths (/app/m<N>), which are permanent internal identifiers chosen when each module was first built and never renumbered — so a developer locating a module's code should

always use the file-path column below, not the displayed module number, to search the repository history.

Displayed #	Module Name	Source File
M1	Tenant & Org Hierarchy	Module1Page.jsx
M2	Identity & RBAC	Module2Page.jsx
M3	Organizational Breakdown Structure (OBS)	Module22Page.jsx
M4	Macro Process, SIPOC, RACSI & E2E Process Registry	Module18Page.jsx
M5	Change Management Charter Registry	Module19Page.jsx
M6	AI Use Case Library & Governance	Module16Page.jsx
M7	Initiative (CM Project) Registry	Module3Page.jsx
M8	Work Breakdown Structure & Gantt	Module17Page.jsx
M9	Stakeholder & Impact Mapping	Module4Page.jsx
M10	ADKAR Engine	Module5Page.jsx
M11	Emotional & Transition Layer (Bridges / Kübler- Ross)	Module6Page.jsx
M12	Change Risk Register	Module13Page.jsx
M13	Sponsor & Coalition	Module7Page.jsx
M14	Communication Planning & Execution	Module8Page.jsx
M15	Training & Capability Building	Module9Page.jsx
M16	Resistance Management	Module10Page.jsx
M17	Manager-as-Coach Enablement	Module11Page.jsx
M18	Journey Map / Visual Core	Module15Page.jsx
M19	Stakeholder Journeys, Touchpoints & Analytics	Module20Page.jsx
M20	Metrics & Analytics Dashboard	Module14Page.jsx
M21	Reinforcement & Sustainment	Module12Page.jsx
M22	Field Notes	Module21Page.jsx

The sidebar groups these into three sections: **Platform & Governance** (M1–M6 — tenant setup, identity, and the reference data every project draws on), **Change Management Program** (M7–M22 — the working lifecycle of a single Change Management Project, in the order a practitioner actually touches them), and **Ask journi** — Query Data, Query Features, and (since v2.0) the chatbot described in Section 6.3.3, three cross-application capabilities deliberately left outside the M1–M22 sequence since none belongs to one module: all three query across the whole tenant, RBAC-scoped to whoever is asking, rather than operate within a single module’s own data.

A fourth category, **Platform Extensions** (Section 6.4 — Configuration Management, Compliance & Security Standards, the Template Library, and the Process Registry’s Governance and Flow (BPMN 2.0) tabs), was added in v2.0 for the same reason: none of these is a single M1–M22 module in its own right. Configuration Management and the Template Library are separate routes (/app/config, /app/templates) reached from the sidebar rather than an M<n> slot; Governance and Flow are new tabs added to the existing M4 Process Registry page rather than new modules, since both operate on the same Macro Process / E2E Process catalogs M4 already owns.

2. Overall Description

2.1 Product Perspective

journi is a self-contained, single-tenant-installable web application, not a module of a larger suite. It runs as a Node.js server process (bundled frontend + REST API) backed by a local SQLite database file, distributed today as a Windows-installable package (install.bat / start-journi.bat) but architecturally portable to any environment able to run Node.js 18+. It has no required external service dependency — the optional exception is the AI Use Case Library’s Real LLM Provider Connection (Section 6.6, M6), which is opt-in and falls back to a deterministic built-in generator when not configured.

2.2 Product Functions (Summary)

- Multi-tenant organizational hierarchy (Group → Organization → Projects) with hard data isolation between Organizations (Section 2, M1).
- Role-based access control with a runtime-editable Permission Matrix and a justification-governed audit trail for every score/state change (Section 3, M2).
- A 16-module Change Management Program lifecycle covering stakeholder mapping, ADKAR readiness, emotional/transition tracking, sponsorship, communications, training, resistance, coaching, risk, journey mapping, analytics, and sustainment (M7–M22).
- A shared, cross-cutting reference layer — Macro Processes/SIPOC/RACSI, WBS & Gantt, OBS, and a Change Management Charter Registry — that every program module draws on rather than duplicating (M3–M6, M8).
- A governed, tiered (Assistive/Augmented — never Autonomous) AI Use Case Library plugged into most modules (M6).
- Multilingual (English/French/Arabic, including full RTL) UI with tenant-default and personal-override language precedence.
- Client-side CSV export on high-traffic tables and an in-app Notification Center surfacing live-computed alert conditions.

- Since v2.0: Configuration Management (Solution Pack selection with real module/AI-tier gating), Compliance & Security Standards activation, a Template Library (Charter/Communication/Training templates), per-process Governance (Alerts, Business Rules, COSO-tagged Controls, KPIs, Reports, Risks & Opportunities), a seeded per-process RAG knowledge base, the “Ask journi” chatbot, and a BPMN 2.0-compliant Process Flow Modeler (Section 6.4, Section 6.3.3).

2.3 User Classes and Characteristics

See Section 3.2 (RBAC) for the authoritative role table. In summary: platform-wide administrators (Super Admin), organization/group administrators, project-scoped practitioners (Change Manager, PMO, Trainer, Communications Practitioner), team-scoped People Managers/Coaches, read-only Sponsors and Executive Viewers, and Employees with self-service, submission-only access to their own data.

2.4 Operating Environment

- **Server:** Node.js ≥ 18 (tested through Node 24), running an Express HTTP server on a configurable port (default 4000), serving both the built frontend (static assets) and the REST API from the same origin.
- **Database:** a single local SQLite file (server/data/journi.db), opened via one of two interchangeable drivers — see Section 3.3.
- **Client:** any evergreen desktop browser (Chrome, Edge, Firefox); no mobile-specific layout is shipped beyond standard responsive breakpoints, though Module M17’s UI is deliberately lightweight for frontline-supervisor use on a phone browser.
- **OS:** primary packaging target is Windows 10/11 (install.bat), but the Node/Express/SQLite stack is OS-agnostic; the same source runs on macOS/Linux with `npm install && npm start` in server/.

2.5 Design and Implementation Constraints

- **Frontend:** React 18 (function components + hooks only), Vite as the build tool, React Router for client-side routing, Tailwind CSS for styling, all state read from a single React Context (AppStateContext) rather than a state-management library.
- **Backend:** Express, minimal middleware, a single persisted JSON document per tenant-scope rather than a normalized relational schema (Section 4).
- **Persistence portability:** the backend must run without requiring a native-compiled dependency to succeed at `npm install` — this is why two interchangeable SQLite drivers exist (Section 3.3); a rebuild targeting only modern Node (≥ 22 , where `node:sqlite` is stable) could drop the fallback, but the dual-driver approach is the current constraint for Windows install reliability across a wide range of installed Node versions.
- **No required cloud dependency:** the reference build must remain fully functional offline, with the sole opt-in exception of the Real LLM Provider Connection.
- **Localization-first:** every user-facing string must exist in `translations.js` for all three languages; no hardcoded UI string is acceptable outside that file.


2.6 Assumptions and Dependencies

- A single journi installation serves one physical/virtual machine and one SQLite file; horizontal scaling or multi-instance deployment is out of scope for the reference build (Section 8.3 discusses what a production re-platform would need).
- The application assumes trusted network access to the machine it runs on (e.g. a LAN or a single user's desktop) — the reference build does not implement TLS termination, rate limiting, or a WAF; a production, internet-facing deployment must add these at the infrastructure layer.
- Demo/seed data (Section 9) is fictional and is not a substitute for real organizational data before go-live, per the Closing Notes of the predecessor Functional Specification.

3. System Architecture

3.1 High-Level Architecture

journi is a single Node.js process that both serves the compiled frontend and exposes the API the frontend calls, backed by one local SQLite file:

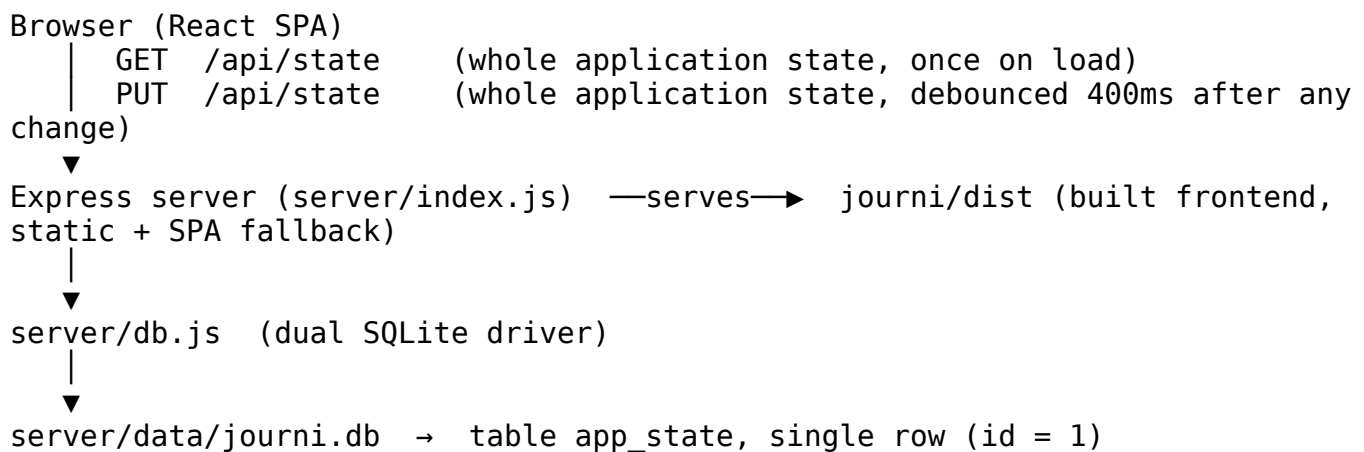

There is deliberately no per-entity REST surface: the entire application's data — every organization, project, and sub-record — lives in one JSON document, and the client and server exchange that whole document rather than individual resources. Section 3.4 explains why, and what a normalized-schema rebuild would need to change.

3.2 Frontend Architecture

- **Framework:** React 18, function components and hooks only, built with Vite.
- **Routing:** React Router; each of the 22 modules is a top-level route (/app/m1 ... /app/m22), rendered inside a shared Layout (TopBar + Sidebar + routed content).
- **State:** a single React Context, AppStateContext (journi/src/state/AppStateContext.jsx), is the sole source of truth for all persisted application data (Section 4) and exposes every mutation as a function via useAppState() — no separate state-management library, no per-page local copies of server data.
- **Component library:** a small shared set used across all 22 module pages — PageHeader, Modal (the standard Add/Edit dialog shell), Badge (status/tone pill),

EmptyState, ExportCsvButton, AiSuggestionBox (the standard AI-use-case card, Section 6.6), ProgressBar, JustifyPanel (the stage-then-justify governance widget, Section 6.6.5), RequireProject / RequireRole (route guards).

- **Internationalization:** `journi/src/i18n/` — a single `translations.js` dictionary keyed by string id, each with `en/fr/ar` values; `useI18n()` resolves the active language and returns a `t(key)` function. Arabic renders full right-to-left, including navigation, tables and the Journey Map chart, not just mirrored text direction.
- **Data-entry pattern:** every module's Create/Edit flow follows the same shape — a modal state of `{ mode: 'add' | 'edit', id? } | null`, a form state seeded from a `BLANK_*` constant (add) or the selected record (edit), and a `submit()` that branches into `addSubItem` or `updateSubItem` (Section 4.3) — a deliberate, repeated convention so a developer who has read one module's CRUD code has read all of them.

3.3 Backend Architecture & Persistence Model

Server: a single Express app (`server/index.js`) with one JSON body-parsing middleware (25MB limit, raised well above Express's 100kb default since a data-rich tenant's full state can run to several MB) and no CORS, session, or authentication middleware of any kind — see the security note in Section 8.2.

Dual SQLite driver (`server/db.js`): `journi`'s own Windows-installability requirement — `npm install` must succeed without a native C++ toolchain on a machine that may be running anything from Node 18 to the very latest release — is met by trying two interchangeable drivers in order:

1. `node:sqlite` (Node's built-in DatabaseSync, stable from Node 22.5+) — zero npm dependency, tried first.
1. `better-sqlite3` — kept as an optionalDependency specifically so a failed native build (e.g. no Visual Studio Build Tools on a fresh Windows machine, or no prebuilt binary for a very new Node ABI) never aborts `npm install` as a whole; it is the fallback for Node versions below 22.5.

If neither driver loads, the server fails fast with one actionable error at import time rather than an unintelligible crash later. `driver.supportsPragma` distinguishes the two — only `better-sqlite3` receives `PRAGMA journal_mode = WAL`.

Schema — one table, one row, a JSON-blob key-value store rather than a normalized relational schema:

```
CREATE TABLE IF NOT EXISTS app_state (
  id          INTEGER PRIMARY KEY CHECK (id = 1),
  data        TEXT,          -- JSON.stringify of the entire frontend
  `data` object (Section 4)
  current_user_id TEXT,
  scope       TEXT,          -- JSON.stringify of { orgId, cmProjectId }
  updated_at  TEXT NOT NULL
)
```

This is a deliberate design choice, not an oversight: the frontend's own evolving state shape (`migrateOrSeed()` in `AppStateContext.jsx`) is treated as the single source of

truth for what the data looks like, so a normalized SQL schema would be a second, driftable copy of the same shape. A production re-platform that needs per-entity querying, reporting joins, or multi-writer concurrency should normalize this into real tables (Section 8.3 discusses the tradeoff explicitly) — but should preserve the JSON field shapes in Section 4 as the schema-design input, since every module’s frontend code is written directly against them.

Storage location: `${JOURNI_DATA_DIR:-<server>/data}/journi.db`, directory auto-created if missing.

3.4 State Synchronization

Persistence is debounced client-side, not per-mutation, and every write is a full-document overwrite:

1. On app load, the client fetches `GET /api/state` once. If the backend already holds data, it replaces the initial in-memory demo seed (rendered immediately for a no-flash first paint) with the server’s data, `currentUserId`, and `scope`.
1. Every subsequent state change re-arms a 400ms debounce timer; when it elapses, the client sends the **entire** current `{ data, currentUserId, scope }` object as the body of `PUT /api/state`, coalescing bursts of rapid edits (e.g. typing in a field) into one write.
1. The server does not merge or patch — it JSON-stringifies the body and upserts the single `app_state` row. There is no optimistic-locking or versioning at the transport level: the last write to finish wins.
1. A failed save is swallowed silently and simply retried on the next state change; nothing is queued client-side beyond ordinary React state.

A developer tracing “why did my edit not save”: check that the 400ms debounce elapsed, that `loadedFromServer` was already true when the edit happened (edits made before the initial `GET /api/state` resolves are held in memory and included in the next debounced save once it does), and that the server process could reach its SQLite file.

3.5 Deployment & Installation

The distributed package (`deliverables/journi_fullstack_windows.zip`) ships source only — `journi/` (frontend source, no `node_modules` or `dist`) and `server/` (backend source, no `node_modules`) — plus `install.bat`, `start-journi.bat`, and `WINDOWS_INSTALL.md`. `install.bat` runs `npm install` in both `journi/` and `server/`, then `npm run build` in `journi/` to produce `journi/dist`, which `server/index.js` serves statically with an SPA fallback (any unmatched path returns `index.html` so client-side routing works on a hard refresh/deep link). `start-journi.bat` launches `node server/index.js`, which listens on `process.env.PORT || 4000` and logs the resolved SQLite file path on startup. A rebuild targeting a different OS needs only `npm install && npm run build` (in `journi/`) and `npm start` (in `server/`) — the batch files are a Windows-convenience wrapper around otherwise standard Node tooling.

3.6 Internationalization Architecture

Every user-facing string is keyed in `journi/src/i18n/translations.js` with `en/fr/ar` values — no hardcoded UI string is acceptable outside that file (Section 2.5). Language precedence, resolved on every sign-in and every Organization switch: (1) the signed-in

user’s own explicit language preference, if set; (2) the newly-scoped Organization’s configured Default Language (set on M1 by a Super Admin, Group Admin, or Organization Admin); (3) English as the platform fallback. A manual in-session language switch applies immediately but is session-local only — it never overwrites the stored user preference or the Organization default, and is re-resolved from the precedence order above on the next sign-in or Organization switch. Arabic renders full right-to-left: navigation, tables, and the Journey Map’s chart mirror correctly, not just text direction.

3.7 Access Control Architecture

See Section 6.6.1–6.6.3 (M2) for the full Permission Matrix and Justification Governance functional requirements; this section summarizes the architecture. RBAC is enforced **entirely client-side** (`journi/src/utils/rbac.js`) — the API itself performs no authorization check of any kind (Section 5.2, Section 8.2). Nine roles (`super_admin`, `group_admin`, `org_admin`, `sponsor`, `change_manager`, `people_manager`, `practitioner`, `employee`, `executive`) are each scoped to one level of the Group → Organization → Project hierarchy. Each write/manage capability check (`canWrite`, `canManageHierarchy`, `canManageUsers`, `canActivateAiForOrg`, `canManageCharters`, `canManageAiUseCases`, `canManageTemplates`, `canRequestProjectAiOverride`) reads first from the runtime-editable Permission Matrix (`data.rolePermissions`, a role × capability grid seeded with sensible defaults and editable in place by a Super Admin on M2), falling back to hardcoded default logic only where a matrix entry is missing — so the matrix is a fail-safe override, never a bypass of the underlying model.

3.8 Retrieval-Augmented Generation (RAG) Architecture

Three capabilities — Query Data, Query Features (Section 6.3), and the AI Use Case Library’s own generation (Section 6.1.6) — are served by a real RAG pipeline added to the same Express process described in Section 3.3, under `server/lib/` and `server/routes/`. This is the one place in `journi`’s backend that does more than store and return a JSON blob; the design intent, in each of its three parts, is stated below rather than left to be reverse-engineered from the code.

Retrieval (`server/lib/retrieval.js`). A real TF-IDF (term frequency, log-normalized) + cosine-similarity search over a bag-of-words vector space — not a neural embeddings model and not a vector database. This is a deliberate choice: it needs no network call and no API key to run, so it works fully offline, is exactly reproducible, and can be verified without ever touching a provider’s API (Section 8.6’s Windows-installability requirement extends naturally to this: retrieval has zero new runtime dependency). Every consumer treats the index as an opaque `{ search(query, k) }` capability, so swapping in a real embeddings provider later is a contained change to this one file.

Corpora (`server/lib/corpus/`). Two static reference corpora ship with the server: `features.js` (one entry per routed module plus Query Data/Query Features themselves, used by Query Features) and `methodology.js` (25 short definitions of `journi`’s own Lewin/ADKAR/Bridges/Kübler-Ross stage vocabulary and alert conditions, used to ground the AI Use Case Library). Query Data has no static corpus of its own — see below.

Query Data’s grounding is computed, not retrieved, wherever possible

(`server/lib/queryData.js`). A fixed set of deterministic aggregation functions (project counts, open Resistance Log entries, open risks by category, ADKAR averages, currently-firing alerts) pattern-match the question and compute the answer directly from the request’s data payload — the frontend sends the same `{ data }` object it already holds in memory (Section 4), not a copy held server-side. The LLM’s only role, when one of these matches, is to phrase the already-computed fact into a sentence; it is explicitly instructed never to state a number not given to it. Retrieval only takes over for a question no aggregator recognizes, searching a corpus built on the fly from the visible projects’ own risk/resistance/business-driver text, and even then the model is told to answer from the retrieved records alone.

RBAC enforcement is server-side, reusing the real rule, not a copy of it.

`queryData.js` imports `visibleOrganizations/visibleProjects` from `journi/src/utils/rbac.js` and `ROLES_WITH_INDIVIDUAL_VISIBILITY` from `journi/src/data/constants.js` directly — there is no second, hand-maintained visibility rule to drift out of sync with the one the frontend itself enforces (Section 3.7). `queryFeatures.js` filters the module catalog against the same role gates `<RequireRole>` enforces in `App.jsx`, so a search can never point a caller at a module their own role would be blocked from opening.

Generation (`server/lib/llmProxy.js`) calls the same four providers as Module 6’s Real LLM Provider Connection (Anthropic, OpenAI, Google, or a custom OpenAI-compatible endpoint), using whichever `{ provider, apiKey, model, baseUrl }` the frontend forwards from that same connection, per request. The key is used once, for that one call, and is never written to disk, logged, or cached server-side — the pass-through, not-persisted contract FR-M6-08 already requires stays true. This closes the exact gap the frontend’s own `llmProviders.js` flags in comment: a browser-direct call exposes the key to anyone with devtools access to that origin; proxied through this server, it does not. A server operator may also set `ANTHROPIC_API_KEY` in `server/.env` as a fallback so Query Data and Query Features work before anyone connects a provider on Module 6 — the AI Use Case Library never uses this fallback; it always prefers the signed-in user’s own Module 6 connection (Section 8.2, NFR-19).

Graceful degradation, at every layer. If the backend cannot be reached at all, or generation fails for any reason (no key configured anywhere, a network error, a malformed provider response), every one of the three routes still returns its real retrieval result — the computed fact, the matched module, the retrieved methodology snippets — with a `generationError` field, rather than fail the request outright. `AiSuggestionBox` (Section 3.2) layers this into a three-tier fallback: the RAG backend first, then the pre-existing direct-browser-to-provider call if a Module 6 connection exists, then the deterministic built-in example — the same never-break contract FR-M6-09 already specifies, now with a grounded option ahead of both fallbacks rather than instead of them.

A fourth route, added in v2.0 (Section 6.3.3). `server/lib/chatbot.js` does not introduce a new retrieval mechanism — it composes the three that already exist: it calls Query Data’s own `answerQueryData` for tenant-record aggregation/retrieval, runs a second TF-IDF pass over the same module-feature corpus Query Features uses, and runs a third TF-IDF pass over a new corpus, `processKnowledgeBase.js` (Section 6.4.5), built the same way `macroProcesses.js` and every other cross-boundary reference file

is: imported directly by the server from `journi/src/data/`, never duplicated. All three results are merged into one grounding context before a single LLM call, so the chatbot never performs three separate generations for one question.

4. Data Model

journi persists one JSON document per installation (Section 3.3). This section is the authoritative field-level schema a rebuild must reproduce; every field name below is drawn directly from the reference implementation's default-object constants and seed data, not inferred.

4.1 Top-Level State Shape

Key	Holds
groups	Array of Group objects — optional top tier of the hierarchy (a holding company / multi-entity corporate group).
organizations	Array of Organization objects — the primary tenant boundary.
mainProjects	Array of Main Project objects — the underlying business/IT initiative (e.g. an ERP rollout), distinct from a Change Management Project.
cmProjects	Array of Change Management Project objects — the core, heavily-nested working entity (Section 4.3).
users	Array of platform user/account objects (identity + RBAC scope).
aiUseCaseCatalog	Array of AI Use Case definitions — the shared, versioned catalog (M6).
macroProcessCatalog	Array of Macro Process reference entries (M4, MP-01...MP-10).
e2eProcessCatalog	Array of End-to-End Process Registry entries (M4, E2E-xx). Since v2.0, each entry may also carry an optional bpmnXml string field (Section 6.4.6).
phaseTemplateCatalog	Array of Phase Template definitions — shared, versioned (M8).
racsiGrid	Object keyed by Macro Process id → <code>{ [role]: 'R'\ 'A'\ 'C'\ 'S'\ 'I'\ '' } (M4 RACSI grid, editable).</code>
aiOrgActivation	Object keyed by orgId → <code>{ [useCaseId]: boolean }</code> — whether an AI use case is switched on for an Organization (M6).
aiProject0override	Object keyed by cmProjectId → <code>{ [useCaseId]: boolean }</code> — per-project override of the Organization default (M6).

Key	Holds
aiUsageLog	Array of AI usage/outcome audit-log entries, platform-wide (not nested per project).
codebooks	Object keyed by orgId → array of qualitative-coding Code objects (M16 Coding Workbench, org-scoped taxonomy).
charters	Array of CM Charter definitions (M5), each with a nested entries[] (Section 4.4).
rolePermissions	Object keyed by role → { [capabilityKey]: boolean } — the runtime-editable Permission Matrix (M2).
requireJustification	Boolean — platform-wide Justification Governance flag (M2).
license	Single License object — SaaS-mode demo license record (M2). Object — active Solution Pack, enabled module list, AI tier, and per-standard compliance activation (Section 6.4.1, 6.4.2). Added in v2.0.
processGovernance	Object keyed by Macro Process id → { alerts[], businessRules[], controls[], kpis[], reports[], risks0pportunities[] } (Section 6.4.4). Added in v2.0.
templateLibrary	Object — { charterTemplates[], communicationTemplates[], trainingTemplates[] }, each versioned (Section 6.4.3). Added in v2.0.

currentUserId and scope ({ orgId, cmProjectId }) are persisted alongside data (same server row, sibling fields) but are not part of data itself.

Not persisted server-side by design: the Real LLM Provider Connection’s configuration ({ provider, apiKey, model, baseUrl }) lives only in the browser’s localStorage, under a separate key from the rest of the application’s data, so an API key is never bundled into a data export, and never synced across machines. There is no “Reset Demo Data” action in the current build — it was removed in favor of per-CM-Project version history and revert (Section 4.3, version/versionHistory), which gives the same start-over-on-one-project need a safer, auditable path than a platform-wide wipe.

4.2 Reference/Catalog Data (Cross-Cutting, Not Nested Per Project)

These arrays back M3–M6 and M8 and are shared across every Organization and Project rather than duplicated per tenant: aiUseCaseCatalog, macroProcessCatalog, e2eProcessCatalog, phaseTemplateCatalog, racsiGrid, charters (definitions; compliance logging is per-project, Section 4.3), plus the constant reference tables described per-module in Section 6 (ADKAR block list, resistance types, RESISTANCE_TYPES, journeys/journeyTouchpoints, macroProcesses, e2eProcesses, crossTypeMatrix, benchmarks, mentoringStages, defaultCodebook, alertDefinitions —

each a static JS module under `journi/src/data/`, not a database table, since they change only with a product release, not per-tenant). Added in v2.0:
`packDefinitions.js` (Pack → module list / AI tier / Organization ceiling),
`complianceStandards.js` (the seven standards' metadata), `processGovernanceSeed.js` (the 60 seeded governance items backing Section 6.4.4), `processKnowledgeBase.js` (Section 6.4.5), and `templateLibrarySeed.js` (Section 6.4.3's seeded templates) — all follow the same static-module, not-a-database-table convention as the list above.

4.3 Change Management Project — Field Reference

A `cmProject` object's own top-level fields: `id`, `orgId`, `mainProjectIds[]` (many-to-many link to zero, one, or more Main Projects — Section 6.1, M1), `name`, `changeManager`, `changeType`, `businessDriver`, `targetPopulation`, `successCriteria`, `lewinPhase`, `bridgesPhase`, `bridgesNote`, `sentimentSnapshot`, `aiUseCases[]` (activated-use-case-id strings), `changeLog[]`, `adkar{}`, `sponsor{}`, `sustainment{}`, plus every sub-collection array below.

Collection name	Module	Item shape
-----------------	--------	------------

adkar (object, keyed by block)	M10	{ score: 1-5, note, history: [{ id, date, score, justification? }] }
changeLog	M2 (governance)	{ id, date, module, field, oldValue, newValue, justification } — the Justification Governance audit trail (Section 6.6.2)
risks	M12	{ id, category: 'adoption' \ 'sponsorship' \ 'capacity' \ 'saturation', description, likelihood: 1-5, impact: 1-5, owner, status: 'open' \ 'mitigating' \ 'closed', actions?: [{ id, description, owner, dueDate, status: 'open' \ 'in_progress' \ 'closed' }] } — actions[] is the Mitigation Action Plan
stakeholdersGroups	M9	{ id, name, headcount, impact: { process, tech, role, location, identity } (each 1-5), influence: 1-5 }
communications	M14	{ id, message, audience, channel, sender, timing, adkarBlock, status: 'draft' \ 'scheduled' \ 'sent' }

Col lec tio n	Mo dul e	Item shape
tio ns		
tra ini ngs	M1 5	{ id, curriculum, track, level: 'Foundation'\ 'Practitioner'\ 'Advanced', module, objectives, prerequisites, agenda, targetAudience, expectedResults, workshops, facilitator, format, completion: 0-100, certified: boolean }
res ist anc elo g	M1 6	{ id, type: 'role'\ 'skill'\ 'will'\ 'systemic', source, rootCause, severity: 1-5, mitigation, owner, dueDate, status: 'open'\ 'in_progress'\ 'closed', anonymous: boolean }
coa chi ngN ote s	M1 6 / M1 7	{ id, managerName, cohort, barrierBlock, note }
jou rne yEv ent s	M1 8	{ id, offsetDays, label, type: 'milestone'\ 'communication'\ 'assessment'\ 'training' }
wbs Tas ks	M8	{ id, track: 'pm'\ 'cm'\ 'framework', phase, name, baselineStart, baselineEnd, actualStart, actualEnd, accountabilityTag: 'PROJECT'\ 'CHANGE'\ 'JOINT', status: 'planned'\ 'in_progress'\ 'done'\ 'at_risk', percentComplete: 0- 100 }
pha seG ate s	M8	{ id, phase, date, jointDecision: 'go'\ 'go_with_conditions'\ 'no_go', conditions, accountable: 'PM'\ 'CM'\ 'ES'\ 'FPO'\ 'ITL'\ 'SUP', pmInput: { recommendation, notes }, cmInput: { recommendation, notes, readinessIndexSnapshot, checklistCompletionPct, openFlags } }
pha seC hec kli sts	M8	{ id, phase, track: 'pm'\ 'cm', item, weight: 1-100, done: boolean }
cha rte rAc tio nLo g	M5	{ id, charterActionId (FK → static charter-actions catalog), date, note }
tou chp	M1 9	{ id, touchpointId (FK → static journeyTouchpoints catalog), date, note }

Col lec tio n	Mo dul e	Item shape
oin tLo g		
cod eTa gs	M1 6	{ id, codeId (FK → codebooks[orgId]), sourceType, sourceId, linkedResistanceId: FK → resistanceLog \ null, date }
dis mis sed Ale rts	Not ific atio n Ce nte r	array of alert-id strings — the alerts themselves are always computed live (Section 6.6.4), never persisted; only dismissal state is
fie ldN ote s	M2 2	{ id, date, category, relatedModules: string[] (multi-select), title, body, author }
obs Ent rie s	M3	{ id, role, name, reportsTo: FK → another entry in the same project's obsEntries \ null, notes }
spo nso r (obj ect)	M1 3	{ name, visibility: 'weak'\ 'moderate'\ 'strong', visibilityNote, members: [{ id, name, role, influence: 1-5, engagement: 1-5 }], actions: [{ id, action, phase: 'Prepare'\ 'Manage'\ 'Reinforce', done: boolean }] }
sus tai nme nt (obj ect)	M2 1	{ checkpoints: [{ id, label: '30-day'\ '60-day'\ '90-day', daysAfterGoLive, adoptionRate, regressionRisk: 'low'\ 'moderate'\ 'high'\ null, status: 'not_due'\ 'complete' }], quickWins: [{ id, title, date }], lessonsLearned: [{ id, text, linkedRuleOrControl?, status?: 'pending'\ 'applied' }], signoff: boolean }

Computed-only values (never stored — recomputed from the fields above on every render): riskScore/isHighSeverityRisk (M12), taskGapDays/gapTone (M8), phase-checklist completion percentage (M8), the Composite Readiness Index and divergence flags (M20), and every live alert condition (Notification Center).

4.4 Charter Definitions (M5, Shared Catalog)

charters[] (top-level, not per-project): { id, name, category, what, who, when, where, why, how, ownerRole, racsi, governingScope, version, reviewCadence, status: 'Active'\|'Retired', entries: [{ ...action-mapping fields — pdcaStage, sequence, linkedMacroProcess/Task/Phase, responsibleRole, accountableRole, frequency }] }.

4.5 Entity Relationship Summary

Group (0..1) —< Organization >— License (per-org context via M2)
 Organization —< MainProject
 Organization —< CmProject
 MainProject >—< CmProject (many-to-many via
 cmProject.mainProjectIds[])
 Organization —< User (scoped by scopeType/scopeId to org,
 group, or a specific project)
 CmProject —< every sub-collection in Section 4.3 (1-to-many, embedded
 arrays – not separate tables)
 Organization —< aiOrgActivation entry
 CmProject —< aiProjectOverride entry
 Organization —< codebooks entry —< codeTags (per CmProject, referencing
 codebooks[orgId])

No sub-collection item is ever referenced from more than one cmProject — every relationship below the CmProject level is a plain embedded array, not a foreign-keyed table, which is what makes the single-JSON-document persistence model in Section 3.3 a faithful fit rather than a shortcut.

5. External Interface Requirements

5.1 User Interface Conventions

- **Shell:** a fixed TopBar (wordmark, Organization/Project scope selector, Notification Center bell, current user) and a Sidebar (Section 1.6’s two-section module list), with routed content filling the remaining viewport.
- **CRUD pattern:** every module’s Add/Edit flow opens the shared Modal component; every list view pairs an Edit (secondary-style) and Delete (danger-style) button per row, gated by the same role/capability check as the module’s own write access (Section 3.7).
- **Status encoding:** the shared Badge component renders a colored pill (tone: brand/green/amber/red/gray/sand) for every status, severity, or classification field across all 22 modules — journi’s shared visual vocabulary for “attention needed.”
- **RTL:** every layout listed above mirrors correctly under Arabic (Section 3.6), not just inline text.
- **Visual identity:** journi’s Tailwind color tokens (journi/tailwind.config.js) are pinned to the exact palette in POWERACT Consulting’s own “Brand & Graphical Chart Guide” (v1.0): Orange Primary #F8931D and Orange Deep #E07B00 (brand-600/brand-700 — buttons, active navigation, links, KPI numbers, table header fills) as the one accent color, used sparingly and purposefully, against a light background (surface #FDFDFC) with charcoal-grey chrome and text — Grey Dark #3A3A3C, Grey Ink #58595B, Grey Medium #808184, Grey Light #F2F2F3, Grey Line #E3E3E4 — never black. The guide’s five-color semantic status scale (Section 6.2 of the brand guide; red #F4C7C3 through dark green #B6D7A8) is reproduced as the light-tint shades of Tailwind’s own red/amber/yellow/emerald palettes, so the shared Badge, StatCard, and ProgressBar components render on-brand without per-call-site overrides; multi-series charts (the WBS/Gantt’s three workstreams, the Journey Map’s event types) use brand orange plus the guide’s muted blue #3A6EA5 and muted green

#5AA469 rather than a fourth competing hue. journi’s own logo mark (journi/public/journi-logo.svg — a circular orange/blue people-and-cycle icon, distinct from POWERACT’s own consulting-firm wordmark) appears in the Sidebar header and on the Login screen, always on a white background, consistent with the guide’s general logo-placement good practice even though the guide’s specific POWERACT wordmark rules do not apply to journi’s own product mark. journi/src/index.css’s shared component layer (.card, .btn-*, .input, .badge, .label) is the single place these tokens are consumed; no module page hardcodes a color outside this layer (Section 8.7, NFR-16).

5.2 API Interface

5.2.1 Reference Implementation API (as-built)

The backend exposes exactly two functional endpoints — this is a whole-state store, not a per-resource REST API; all entity-level create/update/delete logic lives client-side (Section 3.2, 4.3) and is expressed on the wire only as the net effect on the one JSON document below.

Method	Path	Request Body	Response	Notes
GET	/api/health	—	{ ok: true, serverFallbackKeyConfigured: boolean }	Liveness check; the second field tells the frontend whether ANTHROPIC_API_KEY is set in server/.env (Section 3.8).
GET	/api/state	—	{ data, currentUserId, scope }, or { data: null, currentUserId: null, scope: { orgId: null, cmProjectId: null } } on an empty database; 500 { error } on failure	Reads the entire application state. No authentication, no scoping/filtering by caller — returns everything.
PUT	/api/	{ data,	{ ok: true }; 500 { error }	Full blind

Method	Path	Request Body	Response	Notes
T	state	currentUserId, scope } (the client's entire in-memory state)	on failure	overwrite of the single stored row — no merge, no shape validation, no optimistic-locking/versioning.
POST	/api/query-data	{ question, user: { role, scopeType, scopeId }, data, llm? }	{ answer, mode: 'aggregate' 'retrieval' 'one', fact, sources, generationError? }	Section 6.3.1. data is the caller's own current state (no server-side copy); RBAC-scoped and computed/retrieved server-side per Section 3.8.
POST	/api/query-features	{ question, user: { role }, llm? }	{ answer, sources }	Section 6.3.2. sources are role-filtered module matches, each with a path the frontend can navigate to directly.
POST	/api/ai-suggest	{ useCaseId, recordContext?, llm? }	{ text, tier, humanCheckpoint, sources, generationError? }	RAG upgrade for M6

Method	Path	Request Body	Response	Notes
GET	/*	—	Static file from <code>journi/dist</code> if present, else <code>index.html</code> (SPA fallback)	(FR-M6-11): retrieves methodology grounding for the named use case before generating. Frontend hosting; if <code>journi/dist</code> is missing, returns 500 with an actionable build-reminder message instead.

Added in v2.0:

Method	Path	Request Body	Response	Notes
POST	/api/chatbot	{ question, history?: [{role,text}], user: { role, scopeType, scopeId }, data, llm? }	{ answer, sources, generationError? }	Section 6.3.3 (FR-CB-01 through FR-CB-06). Merges Query Data's aggregation/retrieval, Query Features' module retrieval, and the seeded process knowledge base (Section 6.4.5) into one grounding

Method	Path	Request Body	Response	Notes
				context before generation.

This is sufficient for the reference build’s single-machine, single-tenant-session usage pattern, but is explicitly not a target to replicate for a multi-user or production rebuild (Section 8.2, NFR-05, NFR-09). Section 5.2.2 specifies the resource-oriented API a rebuild should implement instead; the three RAG routes above are the one part of the reference API already resource-appropriate as-is — a rebuild should keep their shape and simply add the auth/scoping middleware Section 5.2.2 specifies around them.

5.2.2 Recommended Target API for a Rebuild

A rebuild should replace the whole-blob store with a conventional resource-oriented REST API, one route family per entity/sub-collection in Section 4, so that per-entity access control, partial updates, transport-level audit logging, and multi-writer concurrency (NFR-09) all become possible. The table below is the recommended route set; request/response bodies follow the field shapes already specified in Section 4.3 — nothing here changes what data looks like, only how it is addressed and mutated.

Conventions: all routes are prefixed `/api/v1`; authentication is a bearer token or session cookie issued by `POST /api/v1/auth/login` (Section 8.2, NFR-03 closure); every mutating request must carry `Authorization`; every response uses standard HTTP status codes (200/201/204/400/401/403/404/409/500); every entity carries a server-assigned `updatedAt` and an opaque version (or `ETag`), and an `Update` request must send `If-Match/version` — a mismatch returns 409 Conflict with the current server copy, closing the last-write-wins gap in NFR-09; list endpoints support `?orgId=?cmProjectId=` scoping query parameters so a client never has to fetch data outside its own tenant boundary, and the server — not the client — enforces that boundary per the signed-in user’s role and scope (Section 3.7), closing NFR-03.

Resource	Routes	Notes
Auth / session	POST <code>/auth/login</code> , POST <code>/auth/logout</code> , GET <code>/auth/me</code>	Replaces the reference build’s client-side-only “sign in as a demo persona” picker with real credential verification.
Groups	GET/POST <code>/groups</code> , GET/PATCH/DELETE <code>/groups/:id</code>	M1.
Organizations	GET/POST <code>/organizations</code> , GET/PATCH/DELETE <code>/organizations/:id</code>	M1; DELETE cascades per FR-M1-04.
Main Projects	GET/POST <code>/organizations/:orgId/main-projects</code> , GET/PATCH/DELETE <code>/main-projects/:id</code>	M1.
Change Management	GET/POST <code>/organizations/:orgId/cm-projects</code> ,	M1/M7; <code>mainProjectId</code>

Resource	Routes	Notes
Projects	GET/PATCH/DELETE /cm-projects/:id	s[] managed via PATCH.
Users	GET/POST /users, GET/PATCH/DELETE /users/:id	M2.
Permission Matrix	GET /role-permissions, PATCH /role-permissions/:role	M2, FR-M2-02/03; super_admin only.
Governance settings	GET/PATCH /governance	M2, requireJustification toggle.
License	GET/PATCH /license	M2.
OBS entries	GET/POST /cm-projects/:id/obs-entries, PATCH/DELETE /obs-entries/:entryId	M3.
Macro Process / E2E / RACSI catalogs	GET /catalog/macro-processes, GET /catalog/e2e-processes, GET /racsi-grid, PATCH /racsi-grid/:macroProcessId	M4; catalogs are read-only per FR-M4-01, RACSI grid is the one editable piece.
Charters	GET/POST /charters, GET/PATCH/DELETE /charters/:id, GET/POST /charters/:id/entries, PATCH/DELETE /charter-entries/:entryId	M5; DELETE /charters/:id returns 409 if status is Active (FR-M5-02).
Charter Action catalog	GET /catalog/charter-actions	M5; read-only.
Charter Action Log	GET/POST /cm-projects/:id/charter-action-log, DELETE /charter-action-log/:logId	M5; no PATCH — append/delete only, per FR-M5-04.
Mentoring stages	GET /catalog/mentoring-stages	M5; read-only.
AI Use Case catalog	GET/POST /ai-use-cases, GET/PATCH/DELETE /ai-use-cases/:id, POST /ai-use-cases/:id/revert	M6.
AI activation	GET/PATCH /organizations/:orgId/ai-activation, GET/PATCH /cm-projects/:id/ai-override	M6.
AI usage log	GET/POST /ai-usage-log	M6; append-only.
Initiative metadata / Change Log	PATCH /cm-projects/:id/meta, GET/POST /cm-projects/:id/change-log	M7; Change Log is append-only, written by every

Resource	Routes	Notes
		module's justified-change flow.
WBS tasks	GET/POST /cm-projects/:id/wbs-tasks, PATCH/DELETE /wbs-tasks/:taskId	M8.
Phase Checklists	GET/POST /cm-projects/:id/phase-checklist, PATCH/DELETE /phase-checklist/:itemId	M8.
Phase Gates	GET/POST /cm-projects/:id/phase-gates, DELETE /phase-gates/:gateId	M8; no PATCH, per FR-M8-03.
Phase Template library	GET/POST /phase-templates, GET/PATCH/DELETE /phase-templates/:id, POST /phase-templates/:id/revert, POST /cm-projects/:id/wbs-tasks/load-template	M8.
Stakeholder Groups	GET/POST /cm-projects/:id/stakeholder-groups, PATCH/DELETE /stakeholder-groups/:groupId	M9.
ADKAR	GET /cm-projects/:id/adkar, PATCH /cm-projects/:id/adkar/:block	M10; PATCH requires justification in the body whenever requireJustification is true (FR-X-10).
Coaching Notes	GET/POST /cm-projects/:id/coaching-notes, PATCH/DELETE /coaching-notes/:noteId	M10/M17; a rebuild should add the PATCH/DELETE the reference build is missing (Section 10.3, item 1).
Bridges / Sentiment	PATCH /cm-projects/:id/bridges, PATCH /cm-projects/:id/sentiment	M11; justified-change.
Risks	GET/POST /cm-projects/:id/risks, PATCH/DELETE /risks/:riskId, GET/POST /risks/:riskId/actions, PATCH/DELETE /risk-actions/:actionId	M12; a rebuild should allow full PATCH on a risk's core fields, not status only (Section 10.3, item 4).
Sponsor / Coalition	GET/PATCH /cm-projects/:id/sponsor, GET/POST /sponsor/:id/members, PATCH/DELETE /coalition-members/:memberId,	M13; a rebuild should add coalition-

Resource	Routes	Notes
	GET/POST /sponsor/:id/actions, PATCH/DELETE /sponsor-actions/:actionId	member and sponsor-action CRUD the reference build is missing (Section 10.3, items 2-3).
Communications	GET/POST /cm-projects/:id/communications, PATCH/DELETE /communications/:commId	M14.
Trainings	GET/POST /cm-projects/:id/trainings, PATCH/DELETE /trainings/:trainingId	M15; certification PATCH is justified-change.
Resistance Log	GET/POST /cm-projects/:id/resistance-log, PATCH/DELETE /resistance-log/:entryId	M16.
Codebook (org-scoped)	GET/POST /organizations/:orgId/codebook, PATCH/DELETE /codebook/:codeId	M16; a rebuild should add PATCH, missing in the reference build (Section 10.3, item 7).
Code Tags	GET/POST /cm-projects/:id/code-tags, DELETE /code-tags/:tagId	M16.
Manager Readiness	PATCH /cm-projects/:id/manager-readiness	M17; justified-change.
Journey Events	GET/POST /cm-projects/:id/journey-events, PATCH/DELETE /journey-events/:eventId	M18.
Journeys / Touchpoints / Dashboards / Context Overlay catalogs	GET /catalog/journeys, GET /catalog/journey-touchpoints, GET /catalog/journey-dashboards, GET /catalog/project-context-overlay	M19; read-only.
Touchpoint Log	GET/POST /cm-projects/:id/touchpoint-log, DELETE /touchpoint-log/:logId	M19; no PATCH, per FR-M19-02.
Analytics roll-ups	GET /organizations/:orgId/analytics?level=project\ organization\ group, GET /catalog/benchmarks, GET /catalog/cross-type-matrix	M20; server computes and returns the Readiness Index/benchmarking values rather than the

Resource	Routes	Notes
		client, closing the trust boundary the reference build's client-side computation implies.
Sustainment	GET/PATCH /cm-projects/:id/sustainment, POST /sustainment/:id/checkpoints/:label/record, GET/POST /sustainment/:id/quick-wins, PATCH/DELETE /quick-wins/:winId, GET/POST /sustainment/:id/lessons, PATCH/DELETE /lessons/:lessonId, PATCH /sustainment/:id/signoff	M21; a rebuild should add full Quick Win and Lesson CRUD the reference build is missing (Section 10.3, items 5-6).
Field Notes	GET/POST /cm-projects/:id/field-notes, PATCH/DELETE /field-notes/:noteId	M22.
Alert definitions	GET /catalog/alerts	Cross-cutting; read-only.
Alerts (computed)	GET /cm-projects/:id/alerts, POST /cm-projects/:id/alerts/:alertId/dismiss, POST /cm-projects/:id/alerts/:alertId/restore	Cross-cutting, FR-X-04 through FR-X-08; the server computes live conditions rather than the client.
CSV export	GET /cm-projects/:id/{collection}/export.csv, GET /organizations/:orgId/analytics/export.csv	Cross-cutting, FR-X-01 through FR-X-03; may remain a server-generated file instead of the reference build's client-side Blob generation.

Added in v2.0 (Platform Extensions, Section 6.4):

Resource	Routes	Notes
Pack configuration	GET/PATCH /organizations/:orgId/pack-config	Section 6.4.1; PATCH includes activePack,

Resource	Routes	Notes
Compliance standards	GET/PATCH /organizations/:orgId/compliance-standards	enabledModules, aiTier. Section 6.4.2.
Template Library	GET/POST /template-library/{charter,communication,training}, GET/PATCH/DELETE /template-library/:kind/:id, POST /template-library/:kind/:id/revert	Section 6.4.3.
Process Governance	GET/POST /macro-processes/:mpId/governance/{alerts,business-rules,controls,kpis,reports,risks-opportunities}, PATCH/DELETE .../:itemId	Section 6.4.4.
Process Knowledge Base	GET /catalog/process-knowledge-base	Section 6.4.5; read-only.
E2E Process BPMN diagram	GET/PUT /e2e-processes/:id/bpmn-xml	Section 6.4.6; stores/retrieves the raw BPMN 2.0 XML string.
Chatbot	POST /chatbot	Section 6.3.3; same RBAC-scoping middleware as every other authenticated route.

A rebuild is not obligated to implement every route above before shipping — Section 10.3’s known-gaps table already flags which sub-resources (coaching notes, coalition members, sponsor actions, quick wins, lessons, codebook entries, phase gates) the reference build itself ships without full CRUD, and the API design above simply makes each of those a first-class route so closing a gap later is additive, not a redesign.

5.3 Hardware Interfaces

None. journi is a standard web application with no direct hardware interface requirement.

5.4 Software Interfaces

- **Node.js** ≥ 18 runtime (Section 2.4).
- **SQLite**, via node:sqlite or better-sqlite3 (Section 3.3) — no external database server.
- **Optional**: a third-party LLM provider (Anthropic, OpenAI, Google, or a custom OpenAI-compatible endpoint) for M6’s Real LLM Provider Connection. Two call paths now exist, in the order AiSuggestionBox tries them (Section 3.8): (1) proxied through journi’s own backend (server/lib/llmProxy.js) — the key is

forwarded once per request and never persisted server-side; (2) the original direct-from-browser call, used automatically if the backend cannot be reached. Query Data and Query Features (Section 6.3) only ever use path (1), since they require server-side RBAC enforcement (Section 3.8) that a browser-direct call cannot provide. The connection itself remains opt-in, and every AI use case still falls back to a deterministic built-in generator if no path succeeds.

6. Functional Requirements

6.0 Conventions

Each module below lists: its purpose and the framework(s) it operationalizes; the fields it captures; numbered functional requirements (FR-M n - nn); the business rules/computations it applies; its role gating; and its cross-module integration points. Every module follows the same shared CRUD, RBAC, and AI-governance conventions described in Sections 3.2, 3.7, and 6.6 — those are not repeated per module except where a module's actual behavior deviates from them, which is called out explicitly rather than silently assumed. Section 10.3 (Known Functional Gaps) collects every such deviation in one place for planning purposes.

6.1 Platform & Governance (M1-M6)

6.1.1 M1 — Tenant & Org Hierarchy

Purpose. The structural backbone of journi: Group (optional) → Organization → Projects, and within Projects, a Main Project (the underlying business/IT initiative) many-to-many linked to zero or more Change Management Projects (the people-side initiative that manages its adoption).

Data captured. Group: name. Organization: name, groupId, sector, employeeCount, sites, languages, defaultLanguage. Main Project: name, type (one of ten values — the eight transformation types plus Restructuring and M&A), scope, durationMonths, budgetBand, executiveSponsor. Change Management Project: name, orgId, mainProjectIds[], changeManager, changeType, targetPopulation, businessDriver, successCriteria.

Functional requirements. - FR-M1-01: The system shall support full Create, Read, Update, and Delete on Group, Organization, Main Project, and Change Management Project records, gated by canManageHierarchy (Section 3.7). - FR-M1-02: A Change Management Project shall link to zero, one, or more Main Projects via mainProjectIds[] — a many-to-many relationship, not the one-to-one link of earlier product iterations — supporting both a fully independent OCM initiative (no Main Project link) and a multi-site rollout where several regional CM Projects share one Main Project. - FR-M1-03: Deleting a Group shall not delete its member Organizations; it shall null their groupId, converting them to standalone Organizations. - FR-M1-04: Deleting an Organization shall cascade-delete its Main Projects, Change Management Projects, associated AI activation/override state, and any user accounts scoped directly inside it. - FR-M1-05: Deleting a Main Project shall unlink it from (not delete) any Change Management Project that referenced it via mainProjectIds[]. - FR-M1-06: Deleting a Change Management Project shall also remove any user accounts scoped directly to that project. - FR-M1-07: The Organization record shall carry a Default Language field, editable by the same role set, driving the language-precedence rule in

Section 3.6. - FR-M1-08: The hierarchy view shall display, for each Main Project, the count of Change Management Projects currently linked to it, and shall badge a Change Management Project with no Main Project link as “standalone.”

Frameworks integrated. None directly — this is the structural layer every framework-bearing module (M7 onward) is scoped against.

Primary users. Super Admin, Group Admin, Organization Admin, PMO.

6.1.2 M2 — Identity & RBAC

Purpose. User account management, the runtime-editable Permission Matrix, platform-wide governance toggles, and a lightweight license/plan record. Organized into four tabs: Users & Scope, Permission Matrix, Governance Settings, License & Plan.

Data captured. User: name, email, role (one of the nine roles in Section 3.7), scopeType, scopeId, language. Permission Matrix: 9 roles × 8 capabilities (manageHierarchy, manageUsers, write, activateAiForOrg, requestProjectAiOverride, manageCharters, manageAiUseCases, manageTemplates). Governance: requireJustification (platform-wide boolean). License: mode (SaaS/OnPrem), plan, companyName, maxUsers, issueDate, expiryDate, features[], and (OnPrem) an uploaded .lic JSON file’s companyId/hardwareId.

Functional requirements. - FR-M2-01: The system shall support Create, Update (role only), and Delete on User records, gated by canManageUsers. Name, email, and scope are set at creation and are not independently editable after — a rebuild targeting fuller account-lifecycle management should add this. - FR-M2-02: The Permission Matrix tab shall render all 9 roles × 8 capabilities as an editable grid, editing gated to super_admin only regardless of any Permission Matrix entry (this one gate is intentionally hardcoded, not itself matrix-driven, to prevent a misconfiguration from locking every admin out of the matrix). - FR-M2-03: Every edit to a Permission Matrix cell shall take effect immediately, platform-wide, for every Organization, without a code change or restart. - FR-M2-04: The Governance Settings tab shall expose a single requireJustification toggle, defaulting to true, gated by canManageHierarchy. - FR-M2-05: The License & Plan tab shall display current plan, seat usage against maxUsers with an over-capacity flag when exceeded, and an expiry countdown color-coded red (expired), amber (<30 days), or green (otherwise). - FR-M2-06: Uploading a .lic file shall validate the presence of required fields (version, companyId, companyName, hardwareId, expiryDate, maxUsers, plan, features, issueDate) but does not verify a cryptographic signature — this is a reference-build simplification, not a production licensing control; a Super Admin may revert to SaaS mode at any time.

Frameworks integrated. None directly — this module is the control plane every other module’s write-gating reads from.

Primary users. Super Admin, Group/Organization Admin, all downstream roles (read of their own account).

6.1.3 M3 — Organizational Breakdown Structure (OBS)

Purpose. A per-project resourcing roster — role, named person, and reporting line — distinct from M2's login/RBAC user accounts: an OBS entry needs no journi login, since it exists to be *referenced* (as an assignee) by other modules, not to authenticate.

Data captured. role (free text), name, reportsTo (id of another OBS entry in the same project, or null for the top of the structure), notes.

Functional requirements. - FR-M3-01: The system shall support full Create, Read, Update, and Delete on OBS entries, gated by canWrite. - FR-M3-02: Deleting an OBS entry shall re-parent its direct reports to the deleted entry's own manager (reportsTo) rather than leaving them orphaned. - FR-M3-03: The roster view shall render depth-first, roots first, with indentation reflecting reporting depth, not creation order. - FR-M3-04: The OBS roster shall be consumable as an "Assigned to" source by other modules (M8's WBS tasks, at minimum), so a task can name a specific person from this project's own resourcing structure rather than free text.

Frameworks integrated. None directly — supporting reference data for M8.

Primary users. Change Manager, PMO, Practitioner, People Manager.

6.1.4 M4 — Macro Process, SIPOC, RACSI & End-to-End Process Registry

Purpose. The process backbone every other module is built on, made browsable in one place. Ten Macro Processes (MP-01-MP-10) are the atomic units of journi's process model; every module owns one or more of them. Seventeen End-to-End (E2E) Process chains are registered against that backbone, grouped by kind: core lifecycle chains spanning the whole engagement, cross-cutting loop chains making an existing cross-module dependency explicit as its own registered chain (e.g. the PM ↔ CM Governance Bridge realized by M8's Phase Gates), and one E2E lifecycle per transformation type, each with its own rolled-up SIPOC and linked Phase Template (M8).

Data captured (reference, mostly read-only). Macro Process: id, name, description, primary modules. E2E Process: id, name, kind, ordered Macro Process chain, trigger, terminal state, RACSI (using the 7-code role taxonomy ES/CM/PM/FPO/ITL/SUP/EU), related modules, and — for transformation-type entries — SIPOC suppliers/customers and a linked Phase Template id. RACSI Grid: one row per Macro Process × 6 platform roles.

Functional requirements. - FR-M4-01: The Macro Process Catalog and E2E Process Registry shall be read-accessible to every role; this reference data is not user-editable in the current build (a future release adding admin-editable process taxonomy should preserve read access for all roles as a baseline). - FR-M4-02: The RACSI Grid tab shall be editable in place, one cell at a time, gated by canManageHierarchy; every other role sees it read-only. - FR-M4-03: An E2E Process entry of kind "transformation type" shall resolve and display its linked Phase Template by id, and its rolled-up SIPOC.

Frameworks integrated. Cross-cutting — the canonical source for the Macro Process and E2E Process vocabulary referenced throughout this document; also hosts the RACSI governance layer referenced by M8's Phase Gates.

Primary users. All roles (read); Super Admin, Group/Organization Admin (RACSI grid edits).

6.1.5 M5 — Change Management Charter Registry

Purpose. Eight signed, trackable behavioral standards — one each for sponsorship, participative management, communication, organizational impact, team coaching, one-to-one coaching, mentoring, and pulse/interview discipline — each naming specific, observable actions with a concrete mapping to the Macro Processes/tasks that generate them, plus a per-project compliance log. Organized into three tabs: Charters, Charter Action Mapping, and a read-only Mentoring Progression reference (the three-stage Trainee → Observer → Autonomous competency model).

Data captured. Charter: name, PDCA cycle, RACSI, primary linked Macro Process, governing scope (Project/Organization/Group), status (Active/Draft/Retired), version, effective date, review frequency, and one or more Entries (category, owner, What/Who/When/Where/Why/How). Charter Action (static reference): PDCA stage, sequence, category, linked Macro Process/task/step/lifecycle phase, responsible/accountable role, frequency. Charter Action Log (per project): charterActionId, date, note.

Functional requirements. - FR-M5-01: The system shall support full Create, Read, Update, and Delete on Charters and their Entries, gated by canManageCharters. - FR-M5-02: A Charter with status “Active” shall not be deletable; it must be transitioned to “Retired” before its Delete control is enabled. Delete itself is gated separately by canDeleteCharter, a fixed set (Super/Group/Org Admin) that deliberately excludes Change Manager even though Change Managers can create and edit charters. - FR-M5-03: The Charter Action catalog and Mentoring Progression model are static reference data with no CRUD UI. - FR-M5-04: The system shall support Create and Delete (not Update) on Charter Action Log entries, gated by canWrite; correcting a logged entry is done by delete-and-relog rather than in-place edit. - FR-M5-05: The Action Mapping & Compliance tab shall be filterable by charter and shall show, per action, up to three recent log instances plus a count of any remainder.

Frameworks integrated. Prosci Sponsor Model and Kotter Step 2 (Sponsorship Charter); Kotter Step 5 (Participative Management); Kotter Step 4 (Communication); Prosci Impact & Stakeholder Analysis (Organizational Impact); the Divergence Case recovery workflow (One-to-One Coaching); M15’s trained-versus-capable distinction (Mentoring).

Primary users. Change Manager, Training Lead, People Manager (compliance logging); all roles (read).

6.1.6 M6 — AI Use Case Library & Governance

Purpose. The governed catalog and control plane for every AI capability in journi. Every use case is restricted to one of two tiers — Assistive or Augmented — deliberately excluding Autonomous AI: no use case may take an irreversible action on its own. Also hosts the optional Real LLM Provider Connection every AiSuggestionBox instance across the program modules calls into.

AI tiers. *Assistive*: the AI observes, analyzes, or suggests; a human performs the task and decision (e.g. flagging a barrier pattern). *Augmented*: the AI performs a

substantial part of the task — drafting, classifying, summarizing at scale — but a human must review, edit, and approve before it is finalized or distributed (e.g. drafting an executive readiness narrative). Autonomous AI is out of scope entirely; a future release adding it must govern it as a separate, explicitly-gated tier rather than folding it into these two.

Data captured. AI Use Case (14 seeded, versioned): id, name, tier, module, description, trigger, output, an editable promptTemplate (the literal text sent to the LLM), humanCheckpoint, version history. LLM Provider Connection (browser-local only — Section 4.1): provider, apiKey, model, baseUrl. AI Usage Log: useCaseId, orgId, cmProjectId, outputSummary, outcome (accepted/edited/rejected), user, timestamp.

Functional requirements. - FR-M6-01: The system shall support full Create, Read, Update, Delete, and version-revert on the AI Use Case catalog, gated by canManageAiUseCases. - FR-M6-02: Deleting a use case shall also purge its keys from the organization and project activation maps. - FR-M6-03: An Organization Admin or above (canActivateAiForOrg) shall be able to activate or deactivate each use case independently per Organization. - FR-M6-04: A Change Manager or above (canRequestProjectAiOverride) shall be able to override the Organization's activation state for one specific project, as a tri-state choice (inherit / on / off); effective activation is the project override if set, else the Organization's activation. - FR-M6-05: Deactivating a use case shall immediately stop new AI-generated suggestions in that scope; previously generated and human-approved content shall never be retroactively removed. - FR-M6-06: Every AI-generated output shall be visually labeled as AI-generated and requiring review, wherever it appears in the interface. - FR-M6-07: Every AI suggestion's outcome — accepted as-is, edited, or rejected — shall be logged to the AI Usage Log for governance reporting; the log itself is append-only, with no edit or delete UI. - FR-M6-08: The Real LLM Provider Connection shall store its configuration, including the API key, only in the browser's localStorage, under a key namespace separate from the rest of the application's data, so it is never included in a data export, and never synced to the backend (Section 4.1). There is no "Reset Demo Data" action in the current build (Section 4.1). - FR-M6-09: If a configured LLM call fails for any reason (missing key, network/CORS error, unexpected response), the calling use case shall fall back to its deterministic built-in generator automatically, so a misconfigured or absent connection never blocks a workflow. - FR-M6-10: An AI use case shall never grant a user visibility they would not otherwise have under RBAC — it operates strictly within the data-visibility boundary of the module it plugs into. - FR-M6-11: Before generating output, an AI use case shall retrieve the methodology reference definitions most relevant to its own prompt template and any supplied record context (Section 3.8), and the generation prompt shall instruct the model to stay within journi's own stage vocabulary and to state no number, score, or name absent from that context; the retrieved definitions shall be disclosed to the user alongside the generated output, not hidden.

Frameworks integrated. Cross-cutting — accelerates the analysis/drafting work within every framework-bearing module; tier discipline follows POWERACT's own AI-training-curriculum vocabulary.

Primary users. Super Admin, Group/Organization Admin (activation, provider connection, catalog authoring); Change Manager, Trainer, Communications Practitioner, People Manager (consumption, all program modules).

6.2 Change Management Program (M7-M22)

6.2.1 M7 — Initiative Registry

Purpose. The single-project detail view and organization-wide portfolio table for a Change Management Project: core metadata, the Lewin macro-state (Unfreeze/Change/Refreeze) under justified-change governance, the live Composite Readiness Index, and the full justified-change audit log (the “Change Log”).

Data captured. changeType, lewinPhase (justified), businessDriver, targetPopulation, successCriteria; linked Main Project(s), read-only here (edited on M1); Change Log entries (date, module, field, oldValue, newValue, justification).

Functional requirements. - FR-M7-01: businessDriver, targetPopulation, successCriteria, and changeType shall be editable in place (auto-saved on blur) via updateProjectMeta, gated by canWrite. - FR-M7-02: A change to lewinPhase shall follow the stage-then-justify pattern (Section 6.6.2): a pending value plus a justification note, saved atomically to the Change Log, with Save disabled until a justification is present whenever requireJustification is on. - FR-M7-03: The Change Log shall be append-only — no edit or delete of a logged entry — and shall aggregate justified changes logged from this module and from every other module that calls the shared logJustifiedChange/updateAdkar mutators (M10, M11, M13, M15, M16, M17, M12). - FR-M7-04: The system shall compute a Composite Readiness Index per project as $(ADKAR \text{ average } \% \times 0.5) + (\text{sentiment score} \times 0.25) + (\text{training completion average } \% \times 0.25)$, displayed both on the single-project view and in the organization-wide portfolio table. - FR-M7-05: The portfolio table shall list every Change Management Project visible to the signed-in role within the current Organization, with its Lewin phase and Readiness Index.

Frameworks integrated. Lewin (Unfreeze–Change–Refreeze) as the organizing macro-state; Prosci’s 3-Phase Process (Prepare, Manage, Reinforce) as the default project lifecycle.

Primary users. PMO, Change Manager, Sponsor.

6.2.2 M8 — Work Breakdown Structure & Gantt

Purpose. A single Work Breakdown Structure spanning three tracks — Project Management, Change Management, and the Lewin/Prosci/Bridges/ADKAR framework milestones — so a Change Manager, PMO, and Sponsor share one timeline. Every task carries a baseline and an optional actual date pair, surfacing a schedule gap task-by-task and as a portfolio average. Also hosts Phase Checklists, Phase Gate joint-decision records, a read-only cross-reference into M5’s Charter Actions log, and the shared Phase Template library.

Data captured. WBS Task: track (pm/cm/framework), accountability tag (Project/Change/Joint — deliberately distinct from track), phase, name, assignee (from M3’s OBS roster), baseline start/finish, optional actual start/finish, status. Phase Checklist item: phase, track, item, weight%, done. Phase Gate (“Joint Decision Record”): phase, date, independent PM and CM recommendations with notes (the CM input auto-carrying a Composite Readiness Index snapshot, checklist completion %, and open flags), the fused joint decision (Go / Go with Conditions / No-Go), and exactly one Accountable role selected from the RACSI role-code list. Phase Template (shared,

versioned, 8 seeded): per-phase name, CM-track actions, checklist items, gate review questions.

Functional requirements. - FR-M8-01: The system shall support full Create, Read, Update, and Delete on WBS tasks. - FR-M8-02: The system shall support Create, Read, and Delete (done-toggle counts as the only field-level update) on Phase Checklist items. - FR-M8-03: The system shall support Create and Delete on Phase Gates; a recorded Joint Decision is treated as immutable once logged and has no Edit — correcting one requires deleting and re-recording it. A rebuild wanting mutable gate records should add this deliberately, not assume it already exists. - FR-M8-04: “Load Phase Template” shall seed the PM track with one skeleton task per phase of a selected Phase Template, evenly spaced from a chosen start date, defaulting to the template matching the linked Main Project’s transformation type; this is a starting skeleton, not a finished plan, and does not itself constitute editing the template. - FR-M8-05: The Phase Template library shall support full Create, Update, Delete, and version-revert, gated by `canManageTemplates`, independent of the per-project WBS CRUD above. - FR-M8-06: The system shall compute, per task with an actual date recorded, a schedule-gap value in days, and shall render it color-coded (on-time/ahead, minor slip, significant slip); a portfolio-level summary shall show total tasks, tasks on-track or ahead, tasks at risk, and the average gap. - FR-M8-07: A framework-track task may be zero-duration (baseline start equals finish), rendered as a marker rather than a bar, for discrete state transitions (e.g. “Unfreeze → Change”) rather than continuous work. - FR-M8-08: Every task, checklist item, and gate shall additionally be filterable against the seven generic P1–P7 lifecycle phases that every type-specific Phase Template rolls up into, auto-mapped from the task’s own phase label. - FR-M8-09: A Phase Gate’s CM input fields (readiness index snapshot, checklist completion %, open flags) shall auto-populate from live computed values (M7’s Readiness Index, this module’s own checklist completion, and M11/M16’s divergence/stalled-block flags) at the moment the gate modal opens. - **Known deviation** (Section 10.3): this module’s write-access check calls `canWrite(currentUser?.role)` without passing the Permission Matrix, unlike every other module — so a Super Admin’s runtime edits to the Permission Matrix do not affect M8’s write gating, which always falls back to the hardcoded default role set. A rebuild should pass the matrix here for consistency with the rest of the application, unless this is confirmed as an intentional exception.

Frameworks integrated. Cross-cutting — gives Lewin, Prosci, Bridges, and ADKAR a shared timeline alongside the Project Management delivery track; Phase Gates implement the PM ↔ CM Governance Bridge cross-cutting E2E chain (M4).

Primary users. PMO, Change Manager, Sponsor.

6.2.3 M9 — Stakeholder & Impact Mapping

Purpose. Identifies who is affected by a change, how heavily, and in what dimension, so effort (deep ADKAR tracking versus light-touch communication) is proportional to risk.

Data captured. name, headcount, impact across five dimensions (process, technology, role, location, identity, each 1–5), influence (1–5).

Functional requirements. - FR-M9-01: The system shall support full Create, Read, Update, and Delete on stakeholder groups, gated by `canWrite`. - FR-M9-02: The system

shall automatically flag a stakeholder group as “High Impact / Low Influence” when its average impact across the five dimensions is ≥ 3.6 and its influence is ≤ 2 — the population most at risk of being under-supported. - FR-M9-03: Each impact-dimension cell shall be color-coded by severity (red ≥ 4 , amber = 3, brand-neutral < 3).

Frameworks integrated. Prosci Impact & Stakeholder Analysis; determines which cohorts receive deep ADKAR tracking on M10.

Primary users. Change Manager, People Managers, PMO.

6.2.4 M10 — ADKAR Engine

Purpose. The heart of person/cohort-level tracking: the five ADKAR building blocks (Awareness, Desire, Knowledge, Ability, Reinforcement), each under justified-change governance, plus an AI-assisted Desire-barrier diagnosis-and-coaching workflow and manager coaching-note capture.

Data captured. Per block: score (1-5), justification note, history (date, score, justification). Coaching Note: manager name, cohort, barrier block, note.

Functional requirements. - FR-M10-01: A change to any ADKAR block’s score shall follow the stage-then-justify pattern, appended to that block’s own history and to the project Change Log. - FR-M10-02: The system shall flag any block scoring ≤ 2 as “stalled,” shown with an amber badge and an auto-flag banner. - FR-M10-03: The system shall support Create (not Update or Delete) on Coaching Notes via the generic sub-item Add — this is a known gap (Section 10.3): a coaching note, once logged, cannot be corrected or removed from this module, and is displayed read-only again in M17. - FR-M10-04: The Desire-diagnosis workflow shall be a bespoke two-step assistive flow, distinct from the generic AI Use Case card pattern: step one diagnoses the stalled Desire score citing Resistance Log and sentiment evidence; on confirmation, step two offers to draft a manager coaching script. Each step requires an explicit Confirm/Discard decision.

Frameworks integrated. ADKAR (Prosci) — the primary individual-level model this module powers directly.

Primary users. Change Manager, People Manager/Coach, Employee (self-report).

6.2.5 M11 — Emotional & Transition Layer

Purpose. Where ADKAR reports what capability or motivation is missing, this layer reports what someone is actually feeling: the Bridges Transition position (Ending → Neutral Zone → New Beginning) and a Kübler-Ross-derived sentiment stage, both under justified-change governance, plus the Divergence Pattern alert that gives journi its “hidden resistance” early-warning signal.

Data captured. bridgesPhase (justified), bridgesNote; sentimentStage (justified, or inferred from sentimentSnapshot free text via keyword match when not explicitly set), sentimentSnapshot note.

Functional requirements. - FR-M11-01: Both bridgesPhase and sentimentStage shall follow the stage-then-justify pattern. - FR-M11-02: When sentimentStage is not explicitly set, the system shall infer one of commitment/exploration/denial/resistance from keyword matching against the free-text sentiment snapshot, defaulting to

“exploration” if no keyword matches. - FR-M11-03: The system shall raise a Divergence Alert whenever Knowledge ≥ 3 AND Ability ≥ 3 (strong demonstrated capability, per M10) while the Bridges position still reads “Ending” — a classic hidden-resistance pattern — and shall surface this same flag to M8’s Phase Gate open-flags field.

Frameworks integrated. William Bridges’ Transition Model; Kübler-Ross Change Curve (adapted for organizational, not grief, context).

Primary users. Change Manager, People Manager/Coach.

6.2.6 M12 — Change Risk Register

Purpose. A risk register purpose-built for the people side of change — adoption risk, sponsor-attrition risk, and change-saturation risk from concurrent initiatives targeting the same population — distinct from generic project risk, with a per-risk Mitigation Action Plan tracked to closure.

Data captured. Risk: category (adoption/sponsorship/capacity/saturation), description, likelihood (1-5), impact (1-5), owner, status (justified-change). Mitigation Action (nested per risk): description, owner, dueDate, status.

Functional requirements. - FR-M12-01: The system shall support Create and Delete on risk records; a risk’s core fields (category, description, likelihood, impact, owner) have no in-place Edit once created in the current build — only status is changeable post-creation, via the justified-change flow. This is a known gap (Section 10.3) for a rebuild targeting full risk-record editability. - FR-M12-02: The system shall support full Create, Update, and Delete on a risk’s nested Mitigation Actions. - FR-M12-03: The system shall compute Risk Score as likelihood $\times$ impact, flag scores ≥ 12 as high-severity (red) and ≥ 8 as elevated (amber), and sort the risk list by score descending. - FR-M12-04: The system shall surface a saturation banner whenever other active Change Management Projects exist in the same Organization.

Frameworks integrated. Extends standard project-risk practice with change-saturation and adoption-risk categories.

Primary users. Change Manager, PMO, Sponsor.

6.2.7 M13 — Sponsor & Coalition

Purpose. Tracks Executive Sponsor visibility under justified-change governance, the guiding-coalition roster, and a sponsor-action roadmap — the single factor Prosci research identifies as the top predictor of change success, and the substance of Kotter’s Step 2.

Data captured. sponsor.visibility (weak/moderate/strong, justified), visibilityNote; Coalition Member: name, role, influence (1-5), engagement (1-5); Sponsor Action: action text, phase, done.

Functional requirements. - FR-M13-01: sponsor.visibility shall follow the stage-then-justify pattern. - FR-M13-02: The system shall support Create (not Update or Delete) on Sponsor Actions, plus a done-toggle. This is a known gap (Section 10.3): once added, a sponsor action’s text cannot be edited or removed. - FR-M13-03: The Coalition Member roster has no Add/Edit/Delete UI in the current build — it is read-

only display only, populated at seed time. This is a more significant known gap (Section 10.3) given the module's name; a rebuild should treat coalition-roster CRUD as a real requirement even though the reference implementation does not yet expose it. - FR-M13-04: The system shall raise a red alert banner whenever `sponsor.visibility === 'weak'`, cross-referencing M10's stalled Desire scores in the alert text.

Frameworks integrated. Prosci Sponsor Model (active/visible sponsorship); Kotter Step 2 — Build a Guiding Coalition.

Primary users. Change Manager, Sponsor, PMO.

6.2.8 M14 — Communication Planning & Execution

Purpose. Plans and tracks the message-audience-channel-timing matrix driving Awareness and Desire, and operationalizes Kotter's Step 4.

Data captured. message, audience, channel, sender, timing, linked ADKAR block, status (draft/scheduled/sent).

Functional requirements. - FR-M14-01: The system shall support full Create, Read, Update, and Delete on communications, gated by `canWrite`. - FR-M14-02: The system shall surface a change-saturation banner whenever other active Change Management Projects exist in the same Organization, matching M12's saturation logic. - FR-M14-03: The communications log shall offer client-side CSV export (Section 6.6.6) to every role, independent of write access.

Frameworks integrated. Kotter Step 4 — Communicate the Vision; feeds ADKAR Awareness/Desire.

Primary users. Change Manager, Communications Practitioner, Sponsor.

6.2.9 M15 — Training & Capability Building

Purpose. Maps directly to ADKAR's Knowledge and Ability blocks, tracking curriculum coverage, completion, and demonstrated capability — "trained" versus "certified/capable" as two distinct, separately-governed states.

Data captured. curriculum, track, level (Foundation/Practitioner/Advanced), module, objectives/prerequisites/agenda/expectedResults/workshops, targetAudience, facilitator, format, completion (0-100%), certified (justified-change, distinct from completion).

Functional requirements. - FR-M15-01: The system shall support full Create, Read, Update, and Delete on training/curriculum records, gated by `canWrite`. - FR-M15-02: A change to certified shall follow the stage-then-justify pattern, independent of the general record-edit flow, since certification is a governed capability claim, not a data-entry field. - FR-M15-03: The system shall surface a training-needs banner whenever M10 reports Knowledge or Ability ≤ 2 , citing the gap's source module.

Frameworks integrated. ADKAR Knowledge & Ability blocks; Kotter Step 5 — Enable Action by Removing Barriers.

Primary users. Change Manager, Trainer/Practitioner, People Manager.

6.2.10 M16 — Resistance Management

Purpose. Structured logging and resolution of resistance by type (role/skill/will/systemic), with root cause, severity, and mitigation tracked under justified-change status governance, systemic-pattern detection across cohorts, and a Qualitative Coding Workbench for tagging free-text coaching notes and resistance entries against an organization-scoped codebook.

Data captured. Resistance entry: type, source, rootCause, severity (1-5), mitigation, owner, dueDate, status (justified-change), anonymous flag. Codebook entry (org-scoped): label, description. Code Tag: codeId, sourceType, sourceId, optional linkedResistanceId.

Functional requirements. - FR-M16-01: The system shall support full Create, Read, Update, and Delete on resistance-log entries, gated by canManage (= canWrite). - FR-M16-02: A change to status (open → in progress → closed) shall follow the stage-then-justify pattern, separate from the general record-edit flow. - FR-M16-03: An Employee role shall be permitted to submit a resistance/concern entry (optionally anonymous) via a “submission only” path (canSubmit = canWrite OR role === 'employee'), without gaining status-management, classification-edit, or delete rights. - FR-M16-04: The system shall raise a red pattern-detection banner when two or more systemic-type entries are logged, framing the pattern as organizational rather than individual and pointing to M13. - FR-M16-05: The Qualitative Coding Workbench shall support Create and Delete (not Update) on codebook entries — a known gap (Section 10.3) — and Create/Delete on code tags, drawing taggable source material live from this project’s own resistance-log entries and M10’s coaching notes, with an optional cross-link from a coaching-note tag to a specific resistance-log entry. - FR-M16-06: The Workbench shall compute a tag-frequency rollup relative to the most-used code, surfacing recurring themes a single practitioner reading each note individually would likely miss.

Frameworks integrated. Kübler-Ross resistance/anger stage; Kotter Step 5.

Primary users. Change Manager, People Manager, Employee (submission only).

6.2.11 M17 — Manager-as-Coach Enablement

Purpose. Operationalizes the research finding that a direct manager is the single most influential factor in individual adoption: a team-scoped ADKAR heatmap restricted to a People Manager’s own direct reports, a justified Manager Readiness rating, and a read-only view of coaching notes and AI-generated coaching scripts, without exposing organization-wide change data the manager doesn’t need.

Data captured. managerReadiness (1-5, justified-change, default 3).

Functional requirements. - FR-M17-01: managerReadiness shall follow the stage-then-justify pattern; the ADKAR heatmap and coaching-note list are always view-only in this module regardless of role, by design — this module deliberately has no add/edit/delete UI of its own for coaching notes, directing users to M10 instead. - FR-M17-02: The heatmap shall be scoped strictly to the manager’s own direct reports; it must never expose organization-wide change data through this module.

Frameworks integrated. Prosci Manager/Coach research; ADKAR at the team level.

Primary users. People Manager/Coach.

6.2.12 M18 — Journey Map / Visual Core

Purpose. The signature interface of journi: a literal, visual SVG timeline (the Bridges Ending → Neutral Zone → New Beginning curve) plotting project- or organization-level events with a “Today” marker — deliberately distinct from the tabular dashboards elsewhere, and the visual identity the product takes its name from.

Data captured. Journey Event: label, offsetDays (relative to today), type (milestone/communication/training/assessment).

Functional requirements. - FR-M18-01: The system shall support full Create, Read, Update, and Delete on journey events, gated by canWrite. - FR-M18-02: An Organization-level zoom shall aggregate journey events across every Change Management Project in the Organization onto one chart, in addition to the default single-project view. - FR-M18-03: The “Share Snapshot” control is a demo-only confirmation in the current build with no real export/share backend; a production rebuild wanting an actual shareable artifact must implement this as new functionality, not assume it exists.

Frameworks integrated. Visual synthesis of ADKAR, Bridges, and Kübler-Ross on a single timeline.

Primary users. All roles, at the scope permitted by RBAC.

6.2.13 M19 — Stakeholder Journeys, Touchpoints & Analytics

Purpose. The experience-layer companion to M20’s score-centric dashboards: eight persona/exception/sector-specific/system journeys, twenty-four concrete touchpoints across six of those journeys with auditable success criteria, five journey-analytics dashboard definitions (two with genuinely live computed metrics), and a per-project context-overlay reference table.

Data captured (mostly static reference). Journey: id, predecessorId, name, type, trigger, audience, duration, linked modules. Touchpoint: journeyId, PDCA sub-phase, sequence, day offset from trigger, owner role, success criterion, evidence requirement. Touchpoint Log (per project, user-writable): touchpointId, date, note.

Functional requirements. - FR-M19-01: Journeys, Touchpoints, Dashboards, and the Context Overlay are static reference data with no CRUD UI; only the Touchpoint Log is user-writable. - FR-M19-02: The system shall support Create (not Update) and Delete on Touchpoint Log entries, gated by canWrite. - FR-M19-03: The “End User Journey Completion” dashboard shall compute, live, the percentage of the End User Adoption journey’s touchpoints with at least one log entry for the current project. - FR-M19-04: The “Sponsor & Charter Compliance” dashboard shall compute, live, the percentage of all M5 Charter Actions with at least one completion log entry for the current project, reading M5’s charterActionLog directly. - FR-M19-05: The remaining three dashboards (Mentoring Progression, Divergence Case Resolution, Executive Roll-Up) shall render as descriptive reference cards, since the reference build does not model per-mentee or per-case granularity separately from the underlying M5/M12 logs a BI-connected deployment would aggregate.

Frameworks integrated. Cross-cutting — realizes M18's Journey Map at the persona-definition and touchpoint level of detail; the Divergence Case journey operationalizes M11's Divergence Alert as a recovery workflow; the Mentee journey operationalizes M5's Mentoring Progression model.

Primary users. Change Manager, Training Lead (touchpoint logging); all roles (read).

6.2.14 M20 — Metrics & Analytics Dashboard

Purpose. The analytical brain of journi: the Composite Readiness Index, ADKAR heatmaps, an adoption-curve chart, sentiment/adoption-speed correlation, benchmarking against seeded reference bands, and a cross-transformation-type comparison matrix — rolled up at Project, Organization, or Group level depending on the signed-in role.

Data captured. Purely a computed/aggregated reporting surface — no user-entered fields beyond the roll-up level selector.

Functional requirements. - FR-M20-01: The level selector shall offer Project level to every role; Organization level only to a role scoped Organization-or-broader; Group level only additionally when the scoped Organization actually belongs to a Group and the role is Super Admin or Group Admin — an ungrouped Organization must never show a Group tab, for any role. - FR-M20-02: The system shall compute a benchmarking standing (Behind / In Line / Ahead) per project against a seeded reference band for its current Lewin phase and against the peer average of every other project in scope at the active level. - FR-M20-03: The Cross-Type Comparison Matrix shall contrast all eight transformation types side by side — typical duration, terminal gate, external-party involvement, dominant framework, and reversibility — each row linked to a seed-project example. - FR-M20-04: The Analytics heatmap and Benchmarking tables shall offer client-side CSV export (Section 6.6.6). - FR-M20-05: This module shall perform no write operations of its own — it is read-only by design, at every roll-up level.

Frameworks integrated. Synthesizes every framework in the platform into one readiness signal, benchmarked against phase-appropriate reference bands.

Primary users. Change Manager, Sponsor, Executive Viewer, PMO.

6.2.15 M21 — Reinforcement & Sustainment

Purpose. The most commonly neglected stage of change work: post-go-live adoption checkpoints, Quick Wins celebration, a lessons-learned (REX) institutionalization log, and the formal sustainment sign-off — Lewin's Refreeze.

Data captured. Checkpoint (fixed set of three: 30/60/90-day): adoptionRate, regressionRisk, status. Quick Win: title, date. Lesson Learned: text, linkedRuleOrControl (naming which rule/control/charter now encodes it), status (auto-derived). Sign-off: boolean.

Functional requirements. - FR-M21-01: "Record checkpoint" shall be a one-click completion action that generates an adoption-rate value and derives regressionRisk from it (> 80% low, > 60% moderate, else high); the three checkpoints are a fixed set with no add/delete. - FR-M21-02: The system shall support Create (not Update or

Delete) on Quick Wins — a known gap (Section 10.3). - FR-M21-03: The system shall support Create and Update (limited to the `linkedRuleOrControl` field) on Lessons Learned, with no Delete — a known gap (Section 10.3); a lesson's status shall auto-flip to "applied" the moment a link is entered, "pending" otherwise. - FR-M21-04: Sign-off shall be a simple boolean toggle representing the Lewin Refreeze state, referenced by M8's Phase Template "Sustain" phase-gate criteria.

Frameworks integrated. Lewin Refreeze; Kotter Steps 6 (Generate Short-Term Wins) and 8 (Anchor New Approaches).

Primary users. Change Manager, People Manager, Sponsor.

6.2.16 M22 — Field Notes

Purpose. A lightweight freeform log for change-management knowledge that doesn't fit a structured module — workshops, decisions, sign-offs, nominations, handoffs — explicitly positioned as a scratchpad, not a substitute for a structured module: once something becomes a real record elsewhere, it belongs there instead.

Data captured. date, category (Workshop/Decision/Sign-Off/Nomination/Handoff/Other), relatedModules (multi-select across all M1-M22), title, body, author.

Functional requirements. - FR-M22-01: The system shall support full Create, Read, Update, and Delete on field notes, gated by `canWrite`. - FR-M22-02: relatedModules shall be a free multi-select tag against the current M1-M22 module list — a descriptive cross-reference only, not a structural foreign key into another module's data. - FR-M22-03: The list shall be filterable by category, with each category color-coded (Workshop = brand, Decision/Sign-Off = green, Nomination = amber, Handoff/Other = gray).

Frameworks integrated. None directly — a cross-cutting practitioner utility.

Primary users. All roles with project write access.

6.3 Cross-Application Query & Retrieval (RAG)

Two capabilities, reached from the sidebar's third section ("Ask journi," Section 1.6) rather than any single M1-M22 module, since both query across the whole tenant rather than operate within one module's own data. Both are backed by the RAG architecture in Section 3.8.

6.3.1 Query Data

Purpose. Ask a plain-language question about the signed-in user's own tenant data — project counts, ADKAR trends, open Resistance Log entries, risk exposure, currently-firing alerts — and receive an answer scoped to exactly what that user's role and scope allow, with the specific records or computed fact behind the answer disclosed alongside it.

Data captured. Not persisted — each request is answered from the caller's own in-memory data (Section 4) plus the question text; nothing about a Query Data session is written back to the state document or logged.

Functional requirements. - FR-QD-01: The system shall accept a free-text question and the caller's role/scope, and shall compute or retrieve its answer only from records that role/scope may see under the same visibility rule the rest of the application enforces (Section 3.7, Section 3.8) — never from another tenant's, organization's, or project's data. - FR-QD-02: A question matching a known aggregation pattern (project counts, resistance/risk counts, ADKAR averages, firing alerts) shall have its numeric answer computed deterministically in code; the LLM's role is limited to phrasing that computed fact in prose, and shall be instructed never to state a number not given to it. - FR-QD-03: A question matching no known aggregation shall fall back to retrieval over the visible projects' own record text (business drivers, risk descriptions, resistance root causes); the answer shall be generated only from the retrieved records, and the system shall say plainly when nothing relevant is found rather than guess. - FR-QD-04: Individual-level detail (e.g. named coaching notes) shall only be included in a Query Data response for a role in `ROLES_WITH_INDIVIDUAL_VISIBILITY` (Section 3.7, FR-M6-10, NFR-07); every other role receives the aggregate-only view. - FR-QD-05: If no LLM is reachable (no Module 6 connection and no server fallback key), the response shall still return the computed fact or retrieved records with a `generationError`, rather than fail outright (Section 3.8). - FR-QD-06: The interface shall display, alongside every answer, the specific sources (project names, record ids) the answer was computed or retrieved from — an answer with no disclosed source shall not be presented as authoritative.

Frameworks integrated. None directly — a cross-cutting analytics utility over the data every framework-bearing module already produces.

Primary users. All roles; the answer's own scope is what changes per role, not access to the feature itself.

6.3.2 Query Features

Purpose. Ask what journi can do, in plain language, and be pointed at the specific module that answers it — a natural-language front end to Section 1.6's module list, filtered to what the asking role can actually open.

Data captured. Not persisted — the module/feature catalog (`server/lib/corpus/features.js`) is static reference content, not tenant data.

Functional requirements. - FR-QF-01: The system shall retrieve, for a free-text question, the modules whose description best matches it, and shall exclude any module the asking role is not permitted to open (the same roles `<RequireRole>` enforces for M1/M2, Section 3.7) before ranking or returning results. - FR-QF-02: Each returned match shall carry a direct link (route path) the interface can navigate to immediately, not just a module name. - FR-QF-03: If no LLM is reachable, the response shall still return the raw retrieval matches with a `generationError`, rather than fail outright (Section 3.8). - FR-QF-04: A question matching no module above a minimal relevance threshold shall say so plainly rather than force a low-confidence suggestion.

Frameworks integrated. None directly — a cross-cutting discoverability utility.

Primary users. All roles, especially a new user or a role encountering a module for the first time.

6.3.3 Ask *journi* (Chatbot)

Purpose. A persistent, floating chat surface available from every screen in the application (not a dedicated page a user must navigate to, unlike Query Data/Query Features), so a question can be asked in the middle of any workflow without losing place. It answers a strictly wider class of question than either Query Data or Query Features alone by merging both of their retrieval sources with a third the other two do not reach: the seeded per-process knowledge base (Section 6.4.5).

Data captured. Not persisted server-side — the conversation lives only in the browser tab’s component state for the duration of the session; each request carries the caller’s own in-memory data (Section 4), the question, and a short window of recent conversation turns (at most the last six) as context for the LLM, the same pattern Query Data already uses for its own single-turn requests.

Functional requirements. - FR-CB-01: The interface shall render a floating action button in the bottom corner of every authenticated screen (`Layout.jsx`, outside the routed `<Outlet/>`), opening a chat panel on click without navigating away from the current page. - FR-CB-02: For a given question, the system shall attempt, in order: (a) the same deterministic aggregation functions Query Data uses (FR-QD-02) over the caller’s RBAC-scoped tenant data; (b) retrieval over the module/feature catalog (FR-QF-01); (c) retrieval over the seeded per-process knowledge base (FR-KB-02); combining whichever of (a)/(b)/(c) return a match into one grounding context before generation, rather than picking only one source. - FR-CB-03: The same RBAC scoping Query Data enforces (FR-QD-01, FR-QD-04) shall apply identically inside the chatbot — it shall never disclose a record, module, or individual-level detail the asking user’s role could not otherwise see. - FR-CB-04: The system prompt shall explicitly instruct the model that the chatbot is Assistive-tier only (Section 6.1.6, Section 7.5): it may explain, summarize, and point the user to a module, but shall never claim to have performed an action on the user’s behalf, and never state a tenant-specific number not present in the grounding context. - FR-CB-05: Every assistant response shall carry its disclosed sources (tenant records, matched modules, or knowledge-base articles) alongside the answer, following the same non-authoritative-without-a-source rule as FR-QD-06. - FR-CB-06: If no LLM is reachable, the response shall still surface the best available computed fact or retrieved match with a `generationError`, rather than fail outright (Section 3.8, FR-QD-05).

Frameworks integrated. None directly — a cross-cutting conversational front end over the same retrieval sources Query Data, Query Features, and the seeded knowledge base already provide.

Primary users. All roles; the chatbot’s own answer scope narrows per role exactly as Query Data’s does, not access to the widget itself.

6.4 Platform Extensions (Beyond M1-M22)

Added in v2.0 to close the gap between the reference build and the DynamicJourni Technical & Solution Offer’s Pack/compliance model (Section 1.1). Each is a genuinely new capability, not a relabeling of an existing module, and each is deliberately kept outside the M1-M22 numbering per Section 1.6’s rationale.

6.4.1 Configuration Management

Purpose. Lets a Super/Group/Org Admin select the tenant's active Solution Pack (Trailhead, Waypoint, or Horizon, mirroring the Technical Offer's three-Pack structure) and have that selection actually gate which of the 22 modules are reachable, rather than the pre-v2.0 `license.features` array, which was read in exactly one display location and enforced nowhere (Section 8.2, NFR-22).

Data captured. `data.packConfig`: { `activePack`: 'trailhead'|'waypoint'|'horizon', `enabledModules`: string[] (internal route ids, Section 1.6), `aiTier`: 'assistive'|'augmented', `customOverride`: boolean, `complianceStandards`: { [standardKey]: boolean } }.

Functional requirements. - FR-CFG-01: The system shall define, for each of the three Packs, a stock module list, AI tier, and Organization-count ceiling matching the Technical Offer's Section 3 table (`packDefinitions.js`). - FR-CFG-02: Selecting a Pack shall replace `enabledModules` and `aiTier` with that Pack's stock values and clear `customOverride`, after an explicit confirmation step (a Pack switch is a wide-blast-radius change). - FR-CFG-03: A Super/Group/Org Admin (`canManageConfiguration`) shall be able to hand-toggle any individual module's enabled state after selecting a Pack, which sets `customOverride`: `true` so the UI never silently claims a hand-edited configuration is still "stock." - FR-CFG-04: Every module route (`m1` through `m22`) shall be wrapped in a route guard (`RequireModule`) that redirects to the Dashboard if that route's internal id is not present in `enabledModules`; the Sidebar shall hide the corresponding nav entry using the same list, so the guard and the navigation can never disagree. - FR-CFG-05: The AI tier toggle (Assistive-only vs. Assistive+Augmented) shall be a tenant-wide setting read wherever the application currently distinguishes AI Use Case tiers (Section 6.1.6). - FR-CFG-06: A session persisted before Configuration Management shipped shall be back-filled with the Horizon Pack's stock configuration (all 22 modules enabled) on load, so no existing installation loses access to a module it could already reach (`migrateOrSeed`, Section 3.4).

Frameworks integrated. None directly — a tenant-commercial/administrative control surface.

Primary users. Super Admin, Group Admin, Organization Admin only (`canManageConfiguration`); read-only for every other role that can reach the page.

6.4.2 Compliance & Security Standards

Purpose. Lets an Admin activate or deactivate, per tenant, the seven compliance/security standards named in the Technical Offer's Section 9 (GDPR, ISO/IEC 27001, ISO/IEC 27701, SOC 2 Type II, HIPAA, FIPS 140-2, ISO 9001), independent of which Pack is active — matching the Offer's own model, where compliance is priced and activated separately from Pack selection, not bundled into one specific Pack.

Data captured. `data.packConfig.complianceStandards`: { `gdpr`, `iso27001`, `iso27701`, `soc2`, `hipaa`, `fips140_2`, `iso9001`: boolean }. Standard metadata (full name, focus description, whether it is a priced standard per the Offer) is static reference content (`complianceStandards.js`), not per-tenant data.

Functional requirements. - FR-CMP-01: The Configuration Management page shall list all seven standards with an independent on/off toggle each, gated by `canManageConfiguration`. - FR-CMP-02: Activating a standard shall be the mechanism by which a Control (Section 6.4.4) tagged with that standard is treated as “in scope” wherever the application filters or reports on active Controls. - FR-CMP-03: Deactivating a standard shall not delete any Control tagged with it — Controls are never destroyed by a Configuration change, only their in-scope status changes. - FR-CMP-04: The default seed shall activate GDPR and ISO/IEC 27001 (a reasonable illustrative baseline) and leave the remaining five inactive, editable immediately by an Admin.

Frameworks integrated. None directly — see Section 8.2 (NFR-23) for the explicit boundary between this feature and actually implementing/certifying a standard’s technical controls.

Primary users. Super Admin, Group Admin, Organization Admin only.

6.4.3 Template Library

Purpose. A reusable, versioned authoring-template catalog for the three CM artifact types that had no template concept at all before v2.0 — Charters (M5), Communications (M14), and Training curricula (M15) — following the same versioned-CRUD pattern Phase Templates (M8) and the AI Use Case Library (M6) already established, rather than inventing a new one.

Data captured. `data.templateLibrary`: { `charterTemplates`, `communicationTemplates`, `trainingTemplates` }, each an array of { `id`, `version`, `versionHistory`, ...`kind-specific fields` }. Charter templates carry a `sections[]` outline ({ `heading`, `prompt` }); communication templates carry `channel`, `audience`, `bodyOutline`; training templates carry `targetRole` and a `modules[]` curriculum outline ({ `name`, `durationHours` }).

Functional requirements. - FR-TPL-01: The system shall support full Create, Read, Update, and Delete on all three template catalogs, gated by `canManageTemplates` (the same capability that already gates Phase Templates, extended rather than duplicated). - FR-TPL-02: Every template edit shall be versioned via the shared `withVersionBump/revertEntityToVersion` utilities (Section 4, `VersionHistoryPanel`) — identical mechanism to Phase Templates and AI Use Cases, not a bespoke history model. - FR-TPL-03: The Template Library page shall also surface the existing Phase Template catalog (M8) as a read-only linked view, so an Admin has one place to see every template kind, while Phase Templates keep their own dedicated CRUD UI in M8 as the canonical editing surface. - FR-TPL-04: Deleting a template shall not affect any charter, communication, or training record already created from it in a live project — templates are a starting point copied at use time, not a live-linked reference.

Frameworks integrated. None directly — an authoring-efficiency layer over M5/M14/M15.

Primary users. Super Admin, Group Admin, Organization Admin, Change Manager (same role set as `canManageTemplates/canManageCharters`).

6.4.4 Process Governance (Alerts, Business Rules, Controls, KPIs, Reports, Risks & Opportunities)

Purpose. Attaches six governance-artifact types to each Macro Process in the M4 Process Registry catalog, closing the gap between the platform's pre-v2.0 project-level-only governance (the 16 fixed Notification Center alert definitions, Section 7.2; the project-level Risk Register, M12) and process-level governance as commonly modeled in BPM/GRC practice, including COSO-aligned Control tagging. Deliberately scoped to the Macro Process (the stable, platform-wide catalog M4 already owns) rather than to a per-project WBS task instance — see Section 10.3, item 12, for the rationale and the rebuild consideration if task-level granularity is required.

Data captured. `data.processGovernance`: object keyed by Macro Process id (MP-01..MP-10") → { `alerts[]`, `businessRules[]`, `controls[]`, `kpis[]`, `reports[]`, `risksOpportunities[]` }. Field shapes: Alert { `id`, `name`, `condition`, `severity`: 'low'|'medium'|'high'|'critical', `recipientRoles[]`, `channel`, `active` }; Business Rule { `id`, `name`, `description`, `trigger`, `action`, `owner`, `active` }; Control { `id`, `name`, `description`, `cosoComponent`, `controlType`: 'preventive'|'detective'|'corrective', `frequency`, `owner`, `complianceStandards[]`, `status`: 'effective'|'needs_review'|'ineffective' }, where `cosoComponent` is one of the five COSO 2013 Internal Control — Integrated Framework components (control environment, risk assessment, control activities, information & communication, monitoring activities); KPI { `id`, `name`, `description`, `target`, `unit`, `owner`, `frequency` }; Report { `id`, `name`, `description`, `audience[]`, `format`, `frequency`, `owner` }; Risk/Opportunity { `id`, `type`: 'risk'|'opportunity', `description`, `likelihood` (1-5), `impact` (1-5), `owner`, `status` }.

Functional requirements. - FR-GOV-01: The system shall support full Create, Read, Update, and Delete on all six governance-artifact types, independently per Macro Process, gated by a new `manageProcessGovernance` capability (Section 7.4, Section 10.4). - FR-GOV-02: The Process Registry's Governance tab shall present a Macro Process picker alongside all six artifact-type panels for the selected process, so a user reviews one process's full governance posture in one screen rather than six separate lists. - FR-GOV-03: A Control's `cosoComponent` shall be selectable from exactly the five COSO 2013 components; the field exists to support COSO-aligned internal-control reporting, not to itself implement or certify COSO compliance (Section 8.2, NFR-23). - FR-GOV-04: A Control's `complianceStandards[]` shall reference zero or more of the seven standards in Section 6.4.2, so a Configuration-level standard deactivation (FR-CMP-03) can be reflected in any future in-scope/out-of-scope Control filtering without deleting the Control itself. - FR-GOV-05: Deleting a Macro Process (Section 6.4.4 read together with the now-CRUD-able M4 catalog, formerly read-only) shall cascade-delete its governance bucket in `data.processGovernance`, mirroring the cascade pattern FR-M1-04 already establishes for Organization deletion. - FR-GOV-06: The seed data shall populate one realistic example of each of the six artifact types for every one of the ten Macro Processes (60 seeded items total), so the Governance tab is never empty on a fresh install and a user can see the intended shape of each artifact type before authoring their own.

Frameworks integrated. COSO 2013 Internal Control — Integrated Framework (Controls only); otherwise a cross-cutting governance layer over the M4 process catalog.

Primary users. Super Admin, Group Admin, Organization Admin, Change Manager (same role set as `canManageAiUseCases/canManageCharters`); read-only for every other role.

6.4.5 Seeded Process Knowledge Base (RAG)

Purpose. Gives each Macro Process a piece of authored practitioner guidance (e.g. “how to run a stakeholder assessment without under-covering a business unit,” “how to classify resistance by root cause before reacting”) that Query Data, Query Features, and the chatbot (Section 6.3.3) can retrieve for a step-scoped question, which neither of the pre-v2.0 RAG corpora (tenant records; the static module-feature catalog) could answer.

Data captured. `processKnowledgeBase.js`: one static array entry per Macro Process, `{ id, mpId, title: {en, fr, ar}, body: {en, fr, ar} }` — not tenant data, versioned with the codebase like `macroProcesses.js` and indexed identically (imported directly by the server, Section 3.8).

Functional requirements. - FR-KB-01: Every Macro Process shall have exactly one seeded knowledge-base article, authored in English, French, and Arabic. - FR-KB-02: The chatbot backend shall index this corpus with the same TF-IDF retrieval (buildIndex/search, Section 3.8) already used for the tenant-record and feature corpora, so all three retrieval sources share one mechanism rather than three different ones. - FR-KB-03: The Process Registry’s Governance tab (Section 6.4.4) shall display the selected Macro Process’s knowledge-base article inline, so the guidance is discoverable without going through the chatbot at all. - FR-KB-04: The knowledge base is a read-only, code-shipped catalog in v2.0 — no in-app authoring UI exists yet; extending it to be Admin-editable (the same versioned-CRUD pattern as Section 6.4.3) is a natural rebuild candidate, not implemented here.

Frameworks integrated. None directly — practitioner guidance cross-referencing the ADKAR/Lewin/Bridges vocabulary each article discusses.

Primary users. All roles, via the chatbot or the Governance tab; there is no dedicated “browse the knowledge base” page in v2.0.

6.4.6 BPMN 2.0 Process Flow Modeler

Purpose. Replaces the pre-v2.0 read-only, text-chip rendering of an End-to-End process chain (a linear sequence of Macro Process ids joined by → characters, no editing surface at all) with a genuine BPMN 2.0-compliant diagram editor, built on **bpmn-js** (the open-source engine behind Camunda Modeler) rather than a hand-rolled renderer, so the notation, the XML interchange format, and the palette/canvas separation are all the real OMG standard rather than an approximation of it.

Data captured. `data.e2eProcessCatalog[].bpmnXml`: an optional string field holding schema-valid BPMN 2.0 XML (MODEL + DI namespaces per the OMG BPMN 2.0 specification) for that E2E chain, generated on first view if absent (`generateDefaultBpmnXml`) and overwritten on every edit.

Functional requirements. - FR-BPMN-01: For any E2E Process Registry chain with no saved diagram, the system shall generate a starter BPMN 2.0 diagram consisting of one Start Event, one Task per Macro Process in that chain’s `orderedMacroProcesses`

sequence, one End Event, and the connecting sequence flows, laid out left to right. - FR-BPMN-02: A user with `manageProcessGovernance` shall be able to freely edit the generated (or previously saved) diagram using bpmn-js's Modeler — adding gateways, pools, lanes, additional events, or any other BPMN 2.0 element the palette exposes — not limited to the starter shape. - FR-BPMN-03: bpmn-js's own Palette (the tool panel for creating new diagram elements) and Context Pad (the per-element quick-action menu) shall remain the library's native, structurally separate-from-canvas UI — this requirement is satisfied by using bpmn-js's Modeler as-shipped rather than a custom overlay. - FR-BPMN-04: Every diagram edit shall be saved back to `data.e2eProcessCatalog[ ].bpmnXml` via the `commandStack.changed` event, so a save happens on every meaningful edit rather than requiring an explicit "Save" click. - FR-BPMN-05: A user without `manageProcessGovernance` shall see the same diagram rendered with standard BPMN 2.0 notation via bpmn-js's Viewer (not its Modeler), with no editing palette present. - FR-BPMN-06: The system shall provide Export (download the current diagram as a .bpmn XML file) and Import (load a .bpmn/.xml file, replacing the current diagram) actions, so a diagram authored in journi can be opened in any other BPMN 2.0-compliant tool, and vice versa. - FR-BPMN-07: The generated/edited diagram shall always set `isExecutable="false"` on its `<bpmn:process>` element — journi is a process-modeling and documentation register, not a BPMN execution engine; see Section 10.3, item 13.

Frameworks integrated. BPMN 2.0 (Business Process Model and Notation, OMG standard) — the first non-change-management framework the platform models directly, alongside ADKAR/Lewin/Bridges/Kübler-Ross.

Primary users. Super Admin, Group Admin, Organization Admin, Change Manager for editing (`manageProcessGovernance`); all roles for viewing.

7. Cross-Cutting Functional Requirements

These requirements are not owned by any single module — they are shared infrastructure that most or all of M1–M22 draw on identically.

7.1 CSV Export

- FR-X-01: journi's highest-traffic tables shall offer a client-side CSV export — Sponsor Coalition (M13), Communications (M14), Training & Certification (M15), Risk Register (M12), and the Analytics readiness heatmap and benchmarking tables (M20) — built entirely in the browser via a Blob download, with no backend export service required.
- FR-X-02: Each export shall reflect exactly the rows and columns currently on screen, respecting the same RBAC and scope filtering as the table itself.
- FR-X-03: Every export shall be written with a UTF-8 byte-order mark, so accented French and Arabic content opens correctly in Excel.

7.2 Notification Center (Alerts)

- FR-X-04: A bell icon in the TopBar shall surface the platform's defined alert conditions as a persistent, dismissible, per-project in-app log.
- FR-X-05: The following conditions shall fire live, computed client-side from data journi already holds, whenever true for the scoped Change Management Project: a Divergence Pattern (M11); a Critical post-go-live regression-risk score (M21); a Sponsor Coverage Gap — visibility rated Weak (M13); a Resistance Escalation

Threshold breach — three or more open resistance-log entries (M16); a Change Saturation breach — two or more other concurrent initiatives targeting the same Organization (M12/M14); a Communication Overload — more than three not-yet-sent communications scheduled across a project and its concurrent same-Organization initiatives (M14); a Phase Gate closed No-Go or Go-with-Conditions (M8); a Guiding Coalition Gap — fewer than two named coalition members (M13); and a blocked Sustainment sign-off (M21).

- FR-X-06: Dismissing an alert shall persist per Change Management Project (in `dismissedAlerts[]`, Section 4.3) and survive a page reload; a Restore control shall bring a dismissed alert back into view.
- FR-X-07: The alerts themselves shall never be persisted — only the dismissal state is; every alert is recomputed live on each render from current project data.
- FR-X-08: The following conditions are catalogued for traceability but depend on backend/data-model infrastructure the reference build does not have, and never fire: survey-exception retries, AI-confidence scoring, import integrity, administrative account lock-out, GDPR request SLA, AI provider fallback, and Champion Coverage Below Target (the last excluded because journi has no structured champion-tracking data model, not a backend gap). A rebuild adding real outbound delivery (email/push/Teams) for the live-firing conditions above should treat that as new infrastructure, not an existing capability being exposed.

7.3 Justification Governance

- FR-X-09: Every score or state change to a Change Management Project's ADKAR block (M10), Lewin macro-state (M7), Bridges/Kübler-Ross position (M11), sponsor visibility (M13), manager readiness (M17), training certification (M15), resistance status (M16), or risk status (M12) shall follow the same stage-then-justify pattern: the practitioner stages the new value, writes a justification note, then saves — at which point the new value and its justification are appended together, in one atomic update, to that project's Change Log (M7).
- FR-X-10: A platform-wide `requireJustification` toggle (M2, Governance Settings, default on) shall determine whether the justification note is a hard requirement before Save enables, or merely offered and recorded when given.
- FR-X-11: Justification text is expected to cite evidence already observed, never a plan for future evidence; journi does not enforce this discipline programmatically, by design — it is a record of practitioner judgment, and the tool's role is to make that judgment easy to capture and impossible to lose, not to police its content.

7.4 Permission Matrix

See Section 3.7 and FR-M2-02 through FR-M2-03 for the full specification; in summary, the role × capability grid on M2 is the single runtime override every `can*` check in Sections 3.7 and 6 reads from, editable in place by a Super Admin, taking effect immediately and platform-wide without a code change. Section 10.3 notes the one known module (M8) that does not currently read from it. Two capabilities were added in v2.0: `manageConfiguration` (Section 6.4.1, FR-CFG-03) and `manageProcessGovernance` (Section 6.4.4, FR-GOV-01) — see Section 10.4 for their default seeded values.

7.5 AI Governance Tiers

See Section 6.1.6 (M6) FR-M6-01 through FR-M6-10 for the full specification of the Assistive/Augmented tier model and its activation, override, and audit-logging requirements. The chatbot (Section 6.3.3) is Assistive-tier by design (FR-CB-04) and is not subject to per-Organization/per-project activation toggling the way an M6 AI Use Case is — it is always available to every authenticated user, since it never drafts or takes an action, only explains and points.

7.6 Framework-to-Module Mapping

journi does not force a single change methodology; each established framework is mapped onto the module(s) where it is operationally expressed, so practitioners trained in any one methodology find their vocabulary represented in the tool. Module numbers below use the current M1–M22 sequence (Section 1.6).

Framework	Primary Level	Modules Where Applied
ADKAR (Prosci)	Individual / Cohort	M10 ADKAR Engine; M15 Training; M17 Manager as Coach; M20 Analytics
Kotter’s 8 Steps	Organizational	M13 Sponsor & Coalition; M14 Communications; M15 Training; M21 Sustainment
Lewin (Unfreeze–Change–Refreeze)	Organizational (macro-state)	M7 Initiative Registry; M21 Sustainment
Bridges Transition Model	Individual / Emotional	M11 Emotional & Transition; M18 Journey Map
Kübler-Ross Change Curve	Individual / Emotional	M11 Emotional & Transition; M16 Resistance Management
Prosci Sponsor & Manager Research	Organizational / Team	M13 Sponsor & Coalition; M17 Manager-as-Coach
AI Tiers — Assistive & Augmented	Cross-cutting	M6 AI Use Case Library; expressed inside M9, M10, M11, M13, M14, M15, M16, M17, M18, M20, M21

M8 (WBS & Gantt) is deliberately cross-cutting rather than tied to one row above: it gives every framework in this table a single baseline-vs-actual calendar alongside the Project Management delivery track, next to the Lewin macro-state owned by M7, the Bridges/Kübler-Ross position owned by M11, and the ADKAR scores owned by M10.

M5 (Charter Registry) and M19 (Journeys, Touchpoints & Analytics) are cross-cutting in the same sense — rather than introducing frameworks of their own, they operationalize the Prosci and Kotter rows above as signed, trackable behavioral standards (M5) and give the Bridges/Kübler-Ross journey M18 already visualizes a touchpoint-level completion record (M19).

8. Non-Functional Requirements

8.1 Performance

- NFR-01: The frontend build shall load and render the largest single-project view within normal broadband/LAN latency without a loading spinner exceeding a few seconds — the entire application ships as one JS bundle (currently ~660KB minified, ~180KB gzipped) with no code-splitting; a rebuild adding substantially more module content should consider `manualChunks` splitting if the bundle grows enough to trigger Vite’s default 500KB warning meaningfully.
- NFR-02: State-save shall be debounced 400ms after the last change (Section 3.4) to avoid saturating the backend with a write per keystroke, at the deliberate cost of up to 400ms of unsaved-edit exposure if the process is killed mid-edit.
- NFR-20: Adding `bpmn-js` (Section 6.4.6) grew the single JS bundle from ~660KB to ~1.38MB minified (~395KB gzipped, plus a separately cached ~49KB font and ~136KB icon-sprite asset); this is a deliberate trade-off for a genuine BPMN 2.0 engine over a lighter hand-rolled renderer (Section 6.4.6’s rationale) and further raises the case for the `manualChunks` code-splitting NFR-01 already flags, specifically so the BPMN editor’s chunk loads only when the Flow tab is opened.

8.2 Security

- NFR-03: **The reference build has no authentication at the HTTP layer.** GET/PUT `/api/state` accept any caller with no login, session, token, or credential check whatsoever — RBAC (Section 3.7) is enforced entirely client-side, in the React app, as a UX/workflow control, not a security boundary. A user with direct HTTP access to the server (or its port) can read or overwrite the *entire* application’s data for every tenant, regardless of role. This is acceptable for the reference build’s intended context — a single machine on a trusted LAN or a single user’s desktop — but is not a production security posture. A production or multi-tenant-hosted rebuild must add real server-side authentication and per-request authorization before RBAC can be considered anything more than a workflow convenience.
- NFR-04: The reference build implements no TLS termination, rate limiting, or web-application-firewall behavior; these must be added at the infrastructure layer for any internet-facing deployment.
- NFR-05: The API performs no request-body shape validation on PUT `/api/state` — a malformed body will overwrite the stored state with whatever was sent. A production rebuild should validate the body against the Section 4 schema before persisting it.
- NFR-06: An AI use case shall never grant a user visibility they would not otherwise have (FR-M6-10); the Real LLM Provider Connection’s API key shall never be persisted server-side or included in any data export (FR-M6-08).
- NFR-07: Individual-level ADKAR scores and sentiment data shall be restricted, by RBAC default, to roles in `ROLES_WITH_INDIVIDUAL_VISIBILITY` (Super Admin,

Group Admin, Organization Admin, Change Manager, People Manager); Sponsors and Executives see aggregated, de-identified views only, per M20's roll-up logic.

- NFR-19: The RAG routes' LLM proxy (`server/lib/llmProxy.js`, Section 3.8) shall use a forwarded API key exactly once, for the single request it arrived with, and shall never write it to disk, log it, or hold it in memory beyond that request's lifetime — the same never-persisted contract FR-M6-08 requires of the browser-direct path applies equally to the proxied one. An optional server-side `ANTHROPIC_API_KEY` (`server/.env`) is a deployment convenience for Query Data/Query Features only, not a shared credential the AI Use Case Library draws on — that capability always prefers the signed-in user's own Module 6 connection.
- NFR-21: Configuration Management's module gating (`RequireModule`, Section 6.4.1, FR-CFG-04) is a client-side React Router guard, not a server-side authorization boundary — it inherits exactly the security posture NFR-03 already discloses for the rest of the application. A user with direct HTTP access to `GET/PUT /api/state` can still read or write data belonging to a module the active Pack has disabled; a production rebuild's real server-side authorization (Section 5.2.2) must enforce Pack-based module access itself, not delegate it to the frontend route guard.
- NFR-22: Activating a standard in Configuration Management (Section 6.4.2) is a scoping and labeling mechanism — it determines which Controls (Section 6.4.4) are treated as in-scope in the application's own UI — and is explicitly **not** an implementation or certification of that standard's actual technical or organizational controls (encryption at rest, access logging, breach-notification procedures, an independent third-party audit, etc.). Achieving real GDPR/ISO/SOC 2/HIPAA compliance requires infrastructure, process, and audit work entirely outside this application's code, the same way FR-GOV-03 already draws this boundary for COSO-tagged Controls specifically.

8.3 Reliability & Data Integrity

- NFR-08: The reference build's persistence layer is a single SQLite file with no replication and no automated backup; `journi.db` is the entire durability boundary. A production deployment should add scheduled backups with a defined retention policy at minimum, and should evaluate whether the single-writer-row model (Section 3.3) meets its concurrency needs before scaling beyond one small team's usage.
- NFR-09: Every write is a full-document overwrite with no optimistic-locking or versioning at the transport level (Section 3.4) — two browser tabs editing the same tenant concurrently will silently clobber each other's changes on the losing tab's next debounced save. A rebuild targeting concurrent multi-user editing of the same project must add conflict detection or move to per-entity writes (Section 5.2).
- NFR-10: `better-sqlite3` is deliberately kept as an optionalDependency (Section 3.3) specifically so a failed native build never aborts `npm install` as a whole, given `node:sqlite` is tried first and covers the common case.

8.4 Usability & Accessibility

- NFR-11: Every layout (navigation, tables, charts, the Journey Map) shall render correctly mirrored under Arabic RTL, not just with mirrored text direction (Section 3.6).
- NFR-12: Status, severity, and classification fields shall use the shared Badge component's consistent color vocabulary across all 22 modules (Section 5.1), so a user who has learned the color meaning in one module recognizes it in every other.
- NFR-13: M17's interface shall remain lightweight enough for a time-constrained frontline supervisor to use on a mobile browser, per its stated design intent, even though no dedicated mobile layout exists elsewhere in the application.

8.5 Localization

See Section 3.6 for the full specification. In summary: English, French, and Arabic (with full RTL) are first-class, not translated-as-afterthought; every UI string lives in one dictionary file; language precedence resolves user preference → Organization default → English fallback on every sign-in and Organization switch.

8.6 Portability / Installability

- NFR-14: `npm install` must succeed on a fresh Windows machine with only Node.js installed — no Visual Studio Build Tools, no Python, no C++ toolchain requirement — across the range of Node 18 through the latest release, satisfied by the dual SQLite driver strategy (Section 3.3).
- NFR-15: The same source must run unmodified on macOS/Linux via standard `npm install && npm run build / npm start`, without requiring the Windows batch-file wrappers.

8.7 Maintainability / Extensibility

- NFR-16: Adding a new module shall follow the established pattern: a new `Module<N>Page.jsx` (internal identifier, Section 1.6), a route entry, a Sidebar entry with a `navM<N>` translation key (whose *value*, not key, carries the visible module number), `i18n` keys for every user-facing string in all three languages, and — if it needs its own persisted sub-collection — a new array on the `cmProject` object (Section 4.3) plus `addSubItem/updateSubItem/removeSubItem` wiring rather than a bespoke mutator, unless the module's data genuinely doesn't fit the generic sub-item shape (as with M2's Permission Matrix or M7's Change Log).
- NFR-17: A module's visible number and its internal file/route identifier are permanently decoupled (Section 1.6) specifically so a future renumbering never requires a mechanical rename sweep across the codebase — only the translation dictionary's *values* change.

8.8 Compatibility

- NFR-18: The application targets evergreen desktop browsers (Chrome, Edge, Firefox); no legacy-browser support (e.g. Internet Explorer) is in scope.
- NFR-23: BPMN diagrams (Section 6.4.6) shall be stored and exchanged as schema-valid BPMN 2.0 XML (OMG MODEL + DI namespaces), verified by `bpmn-js`'s own `importXML/saveXML` round-trip rather than a bespoke schema validator; a

diagram exported from journi shall open without error in any other BPMN 2.0-compliant tool (e.g. Camunda Modeler), and vice versa (FR-BPMN-06).

9. Seed / Reference Data Requirements

9.1 Reference Tenant

The reference build seeds one Group (“Atlas Industrial Group”) containing four Organizations, each carrying its own Main Project(s) and linked Change Management Project(s), for a total of 20 seeded Change Management Projects — one per seeded change_manager-role user. Fourteen of these are illustrative “cases” spanning three sectors (Manufacturing, Logistics & Transportation, Health) crossed with eight transformation types, documented in full narrative detail in the predecessor Functional Specification (Section 6) and in the Master User Guide. The remaining seeded projects support the guide’s own running scenario tenant. All seeded organizations, individuals, and figures are fictional composites; they are not a substitute for real organizational data before go-live.

Sector	Transformation Types Covered
Manufacturing	ERP Implementation; Business Process Automation; Integrated Management System (QMS); Cultural / Values Transformation; Training & Skills Development
Logistics & Transportation	ERP Implementation; Business Process Automation; Integrated Management System (QMS); Business Process Reengineering; Operating Model Redesign
Health	ERP Implementation; Business Process Automation; Integrated Management System (QMS); Compliance-Driven Change

9.2 Demo User / Role Matrix

The seed data includes 24 platform users spanning all nine roles (Section 3.7): one Super Admin, one Group Admin, one Organization Admin per seeded Organization, one Change Manager per seeded Change Management Project, one People Manager, one Sponsor, one Executive, and one Employee — each with a fixed scopeType/scopeId demonstrating every scope level the RBAC model supports (Section 3.7).

9.3 Shared Catalogs

Seeded once, shared across every tenant rather than duplicated per-Organization: the AI Use Case catalog (14 entries, M6), the Macro Process catalog (10 entries, M4), the E2E Process Registry (17 entries, M4), the Phase Template library (8 entries, M8), the RACSI grid default, the Charter Registry’s 8 charter definitions (M5), and the default Permission Matrix (DEFAULT_ROLE_PERMISSIONS, M2).

10. Appendices

10.1 Glossary

See Section 1.4 for framework and access-control acronyms. Module-specific vocabulary is defined inline in each module's Section 6 entry on first use.

10.2 Requirement Traceability

Section 1.6's module table is the authoritative map from a displayed module number to its source file; Section 4 is the authoritative field-level schema; Section 6 is the authoritative functional-requirement list, one FR-Mn-*nn* per testable behavior. A QA team writing test cases against this document should trace each test to one FR id; a dev team scoping a rebuild task should trace each task to one module's FR block plus its Section 4 data-model entry.

10.3 Known Functional Gaps (Reference Implementation)

These are honest, verified-against-source gaps in the current reference build, not aspirational shortcomings — each is called out at its owning module in Section 6 and collected here for rebuild-planning convenience. None blocks the application's core workflows; each represents either a deliberate scope decision (e.g. an immutable Phase Gate record) or an incompletely-extended CRUD pattern worth completing in a rebuild.

#	Module	Gap	Type
1	M10 ADKAR Engine	Coaching Notes are Add-only — no Edit or Delete, in this module or in M17 where they are also displayed.	Incomplete CRUD
2	M13 Sponsor & Coalition	Coalition Member roster has no Add/Edit/Delete UI at all — read-only display, populated only at seed time.	Missing CRUD
3	M13 Sponsor & Coalition	Sponsor Actions support Add and a done-toggle only — no Edit or Delete of the action text.	Incomplete CRUD
4	M12 Risk Register	A risk's core fields (category, description, likelihood, impact, owner) have no Edit once created — only status is changeable, via the justified-change flow.	Incomplete CRUD
5	M21 Sustainment	Quick Wins are Add-only — no Edit or Delete.	Incomplete CRUD
6	M21 Sustainment	Lessons Learned support Add and a partial Edit (<code>linkedRuleOrControl</code> only) — no Delete.	Incomplete CRUD

#	Module	Gap	Type
7	M16 Resistance Management	Codebook entries support Add and Delete only — no Edit of an existing code's label/description.	Incomplete CRUD
8	M8 WBS & Gantt	Phase Gates support Add and Delete only — no Edit of a recorded joint decision (may be intentional: a gate record is arguably meant to be immutable once logged).	Design decision or gap — confirm intent before rebuilding
9	M8 WBS & Gantt	Write-access checks call <code>canWrite(currentUser?.role)</code> without passing the Permission Matrix, unlike every other module — Super Admin edits to the matrix do not affect this module's write gating.	Inconsistency
10	M18 Journey Map	"Share Snapshot" is a demo-only confirmation message with no real export/share backend.	Stub, not a regression
11	Cross-module	Some in-code comments and the AI Use Case catalog's <code>moduleLabel</code> strings still reference the pre-renumbering module numbers in places; the Section 1.6 table (sourced from <code>Sidebar.jsx/translations.js</code> , not from code comments) is the authoritative current mapping and should be used for any further documentation work.	Documentation drift

Added in v2.0:

#	Feature	Gap	Type
12	Process Governance (Section 6.4.4)	Alerts, Business Rules, Controls, KPIs, Reports, and Risks & Opportunities attach to a Macro Process (the platform-wide M4 catalog), not to an individual per-	Design decision / scope boundary — confirm whether task-level granularity is required before a rebuild.

#	Feature	Gap	Type
13	BPMN 2.0 Flow Modeler (Section 6.4.6)	project WBS task instance. Diagrams are always saved with <code>isExecutable="false"</code> ; <code>journi</code> ships no BPMN execution engine, so a diagram is a design/documentation artifact only, never a runnable process.	Design decision — <code>journi</code> is a modeling register, not a workflow engine.
14	Compliance & Security Standards (Section 6.4.2)	Activating a standard changes which Controls are labeled in-scope in the application; it does not implement or certify that standard's actual technical/organizational controls (Section 8.2, NFR-22).	Design decision / scope boundary.
15	Configuration Management (Section 6.4.1)	Pack-based module gating (<code>RequireModule</code>) is a client-side route guard, the same non-server-enforced posture NFR-03 already discloses platform-wide — not a new gap in kind, but worth flagging at this specific feature (Section 8.2, NFR-21).	Same class as NFR-03.
16	Template Library (Section 6.4.3)	Deleting or editing a template never propagates to charters/communications/trainings already created from it — templates are copy-on-use,	Design decision — confirm whether template lineage tracking is a rebuild requirement.

#	Feature	Gap	Type
		not live-linked; there is no UI showing which live records originated from which template version.	

10.4 Default Permission Matrix

The seeded default state of `data.rolePermissions` (Section 4.1), editable at runtime on `M2.manageConfiguration` and `manageProcessGovernance` were added in v2.0 (Section 6.4.1, Section 6.4.4).

Role	manageHierarchy	manageUsers	write	activateAIForOrg	requestProjectOverride	manageCharters	manageAIUseCases	manageTemplates	manageConfiguration	manageProcessGovernance
super_admin	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
group_admin	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
org_admin	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
change_manager			✓		✓	✓	✓	✓		✓
people_manager			✓							
practitioner			✓							
sponsor										
employee										
executive										

10.5 Full i18n String Catalog

The complete content of `journi/src/i18n/translations.js` — every user-facing string key, in English, French, and Arabic — reproduced verbatim so a rebuild in another language/stack can achieve text-identical parity without needing separate access to the original source. Tables are grouped exactly as the source file groups them (its own

section comments); several groups mix strings from multiple current modules because the source file organizes by when a string was added, not strictly by module. Where a source comment names a module by its old pre-renumbering internal number (e.g. “Module 7”), that is a source code-comment artifact, not the current displayed number — Section 1.6 is authoritative for the current mapping.

10.5.1 Addendum — Keys Added in v2.0

The 111 keys below were added to `journi/src/i18n/translations.js` for the v2.0 features in Section 6.3.3 and Section 6.4 (Configuration Management, Compliance & Security Standards, Template Library, Process Governance, the BPMN 2.0 Flow tab, and the chatbot). They are additive to the v1.0 catalog above, not a replacement of it. Two v1.0 keys shown in that catalog, `resetDemoData` and `resetDemoDataConfirm`, no longer exist in the current dictionary — see Section 4.1’s note on the removed Reset Demo Data action.

Key	English	Français	العربية
<code>navConfig</code>	Configuration	Configuration	الإعدادات
<code>navTemplateLibrary</code>	Template Library	Bibliothèque de modèles	مكتبة النماذج
<code>config_title</code>	Configuration Management	Gestion de la configuration	إدارة الإعدادات
<code>config_desc</code>	Choose the active Solution Pack, fine-tune which modules and AI tier are enabled, and activate the compliance standards that apply to this tenant.	Choisissez le Pack de solution actif, ajustez les modules et le palier IA activés, et activez les normes de conformité applicables à ce tenant.	اختر الباقة النشطة، واضبط الوحدات ومستوى الذكاء الاصطناعي المفعلة، وفعل معايير الامتثال المطبقة على هذا المستأجر.
<code>config_readonly_notice</code>	You can view the current configuration but do not have permission to change it.	Vous pouvez consulter la configuration actuelle mais n’avez pas la permission de la modifier.	يمكنك عرض الإعداد الحالي لكن لا تملك صلاحية تعديله.
<code>config_pack_heading</code>	Solution Pack	Pack de solution	باقة الحل
<code>config_pack_trailhead_name</code>	Trailhead (Essentials)	Trailhead (Essentiel)	Trailhead (أساسي)
<code>config_pack_trailhead_desc</code>	Multi-project change management within a single Organization.	Gestion du changement multi-projets au sein d’une seule Organisation.	إدارة تغيير متعددة المشاريع داخل مؤسسة واحدة.

Key	English	Français	العربية
config_pack_waypoint_name	Waypoint (Professional)	Waypoint (Professionnel)	Waypoint (احترافي)
config_pack_waypoint_desc	Multi-project, multi-framework program management across up to 5 Organizations.	Gestion de programme multi-projets et multi-référentiels sur jusqu'à 5 Organisations.	إدارة برامج متعددة المشاريع والأطر عبر ما يصل إلى 5 مؤسسات.
config_pack_horizon_name	Horizon (Enterprise)	Horizon (Entreprise)	Horizon (مؤسسي)
config_pack_horizon_desc	Group-wide governance across unlimited Organizations, full AI library & sovereign deployment.	Gouvernance à l'échelle du groupe sur un nombre illimité d'Organisations, bibliothèque IA complète et déploiement souverain.	حوكمة على مستوى المجموعة عبر عدد غير محدود من المؤسسات، مع مكتبة ذكاء اصطناعي كاملة ونشر سيادي.
config_active	Active	Actif	نشط
config_modules_heading	Modules	Modules	الوحدات
config_ai_heading	AI Use Cases	Cas d'usage IA	حالات استخدام الذكاء الاصطناعي
config_max_orgs	Organizations	Organisations	المؤسسات
config_unlimited	Unlimited	Illimité	غير محدود
config_customized	Customized	Personnalisé	مخصّص
config_ai_tier_heading	AI Tier	Palier IA	مستوى الذكاء الاصطناعي
config_ai_tier_assistive	Assistive only	Assistif uniquement	مساعد فقط
config_ai_tier_assistive_desc	The AI observes, analyzes, or suggests — a person performs the task and makes the decision.	L'IA observe, analyse ou suggère — une personne exécute la tâche et prend la décision.	يراقب الذكاء الاصطناعي أو يحلل أو يقترح — ويقوم الشخص بتنفيذ المهمة واتخاذ القرار.
config_ai_tier_augmented	Assistive + Augmented	Assistif + Augmenté	مساعد + معزز
config_ai_tier_augmented_desc	Adds drafting/classifying/summarizing at scale — a person must still review, edit, and approve.	Ajoute la rédaction/classification/synthèse à grande échelle — une personne doit toujours relire,	يضيف الصياغة/التصنيف/التلخيص على نطاق واسع — ويجب أن يراجع شخص ويعدّل ويوافق دائمًا.

Key	English	Français	العربية
		modifier et approuver.	
config_compliance_heading	Compliance & Security Standards	Normes de conformité et de sécurité	معايير الامتثال والأمان
config_compliance_hint	Activating a standard here is what makes its related Controls (Process Registry → Governance tab) count as in-scope.	Activer une norme ici fait que ses Contrôles associés (Registre des processus → onglet Gouvernance) comptent comme dans le périmètre.	تفعيل معيار هنا يجعل الضوابط المرتبطة به (سجل العمليات ← تبويب الحوكمة) ضمن النطاق.
config_compliance_priced	Priced standard	Norme payante	معيار مدفوع
config_deployment_heading	Deployment Options	Options de déploiement	خيارات النشر
config_deployment_hint	Which options are available depends on the active Pack — see the Technical & Solution Offer, Section 2.4.	Les options disponibles dépendent du Pack actif — voir l'Offre Technique et Solution, section 2.4.	تعتمد الخيارات المتاحة على الباقة النشطة — راجع العرض التقني والحل، القسم 2.4.
config_available	Available	Disponible	متاح
config_via_addon	Via Add-On	Via extension	عبر إضافة
config_current_license_mode	Current license mode	Mode de licence actuel	وضع الترخيص الحالي
config_confirm_switch	Switch the active Pack to {pack}? This resets the enabled-module list and AI tier to that Pack's stock configuration.	Basculer le Pack actif vers {pack} ? Cela réinitialise la liste des modules activés et le palier IA à la configuration standard de ce Pack.	هل تريد التبديل إلى ؟ سيعيد {pack} باقة ذلك ضبط قائمة الوحدات المفعلّة ومستوى الذكاء الاصطناعي إلى الإعداد الافتراضي لتلك الباقة
compliance_gdpr_focus	Data subject rights, consent, and cross-border transfer controls.	Droits des personnes concernées, consentement et contrôles des transferts transfrontaliers.	حقوق أصحاب البيانات، والموافقة، وضوابط النقل عبر الحدود.
compliance_iso27001_focus	Information security	Contrôles du système de	ضوابط نظام إدارة أمن

Key	English	Français	العربية
	management system (ISMS) controls.	management de la sécurité de l'information (SMSI).	
compliance_iso27701_focus	Privacy information management, extending ISO/IEC 27001.	Gestion de l'information relative à la vie privée, en extension de l'ISO/IEC 27001.	إدارة معلومات الخصوصية، امتدادًا لـ ISO/IEC 27001.
compliance_soc2_focus	Security, availability, and confidentiality of vendor-hosted environments.	Sécurité, disponibilité et confidentialité des environnements hébergés par le fournisseur.	أمن وتوافر وسرية البيانات المستضافة لدى المزود.
compliance_hipaa_focus	U.S. protected health information, for Health-sector Organizations.	Informations de santé protégées (États-Unis), pour les Organisations du secteur de la santé.	معلومات صحية محمية (الولايات المتحدة)، للمؤسسات في قطاع الصحة.
compliance_fips140_2_focus	Applicable to the Sovereign & Air-Gapped Deployment Suite.	Applicable à la Suite de déploiement souverain et isolé (air-gapped).	ينطبق على حزمة النشر السيادي والمعزول عن الشبكة.
compliance_iso9001_focus	Applicable to the delivery and support organization's own QMS.	Applicable au système de management de la qualité de l'organisation de livraison et de support.	ينطبق على نظام إدارة الجودة الخاص بمؤسسة التسليم والدعم.
deployment_dedicated_cloud	Dedicated Cloud — Public Cloud, Single-Tenant	Cloud dédié — Cloud public, mono-tenant	سحابة مخصصة — سحابة عامة، أحادية المستأجر
deployment_group_cloud	Group Cloud — Public Cloud, Multi-Tenant	Cloud de groupe — Cloud public, multi-tenant	سحابة جماعية — سحابة عامة، متعددة المستأجرين
deployment_hybrid_shield	Hybrid Shield — App On-Prem, AI Public Cloud	Hybrid Shield — Application sur site, IA en cloud public	Hybrid Shield — التطبيق محليًا، الذكاء الاصطناعي في سحابة عامة
deployment_sovereign_core	Sovereign Core — Full On-Prem (App	Sovereign Core — Entièrement sur	Sovereign Core — محلي بالكامل (التطبيق

Key	English	Français	العربية
	+ AI)	site (application + IA)	والذكاء الاصطناعي)
deployment_ sovereign_vault	Sovereign Vault — Full On-Prem, Air-Gapped	Sovereign Vault — Entièrement sur site, isolé (air-gapped)	Sovereign Vault — محلي بالكامل ومعزول عن الشبكة
tpl_page_desc	Reusable, versioned authoring templates for Charters, Communications, and Training — on top of the Phase Templates already managed from WBS & Gantt.	Modèles de rédaction réutilisables et versionnés pour les Chartes, Communications et Formations — en complément des Modèles de phase déjà gérés depuis WBS & Gantt.	نماذج صياغة قابلة لإعادة الاستخدام ومُتَابَعَة الإصدارات للمواثيق والاتصالات والتدريب — بالإضافة إلى نماذج المراحل المُدَارَة أصلاً من هيكل تجزئة العمل والجدول الزمني.
tpl_tab_charterTemplates	Charter Templates	Modèles de charte	نماذج المواثيق
tpl_tab_communicationTemplates	Communication Templates	Modèles de communication	نماذج الاتصال
tpl_tab_trainingTemplates	Training Templates	Modèles de formation	نماذج التدريب
tpl_tab_phaseTemplates	Phase Templates	Modèles de phase	نماذج المراحل
tpl_charterTemplates_desc	Reusable section outlines for a new CM Charter — applied when a Change Manager drafts one in M5.	Plans de sections réutilisables pour une nouvelle Charte CM — appliqués lorsqu'un Change Manager en rédige une dans M5.	مخططات أقسام قابلة لإعادة الاستخدام لميثاق إدارة تغيير جديد — تُطَبَّق عندما يصوغ مدير M5. التغيير واحدًا في
tpl_communicationTemplates_desc	Reusable message outlines for common communication moments across a change program.	Plans de messages réutilisables pour les moments de communication courants d'un programme de changement.	مخططات رسائل قابلة لإعادة الاستخدام للحظات الاتصال الشائعة في برنامج التغيير.
tpl_trainingTemplates_desc	Reusable curriculum outlines mapped to a role — a starting point for M15 Training.	Plans de programme réutilisables associés à un rôle — un point de départ pour la	مخططات مناهج قابلة لإعادة الاستخدام مرتبطة بدور — نقطة انطلاق لتدريب M15.

Key	English	Français	العربية
		Formation M15.	
tpl_name	Name	Nom	الاسم
tpl_description	Description	Description	الوصف
tpl_sections	Sections	Sections	الأقسام
tpl_sections_hint	One per line, as "Heading: Prompt".	Un par ligne, sous la forme « Titre : Question ».	واحد في كل سطر، بصيغة "العنوان: السؤال".
tpl_channel	Channel	Canal	القناة
tpl_audience	Audience	Audience	الجمهور
tpl_body_outline	Body Outline	Plan du message	مخطط المحتوى
tpl_target_role	Target Role	Rôle cible	الدور المستهدف
tpl_modules	Curriculum Modules	Modules du programme	وحدات المنهج
tpl_modules_hint	One per line, as "Module name duration in hours".	Un par ligne, sous la forme « Nom du module durée en heures ».	واحد في كل سطر، بصيغة "اسم الوحدة المدة بالساعات".
tpl_add	Add Template	Ajouter un modèle	إضافة نموذج
tpl_edited_note	Edited	Modifié	تم التعديل
tpl_phase_templates_note	Phase Templates keep their existing home and full versioned CRUD in WBS & Gantt (M8) — shown here read-only for a single view of the whole Template Library.	Les Modèles de phase conservent leur emplacement et leur CRUD versionné complet dans WBS & Gantt (M8) — affichés ici en lecture seule pour une vue unique de toute la bibliothèque.	تحتفظ نماذج المراحل بموقعها وإدارتها الكاملة (مع تتبّع الإصدارات) في هيكل تجزئة العمل (M8) والجدول الزمني وتُعرض هنا للقراءة فقط لإتاحة نظرة موحّدة على المكتبة بأكملها.
tpl_phases_suffix	phases	phases	مراحل
tpl_manage_phase_templates	Manage Phase Templates in M8 →	Gérer les modèles de phase dans M8 →	إدارة نماذج المراحل في M8 ←
m18_add_process	Add Process	Ajouter un processus	إضافة عملية
m18_actions	Actions	Actions	إجراءات
m18_process_edited_note	Edited	Modifié	تم التعديل
m18_delete_confirm	Delete this macro process? This also removes its governance items	Supprimer ce macro-processus ? Cela supprime aussi ses éléments	حذف هذه العملية الكبرى؟ سيؤدي ذلك أيضًا إلى حذف عناصر حوكمتها (التنبيهات،

Key	English	Français	العربية
	(alerts, controls, KPIs, etc).	de gouvernance (alertes, contrôles, KPI, etc).	الضوابط، مؤشرات الأداء، إلخ.
m18_tab_flow	Flow (BPMN)	Flux (BPMN)	(BPMN) التدفق
m18_tab_governance	Governance	Gouvernance	الحوكمة
m18_flow_select_chain	End-to-End chain to edit	Chaîne de bout en bout à modifier	سلسلة العملية الشاملة للتعديل
m18_flow_readonly	Read-only for your role — diagram shown with standard BPMN 2.0 notation but no editing palette.	Lecture seule pour votre rôle — diagramme affiché avec la notation BPMN 2.0 standard, sans palette d'édition.	للقراءة فقط بالنسبة لدورك — يُعرض المخطط بترميز القياسي BPMN 2.0 دون لوحة تحرير.
m18_flow_export	Export BPMN 2.0 XML	Exporter en XML BPMN 2.0	بمعيار XML تصدير BPMN 2.0
m18_flow_import	Import BPMN 2.0 XML	Importer un XML BPMN 2.0	بمعيار XML استيراد BPMN 2.0
m18_flow_bpmn20_note	Built with bpmn-js — reads and writes schema-valid BPMN 2.0 XML (OMG standard), so diagrams exported here can be opened in any BPMN 2.0-compliant tool (e.g. Camunda Modeler).	Construit avec bpmn-js — lit et écrit du XML BPMN 2.0 conforme au schéma (norme OMG) ; les diagrammes exportés ici s'ouvrent dans tout outil compatible BPMN 2.0 (ex. Camunda Modeler).	bpmn-js مبني باستخدام XML يقرأ ويكتب — bpmn-js متوافقًا مع معيار BPMN 2.0 (معيار OMG)، بحيث يمكن فتح المخططات المُصدّرة هنا في أي أداة متوافقة مع BPMN 2.0 (مثل Camunda Modeler).
gov_kind_alerts	Alerts	Alertes	التنبيهات
gov_kind_businessRules	Business Rules	Règles métier	قواعد العمل
gov_kind_controls	Controls (COSO)	Contrôles (COSO)	(COSO) الضوابط
gov_kind_kpis	KPIs	Indicateurs clés (KPI)	مؤشرات الأداء الرئيسية
gov_kind_reports	Reports	Rapports	التقارير
gov_kind_risksOpportunities	Risks & Opportunities	Risques et opportunités	المخاطر والفرص
gov_none_yet	None yet.	Aucun pour l'instant.	.لا يوجد بعد
gov_owner	Owner	Responsable	المسؤول

Key	English	Français	العربية
gov_target	Target	Cible	الهدف
gov_name	Name	Nom	الاسم
gov_condition	Trigger Condition	Condition de déclenchement	شرط التفعيل
gov_severity	Severity	Sévérité	الخطورة
gov_description	Description	Description	الوصف
gov_trigger	Trigger	Déclencheur	المُحفِّز
gov_action	Action	Action	الإجراء
gov_coso_component	COSO Component	Composante COSO	مكوّن COSO
gov_control_type	Control Type	Type de contrôle	نوع الضابط
gov_frequency	Frequency	Fréquence	التكرار
gov_status	Status	Statut	الحالة
gov_unit	Unit	Unité	الوحدة
gov_audience	Audience	Audience	الجمهور
gov_format	Format	Format	الصيغة
gov_type	Type	Type	النوع
gov_likelihoood	Likelihood (1-5)	Probabilité (1-5)	الاحتمالية (1-5)
gov_impact	Impact (1-5)	Impact (1-5)	الأثر (1-5)
gov_kb_heading	Practitioner Guidance (seeded knowledge base)	Conseils pratiques (base de connaissances pré-alimentée)	إرشادات الممارسين (قاعدة معرفة مُعدّة مسبقًا)
ro_type_risk	Risk	Risque	مخاطرة
ro_type_opportunity	Opportunity	Opportunité	فرصة
chatbot_open	Open Ask journi	Ouvrir Ask journi	journi فتح اسأل
chatbot_title	Ask journi	Ask journi	journi اسأل
chatbot_subtitle	Assistive AI — explains and points, never acts for you	IA assistive — explique et oriente, n’agit jamais à votre place	ذكاء اصطناعي مساعد — يشرح ويوجّه، ولا يتصرف نيابة عنك أبدًا
chatbot_empty_hint	Ask about your data (“how many open risks?”), where to do something (“where do I score ADKAR?”), or how to run a step (“how should we run stakeholder	Posez une question sur vos données (« combien de risques ouverts ? »), sur où faire quelque chose (« où noter l’ADKAR ? »), ou comment mener une étape (« comment mener	اسأل عن بياناتك (“كم عدد المخاطر المفتوحة؟“), أو أين أين أقيم (“تنفّذ أمرًا ADKAR؟“), أو كيف تُدير خطوة (“كيف تجري تقييم أصحاب المصلحة؟“)

Key	English	Français	العربية
	assessment?”).	l'évaluation des parties prenantes ? »).	
chatbot_placeholder	Ask journi anything...	Demandez n'importe quoi à journi...	عن أي Journi أسأل... شيء

App shell

Key	English	French	Arabic
appName	journi	journi	journi
appTagline	the human side of change, mapped as a journey	le côté humain du changement, cartographié comme un parcours	الجانب الإنساني للتغيير، بشكل رحلة مرسومة
poweredBy	Human Change Management Platform	Plateforme de gestion humaine du changement	منصة إدارة التغيير البشري
search	Search	Rechercher	بحث
logout	Sign out	Déconnexion	تسجيل الخروج
resetDemoData	Reset Demo Data	Réinitialiser les données	إعادة تعيين البيانات
resetDemoDataConfirm	This will discard every change made in this browser and restore the original seed data for all Organizations. This cannot be undone. Continue?	Cette action supprimera toutes les modifications effectuées dans ce navigateur et restaurera les données d'origine pour toutes les Organisations. Cette action est irréversible. Continuer ?	سيؤدي هذا إلى إلغاء كل التغييرات التي تمت في هذا المتصفح واستعادة البيانات الأصلية لجميع المؤسسات. لا يمكن التراجع عن هذا الإجراء. هل تريد المتابعة؟
language	Language	Langue	اللغة
role	Role	Rôle	الدور
scope	Scope	Périmètre	النطاق
viewingAtLevel	Viewing at	Vue au niveau	العرض على مستوى
benchmarking	Benchmarking	Analyse comparative	المقارنة المرجعية
peerAverage	Peer average	Moyenne des	متوسط الأقران

Key	English	French	Arabic
referenceBand	Reference band	pairs Fourchette de référence	النطاق المرجعي
standing_ahead	Ahead of reference	Au-dessus de la référence	أعلى من المرجع
standing_in_line	In line with reference	Conforme à la référence	مطابق للمرجع
standing_behind	Behind reference	En retard sur la référence	أقل من المرجع
defaultLanguage	Default language	Langue par défaut	اللغة الافتراضية
save	Save	Enregistrer	حفظ
cancel	Cancel	Annuler	إلغاء
add	Add	Ajouter	إضافة
edit	Edit	Modifier	تعديل
delete	Delete	Supprimer	حذف
close	Close	Fermer	إغلاق
confirm	Confirm	Confirmer	تأكيد
actions	Actions	Actions	إجراءات
status	Status	Statut	الحالة
owner	Owner	Responsable	المسؤول
date	Date	Date	التاريخ
notes	Notes	Notes	ملاحظات
name	Name	Nom	الاسم
description	Description	Description	الوصف
type	Type	Type	النوع
loading	Loading...	Chargement...	...جارٍ التحميل
noData	No records yet.	Aucune donnée pour le moment.	.لا توجد بيانات بعد
all	All	Tous	الكل
back	Back	Retour	رجوع
export	Export	Exporter	تصدير
aiGenerated	AI-generated — review required	Généré par IA — vérification requise	مُولَّد بالذكاء الاصطناعي — يتطلب مراجعة
accept	Accept	Accepter	قبول
reject	Reject	Rejeter	رفض
generate	Generate	Générer	توليد

Scope switcher

Key	English	French	Arabic
group	Group	Groupe	المجموعة
organization	Organization	Organisation	المؤسسة
project	Project	Projet	المشروع
mainProject	Main Project	Projet principal	المشروع الرئيسي
cmProject	Change Management Project	Projet de gestion du changement	مشروع إدارة التغيير
noGroup	No Group (standalone)	Sans groupe (autonome)	بدون مجموعة (مستقلة)
selectOrg	Select organization...	Choisir une organisation...	...اختر مؤسسة
selectProject	Select project...	Choisir un projet...	...اختر مشروعًا

Nav / Modules (values shown are the CURRENT displayed labels; key names retain their internal/legacy numbering per Section 1.6)

Key	English	French	Arabic
navPortfolio	Portfolio Dashboard	Tableau de bord du portefeuille	لوحة المحفظة
navM1	M1 · Hierarchy	M1 · Hiérarchie	م1 · الهيكل التنظيمي
navM2	M2 · Identity & RBAC	M2 · Identité et RBAC	م2 · الهوية والصلاحيات
navM3	M7 · Initiative Registry	M7 · Registre des initiatives	م7 · سجل المبادرات
navM17	M8 · WBS & Gantt	M8 · SDP et Gantt	م8 · هيكل تجزئة العمل وغانت
navM4	M9 · Stakeholder Mapping	M9 · Cartographie des parties prenantes	م9 · خريطة أصحاب المصلحة
navM5	M10 · ADKAR Engine	M10 · Moteur ADKAR	م10 · محرك ADKAR
navM6	M11 · Emotional & Transition	M11 · Transition émotionnelle	م11 · الانتقال العاطفي
navM7	M13 · Sponsor & Coalition	M13 · Sponsor et coalition	م13 · الراعي والتحالف
navM8	M14 · Communications	M14 · Communications	م14 · الاتصالات
navM9	M15 · Training	M15 · Formation	م15 · التدريب
navM10	M16 · Resistance	M16 · Résistance	م16 · المقاومة

Key	English	French	Arabic
navM11	M17 · Manager as Coach	M17 · Manager-coach	م17 · المدير كموجه
navM12	M21 · Sustainment	M21 · Pérennisation	م21 · الاستدامة
navM13	M12 · Risk Register	M12 · Registre des risques	م12 · سجل المخاطر
navM14	M20 · Analytics	M20 · Analytique	م20 · التحليلات
navM15	M18 · Journey Map	M18 · Carte du parcours	م18 · خريطة الرحلة
navM16	M6 · AI Use Case Library	M6 · Bibliothèque de cas d'usage IA	م6 · مكتبة حالات استخدام الذكاء الاصطناعي
navM18	M4 · Process Registry	M4 · Registre des processus	م4 · سجل العمليات
navM19	M5 · CM Charters	M5 · Chartes GC	م5 · موافق إدارة التغيير
navM20	M19 · Journeys & Analytics	M19 · Parcours & analytique	م19 · الرحلات والتحليلات
navM21	M22 · Field Notes	M22 · Notes de terrain	م22 · ملاحظات ميدانية
navM22	M3 · OBS	M3 · OBS	م3 · الهيكل التنظيمي
sectionPlatform	Platform & Governance	Plateforme et gouvernance	المنصة والحوكمة
sectionCore	Change Management Program	Programme de gestion du changement	برنامج إدارة التغيير

Login

Key	English	French	Arabic
loginTitle	Welcome to journi	Bienvenue sur journi	journi مرحبًا بك في
loginSubtitle	Sign in to track the human side of your change portfolio.	Connectez-vous pour suivre le côté humain de votre portefeuille de changement.	سجل الدخول لمتابعة الجانب الإنساني لمحفظة التغيير لديك.
chooseDemoUser	Choose a demo persona to sign in as	Choisissez un profil de démonstration	اختر ملفًا تجريبيًا لتسجيل الدخول
signIn	Sign in	Se connecter	تسجيل الدخول
demoNotice	Demo environment — no password	Environnement de démonstration — aucun mot de	بيئة تجريبية — لا حاجة لكلمة مرور. تُخزّن البيانات محليًا في متصفحك.

Key	English	French	Arabic
	required. Data is stored locally in your browser.	passee requis. Les données sont stockées localement dans votre navigateur.	

Roles

Key	English	French	Arabic
role_super_admin	Super Admin	Super administrateur	المسؤول الأعلى
role_group_admin	Group Admin	Administrateur de groupe	مسؤول المجموعة
role_org_admin	Organization Admin	Administrateur d'organisation	مسؤول المؤسسة
role_sponsor	Project Sponsor	Sponsor du projet	راعي المشروع
role_change_manager	Change Manager / Lead	Change Manager / Responsable	مدير التغيير
role_people_manager	People Manager / Coach	Manager d'équipe / Coach	مدير الأفراد / موجه
role_practitioner	Practitioner / Contributor	Praticien / Contributeur	ممارس / مساهم
role_employee	Employee / End User	Employé / Utilisateur final	موظف / مستخدم نهائي
role_executive	Executive Viewer	Observateur exécutif	مشاهد تنفيذي

Frameworks

Key	English	French	Arabic
adkar	ADKAR	ADKAR	ADKAR
awareness	Awareness	Sensibilisation	الوعي
desire	Desire	Désir	الرغبة
knowledge	Knowledge	Connaissance	المعرفة
ability	Ability	Capacité	القدرة
reinforcement	Reinforcement	Renforcement	التعزيز
bridges	Bridges Transition	Transition de Bridges	انتقال جسر
bridges_ending	Ending	Fin	الانتهاء
bridges_neutral	Neutral Zone	Zone neutre	المنطقة المحايدة
bridges_beginning	New Beginning	Nouveau départ	بداية جديدة

Key	English	French	Arabic
kubler	Kübler-Ross Curve	Courbe de Kübler-Ross	منحنى كوبلر-روس
sentiment_denial	Denial	Déni	الإنكار
sentiment_resistance	Resistance / Anger	Résistance / Colère	المقاومة / الغضب
sentiment_exploration	Exploration	Exploration	الاستكشاف
sentiment_commitment	Commitment	Engagement	الالتزام
lewin	Lewin Macro-State	État macro de Lewin	حالة لوين الكلية
lewin_unfreeze	Unfreeze	Décristallisation	إذابة الجمود
lewin_change	Change	Changement	التغيير
lewin_refreeze	Refreeze	Recristallisation	إعادة التجميد
kotter	Kotter's 8 Steps	Les 8 étapes de Kotter	خطوات كوتر الثماني

AI tiers

Key	English	French	Arabic
tier_assistive	Assistive	Assistif	مساعد
tier_augmented	Augmented	Augmenté	معزز
tier_autonomous	Autonomous (out of scope)	Autonome (hors périmètre)	مستقل (خارج النطاق)

M7 (Initiative Registry) / M8 (WBS & Gantt) / M4 (Process Registry) / M5 (CM Charters) / M19 (Journeys & Analytics) / M22 (Field Notes) / M3 (OBS) / M16 (Resistance Coding Workbench) / shared CM Project fields

Key	English	French	Arabic
m3_title	Initiative & Portfolio Registry	Registre des initiatives et du portefeuille	سجل المبادرات والمحفظة
m3_desc	System of record for every change initiative — business driver, scope, target population, and Lewin macro-state.	Registre de toutes les initiatives de changement — moteur métier, périmètre, population cible et état macro de Lewin.	سجل شامل لكل مبادرات التغيير — الدافع، النطاق، الفئة المستهدفة، وحالة لوين الكلية.
m17_title	Work Breakdown Structure & Gantt	Structure de découpage du projet et Gantt	هيكل تجزئة العمل ومخطط غانت
m17_desc	One WBS spanning	Un SDP unique	هيكل تجزئة عمل واحد

Key	English	French	Arabic
	Project Management, Change Management and the Lewin/Prosci/Bridges/ADKAR framework milestones — baseline vs. actual dates, with the schedule gap called out task by task.	couvrant la gestion de projet, la conduite du changement et les jalons des cadres Lewin/Prosci/Bridges/ADKAR — dates de référence et réelles, avec l'écart calendaire par tâche.	يغطي إدارة المشروع وإدارة التغيير ومعالج أطر لوين وبريدجز و ADKAR — التواريخ المرجعية مقابل الفعلية، مع إبراز الفجوة الزمنية لكل مهمة.
m17_load_template	Load phase template	Charger un modèle de phases	تحميل نموذج المراحل
m17_load_template_title	Load phase template	Charger un modèle de phases	تحميل نموذج المراحل
m17_load_template_desc	Seeds one skeleton task per phase into the Project Management track, spaced 30 days apart from the start date below — a starting point to break down into real tasks, not a finished plan.	Ajoute une tâche squelette par phase dans la piste Gestion de projet, espacées de 30 jours à partir de la date de début ci-dessous — un point de départ à détailler, pas un plan final.	يضيف مهمة أولية واحدة لكل مرحلة إلى مسار إدارة المشروع، بفاصل 30 يومًا ابتداءً من تاريخ البدء أدناه — نقطة انطلاق لتفصيلها لاحقًا، وليست خطة نهائية.
m17_template_label	Phase template	Modèle de phases	نموذج المراحل
m17_recommended_for	Recommended for this project's linked Main Project and transformation type.	Recommandé pour le projet principal lié et le type de transformation de ce projet.	موصى به للمشروع الرئيسي المرتبط ونوع التحول لهذا المشروع.
m17_start_date	Start date	Date de début	تاريخ البدء
m17_load_button	Load into PM track	Charger dans la piste GP	تحميل في مسار إدارة المشروع
m18_title	Macro Process, SIPOC, RACSI & E2E Registry	Registre des macro-processus, SIPOC, RACSI et E2E	سجل العمليات الكلية و SIPOC و RACSI والعمليات الشاملة
m18_desc	The process	L'ossature de	العمود الفقري للعمليات

Key	English	French	Arabic
	backbone every module is built on: the 10 macro processes, the 16 registered end-to-end chains, and who is Responsible / Accountable / Consulted / Sign-off / Informed for each.	processus sur laquelle chaque module est construit : les 10 macro-processus, les 16 chaînes de bout en bout enregistrées, et qui est Responsable / Redevable / Consulté / Valideur / Informé pour chacune.	الذي بُني عليه كل وحدة: العمليات الكلية العشر، وسلاسل العمليات الشاملة الـ 16 المسجلة، ومن هو المسؤول التنفيذي / المعتمد / المستشار / المصادق / المطلع لكل منها.
m18_tab_macro	Macro Processes	Macro-processus	العمليات الكلية
m18_tab_e2e	E2E Process Registry	Registre des processus E2E	سجل العمليات الشاملة
m18_tab_racsi	RACSI Grid	Grille RACSI	RACSI شبكة
m18_kind_core	Core lifecycle	Cycle de vie principal	دورة الحياة الأساسية
m18_kind_loop	Cross-cutting loop	Boucle transversale	حلقة متقاطعة
m18_kind_type	Transformation-type lifecycle	Cycle de vie par type de transformation	دورة حياة حسب نوع التحول
m18_trigger	Trigger	Déclencheur	المحفز
m18_terminal	Terminal state	État final	الحالة النهائية
m18_sipoc_supplier	SIPOC Suppliers	Fournisseurs SIPOC	SIPOC موردو
m18_sipoc_customer	SIPOC Customers	Clients SIPOC	SIPOC عملاء
m18_phase_template	Phase template	Modèle de phases	نموذج المراحل
m18_owning_modules	Owning module(s)	Module(s) propriétaire(s)	الوحدة (الوحدات) المالكة
m18_racsi_legend	R = Responsible · A = Accountable · C = Consulted · S = Sign-off · I = Informed	R = Responsable · A = Redevable · C = Consulté · S = Valideur · I = Informé	· المسؤول التنفيذي · A = المعتمد · C = المستشار · S = المطلع · I =
m18_chain_racsi	RACSI (ES/CM/PM/FPO/ITL/SUP/EU)	RACSI (ES/CM/PM/FPO/ITL/SUP/EU)	RACSI (ES/CM/PM/FPO/ITL/SUP/EU)

Key	English	French	Arabic
m18_racsi_readonly	Only a Group/Org/Super Admin can edit this grid. Every other role sees it read-only.	Seul un administrateur Groupe/Organisation/Super Admin peut modifier cette grille. Tout autre rôle la voit en lecture seule.	يمكن فقط لمسؤول المجموعة/المؤسسة/المسؤول الأعلى تعديل هذه الشبكة. تظهر لبقية الأدوار للقراءة فقط.
m19_title	Change Management Charter Registry	Registre des chartes de gestion du changement	سجل موثائق إدارة التغيير
m19_desc	The 8 signed, trackable behavioral standards governing sponsorship, frontline engagement, communication, impact assessment, coaching and mentoring, and pulse/interview diagnostics.	Les 8 standards comportementaux signés et suivables régissant le sponsoring, l'engagement de première ligne, la communication, l'évaluation d'impact, le coaching et le mentorat, et les diagnostics de type pulse/entretien.	المعايير السلوكية الثمانية الموقعة والقابلة للتتبع التي تحكم الرعاية، إشراك الخط الأمامي، التواصل، تقييم الأثر، التدريب والتوجيه، وتشخيصات النبض/المقابلات.
m19_tab_charters	Charters	Chartes	الموathائق
m19_tab_actions	Action Mapping & Compliance	Cartographie des actions & conformité	خريطة الإجراءات والامتثال
m19_tab_mentoring	Mentoring Progression	Progression du mentorat	تقدم التوجيه
m19_charter_desc	Each charter names specific, observable behaviors rather than generic guidance.	Chaque charte nomme des comportements spécifiques et observables plutôt qu'une orientation générique.	يحدد كل ميثاق سلوكيات محددة وقابلة للملاحظة بدلاً من توجيه عام.
m19_add_charter	Add Charter	Ajouter une charte	إضافة ميثاق
m19_entries	Entries	Entrées	الإدخالات
m19_entry_singular	entry	entrée	إدخال
m19_add_entry	Add Entry	Ajouter une entrée	إضافة إدخال
m19_no_entries	No entries yet on this charter.	Aucune entrée pour cette charte	لا توجد إدخالات لهذا

Key	English	French	Arabic
m19_edit	Edit	pour le moment. Modifier	الميثاق بعد تعديل
m19_delete_retire _first	Set status to Draft or Retired before deleting an Active charter.	Passez le statut à Brouillon ou Retirée avant de supprimer une charte Active.	غيّر الحالة إلى مسودة أو متقاعد قبل حذف ميثاق نشط.
m19_owner	Owner	Propriétaire	المالك
m19_what	What	Quoi	ماذا
m19_who	Who	Qui	من
m19_when	When	Quand	متى
m19_where	Where	Où	أين
m19_why	Why	Pourquoi	لماذا
m19_how	How	Comment	كيف
m19_version	Version	Version	الإصدار
m19_effective	Effective	Date d'effet	تاريخ السريان
m19_review	Review	Révision	المراجعة
m19_obs_level	Governs	Régit	يحكم
m19_linked_macro	Primary macro process	Macro-processus principal	العملية الكلية الرئيسية
m19_filter_charter	Filter by charter	Filtrer par charte	تصفية حسب الميثاق
m19_all_charters	All charters	Toutes les chartes	كل الموائيق
m19_select_project_log	Select a CM Project (top bar) to log and see per- project compliance.	Sélectionnez un projet GC (barre supérieure) pour consigner et voir la conformité par projet.	اختر مشروع إدارة تغيير (الشريط العلوي) لتسجيل ورؤية الامتثال الخاص بالمشروع.
m19_action	Action	Action	الإجراء
m19_linked_task	Linked task	Tâche liée	المهمة المرتبطة
m19_racsi_ra	Responsible / Accountable	Responsable / Redevable	المسؤول التنفيذي / المعتمد
m19_frequency	Frequency	Fréquence	التكرار
m19_compliance	Compliance log	Journal de conformité	سجل الامتثال
m19_log_completion	+ Log completion	+ Consigner la réalisation	تسجيل الإنجاز +
m19_not_logged	Not yet logged	Pas encore consigné	لم يُسجَل بعد
m19_more	more	de plus	أخرى
m19_mentoring_d	The 3-stage	Le modèle	نموذج الكفاءة التدريجي

Key	English	French	Arabic
esc	progressive competency model behind CHTR-07: Trainee → Observer → Autonomous. A regression routes back one stage, not to zero.	progressif de compétence en 3 étapes derrière CHTR-07 : Stagiaire → Observateur → Autonome. Une régression revient d'une étape, pas à zéro.	ذو المراحل الثلاث وراء متدرب ← مراقب ← مستقل. يعود التراجع خطوة واحدة إلى الوراء، لا إلى الصفر.
m19_stage	Stage	Étape	المرحلة
m19_entry	Entry criteria	Critères d'entrée	معايير الدخول
m19_exit	Exit criteria	Critères de sortie	معايير الخروج
m19_duration	Typical duration	Durée typique	المدة النموذجية
m19_setting	Setting	Cadre	البيئة
m19_mentor_involvement	Mentor involvement	Implication du mentor	مشاركة الموجّه
m19_evidence	Competency evidence	Preuve de compétence	دليل الكفاءة
m19_regression	Regression path	Voie de régression	مسار التراجع
m20_title	Stakeholder Journeys, Touchpoints & Analytics	Parcours des parties prenantes, points de contact & analytique	رحلات أصحاب المصلحة ونقاط الاتصال والتحليلات
m20_desc	The experience-layer companion to the score-centric dashboards elsewhere in journi.	Le complément expérientiel aux tableaux de bord centrés score du reste de journi.	المكمل القائم على التجربة للوحات المعلومات القائمة على journi. النقاط في بقية
m20_tab_journeys	Journeys	Parcours	الرحلات
m20_tab_touchpoints	Touchpoints & Completion	Points de contact & réalisation	نقاط الاتصال والإنجاز
m20_tab_dashboards	Analytics Dashboards	Tableaux de bord analytiques	لوحات معلومات التحليلات
m20_tab_overlay	Project Context Overlay	Surcouche de contexte projet	طبقة سياق المشروع
m20_specializes	Specializes	Spécialise	يخصص
m20_trigger	Trigger	Déclencheur	المحفز
m20_audience	Audience	Audience	الجمهور
m20_duration	Duration	Durée	المدة
m20_owner	Owner	Propriétaire	المالك
m20_filter_journe	Filter by journey	Filtrer par	تصفية حسب الرحلة

Key	English	French	Arabic
y		parcours	
m20_all_journeys	All journeys	Tous les parcours	كل الرحلات
m20_select_project_log	Select a CM Project (top bar) to log and see per-project completion.	Sélectionnez un projet GC (barre supérieure) pour consigner et voir la réalisation par projet.	اختر مشروع إدارة تغيير (الشريط العلوي) لتسجيل ورؤية الإنجاز الخاص بالمشروع.
m20_touchpoint	Touchpoint	Point de contact	نقطة الاتصال
m20_day	Day	Jour	اليوم
m20_success_criteria	Success criteria	Critères de succès	معايير النجاح
m20_dashboard_desc	DASH-01 and DASH-02 compute a live metric from this project's own touchpoint and charter-action logs. The remaining dashboards are shown as reference cards.	DASH-01 et DASH-02 calculent une métrique en direct à partir des journaux de points de contact et d'actions de charte de ce projet. Les autres tableaux de bord sont présentés comme des fiches de référence.	DASH-01 يحسب مقياسًا حيًا وDASH-02 من سجلات نقاط الاتصال وإجراءات الموائيق الخاصة بهذا المشروع. تُعرض بقية لوحات المعلومات كبطاقات مرجعية.
m20_live_metric	Live metric	Métrique en direct	مقياس حي
m20_touchpoint_completion	JRN-01 touchpoint completion	Réalisation des points de contact JRN-01	JRN-01 إنجاز نقاط اتصال
m20_charter_completion	Charter action completion	Réalisation des actions de charte	إنجاز إجراءات الموائيق
m20_kpis	Journey KPIs	ICP de parcours	مؤشرات أداء الرحلة
m20_visualisation	Visualisation	Visualisation	التصور
m20_linked_report	Linked report	Rapport lié	التقرير المرتبط
m20_reference_only	Reference card only — no per-mentee/per-case data model in this demo.	Fiche de référence uniquement — aucun modèle de données par mentoré/cas dans cette démonstration.	بطاقة مرجعية فقط — لا يوجد نموذج بيانات لكل متدرب/حالة في هذا العرض التوضيحي.
m20_overlay_desc	What makes each of the source framework's 13	Ce qui distingue chacun des 13 projets pilotes	ما يميز كل مشروع من المشاريع النموذجية

Key	English	French	Arabic
	illustrative seed projects distinct from the generic journey template.	illustratifs du référentiel source du modèle de parcours générique.	التوضيحية الثلاثة عشر للإطار المصدر عن نموذج الرحلة العام.
m21_title	Field Notes	Notes de terrain	ملاحظات ميدانية
m21_desc	A lightweight, freeform log for the knowledge that doesn't fit a structured module yet.	Un journal léger et libre pour les connaissances qui ne rentrent pas encore dans un module structuré.	سجل خفيف وحر للمعرفة التي لا تنتمي بعد إلى وحدة منظمة.
m21_select_project	Select a Change Management Project to view or add Field Notes.	Sélectionnez un projet de gestion du changement pour consulter ou ajouter des notes de terrain.	اختر مشروع إدارة تغيير لعرض أو إضافة ملاحظات ميدانية.
m21_filter	Category	Catégorie	الفئة
m21_all_categories	All categories	Toutes les catégories	كل الفئات
m21_add_note	Add Field Note	Ajouter une note de terrain	إضافة ملاحظة ميدانية
m21_empty	No Field Notes logged yet for this project.	Aucune note de terrain consignée pour ce projet.	لا توجد ملاحظات ميدانية مسجلة لهذا المشروع بعد.
m21Untitled	Untitled note	Note sans titre	ملاحظة بدون عنوان
m21_title_field	Short title (e.g. "Discovery Workshop 1 — Casablanca HQ")	Titre court (ex. « Atelier de découverte 1 — siège de Casablanca »)	عنوان قصير (مثال: "ورشة الاكتشاف 1 — المقر الرئيسي بالدار البيضاء")
m21_author	Logged by	Consigné par	سجله
m21_related_module_none	Not yet linked to a module	Pas encore lié à un module	غير مرتبط بوحدة بعد
m21_body	What happened, and what it feeds into later	Ce qui s'est passé, et ce que cela alimente par la suite	ما حدث، وما الذي يغذي لاحقاً
m22_title	Organizational Breakdown Structure	Structure organisationnelle du projet (OBS)	الهيكل التنظيمي للمشروع
m22_desc	The project's resourcing roster: who fills which	Le registre des ressources du projet : qui occupe	سجل موارد المشروع: من يشغل أي دور، ولمن

Key	English	French	Arabic
	role, and who they report to.	quel rôle, et à qui il ou elle rend compte.	يرفع تقاريره.
m22_add_entry	Add Role	Ajouter un rôle	إضافة دور
m22_empty	No roles logged yet for this project.	Aucun rôle consigné pour ce projet.	لا توجد أدوار مسجلة لهذا المشروع بعد.
m22_role	Role	Rôle	الدور
m22_reports_to	Reports to	Rend compte à	يرفع تقاريره إلى
m22_no_role	No role set	Rôle non défini	لم يُحدّد الدور
m22_no_name	Unnamed	Sans nom	بدون اسم
m10_tab_log	Resistance Log	Registre des résistances	سجل المقاومة
m10_tab_coding	Coding Workbench	Atelier de codage	مساحة عمل الترميز
m10_qcw_desc	Tags 1:1 coaching notes and resistance-log entries against a configurable codebook.	Étiquette les notes de coaching en tête-à-tête et les entrées du registre des résistances par rapport à un référentiel de codes configurable.	يقوم بترميز ملاحظات التدريب الفردي وسجلات المقاومة وفق دفتر رموز قابل للتخصيص.
m10_qcw_codebook	Codebook	Référentiel de codes	دفتر الرموز
m10_qcw_codebook_desc	Organization-scoped, not a fixed platform-wide taxonomy.	Défini au niveau de l'Organisation, non une taxonomie fixe à l'échelle de la plateforme.	محدد على مستوى المؤسسة، وليس تصنيفًا ثابتًا على مستوى المنصة.
m10_qcw_code_label	Code label	Libellé du code	تسمية الرمز
m10_qcw_code_description	Code description	Description du code	وصف الرمز
m10_qcw_tagging	Tagging	Étiquetage	الترميز
m10_qcw_tagging_desc	Apply codes to coaching notes and resistance-log entries.	Appliquez des codes aux notes de coaching et aux entrées du registre des résistances.	طبّق الرموز على ملاحظات التدريب وسجلات المقاومة.
m10_qcw_tag_button	Tag	Étiqueter	ترميز
m10_qcw_linked	Linked to a Resistance Log	Lié à un obstacle du registre des	مرتبط بعائق في سجل المقاومة

Key	English	French	Arabic
	barrier	résistances	
m10_qcw_link_barrier	Cross-reference to an existing barrier (optional)	Lien vers un obstacle existant (optionnel)	ربط بعائق قائم (اختياري)
m10_qcw_flag_new	— Flag as a new barrier (no link) —	— Signaler comme nouvel obstacle (sans lien) —	الإبلاغ كعائق جديد — (بدون ربط)
m10_qcw_frequency	Code frequency rollup	Cumul de fréquence des codes	إجمالي تكرار الرموز
m10_qcw_frequency_desc	How often each code has been applied across this project's tagged material.	Fréquence d'application de chaque code sur l'ensemble du matériel étiqueté de ce projet.	عدد مرات تطبيق كل رمز على المواد المرمزة في هذا المشروع.
exportCsv	Export CSV	Exporter en CSV	تصدير CSV
notif_title	Notification Center	Centre de notifications	مركز الإشعارات
notif_select_project	Select a CM Project (top bar) to see its alerts.	Sélectionnez un projet GC (barre supérieure) pour voir ses alertes.	اختر مشروع إدارة تغيير (الشريط العلوي) لرؤية تنبيهاته.
notif_none	No active alerts for this project.	Aucune alerte active pour ce projet.	لا توجد تنبيهات نشطة لهذا المشروع.
notif_dismiss	Dismiss	Ignorer	تجاهل
notif_dismissed	Dismissed	Ignorées	المتجاهلة
notif_restore	Restore	Restaurer	استعادة
changeType	Change Type	Type de changement	نوع التغيير
businessDriver	Business Driver	Moteur métier	الدافع التجاري
targetPopulation	Target Population	Population cible	الفئة المستهدفة
successCriteria	Success Criteria	Critères de succès	معايير النجاح
linkedMainProject	Linked Main Project	Projet principal lié	المشروع الرئيسي المرتبط
standalone	Standalone (no Main Project)	Autonome (sans projet principal)	مستقل (بدون مشروع رئيسي)
budgetBand	Budget Band	Fourchette budgétaire	نطاق الميزانية
duration	Duration	Durée	المدة
executiveSponsor	Executive Sponsor	Sponsor exécutif	الراعي التنفيذي

M9 (Stakeholder Mapping)

Key	English	French	Arabic
m4_title	Stakeholder & Impact Mapping	Cartographie des parties prenantes et de l'impact	خريطة أصحاب المصلحة والتأثير
m4_desc	Who is affected, how heavily, and in what dimension. Impact scores drive tracking depth.	Qui est impacté, à quel degré et selon quelle dimension. Les scores d'impact déterminent le niveau de suivi.	من المتأثر، وبأي درجة، وفي أي بُعد. تحدد درجات التأثير مستوى المتابعة.
stakeholderGroup	Stakeholder Group	Groupe de parties prenantes	مجموعة أصحاب المصلحة
headcount	Headcount	Effectif	عدد الأفراد
impactProcess	Process	Processus	العملية
impactTech	Technology	Technologie	التقنية
impactRole	Role	Rôle	الدور
impactLocation	Location	Localisation	الموقع
impactIdentity	Identity	Identité	الهوية
influence	Influence	Influence	التأثير
highImpactLowInfluence	High-impact / Low-influence	Impact élevé / Influence faible	تأثير عالٍ / نفوذ منخفض
atRiskFlag	At risk of being under-supported	Risque de manque de soutien	معرض لخطر نقص الدعم

M10 (ADKAR Engine)

Key	English	French	Arabic
m5_title	ADKAR Engine — Individual Readiness Core	Moteur ADKAR — Cœur de préparation individuelle	جاهزية ADKAR — محرك الأفراد
m5_desc	Score cohorts across the five ADKAR blocks with barrier-point diagnosis.	Évaluez les cohortes sur les cinq blocs ADKAR avec diagnostic des points de blocage.	قيّم المجموعات عبر عناصر الخمسة مع ADKAR. تشخيص نقاط العائق.
buildingBlock	Building Block	Bloc	العنصر

Key	English	French	Arabic
score	Score	Score	الدرجة
barrierReason	Barrier Reason	Motif du blocage	سبب العائق
cohort	Cohort	Cohorte	المجموعة
history	History	Historique	السجل الزمني
escalated	Escalated — stalled beyond threshold	Escaladé — bloqué au-delà du seuil	تمت التصعيد — متوقف لفترة تتجاوز الحد
addAssessment	Add Assessment	Ajouter une évaluation	إضافة تقييم
coachingNote	Coaching Note	Note de coaching	ملاحظة توجيهية
addCoachingNote	Add coaching note	Ajouter une note de coaching	إضافة ملاحظة توجيهية

M11 (Emotional & Transition)

Key	English	French	Arabic
m6_title	Emotional & Transition Layer	Couche émotionnelle et de transition	طبقة الانتقال العاطفي
m6_desc	Bridges transition position and Kübler-Ross sentiment, cross-referenced with ADKAR.	Position de transition de Bridges et sentiment de Kübler-Ross, croisés avec ADKAR.	موقع انتقال بريدجز ومشاعر كوبلر-روس، ومقارنة مع ADKAR.
divergenceAlert	Divergence Alert	Alerte de divergence	تنبيه تباین
divergenceDesc	Strong ADKAR score but still emotionally in Ending — classic hidden-resistance pattern.	Bon score ADKAR mais encore émotionnellement en phase de Fin — signal classique de résistance cachée.	جيدة لكن ADKAR درجة لا يزال عاطفياً في مرحلة الانتهاء — نمط كلاسيكي للمقاومة الخفية.

M13 (Sponsor & Coalition)

Key	English	French	Arabic
m7_title	Sponsor & Coalition Module	Module Sponsor et coalition	وحدة الراعي والتحالف
m7_desc	Sponsor roadmap, active-vs-passive sponsorship, and guiding coalition strength.	Feuille de route du sponsor, sponsoring actif vs passif, et solidité de la	خارطة طريق الراعي، الرعاية الفعالة مقابل السلبية، وقوة التحالف الموجّه.

Key	English	French	Arabic
coalitionMember	Coalition Member	coalition directrice. Membre de la coalition	عضو التحالف
visibility	Visibility	Visibilité	الظهور
engagement	Engagement	Engagement	الانخراط
sponsorAction	Sponsor Action	Action du sponsor	إجراء الراعي
visibilityWeak	Weak	Faible	ضعيف
visibilityModerate	Moderate	Modéré	متوسط
visibilityStrong	Strong	Fort	قوي

M14 (Communications)

Key	English	French	Arabic
m8_title	Communication Planning & Execution	Planification et exécution des communications	تخطيط وتنفيذ الاتصالات
m8_desc	Message × audience × channel × timing matrix, with saturation detection.	Matrice message × audience × canal × calendrier, avec détection de saturation.	مصفوفة الرسالة × الجمهور × القناة × التوقيت، مع كشف التشبع.
message	Message	Message	الرسالة
audience	Audience	Audience	الجمهور
channel	Channel	Canal	القناة
sender	Sender	Expéditeur	المُرسل
timing	Timing	Calendrier	التوقيت
linkedAdkarBlock	Linked ADKAR Block	Bloc ADKAR lié	المرتبط ADKAR عنصر
saturationWarning	Change saturation risk — overlapping population	Risque de saturation — population qui se chevauche	خطر تشبع التغيير — تداخل في الفئة المستهدفة

M15 (Training)

Key	English	French	Arabic
m9_title	Training & Capability Building	Formation et développement des compétences	التدريب وبناء القدرات
m9_desc	Curriculum coverage,	Couverture du curriculum,	تغطية المنهج، الإتمام، والقدرة الفعلية — مُدَرَّب

Key	English	French	Arabic
	completion, and demonstrated capability — trained vs. capable.	achèvement et capacité démontrée — formé vs. capable.	مقابل قادر.
curriculum	Curriculum / Track	Curriculum / Parcours	المنهج / المسار
facilitator	Facilitator	Animateur	الميسر
format	Format	Format	الصيغة
completion	Completion	Achèvement	نسبة الإنجاز
certification	Certified / Capable	Certifié / Capable	معتمد / قادر

M16 (Resistance)

Key	English	French	Arabic
m10_title	Resistance Management	Gestion de la résistance	إدارة المقاومة
m10_desc	Log, classify and resolve resistance, linked to concrete mitigation actions.	Enregistrez, classez et résolvez la résistance, avec des actions de mitigation concrètes.	سجل وصنف وعالج المقاومة، مع إجراءات تخفيف ملموسة.
resistanceType	Type	Type	النوع
resistance_role	Role-based	Liée au rôle	مرتبطة بالدور
resistance_skill	Skill-based	Liée aux compétences	مرتبطة بالمهارة
resistance_will	Will-based	Liée à la volonté	مرتبطة بالإرادة
resistance_systemic	Systemic	Systémique	منهجية
source	Source	Source	المصدر
rootCause	Root Cause	Cause racine	السبب الجذري
severity	Severity	Gravité	الخطورة
mitigationAction	Mitigation Action	Action de mitigation	إجراء التخفيف
dueDate	Due Date	Date d'échéance	تاريخ الاستحقاق
anonymous	Anonymous	Anonyme	مجهول
submitConcern	Submit a concern	Signaler une préoccupation	إرسال ملاحظة

M17 (Manager as Coach)

Key	English	French	Arabic
m11_title	Manager-as-Coach Enablement	Activation du manager-coach	تمكين المدير كموجه
m11_desc	Team-scoped ADKAR heatmap with suggested coaching actions per barrier.	Carte thermique ADKAR de l'équipe avec actions de coaching suggérées par blocage.	خريطة حرارية لفريقك مع إجراءات توجيهية مقترحة لكل عائق.
managerReadiness	Manager Readiness Self-Assessment	Auto-évaluation de préparation du manager	تقييم ذاتي لجاهزية المدير
coachingScript	Suggested Coaching Script	Script de coaching suggéré	نص توجيه مقترح

M21 (Sustainment)

Key	English	French	Arabic
m12_title	Reinforcement & Sustainment	Renforcement et pérennisation	التعزيز والاستدامة
m12_desc	Post-go-live adoption audits, regression detection, and sustainment sign-off.	Audits d'adoption post-déploiement, détection de régression et validation de pérennisation.	تدقيقات التبني بعد الإطلاق، كشف التراجع، والتوقيع على الاستدامة.
checkpoint	Checkpoint	Point de contrôle	نقطة التحقق
adoptionRate	Adoption Rate	Taux d'adoption	معدل التبني
regressionRisk	Regression Risk	Risque de régression	خطر التراجع
quickWin	Quick Win / Milestone	Gain rapide / Jalon	إنجاز سريع / معلم
sustainmentSignoff	Sustainment Sign-off	Validation de pérennisation	توقيع الاستدامة
lessonsLearned	Lessons Learned	Leçons apprises	الدروس المستفادة
m12_rex_desc	A lesson counts as closed only once it names the specific Rule, Control, or Charter	Une leçon n'est considérée close que lorsqu'elle nomme la règle, le contrôle ou la charte qui l'encode	لا يُعتبر الدرس مغلقًا إلا عند تسمية القاعدة أو الضابط أو الميثاق الذي أصبح يجسده.

Key	English	French	Arabic
	that now encodes it.	désormais.	
m12_rex_applied	Applied	Appliquée	مطبّق
m12_rex_pending	Pending	En attente	قيد الانتظار
m12_rex_link_placeholder	Linked Rule / Control / Charter (e.g. RULE-008, CTRL-012, CHTR-05)	Règle / Contrôle / Charte liée (ex. RULE-008, CTRL-012, CHTR-05)	القاعدة/الضابط/الميثاق (مثال RULE-008, CTRL-012, CHTR-05)
m12_rex_link_label	Linked to	Liée à	مرتبط بـ

M12 (Risk Register)

Key	English	French	Arabic
m13_title	Change Risk Register	Registre des risques de changement	سجل مخاطر التغيير
m13_desc	Adoption, sponsorship, capacity and saturation risk — distinct from generic project risk.	Risques d'adoption, de sponsoring, de capacité et de saturation — distincts du risque projet générique.	مخاطر التبني، الرعاية، القدرة والتشبع — مختلفة عن مخاطر المشروع العامة.
riskCategory	Category	Catégorie	الفئة
risk_adoption	Adoption	Adoption	التبني
risk_sponsorship	Sponsorship	Sponsoring	الرعاية
risk_capacity	Capacity	Capacité	القدرة
risk_saturation	Saturation	Saturation	التشبع
likelihood	Likelihood	Probabilité	الاحتمالية
impact	Impact	Impact	الأثر
riskScore	Risk Score	Score de risque	درجة الخطر

M20 (Analytics)

Key	English	French	Arabic
m14_title	Metrics & Analytics Dashboard	Tableau de bord des indicateurs et analyses	لوحة المقاييس والتحليلات
m14_desc	Composite	Indice	مؤشر الجاهزية المركب،

Key	English	French	Arabic
	Readiness Index, adoption curves, and correlation analysis.	composite de préparation, courbes d'adoption et analyse de corrélation.	منحنيات التبني، وتحليل الارتباط.
m14_crosstype_tab	Cross-Type Matrix	Matrice comparative des types	مصفوفة مقارنة الأنواع
m14_crosstype_title	Cross-Type Comparison Matrix	Matrice de comparaison entre types de transformation	مصفوفة مقارنة أنواع التحول
m14_crosstype_desc	How the 8 transformation types compare on duration, terminal gate, external involvement, dominant framework and reversibility.	Comparaison des 8 types de transformation selon la durée, la porte de sortie, l'implication externe, le cadre dominant et la réversibilité.	مقارنة أنواع التحول الثمانية من حيث المدة، بوابة الإنجاز، المشاركة الخارجية، الإطار السائد، وقابلية الرجوع.
m14_crosstype_duration	Typical Duration	Durée typique	المدة النموذجية
m14_crosstype_gate	Terminal Gate	Porte finale	البوابة النهائية
m14_crosstype_external	External Party Involvement	Implication d'une partie externe	مشاركة طرف خارجي
m14_crosstype_framework	Dominant Framework	Cadre dominant	الإطار السائد
m14_crosstype_reversibility	Reversibility	Réversibilité	قابلية الرجوع
m14_crosstype_example	Seed Project Example	Exemple de projet type	مثال مشروع نموذجي
readinessIndex	Composite Readiness Index	Indice composite de préparation	مؤشر الجاهزية المركب
adoptionCurve	Adoption Curve	Courbe d'adoption	منحنى التبني
heatmapByDept	ADKAR Heatmap	Carte thermique	الحرارية ADKAR خريطة

Key	English	French	Arabic
execNarrative	Executive Readiness Narrative	ADKAR Narratif de préparation exécutif	سرد الجاهزية التنفيذي

M18 (Journey Map)

Key	English	French	Arabic
m15_title	Journey Map / Visual Core	Carte du parcours / Cœur visuel	خريطة الرحلة / النواة البصرية
m15_desc	A literal, visual timeline combining ADKAR stage, Bridges phase and sentiment.	Une chronologie visuelle combinant l'étape ADKAR, la phase de Bridges et le sentiment.	جدول زمني بصري يجمع وطور ADKAR مرحلة. بريدجز والمشاعر.
zoomLevel	Zoom Level	Niveau de zoom	مستوى التكبير
shareSnapshot	Share Snapshot	Partager l'instantané	مشاركة لقطة

M6 (AI Use Case Library)

Key	English	French	Arabic
m16_title	AI Use Case Library & Governance	Bibliothèque et gouvernance des cas d'usage IA	مكتبة وحوكمة حالات استخدام الذكاء الاصطناعي
m16_desc	A governed catalog of Assistive and Augmented AI use cases. No use case acts autonomously.	Un catalogue gouverné de cas d'usage IA assistifs et augmentés. Aucun cas n'agit de façon autonome.	كتالوج محكوم لحالات استخدام الذكاء الاصطناعي المساعد والمعزز. لا تعمل أي حالة بشكل مستقل.
activateForOrg	Active for this Organization	Actif pour cette organisation	مفعّل لهذه المؤسسة
activateForProject	Project-level override	Dérogação au niveau du projet	استثناء على مستوى المشروع
humanCheckpoint	Human Checkpoint	Point de contrôle humain	نقطة التحقق البشرية
triggerInput	Trigger / Input	Déclencheur / Entrée	المُحفِّز / المُدخل
output	Output	Sortie	المُخرج
usageLog	AI Usage &	Journal	سجل استخدام وتجاوز

Key	English	French	Arabic
	Override Log	d'utilisation et de dérogation IA	الذكاء الاصطناعي
outcome_accepted	Accepted as-is	Accepté tel quel	مقبول كما هو
outcome_edited	Edited	Modifié	مُعدَّل
outcome_rejected	Rejected	Rejeté	مرفوض

Dashboard / Sectors / Archetypes

Key	English	French	Arabic
activeInitiatives	Active Initiatives	Initiatives actives	المبادرات النشطة
avgReadiness	Avg. Readiness Index	Indice de préparation moyen	متوسط مؤشر الجاهزية
openRisks	Open Risks	Risques ouverts	المخاطر المفتوحة
peopleInScope	People in Scope	Personnes concernées	الأشخاص المعنيون
portfolioByPhase	Portfolio by Lewin Phase	Portefeuille par phase de Lewin	المحفظة حسب مرحلة لوين
sector_manufacturing	Manufacturing	Industrie manufacturière	الصناعة التحويلية
sector_logistics	Logistics & Transportation	Logistique et transport	الخدمات اللوجستية والنقل
sector_health	Health	Santé	الصحة
archetype_erp	ERP Implementation	Mise en œuvre ERP	تنفيذ نظام تخطيط الموارد
archetype_automation	Process Automation	Automatisation des processus	أتمتة العمليات
archetype_qms	QMS Implementation	Mise en œuvre SMQ	تنفيذ نظام إدارة الجودة
archetype_bpr	Business Process Reengineering	Réingénierie des processus métier	إعادة هندسة العمليات
archetype_cultural	Cultural / Values Transformation	Transformation culturelle / des valeurs	التحول الثقافي / القيمي
archetype_operating_model	Operating Model Redesign	Refonte du modèle opérationnel	إعادة تصميم نموذج التشغيل
archetype_compliance	Compliance-	Changement	التغيير المدفوع بالامتثال

Key	English	French	Arabic
	Driven Change	réglementaire / de conformité	
archetype_training_skills	Training & Skills Development	Formation et développement des compétences	التدريب وتطوير المهارات

10.6 Full Static Reference/Catalog Data

The complete content of every shared reference dataset under `journi/src/data/` — reproduced in full so a rebuild can seed identical demo/reference data without access to the original source files. These are the datasets summarized structurally in Section 4.2 and referenced throughout Section 6; this appendix is their content, verbatim.

10.6.1 Addendum — New Reference/Seed Data (v2.0)

Five new static data files back the v2.0 features; unlike Section 10.6's full verbatim dumps above (captured at v1.0), these are summarized structurally rather than reproduced value-by-value, given the appendix's already-substantial size — the source files themselves (`journi/src/data/`) are the authoritative content.

File	Backs	Structure	Volume
<code>packDefinitions.js</code>	Section 6.4.1	PACKS (3 keys), PACK_DEFINITIONS (per-Pack module list / AI tier / Organization ceiling / deployment options), DEPLOYMENT_OPTIONS (5 entries mirroring the Technical Offer's Section 2.3 table)	3 Packs, 22 module-route ids distributed across them, 5 deployment options
<code>complianceStandards.js</code>	Section 6.4.2	COMPLIANCE_STANDARDS array (key, name, fullName, focus, priced), DEFAULT_ACTIVE_STANDARDS	7 standards (GDPR, ISO/IEC 27001, ISO/IEC 27701, SOC 2 Type II, HIPAA, FIPS 140-2, ISO 9001)
<code>processGovernanceSeed.js</code>	Section 6.4.4	One entry per Macro Process (MP-01..MP-10), each with one seeded Alert, Business Rule, Control, KPI, Report, and	10 Macro Processes × 6 artifact types = 60 seeded governance items

File	Backs	Structure	Volume
processKnowledgeBase.js	Section 6.4.5	Risk/Opportunity One { id, mpId, title: {en,fr,ar}, body: {en,fr,ar} } article per Macro Process	10 articles × 3 languages = 30 authored text blocks
templateLibrarySeed.js	Section 6.4.3	charterTemplates[] (3 seeded), communicationTemplates[] (3 seeded), trainingTemplates[] (2 seeded)	8 seeded templates across 3 kinds

10.6.1 Enumerated Value Sets (data/constants.js, beyond the roles/capabilities already in Sections 3.7 and 10.4)

Set	Values
ADKAR_BLOCKS	awareness, desire, knowledge, ability, reinforcement
BRIDGES_PHASES	ending, neutral, beginning
SENTIMENT_STAGES	denial, resistance, exploration, commitment
LEWIN_PHASES	unfreeze, change, refreeze
AI_TIERS	assistive, augmented
RISK_CATEGORIES	adoption, sponsorship, capacity, saturation
RESISTANCE_TYPES	role, skill, will, systemic
SECTORS	manufacturing, logistics, health
ARCHETYPES (transformation types)	erp, automation, qms, bpr, cultural, operating_model, compliance, training_skills
VISIBILITY_LEVELS	weak, moderate, strong

10.6.2 Macro Process Catalog (data/macroProcesses.js, M4) — 10 entries, the atomic units of journi’s process model.

ID	Name	Description	Primary Module(s)
MP-01	Change Impact & Stakeholder Assessment	Maps stakeholder groups and scores change impact (process, technology, role, location, identity) to establish the	M9

ID	Name	Description	Primary Module(s)
MP-02	Sponsorship & Governance Management	baseline scope of who is affected and how. Builds and tracks the sponsor coalition, escalation actions, and governance cadence that keep executive backing visible and active.	M7, M13
MP-03	Communication & Awareness Management	Plans and logs the communications cadence that drives the Awareness block of ADKAR across stakeholder cohorts.	M14
MP-04	Resistance & Barrier Management	Logs resistance signals by type (role, skill, will, systemic) and tracks mitigation actions through to resolution.	M16
MP-05	Training & Capability Enablement	Delivers the curriculum that builds the Knowledge and Ability ADKAR blocks, tracked by cohort and completion status.	M15
MP-06	Champion Network Management	Manages the change-champion network — floor-level advocates who surface early signals into the Sponsor Coalition and Resistance Log.	M13
MP-07	Readiness Diagnostics & Signal Capture	Aggregates ADKAR scores, sentiment, and	M10, M11

ID	Name	Description	Primary Module(s)
		other signals into the Composite Readiness Index used to judge go/no-go readiness.	
MP-08	Divergence & Risk Detection	Detects divergence patterns between plan and reality (schedule slips, adoption risk, saturation) and logs them to the Risk Register.	M11, M12
MP-09	Hypercare & Floor Coaching Support	Provides manager-led floor coaching and hypercare support immediately after go-live, while adoption is still fragile.	M17, M21
MP-10	Reinforcement & Sustainment Management	Locks in the change through checkpoints, quick wins, and lessons learned so gains outlast the project close-out.	M7, M21

10.6.3 End-to-End Process Registry (data/e2eProcesses.js, M4) — 17 entries: 4 core lifecycle chains, 4 cross-cutting loops, 8 transformation-type lifecycles. RACSI role codes (ES/CM/PM/FPO/ITL/SUP/EU) are a separate 7-code taxonomy from journi's own 9-role platform enum: ES = Executive Sponsor, CM = Change Manager, PM = Program/Project Manager, FPO = Functional Process Owner, ITL = IT/Technical Lead, SUP = Supervisor, EU = End User.

Core lifecycle chains:

ID	Name	Macro Process Chain	Trigger	Terminal State	RACSI
E2E-01	Readiness & Mobilization	MP-01→02→03→06→07	Business case and stakeholder map opened	Mobilized sponsorship, informed and diagnosed population,	R=CM, A=ES, C=FPO/PM, S=SUP,

ID	Name	Macro Process Chain	Trigger	Terminal State	RACSI
				active champion network	I=EU
E2E-02	Capability & Divergence Management	MP-05→08→07	Curriculum, sandbox, and cohort segmentation confirmed from E2E-01	Verified capable and emotionally-ready cohorts; Divergence Pattern log	R=CM, A=CM, C=FPO/ITL, S=PM/SUP, I=ES/EU
E2E-03	Resistance-to-Commitment	MP-04→06→07→09	A stalled Desire score or negative sentiment pulse is first logged	Resolved barriers; recovered Desire/sentiment scores; sustained commitment	R=CM, A=CM, C=ES/SUP, S=PM, I=FPO/EU
E2E-04	Adoption-to-Sustainment	MP-09→10→07	Go-live cutover executed	Stabilized new-normal performance; embedded reinforcement; confirmed Refreeze; closed project	R=CM, A=ES, C=PM/FPO, S=SUP, I=ITL/EU

Cross-cutting loop chains:

ID	Name	Macro Process Chain	Trigger	Terminal State	Related Modules
E2E-05	Signal Aggregation Loop	MP-03→05→07→08	New awareness (MP-03) or knowledge/ability (MP-05) signal recorded	Composite Readiness Index (MP-07) recalculated and evaluated by the Divergence Pattern Detector	M14, M15, M10, M11, M12

ID	Name	Macro Process Chain	Trigger	Terminal State	Related Modules
E2E-06	PM ↔ CM Governance Bridge	MP-02→08	Main Project schedule slip logged OR Phase Gate checkpoint reached	(MP-08) Joint Decision Record produced (Go / Go with Conditions / No-Go); PM and CM inputs preserved independently; exactly one Accountable role named	M13, M12, M8
E2E-07	Champion Early-Warning Loop	MP-06→04	Champion floor-level observation logged	Observation formalized into a Resistance Log barrier record	M13, M16
E2E-08	Governance Escalation Loop	MP-02→10	Sponsor escalation action logged	Escalation resolved and reflected in the sustainment signoff	M13, M21

Transformation-type lifecycles (each links a Phase Template, Section 10.6.4):

ID	Transformation Type	Macro Process Chain	SIPOC Suppliers	SIPOC Customers	Phase Template
E2E-ERP	erp	MP-01→02→03→05→07→09→10	Executive Sponsor, PM, Change Manager	Steering Committee, End Users, Sustainment Team	TPL-ERP-8
E2E-BPR	bpr	MP-01→02→03→05→07→08→09→10	Executive Sponsor, FPOs, Change Manager	Steering Committee, Process Owner,	TPL-BPR-7

ID	Transform ation Type	Macro Process Chain	SIPOC Suppliers	SIPOC Custom ers	Phase Templa te
E2E- BPA	automation	MP- 01→02→03→05→07→0 8→09→10	Executive Sponsor, ITL, FPO	End Users Steering Committ ee, Center of Excellen ce, End Users	TPL- BPA-7
E2E- IMS	qms	MP- 01→02→03→05→07→0 8→09→10	Certification Body, FPOs, Change Manager	Steering Committ ee, Quality Function , External Auditor	TPL- IMS-7
E2E- CULT	cultural	MP- 01→02→03→04→06→0 7→08→09→10	Executive Sponsor, HR Business Partner, Change Manager	Steering Committ ee, Leaders hip Team, All Employee es	TPL- CULT-7
E2E- OM	operating_m odel	MP- 01→02→03→05→07→0 8→09→10	Executive Sponsor, Function Heads, HR Business Partner	Steering Committ ee, Standin g Operatin g Committ ee, All Employee es	TPL-OM- 7
E2E- COMP	compliance	MP- 01→02→03→05→07→0 8→09→10	Legal/ Compliance, FPOs, Change Manager	Steering Committ ee, Complia nce Function ,	TPL- COMP-7

ID	Transform ation Type	Macro Process Chain	SIPOC Suppliers	SIPOC Custom ers	Phase Templa te
E2E- TSD	training_ski ls	MP- 01→02→03→05→06→0 7→08→09→10	Training Lead, FPOs, Change Manager	Regulato r Steering Committ ee, End Users, BAU Owner	TPL- TSD-7

10.6.4 Default RACSI Grid (data/racsi.js, M4) — one row per Macro Process, one column per role (sponsor, change_manager, people_manager, practitioner, employee, executive); values are R/A/C/S/I or blank.

Macro Proces s	Sponsor	Change Manag er	People Manag er	Practitioner	Employee	Executive
MP-01	A	R	I	C	I	
MP-02	A	R	I		I	C
MP-03	A	R	C		I	
MP-04	A	R	C		I	
MP-05		A	C	R	I	
MP-06	A	R	C		I	
MP-07	A	R		C	I	I
MP-08	A	R	I			C
MP-09		A	R		C	
MP-10	S	A	C		I	I

10.6.5 Phase Template Library (data/phaseTemplates.js, M8) — 8 templates. TPL-ERP-8 ships fully populated as the flagship reference example; the 7 Common Lifecycle variants ship with phase names only, ready to be filled in per engagement.

TPL-ERP-8 — ERP Implementation, 8 phases (fully populated):

Phase	CM Track (sample)	Checklist (sample)	Gate Question (sample)
Discovery	Build CM business case; populate Stakeholder Map (M9); name Executive Sponsor with a visible action (M13)	Business case approved, not just drafted	Is the business case approved by the Steering Committee?
Design	Run kickoff communications,	Baseline Awareness score exists for	Is there a baseline

Phase	CM Track (sample)	Checklist (sample)	Gate Question (sample)
	capture baseline Awareness (M10); recruit Champion network; log design decisions	highest-severity cohorts	Awareness reading for high-severity cohorts?
Build	Track ADKAR Desire trend, open recovery response for stalled blocks; run first communications wave; log resistance	No cohort below Desire stall threshold without a logged recovery response	Is ADKAR Desire trending upward across all cohorts?
Test	Re-score Knowledge/Ability for UAT cohorts; watch for Divergence Pattern; confirm training mapped to gaps	UAT participant ADKAR scores re-measured, not assumed	Has UAT capability been re-measured, not assumed?
Train	Deliver training waves, track completion; coach managers on team barriers; re-pulse Bridges/Kübler-Ross	Manager coaching actions logged for any flagged team barrier	Have flagged team barriers received a coaching response?
Deploy	Mark Lewin as provisional Change at cutover; run go-live communications; log cutover as justified change	Go-live communications sent to every affected cohort	Has go-live communication reached every affected cohort?
Hypercare	Re-pulse Bridges/Kübler-Ross at 2- and 4-week marks; track defect-linked sentiment dips; confirm Readiness trend	Two- and four-week re-pulses completed for all affected cohorts	Have the scheduled re-pulses been completed?
Sustain	Confirm Bridges/Kübler-Ross reads New Beginning/Commitment before calling Refreeze; verify reinforcement; run 30/60/90-day checkpoints	Refreeze called on emotional/behavioral evidence, not the go-live date	Is Refreeze backed by confirmed evidence across all cohorts?

(Each phase in the source carries 3 full CM Track actions, 3 checklist items, and 3 gate questions — the table above shows one representative sample of each per phase; the complete text is in `journi/src/data/phaseTemplates.js` and should be transcribed verbatim by a rebuild team seeding this data, since it is prescriptive practitioner guidance, not filler.)

The 7 Common Lifecycle variants (phase names only — `cmTrack/checklist/gate` arrays ship empty, ready for per-engagement authoring via M8's template editor):

Template ID	Transformation Type	Phases (P1-P7)
TPL-BPR-7	bpr	Intake & Diagnosis · Clean-Slate Design · Build · Pilot · Rollout · Stabilization · Sustainment
TPL-BPA-7	automation	Automation-Opportunity Assessment · Architecture Design · Build · UAT & Shadow-Mode · Production Go-Live · Exception Tuning · CoE Handover
TPL-IMS-7	qms	Intake & Diagnosis · Design · Implementation · Mock-up Audit · Certifying Audit · Surveillance Prep · Ongoing Surveillance
TPL-CULT-7	cultural	Diagnosis · Target Values Design · Leadership Modeling & Reinforcement Build · Pilot Cohort · Organization-Wide Rollout · Reinforcement Through Skepticism · Institutionalization
TPL-OM-7	operating_model	Current Operating Model Assessment · TOM Design · Detailed Org Design · Pilot Transition · Full Transition · Governance Adoption Tracking · Standing Rhythm Handover
TPL-COMP-7	compliance	Regulatory Requirement & Gap Analysis · Control Design · Control Implementation · Internal Audit/Independent Testing · Controls Go Live · First Monitoring Cycle · Ongoing Compliance

Template ID	Transformation Type	Phases (P1-P7)
TPL-TSD-7	training_skills	Handover Skills Gap Diagnosis · Curriculum Design · Training Delivery · Competency Verification · Practical Application · On- the-Job Coaching · Skills Sustainment

10.6.6 Charter Registry — full text (data/charters.js, M5) — 8 charters, each with one primary entry (What/Who/When/Where/Why/How).

ID	Name	RACSI	Govern s	Status	Prima ry Macro	Review Frequenc y
CHTR-01	Sponsorship / Leadership Charter	R=CM, A=ES, C=PM/F PO, I=SUP/E U	Project	Active	MP-02	Per Phase Gate
CHTR-02	Participative Management Charter	R=SUP, A=CM, C=FPO/ PM, I=ES/E U	Project	Active	MP-04	Quarterly
CHTR-03	Communication Charter	R=CM, A=CM, C=ES/F PO, S=PM, I=SUP/E U	Project	Active	MP-03	Per communication wave
CHTR-04	Organizational Impact Charter	R=CM, A=CM, C=FPO/ SUP, S=PM, I=ES/E U	Project	Active	MP-01	On scope change
CHTR-05	Team Coaching Charter	R=SUP, A=CM, C=ITL, S=PM, I=ES/FP O/EU	Project	Active	MP-09	Per hypercare phase

ID	Name	RACSI	Govern s	Status	Prima ry Macro	Review Frequenc y
CHTR-06	One-to-One Coaching Charter	R=CM, A=CM, C=FPO, S=SUP, I=ES/P M/EU	Project	Active	MP-08	Per triggered case
CHTR-07	Mentoring Charter (Trainee→Observer→Autonomous)	R=CM, A=CM, C=FPO/ ITL, S=PM/S UP, I=ES/E U	Project	Active	MP-05	Per mentee cohort
CHTR-08	Pulse / Interview Charter	R=CM, A=CM, S=PM/S UP, I=ES/FP O/EU	Project	Active	MP-07	Per phase gate + ad hoc

Full “What” text per charter (the “Who/When/Where/Why/How” fields are equally detailed in the source and should be transcribed verbatim; shown here condensed to the core commitment each charter defines):

- **CHTR-01:** Defines the specific, observable sponsorship behaviors expected of the Executive Sponsor and Steering Committee across the initiative lifecycle.
- **CHTR-02:** Defines how Frontline Supervisors and People Managers involve their teams in decisions that affect them, rather than announcing decisions top-down.
- **CHTR-03:** Defines the message-audience-channel-timing discipline and the FAQ/reply-protocol standard every communication wave must follow.
- **CHTR-04:** Defines the methodology and sign-off standard for assessing how the change affects process, technology, role, location and professional identity.
- **CHTR-05:** Defines the standard for group/team-level floor coaching delivered by People Managers during hypercare, distinct from individual 1:1 coaching.
- **CHTR-06:** Defines the standard for individual, identity-focused coaching conversations — most notably divergence-case 1:1s.
- **CHTR-07:** Defines the three-stage progressive mentoring model (Trainee, Observer, Autonomous) that carries an individual from initial training through to independent, unsupervised competence.
- **CHTR-08:** Defines the cadence, instrument standard and consent protocol for every structured pulse survey, rapid pulse, and 1:1 interview used to capture readiness signals.

10.6.7 Charter Action Mapping (data/charterActions.js, M5) — the many-to-many mapping from each charter to concrete PDCA-staged actions across macro processes/tasks/phases. 35 entries total; representative excerpt (full list in source):

ID	Charter	Name	PDCA	Phase	Responsible / Accountable	Frequency
CHTRAC T-0101	CHTR-01	Log weekly visible-sponsorship activity	Do	P2	ES / ES	Weekly
CHTRAC T-0102	CHTR-01	Review sponsor coverage gate and coach on gaps	Check	P2	CM / CM	Weekly
CHTRAC T-0103	CHTR-01	Escalate unresolved CM risks to Sponsor	Act	P4	CM / ES	Ad hoc
CHTRAC T-0301	CHTR-03	Build the persona × channel × cadence communication matrix	Plan	P2	CM / CM	Once, revised per wave
CHTRAC T-0302	CHTR-03	Run saturation check before scheduling a new wave	Check	P3	CM / CM	Per wave
CHTRAC T-0601	CHTR-06	Triage the divergence alert against supervisor observation	Plan	P6	SUP / CM	Per triggered case
CHTRAC T-0602	CHTR-06	Hold identity-focused 1:1 conversation	Do	P6	CM / CM	Per triggered case
CHTRAC T-0701	CHTR-07	Diagnosis — assess mentee’s starting Knowledge/Ability	Plan	P4	Training Lead / Training Lead	Once per mentee
CHTRAC T-0703	CHTR-07	Execution — Stage 1: Trainee (maps to MENT-01)	Do	P4	Training Lead / Training Lead	Per mentee
CHTRAC T-0704	CHTR-07	Execution — Stage 2: Observer (maps to MENT-02)	Do	P4	Training Lead / Training Lead	Per mentee
CHTRAC T-0705	CHTR-07	Execution — Stage 3: Autonomous	Do	P4	Training Lead /	Per mentee,

ID	Charter	Name	PDCA	Phase	Responsible / Accountable	Frequency
		(maps to MENT-03)			FPO	ongoing
CHTRAC T-0706	CHTR-07	Closure — formal Autonomous sign-off and hand-off	Act	P4	Training Lead / FPO	Once per mentee
CHTRAC T-0801	CHTR-08	Run baseline ADKAR/Bridges/Kübler-Ross pulse	Plan	P1	CM / CM	Once
CHTRAC T-0804	CHTR-08	Consolidate all readings into the Composite Readiness Index	Check	P2-P6	CM / CM	Per phase gate

Each of CHTR-01 through CHTR-08 has 3–6 mapped actions in the source (35 total); the full ID/name/PDCA-stage/sequence/macro-process/task/step/phase/role/frequency table should be transcribed verbatim from `journi/src/data/charterActions.js` for exact rebuild parity.

10.6.8 Mentoring Progression Model (`data/mentoringStages.js`, M5) — the 3-stage model behind CHTR-07.

ID	Stage	Entry Criteria	Exit Criteria	Typical Duration	Mentor Involvement	Regression Path
MENT-01	Trainee	Completed role-based curriculum (M15); assigned to a named Mentor	Consistent, accurate sandbox task completion across defined repetitions	1–2 weeks	Continuous — instructs and corrects in real time	Below-threshold performance triggers remedial training before re-attempting
MENT-02	Observer	Mentor confirms consistent sandbox performance	Defined live repetitions with zero critical-error interventions	1–2 weeks	Passive — observes and logs, intervenes only on critical error	Repeated critical-error interventions return the mentee to Trainee (MENT-01)
MENT-03	Autonomous	Mentor confirms zero critical-error live repetitions;	Formal Autonomous sign-off recorded; handed off to regular	Ongoing from transition date	Minimal — periodic spot-audit only	A spot-audit failure or a Sustainment regression flag returns the

ID	Stage	Entry Criteria	Exit Criteria	Typical Duration	Mentor Involvement	Regression Path
		FPO co-signs	People Manager			individual to Observer (MENT-02)

10.6.9 Default Qualitative Coding Workbench Codebook

(data/defaultCodebook.js, M16) — the starter codebook every Organization is seeded with (org-editable thereafter).

Label	Description
fear-of-obsolescence	Concern that a skill, role, or way of working is being made redundant.
trust-in-leadership	Comments referencing confidence (or lack of it) in sponsors/leadership follow-through.
workload-concern	The change is perceived as adding work without removing anything in return.
skill-gap-anxiety	Fear of not being able to learn or perform the new way of working.
process-ownership-loss	A sense of losing control or authorship over a process the person used to own.
external-comparison	Comparing unfavorably to how another site, team, or a prior employer handled a similar change.

10.6.10 Stakeholder Journeys (data/journeys.js, M19) — 8 journeys.

ID	Name	Type	Trigger	Audience	Duration	Linked Modules
JRN-01	End User Adoption Journey	Persona	Change scope communicated to affected population	Employee / End User	J0-J8 (full lifecycle)	M9, M10, M11, M14, M15, M18
JRN-02	Executive Sponsor Journey	Persona	CM Project opened, Sponsor named	Executive Sponsor	J0-J8	M7, M13
JRN-03	Frontline Supervisor / People Manager Journey	Persona	Team assigned to Supervisor	Frontline Supervisor / People Manager	J3-J8	M16, M17
JRN-04	Champion	Persona	Champion	Employee	J1-J7	M13

ID	Name	Type	Trigger	Audience	Duration	Linked Modules
	Journey		nominated	(Champion role)		
JRN-05	Mentee Journey (specializes JRN-01)	Persona	Assigned to a Mentor at Training entry	Employee / End User (mentored role)	J4, extending into J6	M15
JRN-06	Divergence Case Journey	Exception	Divergence Pattern Detector flags a case	Employee / End User (flagged)	Ad hoc, per case	M11, M12
JRN-07	QMS Certification Journey (specializes JRN-01)	Sector-Specific	Certification requirement confirmed (QMS)	FPO / QHSE Champion	J1-J8, extended by audit gates	M9, M13
JRN-08	AI Suggestion Lifecycle Journey	System	An AI Use Case Library entry generates a suggestion	N/A — human-facing at review step	Minutes to days	M6

10.6.11 Journey Touchpoints (data/journeyTouchpoints.js, M19) — 24 touchpoints across JRN-01, 02, 04, 05, 06.

JRN-01 (End User Adoption, 6 touchpoints): Receives kickoff communication (day 0, CM) → Completes baseline pulse (day 7, CM) → Attends role-based training (day 90, Trainer) → Experiences go-live cutover (day 150, ITL) → Receives hypercare floor coaching (day 157, People Manager) → Reinforcement embedded into performance review (day 240, HR Business Partner).

JRN-02 (Executive Sponsor, 4 touchpoints): Signs the Sponsorship/Leadership Charter (day 0) → Logs first visible-sponsorship activity (day 7) → Attends Phase Gate reviews (day 60) → Confirms sustainment sign-off (day 240).

JRN-04 (Champion, 4 touchpoints): Nominated as champion (day 0) → Onboarded and equipped (day 5) → Participates in listening session (day 30) → Network re-chartered post-go-live (day 180).

JRN-05 (Mentee, 5 touchpoints): Diagnosis assessment completed (day 0) → Enters Trainee stage/sandbox (day 3) → Advances to Observer stage (day 17) → Advances to Autonomous stage (day 31) → Formal Autonomous sign-off & hand-off (day 35).

JRN-06 (Divergence Case, 4 touchpoints): Case flagged and triaged (day 0) → Identity-focused 1:1 held (day 3) → Closure moment delivered (day 4) → Bridges re-checked, case closed (day 14).

Each touchpoint additionally carries a PDCA sub-phase, owner role, automation level, and a concrete success criterion/evidence requirement — see `journi/src/data/journeyTouchpoints.js` for the full 24-row table with every field.

10.6.12 Journey Analytics Dashboards (`data/journeyDashboards.js`, M19) — 5 dashboards; DASH-01/02 compute live metrics, DASH-03/04/05 are reference cards.

ID	Name	Live Metric Source	Visualisation	Refresh
DASH-01	End User Journey Completion Dashboard	JRN-01 touchpoint log	Funnel, Gantt, Bar	Weekly
DASH-02	Sponsor & Charter Compliance Dashboard	charterActionLog	KPI Cards, Bar, Radar	Weekly
DASH-03	Mentoring Progression Dashboard	Reference only	Funnel, Bar, KPI Cards	Weekly
DASH-04	Divergence Case Resolution Dashboard	Reference only	Bar, Heatmap, Line	Real-time
DASH-05	Journey Analytics — Executive Roll-Up	Reference only	Radar, KPI Cards	Monthly

10.6.13 Change Management Benchmarking Reference Bands

(`data/benchmarks.js`, M20) — illustrative, not sourced from a real industry study.

Lewin Phase	Low	Mid	High	(Readiness Index band)
unfreeze	20	35	50	
change	40	55	70	
refreeze	60	75	90	

Checkpoint	Low	Mid	High	(Adoption Rate band)
30-day	40	60	75	
60-day	55	72	85	
90-day	65	80	92	

Standing formula: below low = “behind”; between low and high = “in line”; at or above high = “ahead.”

10.6.14 Cross-Type Comparison Matrix (data/crossTypeMatrix.js, M20) — all 8 transformation types.

Type	Typical Duration	Terminal Gate	External Party	Dominant Framework	Reversibility
erp	12 months (illustrative)	Cutover & Go-Live	Not typically	Knowledge / Ability (balanced)	Low once live
bpr	6-12 months per process	Full rollout	Not typically	Ability	Moderate
automation	3-9 months per workflow	Production go-live	Not typically	Ability / Reinforcement	Low once live
qms	6-14 months	Certifying audit (external)	Yes — certification body	Knowledge	Low — audit is external
cultural	18-36 months	Org-wide rollout	Not typically	Bridges / Kübler-Ross	High — but slow to fix
operating_model	9-18 months from diagnosis	Full transition	Not typically	Awareness / Ability	Low once transitioned
compliance	Driven by external deadline	Enforceable date (external)	Often — regulator	Awareness / Knowledge	None — fixed deadline
training_skills	3-6 months per curriculum wave	Competency verification sign-off	Not typically	Knowledge / Ability	High — gap can be re-addressed

10.6.15 Project Context Overlay (data/projectContextOverlay.js, M19) — reference-framework worked examples, not journi’s own seeded demo projects.

Project	Attribute	Value
PRJ-001	Dominant Tension	Historical, diffuse skepticism (multi-plant legacy ERP consolidation)
PRJ-001	Exception Pattern Most Likely	E3 — Two-Clock Problem at Cutover & Go-Live
PRJ-002	Dominant Tension	Concrete, specific fear of headcount reduction (RPA automation)

Project	Attribute	Value
PRJ-002	Exception Pattern Most Likely	E1 — Desire Stall During Data Migration & Integration
PRJ-003	Dominant Tension	Low job change, but certification adds external audit pressure
PRJ-003	Exception Pattern Most Likely	E6 — Cohort Divergence Across Sites or Departments
PRJ-004	Digital Literacy Risk	High — 24/7 operations, mixed digital-literacy workforce
PRJ-006	Constraint Type	24/7 shift-based operations complicate synchronized training
PRJ-007	Constraint Type	Patient-safety-critical cutover windows constrain go-live timing
PRJ-009	Certification Anchor	JCI accreditation — external pass/fail gate
PRJ-011	Timeline Risk	No forcing deadline — 18-36 month standalone culture program
PRJ-013	Timeline Risk	Fixed, non-negotiable regulatory compliance deadline

10.6.16 AI Use Case Catalog — full prompt templates (data/aiUseCases.js, M6)
— all 14 seeded use cases with their literal prompt text, for exact behavioral parity in a rebuild.

ID	Name	Tier	Module	Prompt Template
uc-stakeholder-impact	Stakeholder Impact Drafting Assistant	Assistive	M9	“You are a Change Management analyst. Given the attached org chart and the change scope description below, propose per-group impact scores (1-5) across Process, Technology, Role, Location, and Identity, and group affected staff into 3-6 named cohorts.

ID	Name	Tier	Module	Prompt Template
uc-adkar-barrier	ADKAR Barrier Diagnosis Assistant	Assistive	M10	Return a short table, not prose. Do not invent org units not present in the input.” “Read the open-text survey response below. Identify which single ADKAR block ... it most likely reflects a barrier in, and summarize the barrier in one short phrase (e.g. ‘Desire — fear of role redundancy’). If the text does not clearly indicate a barrier, say so rather than guessing.”
uc-cohort-summarizer	Cohort Readiness Summarizer	Augmented	M10	“Given the five ADKAR block scores (1-5) for this cohort below, write a 3-4 sentence readiness narrative suitable for a Sponsor update: name the strongest and weakest blocks, state the overall trajectory, and avoid restating the raw numbers verbatim. Plain business prose, no bullet points.”
uc-sentiment-classifier	Sentiment & Emotion Classifier	Augmented	M11	“Classify each pulse-survey comment below into exactly one of: Denial, Resistance/Anger, Exploration, Commitment ... Return one classification per

ID	Name	Tier	Module	Prompt Template
uc-divergence-detector	Divergence Pattern Detector	Assistive	M11	comment with a one-line justification quoting the relevant phrase. If a comment is ambiguous between two stages, pick the earlier one.” “Given a cohort’s ADKAR Knowledge and Ability scores and its current Bridges transition reading below, state in one sentence whether this looks like the Divergence Pattern ... and, if so, recommend a loss-focused conversation rather than additional training.”
uc-sponsor-recommender	Sponsor Action Recommender	Assistive	M13	“Given this sponsor’s current visibility score and their most recent logged sponsorship actions below, suggest one concrete next action ... that would most improve visibility. One sentence, specific, not generic advice.”
uc-comm-draft	Communication Draft Generator	Augmented	M14	“Draft a message for the persona, channel, and language specified below ... Match tone and length to the channel — an email can run 150-200 words, a chat/SMS-style channel under 40.

ID	Name	Tier	Module	Prompt Template
uc-saturation-advisor	Change Saturation Advisor	Assistive	M14	Do not include a subject line unless the channel is email. Plain text only.” “Given the list of scheduled communications below (date, target population, initiative), identify any population that would receive more than one significant communication within the same week from different initiatives, and suggest a specific alternate week for the lower-priority one. List conflicts only.”
uc-training-mapper	Training Gap-to-Curriculum Mapper	Assistive	M15	“Given the ADKAR Knowledge and Ability scores below for this cohort, and the list of available curriculum tracks, recommend which 1-3 tracks would most directly close the gap. Reference the track names exactly as given; do not invent tracks that aren’t in the list.”
uc-coaching-script	Manager Coaching Script Generator	Assistive	M17	“Write a short coaching talking-points script (4-6 bullet points) a people manager could use in a 1:1 to address the flagged ADKAR barrier described below. Tone: supportive,

ID	Name	Tier	Module	Prompt Template
uc-resistance-classifier	Resistance Root-Cause Classifier	Assistive	M16	specific to the barrier named, not generic change-management platitudes. Include one open-ended question the manager should ask.” “Classify the logged resistance description below into exactly one of: Role (concern about job/role security), Skill (concern about ability to perform), Will (unwillingness despite capability), or Systemic (structural/process obstacle outside the individual’s control). One-word classification plus a one-sentence justification quoting the description.”
uc-regression-predictor	Regression Risk Predictor	Augmented	M21	“Given the post-go-live usage trend data below ..., produce a regression-risk score from 1 (low) to 5 (high) and a two-sentence explanation naming the specific trend that drove the score. Do not score above 3 unless the data shows an actual declining trend, not just a low absolute level.”
uc-exec-narrative	Executive Readiness Narrative	Augmented	M20	“Write a 4-5 sentence executive-summary narrative

ID	Name	Tier	Module	Prompt Template
	Generator			for a Steering Committee update, given the Composite Readiness Index and the underlying ADKAR/sentiment/training figures below. Lead with the headline number and trend, name the single biggest risk or blocker if one is evident in the data, and close with the recommended next checkpoint. No jargon beyond what a non-CM executive would recognize.”
uc-journey-annotation	Journey Map Annotation Assistant	Assistive	M18	“Given the timeline event described below (what changed, and when), suggest a short annotation label (under 8 words) suitable for a visual journey map marker. Favor concrete, specific labels (‘UAT go-live delayed 2 weeks’) over vague ones (‘timeline change’).”

10.6.17 Alert Definitions (data/alertDefinitions.js, Notification Center) — all 16 catalogued conditions; see Section 7.2 for which 9 compute live in the reference build and why the other 7 do not.

ID	Name	Severity	SLA	Recipient Roles
ALT-001	Divergence Pattern Detected	High	Acknowledge within 48h	CM
ALT-002	Regression Risk Score Critical	Critical	Acknowledge within 24h	CM, SUP


ID	Name	Severity	SLA	Recipient Roles
ALT-003	Sponsor Coverage Gap	Medium	Acknowledge within 5 business days	PMO, ES
ALT-004	Resistance Escalation Threshold Breached	High	Acknowledge within 3 business days	CM, ES
ALT-005	Survey Exception Escalated to Admin	Medium	Resolve within 1 business day	Admin
ALT-006	Champion Coverage Below Target	Low	Review within 14 days	CM
ALT-007	AI Use Case Confidence Below Threshold	Informational	Review at next session	CM
ALT-008	Change Saturation Threshold Breached	Medium	Review within 10 business days	PMO
ALT-009	Phase Gate No-Go / Conditional	High	Review within 3 business days	PM, CM, PMO
ALT-010	Guiding Coalition Gap	Medium	Review within 10 business days	PMO, ES
ALT-011	Communication Overload Detected	Low	Review within 5 business days	CM, PMO
ALT-012	Import Integrity Check Failed	Medium	Resolve within 1 business day	ITL
ALT-013	Administrative Account Locked	High	Review within 4 business hours	Super Admin
ALT-014	GDPR Request SLA at Risk	High	Review within 5 business days of receipt	Super Admin
ALT-015	Sustainment Sign-Off Blocked	Medium	Review within 5 business days	CM, ES

ID	Name	Severity	SLA	Recipient Roles
ALT-016	AI Provider Fallback Triggered	Informational	Review at next session	ITL

10.7 UI Visual Reference

Full-page screenshots of every one of journi’s 22 modules, the two Query Data/Query Features pages (Section 6.3), and one showing the shared Add/Edit modal pattern (Section 3.2) in use — all captured against the seeded Atlas Industrial Group demo tenant. These give a rebuild team an actual visual reference to match — layout, density, the Sidebar/TopBar shell, table and badge styling — alongside the prose UI conventions in Section 5.1. The palette shown is POWERACT Consulting’s own, exactly as specified in its “Brand & Graphical Chart Guide” (Section 5.1).

M1 — Tenant & Org Hierarchy

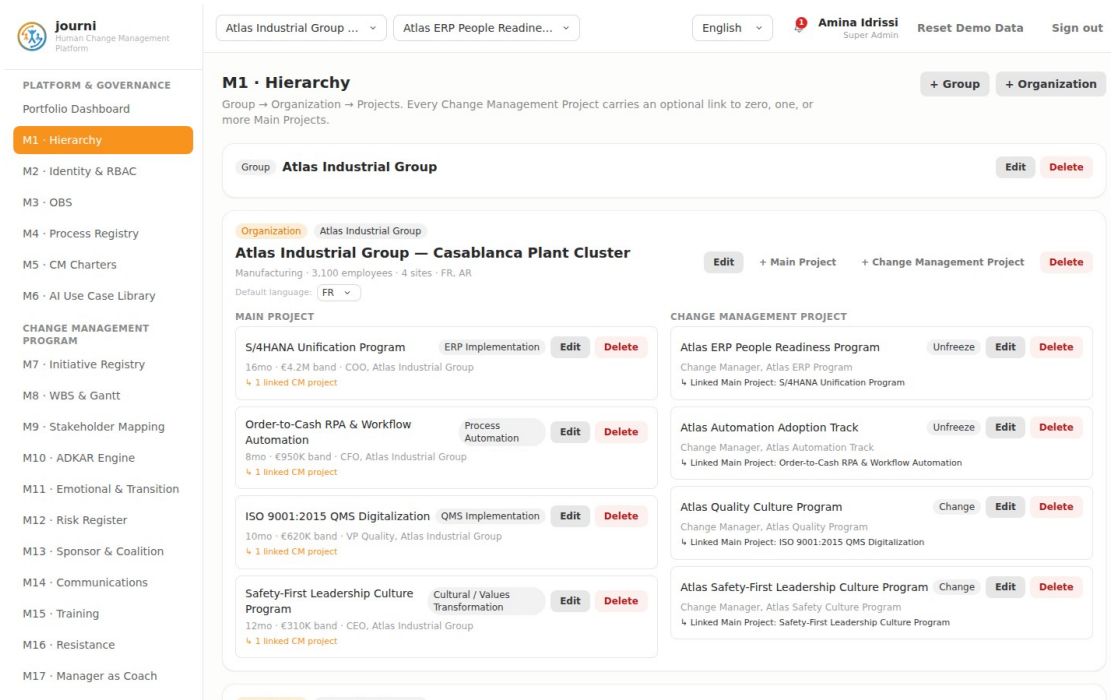

M1 Tenant & Org Hierarchy

M1 Tenant & Org Hierarchy

M2 — Identity & RBAC


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

M2 · Identity & RBAC

Role-based access control scoped to Group / Organization / Project. Self-service sign-ups land as pending Employee accounts until approved.

Users & Scope
Permission Matrix
Governance Settings
License & Plan

NAME	ROLE	SCOPE	LANGUAGE	ACTIONS
Amina Idrissi amina.idrissi@journi.app	Super Admin	platform Platform	EN	Delete
Youssef Bennani youssef.bennani@atlas-industrial.example	Group Admin	group Atlas Industrial Group	FR	Delete
Sara El Fassi sara.efassi@atlas-industrial.example	Organization Admin	organization Atlas Industrial Group — Casablanca Plant Cluster	FR	Delete
Karim Ziani karim.ziani@maghreb-logistics.example	Organization Admin	organization Maghreb Logistics Hub	FR	Delete
Dr. Leila Amrani leila.amrani@meridia-health.example	Organization Admin	organization Meridia Health Network	EN	Delete
Nadia Chraïbi nadia.chraïbi@atlas-industrial.example	Change Manager / ...	project Atlas ERP People Readiness Program	FR	Delete
Omar Tazi omar.tazi@atlas-industrial.example	Change Manager / ...	project Atlas Automation Adoption Track	FR	Delete
Fatima Zahra Naciri fz.naciri@atlas-industrial.example	Change Manager / ...	project Atlas Quality Culture Program	FR	Delete
Yassine Berrada yassine.berrada@atlas-industrial.example	Change Manager / ...	project Atlas Safety-First Leadership Culture Program	FR	Delete
Imane Fassi-Fihri imane.fassifihri@atlas-industrial.example	Change Manager / ...	project Tangier Plant Adoption Program	FR	Delete
Hicham Alaoui hicham.alaoui@maghreb-logistics.example	Change Manager / ...	project Maghreb ERP Transition Program	FR	Delete

M2 Identity & RBAC

M2 Identity & RBAC

M3 — Organizational Breakdown Structure


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

Organizational Breakdown Structure

The project's resourcing roster: who fills which role, and who they report to — distinct from M2 Users, since an OBS entry does not need a Journi login at all.

Add Role

No roles logged yet for this project.

M3 OBS

M3 OBS

M4 — Macro Process, SIPOC, RACSI & E2E Process Registry


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

Macro Process, SIPOC, RACSI & E2E Registry

The process backbone every module is built on: the 10 macro processes, the 16 registered end-to-end chains (core lifecycle, cross-cutting loops, and one per transformation type), and who is Responsible / Accountable / Consulted / Sign-off / Informed for each.

Macro Processes
E2E Process Registry
RACSI Grid

ID	NAME	DESCRIPTION	OWNING MODULE(S)
MP-01	Change Impact & Stakeholder Assessment	Maps stakeholder groups and scores change impact (process, technology, role, location, identity) to establish the baseline scope of who is affected and how.	M9
MP-02	Sponsorship & Governance Management	Builds and tracks the sponsor coalition, escalation actions, and governance cadence that keep executive backing visible and active.	M7 M13
MP-03	Communication & Awareness Management	Plans and logs the communications cadence that drives the Awareness block of ADKAR across stakeholder cohorts.	M14
MP-04	Resistance & Barrier Management	Logs resistance signals by type (role, skill, will, systemic) and tracks mitigation actions through to resolution.	M16
MP-05	Training & Capability Enablement	Delivers the curriculum that builds the Knowledge and Ability ADKAR blocks, tracked by cohort and completion status.	M15
MP-06	Champion Network Management	Manages the change-champion network — floor-level advocates who surface early signals into the Sponsor Coalition and Resistance Log.	M13
MP-07	Readiness Diagnostics & Signal Capture	Aggregates ADKAR scores, sentiment, and other signals into the Composite Readiness Index used to judge go/no-go readiness.	M10 M11
MP-08	Divergence & Risk Detection	Detects divergence patterns between plan and reality (schedule slips, adoption risk, saturation) and logs them to the Risk Register.	M11 M12
MP-09	Hypercare & Floor Coaching Support	Provides manager-led floor coaching and hypercare support immediately after go-live, while adoption is still fragile.	M17 M21
MP-10	Reinforcement & Sustainment Management	Locks in the change through checkpoints, quick wins, and lessons learned so gains outlast the project close-out.	M7 M21

M4 Process Registry

M4 Process Registry

M5 — Change Management Charter Registry


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

Change Management Charter Registry

The 8 signed, trackable behavioral standards governing sponsorship, frontline engagement, communication, impact assessment, coaching and mentoring, and pulse/interview diagnostics — with their concrete action mapping and per-project compliance log, so charter governance is trackable, not just aspirational.

Charters
Action Mapping & Compliance
Mentoring Progression

Each charter names specific, observable behaviors rather than generic guidance — click a charter to see its full What/Who/When/Where/Why/How.

+ Add Charter

CHTR-01
Sponsorship / Leadership Charter
1 entry
Active

CHTR-02
Participative Management Charter
1 entry
Active

CHTR-03
Communication Charter
1 entry
Active

CHTR-04
Organizational Impact Charter
1 entry
Active

CHTR-05
Team Coaching Charter
1 entry
Active

CHTR-06
One-to-One Coaching Charter
1 entry
Active

M5 CM Charters

M5 CM Charters

M6 — AI Use Case Library & Governance



Journi
Human Change Management Platform

PLATFORM & GOVERNANCE

Portfolio Dashboard

M1 · Hierarchy

M2 · Identity & RBAC

M3 · OBS

M4 · Process Registry

M5 · CM Charters

M6 · AI Use Case Library

CHANGE MANAGEMENT PROGRAM

M7 · Initiative Registry

M8 · WBS & Gantt

M9 · Stakeholder Mapping

M10 · ADKAR Engine

M11 · Emotional & Transition

M12 · Risk Register

M13 · Sponsor & Coalition

M14 · Communications

M15 · Training

M16 · Resistance

M17 · Manager as Coach

...

Atlas Industrial Group ...Atlas ERP People Readine...EnglishAmina IdrissiSuper AdminReset Demo DataSign out

AI Use Case Library & Governance
A governed catalog of Assistive and Augmented AI use cases. No use case acts autonomously.

LLM Provider Connection

Not connected — using built-in example generators

journi has no backend: connecting sends your API key and every generated prompt directly from this browser to the provider you choose. The key is stored only in this browser's local storage — never in the seeded demo data, and never cleared by "Reset Demo Data." Do not use a production key on a shared or public machine. Once connected, every AI Use Case across the app calls this provider instead of its canned example text; the review/accept/edit/reject checkpoint is unchanged either way.

PROVIDER

MODEL

Anthropic (Claude)Claude Sonnet 4.5 (recommended for journi)

API KEY

sk-ant-...

Connect

Catalog & GovernanceAI Usage & Override LogAdd AI Use Case

Stakeholder Impact Drafting AssistantAssistiveM9 Stakeholder & Impact Mappingv1Active for this OrganizationProject-level override (inherited)Inactive

Trigger / Input:

Org chart import + change scope definition

Output:

Suggested per-group impact scores (process/tech/role/location/identity) and cohort segmentation

Human Checkpoint:

Change Manager confirms or edits every score before it is saved

EditHistory (1)Delete

ADKAR Barrier Diagnosis AssistantAssistiveM10 ADKAR Enginev1Active for this OrganizationProject-level overrideActive

Trigger / Input:

Open-text survey / pulse responses

Output:

Suggested barrier reason code per stalled ADKAR block

Human Checkpoint:

Change Manager confirms or re-codes before it enters the record

EditHistory (1)Delete

M6 AI Use Case Library

M6 AI Use Case Library

M7 — Initiative Registry



Journi
Human Change Management Platform

PLATFORM & GOVERNANCE

Portfolio Dashboard

M1 · Hierarchy

M2 · Identity & RBAC

M3 · OBS

M4 · Process Registry

M5 · CM Charters

M6 · AI Use Case Library

M7 · Initiative Registry

CHANGE MANAGEMENT PROGRAM

M8 · WBS & Gantt

M9 · Stakeholder Mapping

M10 · ADKAR Engine

M11 · Emotional & Transition

M12 · Risk Register

M13 · Sponsor & Coalition

M14 · Communications

M15 · Training

M16 · Resistance

M17 · Manager as Coach

...

Atlas Industrial Group ...Atlas ERP People Readine...EnglishAmina IdrissiSuper AdminReset Demo DataSign out

Initiative & Portfolio Registry
System of record for every change initiative — business driver, scope, target population, and Lewin macro-state.

Atlas ERP People Readiness ProgramLinked Main Project

S/4HANA Unification Program

16mo · €4.2M band · COO, Atlas Industrial Group

CHANGE TYPE

LEWIN MACRO-STATE

technologyUnfreeze

BUSINESS DRIVER

Unify fragmented plant-level ERPs into a single source of truth ahead of group-wide reporting consolidation.

TARGET POPULATION

~1,200 plant and back-office staff (finance, procurement, planning, warehouse supervisors)

SUCCESS CRITERIA

90% of target population trained and certified; finance close cycle reduced by 3 days; adoption rate >85% at day 90.

Composite Readiness Index

40%

Change Manager, Atlas ERP Program

Bridges TransitionEnding

Lewin Macro-StateUnfreeze

Justification & Change Log
Every scored or state-changing update to this project's Lewin, ADKAR, Bridges and Kübler-Ross readings, with the evidence recorded behind it.


DATE	MODULE	FIELD	CHANGE	JUSTIFICATION
2026-08-07	M10 · ADKAR Engine	Desire	1 → 2	Data migration phase revealed historical skepticism
2026-08-06	M10 · ADKAR Engine	Ability	1 → 2	First hands-on sandbox session run with the finance pilot group; still short of a full practice environment.

M7 Initiative Registry

M7 Initiative Registry

M8 — Work Breakdown Structure & Gantt


Page 120

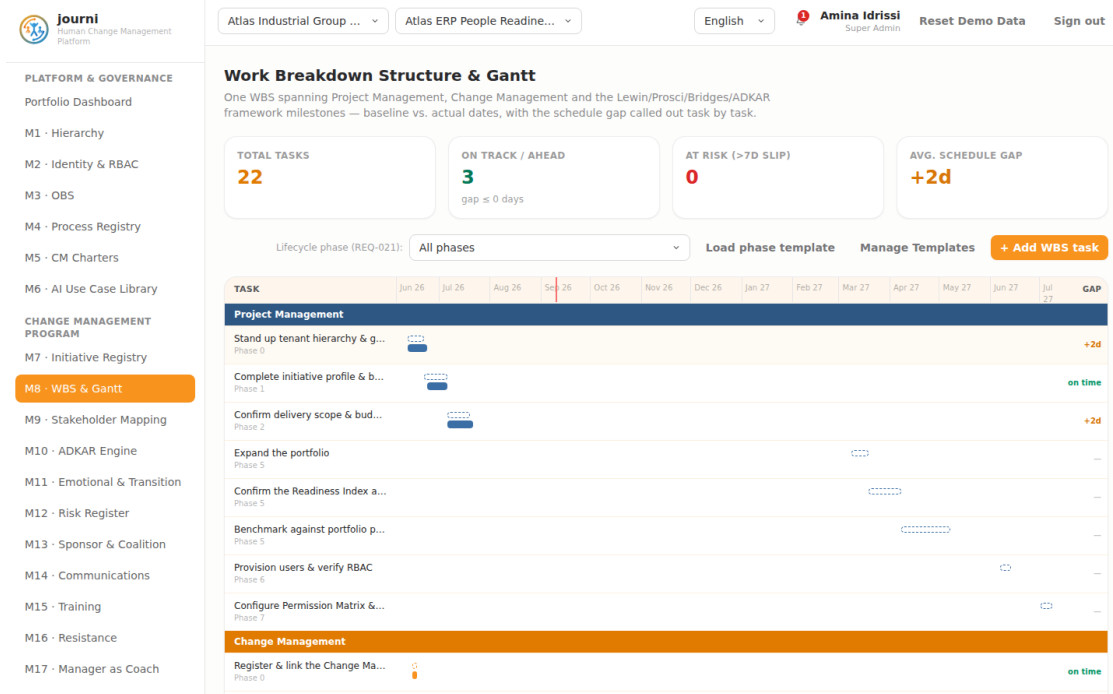

M8 WBS and Gantt

M8 WBS and Gantt

M9 — Stakeholder & Impact Mapping

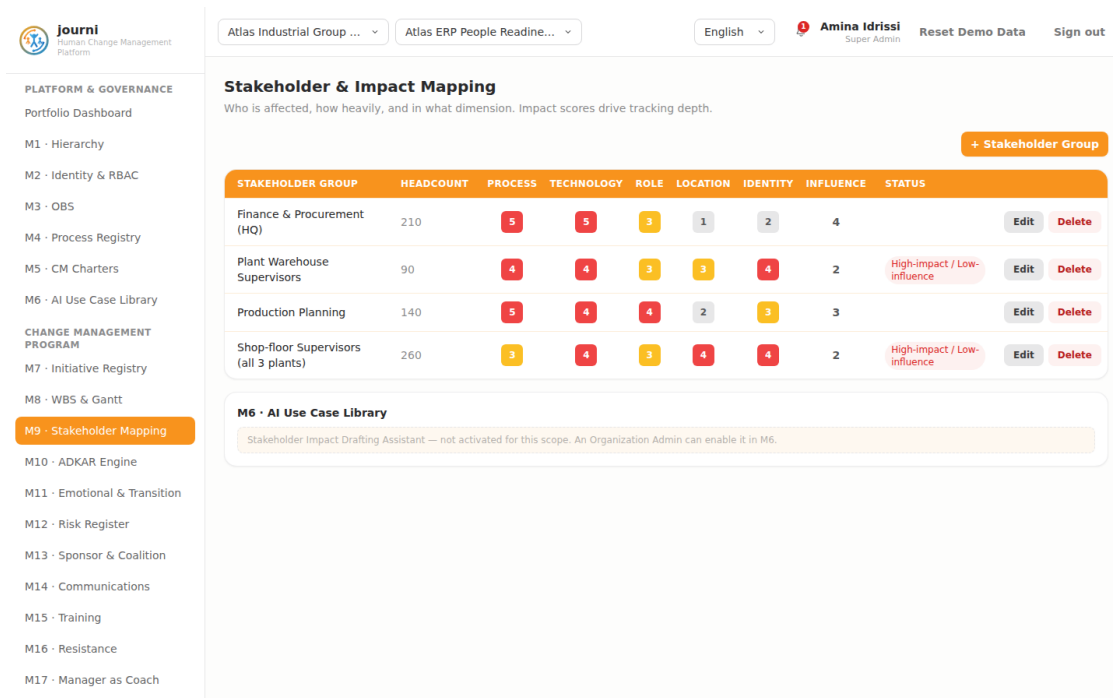

M9 Stakeholder Mapping

M9 Stakeholder Mapping

M10 — ADKAR Engine

ADKAR Engine — Individual Readiness Core
Score cohorts across the five ADKAR blocks with barrier-point diagnosis.

Awareness Escalated — stalled beyond threshold
Score: 3
BARRIER REASON — JUSTIFY THIS SCORE
Town halls held; shop-floor supervisors still under-informed
History: baseline: 1 2026-08-04: 2 — "First-wave town hall held at Ain Seba; awareness lifted from a standing start." 2026-08-05: 3 — "Second wave of town halls completed at all three plants; awareness confirmed via post-session pulse survey."

Desire Escalated — stalled beyond threshold
Score: 2
BARRIER REASON — JUSTIFY THIS SCORE
Job-security concerns after prior automation announcement
History: baseline: 1 2026-08-07: 2 — "Data migration phase revealed historical skepticism"

Knowledge Escalated — stalled beyond threshold
Score: 2
BARRIER REASON — JUSTIFY THIS SCORE
Training curriculum not yet launched
History: baseline: 1 2026-08-06: 2 — "Initial curriculum walkthrough session held with pilot cohort; foundational training materials now published."

Ability Escalated — stalled beyond threshold
Score: 2
BARRIER REASON — JUSTIFY THIS SCORE
No hands-on practice environment available yet
History: baseline: 1 2026-08-06: 2 — "First hands-on sandbox session run with the finance pilot group; still short of a full practice environment."

Reinforcement Escalated — stalled beyond threshold
Score: 1
BARRIER REASON — JUSTIFY THIS SCORE
Go-live still 9 months out; too early to reinforce
History: baseline: 1

Escalated — stalled beyond threshold: Desire, Knowledge, Ability, Reinforcement — automatically flagged to the Change Manager for review.

M10 ADKAR Engine

M10 ADKAR Engine

M11 — Emotional & Transition Layer

Emotional & Transition Layer
Bridges transition position and Kübler-Ross sentiment, cross-referenced with ADKAR.

Bridges Transition
1. Ending 2. Neutral Zone 3. New Beginning
NOTES — WHAT YOU'RE OBSERVING AT THIS STAGE
Ending phase, entering Neutral Zone for early-adopter finance team

Kübler-Ross Curve
Denial Resistance / Anger Exploration Commitment
NOTES — SENTIMENT SNAPSHOT
Mixed Denial/Resistance among shop-floor supervisors; Exploration among finance leadership

Sentiment & Emotion Classifier
AI-generated — review required AUGMENTED
Generate — Sentiment & Emotion Classifier

Divergence Pattern Detector
AI-generated — review required ASSISTIVE
Generate — Divergence Pattern Detector

M11 Emotional and Transition

M11 Emotional and Transition

M12 — Change Risk Register


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

Change Risk Register

Adoption, sponsorship, capacity and saturation risk — distinct from generic project risk.

Portfolio cross-reference: population also targeted by Atlas Automation Adoption Track, Atlas Quality Culture Program, Atlas Safety-First Leadership Culture Program — potential saturation risk.

Export CSV + Category

CATEGORY	DESCRIPTION	LIKELIHOOD	IMPACT	RISK SCORE	OWNER	STATUS
Saturation	Change saturation — concurrent Process Automation initiative targets an overlapping population	4	4	16	Change Manager, Atlas ERP Program	0... Mitigation actions (0) Delete
Adoption	Union sensitivities around headcount perception in consolidated back-office roles	3	4	12	HR Business Partner	0... Mitigation actions (0) Delete
Capacity	Multi-site rollout sequencing risk across 3 plants with different legacy-system maturity	3	3	9	PMO	0... Mitigation actions (0) Delete

M12 Risk Register

M12 Risk Register

M13 — Sponsor & Coalition


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

Sponsor & Coalition Module

Sponsor roadmap, active-vs-passive sponsorship, and guiding coalition strength.

COO, Atlas Industrial Group

Guiding coalition formed (COO, 3 plant directors, Finance VP); visibility rated Moderate — plant-floor presence still limited

VISIBILITY

Weak Moderate Strong

Coalition Member

Export CSV

NAME	ROLE	INFLUENCE	ENGAGEMENT
COO	Executive Sponsor		
Plant Director — Ain Sebaâ	Coalition Member		
Plant Director — Nouaceur	Coalition Member		
Plant Director — Mohammedia	Coalition Member		
Finance VP	Coalition Member		

Sponsor Action — Roadmap

☒ Kick-off town-hall at each of 3 plants Prepare

☐ Monthly plant-floor walk with visible Q&A Manage

☐ Sponsor-led go/no-go review at each cutover Manage

Sponsor Action Add

Sponsor Action Recommender

AI-generated — review required ASSISTIVE

Generate — Sponsor Action Recommender

M13 Sponsor and Coalition

M13 Sponsor and Coalition

M14 — Communication Planning & Execution


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

Communication Planning & Execution

Message x audience x channel x timing matrix, with saturation detection.

Change saturation risk — overlapping population
3 other active initiative(s) in this organization may be targeting an overlapping population: Atlas Automation Adoption Track, Atlas Quality Culture Program, Atlas Safety-First Leadership Culture Program.

Export CSV
+ Message

MESSAGE	AUDIENCE	CHANNEL	TIMING	LINKED ADKAR BLOCK	STATUS		
Why S/4HANA: unifying our plants for one source of truth	All target population	Town Hall	Prepare phase — completed	Awareness	sent	Edit	Delete
What changes for your role on day one	Finance & Procurement	Team Briefing	M+2	Awareness	scheduled	Edit	Delete
No headcount reduction tied to this program — Q&A recording	Shop-floor Supervisors	Intranet + Toolbox Talk	M+1	Desire	draft	Edit	Delete

Communication Draft Generator
AI-generated — review required
AUGMENTED
Generate — Communication Draft Generator

Change Saturation Advisor
AI-generated — review required
ASSISTIVE
Generate — Change Saturation Advisor

M14 Communications

M14 Communications

M15 — Training & Capability Building


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

Training & Capability Building

Curriculum coverage, completion, and demonstrated capability — trained vs. capable.

Training-needs assessment: Knowledge & Ability gap identified from M10 — see recommendation below.

Export CSV
+ Curriculum / Track

CURRICULUM / TRACK	COHORT	LEVEL	TARGET AUDIENCE	COMPLETION	CERTIFIED / CAPABLE		
S/4HANA Finance Essentials	Finance & Procurement	Foundation		15%	trained only	View details	Edit Delete
S/4HANA Production Planning	Planning & Warehouse	Foundation		5%	trained only	View details	Edit Delete

Training Gap-to-Curriculum Mapper
AI-generated — review required
ASSISTIVE
Generate — Training Gap-to-Curriculum Mapper

M15 Training

M15 Training

M16 — Resistance Management


Journi
Human Change Management Platform

Atlas Industrial Group ...

Atlas ERP People Readine...

English

Amina Idrissi
Super Admin

Reset Demo Data

Sign out

PLATFORM & GOVERNANCE

Portfolio Dashboard

M1 · Hierarchy

M2 · Identity & RBAC

M3 · OBS

M4 · Process Registry

M5 · CM Charters

M6 · AI Use Case Library

CHANGE MANAGEMENT PROGRAM

M7 · Initiative Registry

M8 · WBS & Gantt

M9 · Stakeholder Mapping

M10 · ADKAR Engine

M11 · Emotional & Transition

M12 · Risk Register

M13 · Sponsor & Coalition

M14 · Communications

M15 · Training

M16 · Resistance

M17 · Manager as Coach

Resistance Management

Log, classify and resolve resistance, linked to concrete mitigation actions.

Resistance Log

Coding Workbench

0

Role-based

0

Skill-based

1

Will-based

1

Systemic

+ Type

Will-based

Severity: 4/5

in progress

Shop-floor Supervisors

Root Cause:

Fear that ERP consolidation precedes headcount reduction

Mitigation Action:

Joint HR/Union briefing confirming no headcount impact — HR Business Partner (+30d)

Close

Edit

Delete

Systemic

Severity: 3/5

open

Cross-plant

Root Cause:

Legacy system maturity gap creates uneven readiness across 3 plants

Mitigation Action:

Sequenced rollout starting with most digitally mature plant — PMO (+60d)

Mark in progress

Edit

Delete

Resistance Root-Cause Classifier

AI-generated — review required

ASSISTIVE

Generate — Resistance Root-Cause Classifier

M16 Resistance

M16 Resistance

M17 — Manager-as-Coach Enablement


Journi
Human Change Management Platform

Atlas Industrial Group ...

Atlas ERP People Readine...

English

Amina Idrissi
Super Admin

Reset Demo Data

Sign out

PLATFORM & GOVERNANCE

Portfolio Dashboard

M1 · Hierarchy

M2 · Identity & RBAC

M3 · OBS

M4 · Process Registry

M5 · CM Charters

M6 · AI Use Case Library

CHANGE MANAGEMENT PROGRAM

M7 · Initiative Registry

M8 · WBS & Gantt

M9 · Stakeholder Mapping

M10 · ADKAR Engine

M11 · Emotional & Transition

M12 · Risk Register

M13 · Sponsor & Coalition

M14 · Communications

M15 · Training

M16 · Resistance

M17 · Manager as Coach

Manager-as-Coach Enablement

Team-scoped ADKAR heatmap with suggested coaching actions per barrier.

Team-scoped ADKAR Heatmap — ~1,200 plant and back-office staff (finance, procurement, planning, warehouse supervisors)

Awareness

3

Desire

2

Knowledge

2

Ability

2

Reinforcement

1

Restricted to this manager's own reporting line — no org-wide change data exposed.

Manager Readiness Self-Assessment

A manager must be ready to lead the change before their team can be.

1

2

3

4

5

Suggested Coaching Script — Manager Coaching Script Generator

AI-generated — review required

ASSISTIVE

Generate — Manager Coaching Script Generator

Coaching Note

Plant Director — Nouaceur → Shop-floor Supervisors

Desire

Team still associates any system change with the 2024 automation layoffs; recommend small-group listening sessions before more town halls.


Add new coaching notes from M10 · ADKAR Engine.

M17 Manager as Coach

M17 Manager as Coach

M18 — Journey Map / Visual Core


Page 125

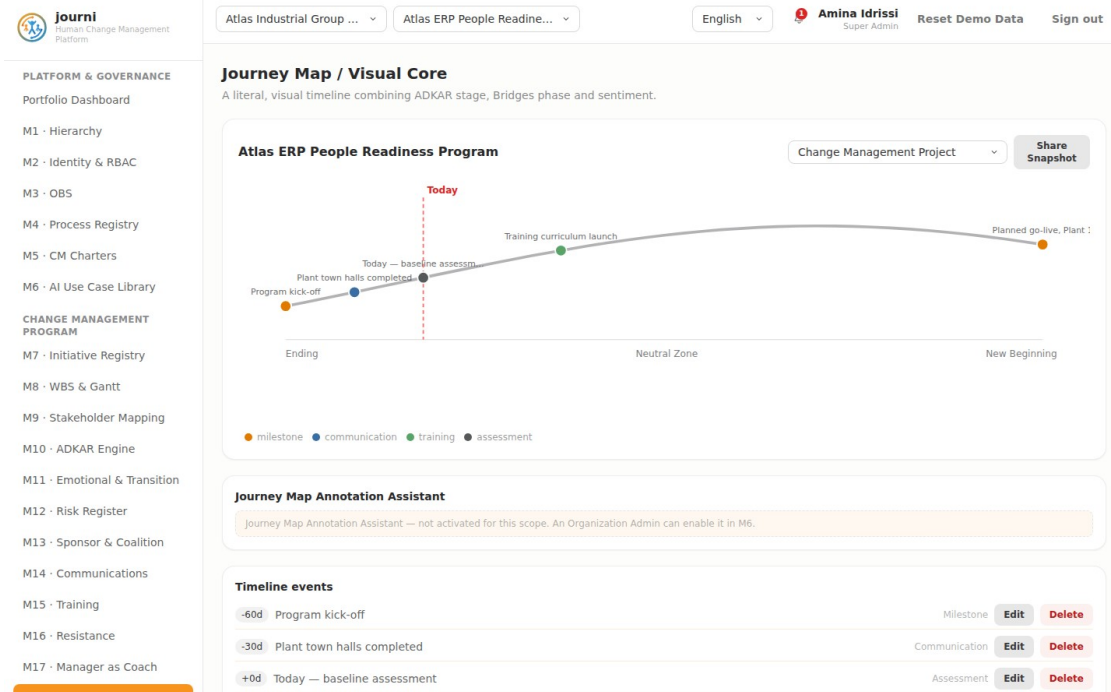

M18 Journey Map

M18 Journey Map


M19 — Stakeholder Journeys, Touchpoints & Analytics

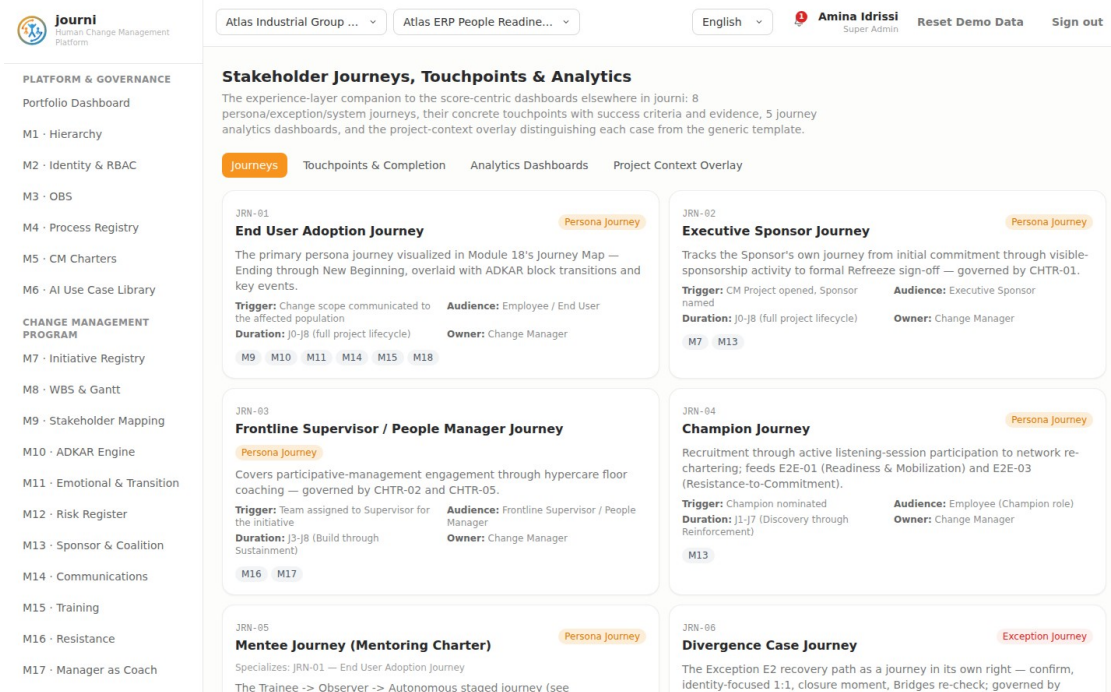

M19 Journeys and Analytics

M19 Journeys and Analytics


M20 — Metrics & Analytics Dashboard

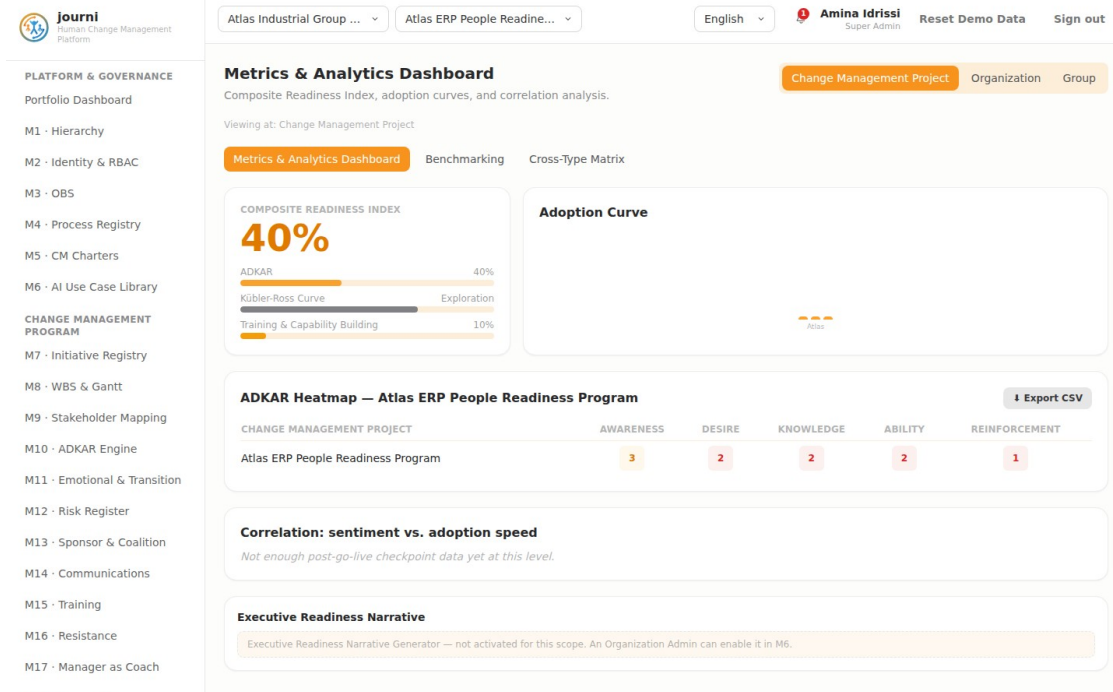

M20 Analytics

M20 Analytics

M21 — Reinforcement & Sustainment

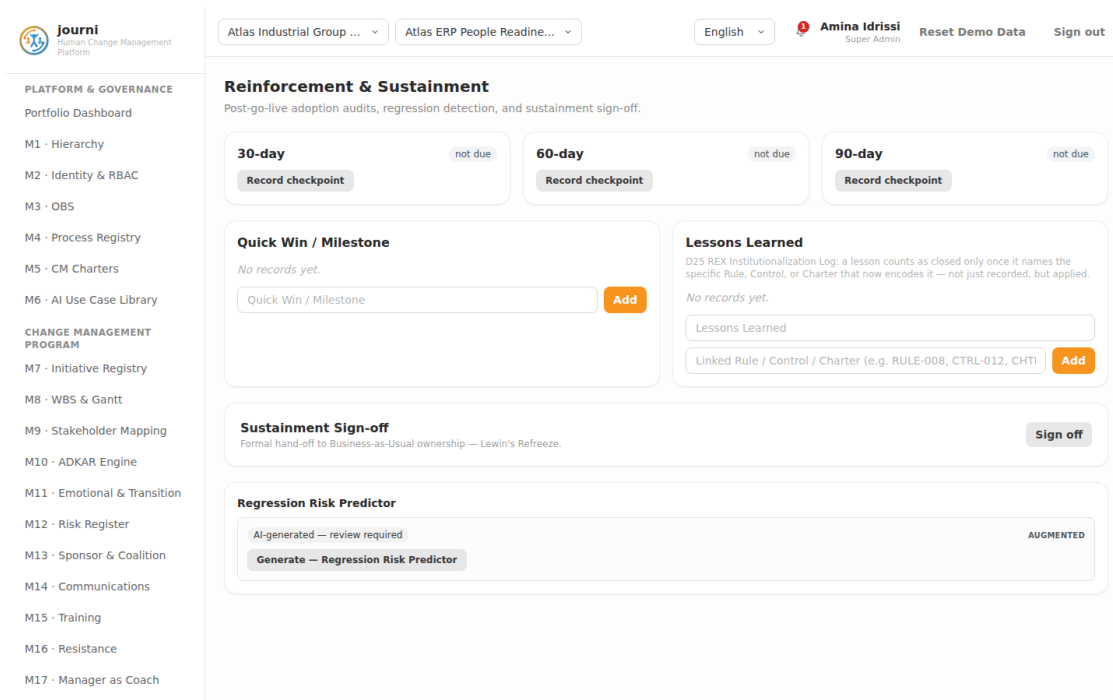

M21 Sustainment

M21 Sustainment

M22 — Field Notes


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

Field Notes

A lightweight, freeform log for the knowledge that doesn't fit a structured module yet — a workshop happened, a decision was made outside Journi, a sign-off landed, a nominee list was drafted. Not a substitute for the structured modules: once something becomes a real record there (a Stakeholder Map entry, an ADKAR score, a Communication), it belongs there. This is for the moments in between.

Category
All categories
+ Add Field Note

No Field Notes logged yet for this project.

M22 Field Notes

M22 Field Notes

Query Data (Section 6.3.1)


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

Query Data RBAC-scoped

Ask a plain-language question about this tenant's own data — the answer is scoped to exactly what your role can see.

Ask

Computed answer
Connect an AI provider on M6 for a phrased answer

There are 15 Change Management Project(s) visible to you.


SOURCES

- Atlas ERP People Readiness Program (unfreeze)
- Atlas Automation Adoption Track (unfreeze)
- Atlas Quality Culture Program (change)
- Atlas Safety-First Leadership Culture Program (change)
- Tangier Plant Adoption Program (unfreeze)
- Tangier Frontline Digital Skills Program (unfreeze)
- Maghreb ERP Transition Program (unfreeze)
- Maghreb Frontline Adoption Program (unfreeze)

Query Data

Query Data


Query Features (Section 6.3.2)

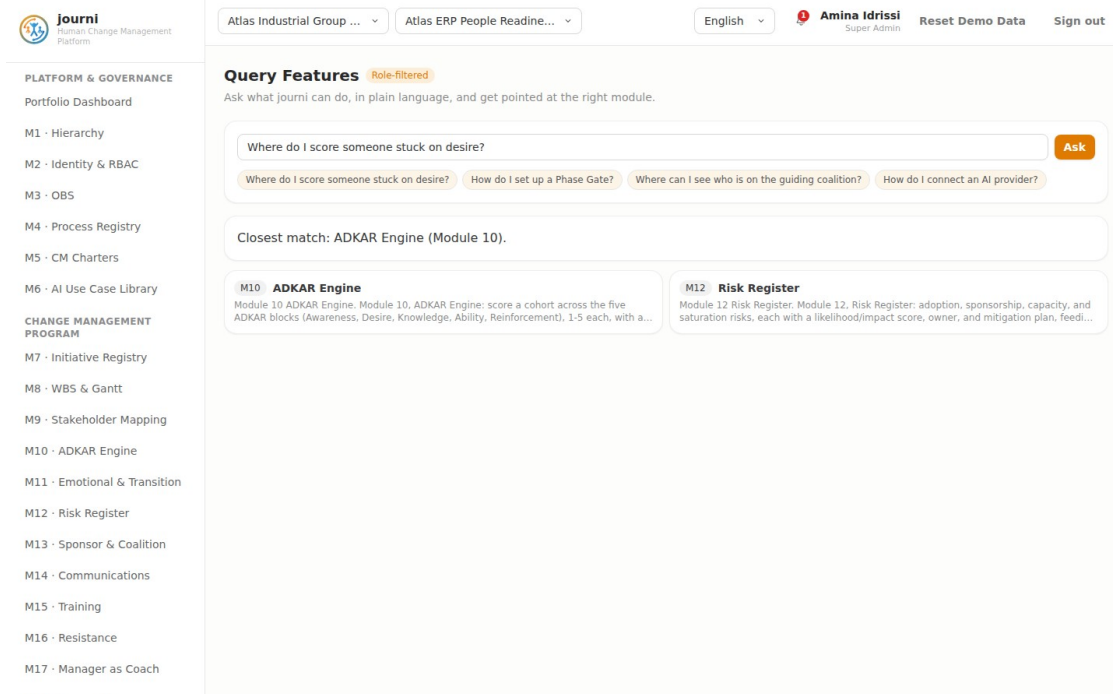

Query Features

Query Features

Shared CRUD modal pattern (illustrated on M1’s “+ Group” Add dialog — every module’s Add/Edit flow uses this same shell, per Section 3.2)

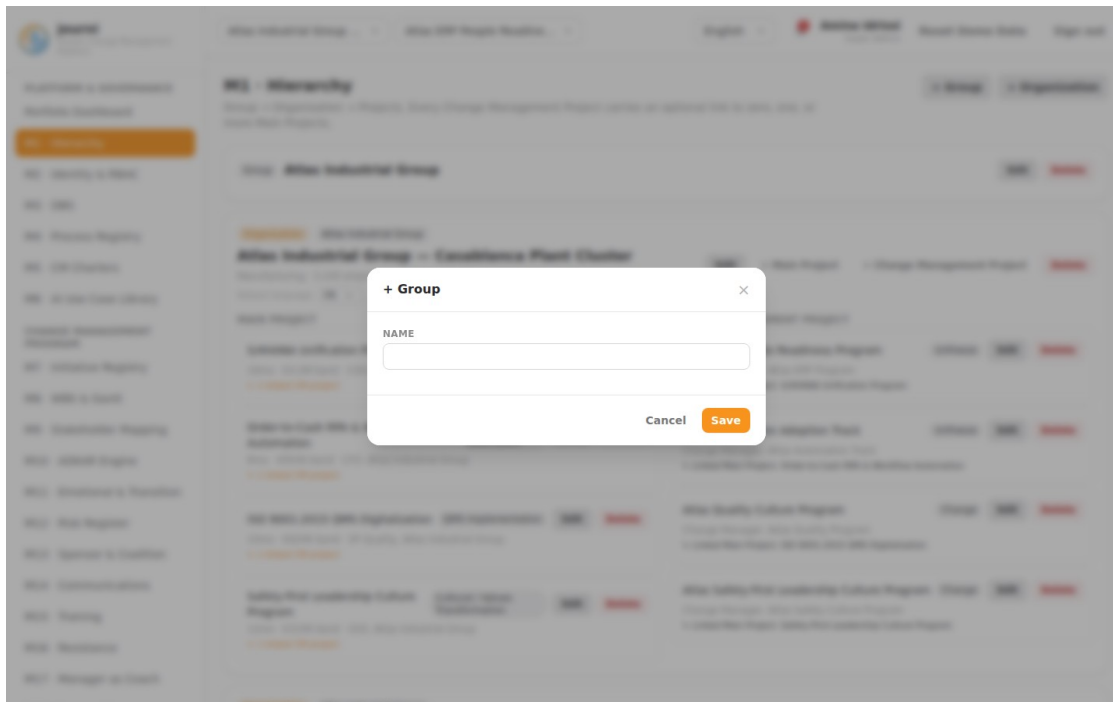

Shared Add/Edit modal example

Shared Add/Edit modal example

10.8 Test Plan / Acceptance Criteria

One acceptance test case per functional requirement in Section 6, in Given/When/Then form, so a QA team can verify a rebuild against this document without re-deriving test intent from prose. Every row traces to exactly one FR-*Mn-*nn** or FR-*X-*nn** id; NFR verification notes follow in Section 10.8.4. Roles referenced are the 9 platform roles (Section 3.7); “a write-capable role” means any role for which the cited capability check returns true under the default Permission Matrix (Section 10.4).

10.8.1 Platform & Governance (M1-M6)

FR	Given	When	Then
FR-M1-01	Signed in as org_admin in a scoped Organization	Creating/editing/deleting a Group, Organization, Main Project, or Change Management Project	The operation succeeds and the record list reflects the change immediately
FR-M1-02	A Change Management Project with an empty mainProjectIds[]	Linking it to two different Main Projects	Both links persist; the project is no longer flagged “standalone”
FR-M1-03	A Group with two member Organizations	Deleting the Group	Both Organizations remain, each with groupId cleared (now standalone)
FR-M1-04	An Organization with Main/CM Projects, AI activation state, and scoped users	Deleting the Organization	All of the above are removed; no orphaned records remain
FR-M1-05	A Main Project linked to one Change Management Project	Deleting the Main Project	The Change Management Project persists, now with the link removed (standalone)
FR-M1-06	A Change Management Project with one user scoped directly to it	Deleting the Change Management Project	That user account is also removed
FR-M1-07	An Organization with Default Language = French	A user with no personal language preference signs in	The UI renders in French
FR-M1-08	A Main Project linked to two	Viewing the M1 hierarchy	The first shows “2 linked CM projects”; the second is

FR	Given	When	Then
	Change Management Projects, another with none		badged “standalone”
FR-M2-01	Signed in as org_admin	Creating a user, then attempting to edit their name/email after creation	Role edits succeed; no UI control exists to edit name/email post-creation
FR-M2-02	Signed in as change_manager (not super_admin)	Viewing the Permission Matrix tab	The grid renders read-only; no edit control is enabled, even if the matrix grants other capabilities to this role
FR-M2-03	super_admin grants people_manager the write capability	Any people_manager user reloads any write-gated module	Write controls that were previously hidden are now visible, with no code deploy
FR-M2-04	requireJustification is toggled off by org_admin	A Change Manager changes an ADKAR score with no justification text	Save succeeds without a justification note
FR-M2-05	A license with maxUsers: 20 and 22 seeded users	Viewing the License & Plan tab	An over-capacity flag is shown; expiry countdown is color-coded per its threshold
FR-M2-06	Uploading a .lic file missing the hardwareId field	Attempting the upload	The upload is rejected for a missing required field (not a signature check)
FR-M3-01	Signed in as change_manager	Adding, editing, and deleting an OBS entry	All three operations succeed and the roster updates
FR-M3-02	An OBS entry “Site Lead” with two direct reports	Deleting “Site Lead”	Both direct reports now report to whoever “Site Lead” reported to (not orphaned)
FR-M3-03	An OBS roster with a 3-level reporting chain, entries added out of order	Viewing the roster	Entries render depth-first, roots first, indented by depth — not in creation order
FR-M3-04	An OBS roster with at least one entry	Opening M8’s “Assigned to” field on a WBS task	The OBS entry appears as a selectable assignee

FR	Given	When	Then
FR-M4-01	Signed in as employee	Viewing the Macro Process Catalog and E2E Process Registry tabs	Both are fully readable; no write control is present for any role
FR-M4-02	Signed in as practitioner (not hierarchy-capable)	Viewing the RACSI Grid tab	The grid renders read-only; a super_admin/group_admin/org_admin sees it editable
FR-M4-03	Viewing E2E-ERP (a “type” entry)	Opening its detail	Its linked Phase Template (TPL-ERP-8) and SIPOC supplier/customer lists resolve and display
FR-M5-01	Signed in as change_manager	Creating a Charter, adding an Entry, editing both, then deleting the Entry	All operations succeed
FR-M5-02	A Charter with status “Active”	Attempting to delete it, then setting status to “Retired” and retrying	First attempt is blocked with an explanatory message; retry after retiring succeeds, and only for Super/Group/Org Admin
FR-M5-03	Any role	Viewing the Charter Action catalog or Mentoring Progression tab	No add/edit/delete control is present for either
FR-M5-04	A logged Charter Action Log entry	Attempting to edit it in place, then deleting and re-logging it	No edit control exists; delete-then-relog succeeds
FR-M5-05	A Charter Action with 5 logged compliance instances	Viewing the Action Mapping & Compliance tab, filtered to that charter	The 3 most recent instances show, plus “+2 more”
FR-M6-01	Signed in as change_manager	Creating, editing, deleting, and reverting a version of an AI Use Case	All four operations succeed
FR-M6-02	A use case activated for two Organizations and one project override	Deleting the use case	Its keys are removed from aiOrgActivation and aiProjectOverride for every Organization/project
FR-M6-03	Signed in as	Toggling a use	The use case stops producing

FR	Given	When	Then
	org_admin	case off for the Organization	new suggestions org-wide
FR-M6-04	A use case active for the Organization	A change_manager sets a project override to “off”	That project’s instances stop suggesting; sibling projects in the same org are unaffected
FR-M6-05	A use case with a previously-accepted, human-approved suggestion on record	Deactivating the use case	The prior approved content remains visible; no new suggestions appear
FR-M6-06	Any AI suggestion box, anywhere in the app	Rendered on screen	It carries the “AI-generated — review required” label
FR-M6-07	A user accepts, edits, and rejects three different AI suggestions	Viewing the AI Usage Log	All three outcomes are recorded; none can be edited or deleted from the log
FR-M6-08	A configured LLM provider API key	Exporting/ inspecting the backend’s persisted state, or triggering “Reset Demo Data”	The API key is absent from the exported/persisted state and survives the reset (browser-local only)
FR-M6-09	An LLM provider configured with an invalid API key	Triggering any AI use case	The use case falls back to its built-in generator and completes without error
FR-M6-10	An employee role with project-only visibility	Triggering an AI use case on a project they can see	The suggestion never surfaces data outside what that role could already see via RBAC

10.8.2 Change Management Program (M7-M22)

FR	Given	When	Then
FR-M7-01	Signed in as change_manager	Editing businessDriver and clicking away (blur)	The field saves without a separate Save button
FR-M7-02	requireJustification is on	Attempting to change lewinPhase with no justification text	Save stays disabled until justification text is entered
FR-M7-	A justified Lewin-	Viewing the Change Log	Both entries appear,

FR	Given	When	Then
03	phase change and an ADKAR score change on the same project		each with old value, new value, module, date, and justification; neither is editable
FR-M7-04	A project with ADKAR average 80%, sentiment score 60, training completion 70%	Viewing the Readiness Index	It computes to $80 \times 0.5 + 60 \times 0.25 + 70 \times 0.25 = 72.5$
FR-M7-05	Three Change Management Projects in one Organization, a change_manager scoped to only one	That user views the M7 portfolio table	Only their own project appears (RBAC-scoped), while an org_admin sees all three
FR-M8-01	Signed in as a write-capable role	Adding, editing, and deleting a WBS task	All three succeed
FR-M8-02	A Phase Checklist item	Toggling its done state, then attempting to edit its text	The toggle works; no other field is editable, matching the Create/Delete-only spec
FR-M8-03	A recorded Phase Gate	Attempting to edit it, then deleting and re-recording it	No edit control exists; delete-then-re-record succeeds
FR-M8-04	A Main Project of type “erp” with no WBS tasks yet	Clicking “Load Phase Template” with the default selection	TPL-ERP-8 is pre-selected; confirming seeds 8 skeleton PM-track tasks spaced from the chosen start date
FR-M8-05	Signed in as change_manager (has manageTemplates)	Editing a Phase Template’s phase text and reverting to a prior version	Both operations succeed independently of any project’s own WBS data
FR-M8-06	A task with baseline finish in the past and no actual finish recorded	Viewing the WBS table	The task shows a red “significant slip” gap badge, and the portfolio summary’s “at risk” count includes it
FR-M8-07	A framework-track task with	Viewing the Gantt chart	It renders as a marker, not a bar

FR	Given	When	Then
	baseline start = baseline finish		
FR-M8-08	Tasks with phase labels matching two different P1-P7 mappings	Applying the P3 lifecycle filter	Only tasks (and checklist items, gates) auto-mapped to P3 are shown
FR-M8-09	A project with a stalled ADKAR block and an open Divergence Alert	Opening the Phase Gate “Add” modal	readinessIndexSnapshot, checklistCompletionPct, and openFlags pre-fill from current live values
FR-M9-01	Signed in as a write-capable role	Adding, editing, and deleting a stakeholder group	All three succeed
FR-M9-02	A group with impact scores averaging 4.0 and influence 2	Viewing the stakeholder table	It is flagged “High Impact / Low Influence”
FR-M9-03	Impact cells at values 5, 3, and 2	Viewing the table	They render red, amber, and neutral respectively
FR-M10-01	requireJustification is on	Changing the Awareness block’s score	Save is blocked until justification text is present; on save, both the block’s history and the project Change Log record the change
FR-M10-02	A block scored at 2	Viewing the ADKAR panel	It shows an amber “stalled” badge and the auto-flag banner
FR-M10-03	A logged coaching note	Attempting to edit or delete it from M10	No such control exists (Create-only, a known gap)
FR-M10-04	A stalled Desire block	Opening the Desire-diagnosis assistant	Step one produces a diagnosis citing Resistance Log/sentiment evidence; confirming offers a draft coaching script, each step requiring explicit Confirm/Discard
FR-M11-01	requireJustification is on	Changing Bridges phase or sentiment stage	Both follow the same pending-value-plus-

FR	Given	When	Then
			justification pattern as M10
FR-M11-02	A sentiment snapshot containing the word “excited” and no explicit sentimentStage set	Viewing the module	The inferred stage reads “commitment” (or the nearest matching keyword category); an unmatched snapshot defaults to “exploration”
FR-M11-03	Knowledge = 4, Ability = 4, Bridges = “ending”	Viewing the module	A Divergence Alert banner appears, and M8’s Phase Gate open-flags field reflects it
FR-M12-01	An existing risk	Attempting to edit its category/description/likelihood/impact/owner	No such control exists; only status is changeable, via the justified-change flow (a known gap)
FR-M12-02	A risk with no mitigation actions	Adding, updating the status of, and deleting a mitigation action	All three succeed
FR-M12-03	A risk with likelihood 4, impact 3	Viewing the risk table	Risk Score = 12, shown red (high-severity); the list is sorted by score descending
FR-M12-04	Two other active CM Projects in the same Organization	Viewing the Risk Register	A saturation banner is shown
FR-M13-01	requireJustification is on	Changing sponsor visibility	Follows the stage-then-justify pattern
FR-M13-02	An existing sponsor action	Toggling done, then attempting to edit its text	Toggle works; no edit/delete control exists (a known gap)
FR-M13-03	The Coalition Member table	Attempting to add, edit, or delete a member	No such control exists anywhere in M13 (a known gap)
FR-M13-04	sponsor.visibility = ‘weak’	Viewing M13	A red alert banner appears, referencing M10’s stalled Desire scores
FR-M14-01	Signed in as a write-capable role	Adding, editing, deleting a communication	All three succeed

FR	Given	When	Then
FR-M14-02	Two other active CM Projects in the same Organization	Viewing the Communications log	A saturation banner is shown, matching M12's condition
FR-M14-03	Signed in as sponsor (read-only role)	Clicking Export CSV on the Communications table	The export succeeds despite no write access
FR-M15-01	Signed in as a write-capable role	Adding, editing, deleting a training record	All three succeed
FR-M15-02	requireJustification is on	Toggling certified	Follows the stage-then-justify pattern, separate from the general edit modal
FR-M15-03	M10 reports Knowledge = 2 for this project	Viewing M15	A training-needs banner appears citing M10 as the gap source
FR-M16-01	Signed in as change_manager (canManage)	Adding, editing, deleting a resistance-log entry	All three succeed
FR-M16-02	An open resistance entry, requireJustification on	Advancing status to "in progress"	Follows the stage-then-justify pattern
FR-M16-03	Signed in as employee	Submitting an anonymous concern	Submission succeeds; the same user cannot change status, classification, or delete any entry
FR-M16-04	Two systemic-type entries logged	Viewing the Resistance Log	A red pattern-detection banner appears, pointing to M13
FR-M16-05	The org codebook	Adding a code, then attempting to edit its label	Add succeeds; no edit control exists (a known gap); a code tag can be added/deleted and optionally cross-linked to a resistance entry
FR-M16-06	Three tags using code A, one using code B	Viewing the frequency rollup	Code A's bar renders larger, proportioned against the most-used code
FR-M17-	requireJustifica	Changing Manager	Follows the stage-

FR	Given	When	Then
01	tion is on	Readiness	then-justify pattern; the ADKAR heatmap and coaching-note list show no add/edit/delete control regardless of the signed-in role
FR-M17-02	A people_manager with 3 direct reports out of 40 project staff	Viewing the M17 heatmap	Only the 3 direct reports' data appears
FR-M18-01	Signed in as a write-capable role	Adding, editing, deleting a journey event	All three succeed
FR-M18-02	Two CM Projects in the same Organization, each with journey events	Switching the zoom selector to "Organization"	Events from both projects render on one chart
FR-M18-03	Any user	Clicking "Share Snapshot"	A confirmation message appears; no file or link is actually produced
FR-M19-01	Any role	Viewing Journeys, Touchpoints, Dashboards, Context Overlay tabs	No add/edit/delete control is present on any of them
FR-M19-02	A write-capable role	Logging a touchpoint completion, then attempting to edit it, then deleting it	Log and delete succeed; no edit control exists
FR-M19-03	6 of JRN-01's touchpoints logged out of 6 total	Viewing DASH-01	It computes and displays 100%
FR-M19-04	4 of 35 total Charter Actions logged for this project	Viewing DASH-02	It computes the live percentage from charterActionLog, matching that ratio
FR-M19-05	Viewing DASH-03, 04, 05	No touchpoint/case data exists for these	They render as static reference cards, not live metrics
FR-M20-01	A change_manager (project-scoped) and an org_admin viewing the same ungrouped Organization	Both open M20's level selector	The Change Manager sees only Project; the Org Admin sees Project and Organization but never Group

FR	Given	When	Then
FR-M20-02	A project's Readiness Index below its Lewin-phase reference band's low threshold	Viewing Benchmarking	Standing shows "Behind"
FR-M20-03	Viewing the Cross-Type Matrix	For each of the 8 transformation types	Duration, terminal gate, external involvement, dominant framework, reversibility, and a seed-project link are all shown
FR-M20-04	Any role	Clicking Export CSV on the Analytics heatmap or Benchmarking table	The export succeeds
FR-M20-05	Any role, including write-capable ones	Viewing any M20 tab	No add/edit/delete control exists anywhere in the module
FR-M21-01	The 30-day checkpoint, not yet recorded	Clicking "Record checkpoint"	An adoption rate is generated and regressionRisk derives from it per the stated thresholds; no manual field entry is offered
FR-M21-02	An existing Quick Win	Attempting to edit or delete it	No such control exists (a known gap)
FR-M21-03	A Lesson Learned with no linkedRuleOrControl	Adding a link value, then attempting to delete the lesson	Status flips to "applied" on adding the link; no delete control exists (a known gap)
FR-M21-04	Sign-off is currently false	Toggling it	It flips to true/false with no other side effect beyond the boolean state
FR-M22-01	Signed in as a write-capable role	Adding, editing, deleting a field note	All three succeed
FR-M22-02	A field note tagged to M9 and M14	Viewing the note	Both tags display as descriptive labels; no navigation or foreign-key behavior is implied
FR-M22-	Notes across 3	Filtering by "Decision"	Only Decision-

FR	Given	When	Then
03	different categories		category notes show, color-coded green

10.8.3 Cross-Cutting Requirements

FR	Given	When	Then
FR-X-01	The Sponsor Coalition, Communications, Training, Risk Register, or Analytics tables	Clicking Export CSV	A CSV file downloads client-side, with no server round-trip
FR-X-02	A table filtered/sorted to a subset of its rows	Exporting	The CSV contains exactly the filtered/visible rows and columns, respecting RBAC scope
FR-X-03	A communications record containing French/Arabic accented text	Exporting and opening in Excel	Accented characters render correctly (UTF-8 BOM present)
FR-X-04	An active project with at least one live alert condition true	Viewing the TopBar bell icon	The alert appears in a persistent,

FR	Given	When	Then
			dismissible list
FR-X-05	Each of the 9 live-computable conditions (Divergence Pattern, Critical Regression Risk, Sponsor Coverage Gap, Resistance Escalation, Change Saturation, Communication Overload, Phase Gate No-Go/Conditional, Guiding Coalition Gap, blocked Sustainment sign-off)	Its underlying data condition becomes true	The corresponding alert fires without a page reload
FR-X-06	An active alert	Dismissing it, then reloading the page	It stays dismissed; a Restore control brings it back
FR-X-07	Two open resistance entries becoming three	Viewing the Notification Center without any explicit save action	The Resistance Escalation alert appears automatically, confirming it is computed live, not stored
FR-X-08	Any of the 7 non-live conditions (survey-exception retries, AI-confidence scoring, import integrity, account lock-out, GDPR SLA, AI provider fallback, Champion Coverage)	Any state change in the app	None of these 7 ever fire, by design
FR-X-09	requireJustification on, an ADKAR/Lewin/Bridges/sentiment/sponsor-visibility/readiness/certification/resistance-status/risk-status change staged	Saving	The new value and justification are appended together, atomica

FR	Given	When	Then
FR-X-10	requireJustification toggled off by an admin	Staging the same kind of change with no justification	lly, to the Change Log Save succeeds without a justification note
FR-X-11	A justification note is entered	Saving	journi accepts and stores the text verbatim; it performs no content validation against “evidence already observed”

10.8.4 Non-Functional Requirement Verification Notes

NFR	Verification approach
NFR-01	Load the built bundle over a throttled connection profile; confirm first meaningful paint of the largest module view completes without a multi-second stall.
NFR-02	Make 5 rapid successive edits to the same field within 400ms; confirm exactly one PUT /api/state fires, timed ~400ms after the last edit.
NFR-03	Attempt GET/PUT /api/state directly (e.g. via curl) with no credentials; confirm the reference build accepts it — then confirm a rebuild targeting NFR-03 closure rejects it without a valid

NFR	Verification approach
NFR-04	session/token. Confirm no TLS/rate-limiting/WAF behavior exists in the reference build's own process (these are expected to be infrastructure-layer, not application-layer).
NFR-05	Send a PUT /api/state body missing required fields or with an invalid type; confirm the reference build stores it as-is (documenting the gap), and confirm a rebuild rejects it with 400.
NFR-06	Confirm no AI suggestion ever renders data outside the viewer's RBAC scope; confirm an exported/persisted state file never contains an LLM provider API key.
NFR-07	Sign in as sponsor/executive; confirm ADKAR/sentiment views show aggregated data only, never an individual/cohort-level breakdown reserved for ROLES_WITH_INDIVIDUAL_VISIBILITY.
NFR-08	Confirm journi.db is a single file with no replication configured in the reference build; document backup/retention as a deployment-owner responsibility.
NFR-09	Open the same project in two browser tabs, edit the same field differently in each within the debounce window; confirm the reference build's last write silently wins, and confirm a rebuild against Section 5.2.2 returns 409 Conflict on the losing write instead.
NFR-10	Simulate a better-sqlite3 native build failure (e.g. remove its prebuilt binary) on a machine with Node $\geq$ 22.5; confirm npm install still succeeds and the server starts on node:sqlite.
NFR-11	Switch language to Arabic; confirm the Sidebar, every table, and the M18 Journey Map chart all mirror layout direction, not just text.
NFR-12	Sample 5 different modules' status/severity badges of the same semantic meaning (e.g. "high severity"); confirm consistent color use across all 5.
NFR-13	Load M17 on a narrow mobile-width

NFR	Verification approach
NFR-14	viewport; confirm the layout remains usable without horizontal scrolling or unreadably small controls. On a fresh Windows VM with only Node.js 18 installed and no Visual Studio Build Tools, run <code>install.bat</code> ; confirm it completes successfully.
NFR-15	On a clean macOS or Linux machine, run <code>npm install && npm run build</code> in <code>journi/</code> and <code>npm install && npm start</code> in <code>server/</code> with no batch-file wrapper; confirm the app starts and serves correctly.
NFR-16	Add a new module following the pattern in NFR-16's own text (new page + route + Sidebar entry + <code>il8n</code> keys + sub-collection wiring); confirm no existing module's behavior changes as a side effect.
NFR-17	Change a module's displayed number in <code>translations.js</code> only (not its file name or route); confirm no other file requires a corresponding edit.
NFR-18	Load the app in Chrome, Edge, and Firefox current-stable releases; confirm no console errors and consistent rendering across all three.

10.9 Closing Notes

The module set and hierarchy described in this document are designed to scale from a single standalone Change Management Project run by one consultant, up to a multi-Organization Group portfolio managed by a central Center of Excellence, without changing the underlying data model. A rebuild team's practical next steps, in order: (1) stand up the target resource-oriented API (Section 5.2.2) and a persistence layer preserving the Section 4 field shapes, since every module's frontend logic assumes that shape; (2) rebuild the 22 module pages against Section 6's functional requirements and Section 10.7's visual reference, reusing the shared component/CRUD conventions in Section 3.2 rather than inventing per-module patterns; (3) seed reference/demo data from Sections 9 and 10.6 and localized strings from Section 10.5 for parity with the reference build; (4) verify against Section 10.8's test plan; (5) close the gaps in Section 10.3 opportunistically as each owning module is rebuilt, rather than as a separate pass; (6) treat Section 8.2's authentication gap as the first production-hardening item before any internet-facing deployment, implementing the auth routes and per-request authorization described in Section 5.2.2.