



Software Requirements Specification

Human Change Management Application — Rebuild-Grade Technical Reference

Prepared for POWERACT Consulting

Version 1.0 · August 2026 · Confidential

TOCPLACEHOLDERXYZ

1. Introduction

1.1 Purpose

This Software Requirements Specification (SRS) documents *journi* — a human change-management web application — at a level of technical and functional detail sufficient for an independent development team to rebuild it from scratch: the same 22 modules, the same data model, the same access-control and localization behavior, and the same installable Windows deployment, without access to the original source code.

It is a companion to, and supersedes for rebuild purposes, the earlier *journi Functional & Module Specification*: that document describes the product's intent and framework rationale in narrative form; this one adds the missing engineering layers — data model, API surface, non-functional requirements, and per-module functional requirements with unique identifiers — and corrects two things that changed since it was written: the module numbering (all 22 modules now run in one continuous logical sequence, M1-M22, described in Section 1.6) and the persistence architecture (*journi* now ships with a real local backend, not a browser-only reference build — Section 3).

1.2 Scope

journi is a standalone, multi-tenant human change-management application. It sits alongside — but does not replace or integrate with — an organization's project-delivery/PMO tooling, and tracks the people side of a change initiative: individual and cohort readiness (ADKAR), emotional trajectory (Bridges, Kübler-Ross), organizational sponsorship and coalition strength (Kotter), and overall program state (Lewin), layered onto one shared, framework-agnostic data model.

In scope for this document: the full functional behavior of all 22 modules; the organizational hierarchy, role-based access control, and localization architecture; the data model and REST API; the Windows installation and deployment model; the governed AI Use Case Library; and the non-functional requirements (performance, security, portability, usability) the reference implementation satisfies.

In scope, in addition to the above: a full-page screenshot of every module (Section 10.7) as a visual reference alongside the prose UI conventions; the complete i18n string catalog in English/French/Arabic (Section 10.5); the complete content of every shared reference/catalog dataset (Macro Processes, E2E chains, Phase Templates, Charters, Journeys, Touchpoints, AI Use Case prompt templates, alert definitions, and more — Section 10.6); a recommended target REST API design for a rebuild, since the reference build's own API is a whole-state store not meant to be replicated (Section 5.2.2); and one acceptance test case per functional requirement (Section 10.8).

Out of scope: pixel-level visual design beyond the screenshots in Section 10.7 and the palette tokens in Section 5.1 — the palette is POWERACT Consulting's own "Brand & Graphical Chart Guide" (v1.0), adopted directly in `journi/tailwind.config.js` and `journi/src/index.css` (Section 5.1) rather than reproduced as a separate artifact; the illustrative seed-data narratives' full prose form (Section 9 and 10.6 give structured/condensed content; full narratives live in the Master User Guide), and any integration with a specific third-party PMO, HRIS, or LMS system (*journi* exposes CSV

export and a documented API surface as its integration points, but ships no pre-built connector).

1.3 Intended Audience

A development team tasked with rebuilding, extending, or re-platforming *journi*; a QA team writing test plans against its functional requirements; a solutions architect scoping a production (multi-tenant, cloud-hosted) deployment beyond the reference Windows installation described here.

1.4 Definitions, Acronyms, Abbreviations

Term	Meaning
ADKAR	Prosci's five-block individual change model: Awareness, Desire, Knowledge, Ability, Reinforcement
Bridges	William Bridges' Transition Model: Ending → Neutral Zone → New Beginning
Kübler-Ross	The Change Curve, adapted here for organizational (not grief) sentiment: denial, resistance, exploration, commitment
Kotter	Kotter's 8-Step organizational change process
Lewin	Unfreeze-Change-Refreeze macro-state model
RBAC	Role-Based Access Control
RACSI	Responsible / Accountable / Consulted / Sign-off / Informed — <i>journi</i> 's extended RASCI variant
SIPOC	Suppliers-Inputs-Process-Outputs-Customers process-mapping notation
OBS	Organizational Breakdown Structure (Module M3) — the roster of named resources/roles a project draws on
WBS	Work Breakdown Structure (Module M8)
CM	Change Management (as opposed to PM, Project Management)
E2E	End-to-End (process chain, Module M4)
MP	Macro Process — an atomic unit of <i>journi</i> 's process model (Module M4)
FR-Mn- <i>nn</i>	Functional requirement identifier: module number, then a sequential requirement number within that module
NFR- <i>nn</i>	Non-functional requirement identifier

1.5 References

- *journi Functional & Module Specification* (docs-src/spec/journi_spec.md) — narrative predecessor to this document; module numbers there use the pre-renumbering internal sequence (see the translation table in Section 1.6).
- *journi — The Complete User Guide* (docs-src/master-guide) — worked walkthroughs of every module against a running scenario tenant.
- *WINDOWS_INSTALL.md* (repository root) — end-user installation instructions.
- *journi Gap Analysis* and *Gap Closure Summary* (deliverables/) — historical record of functional gaps identified and closed prior to this SRS.

1.6 Module Numbering Convention

journi's 22 modules are organized into one continuous logical sequence, M1 through M22, running from tenant creation through platform governance, the full change-management project lifecycle, and sustainment. This visible numbering is intentionally decoupled from the source file names (Module<N>Page.jsx) and route paths (/app/m<N>), which are permanent internal identifiers chosen when each module was first built and never renumbered — so a developer locating a module's code should always use the file-path column below, not the displayed module number, to search the repository history.

Displayed #	Module Name	Source File
M1	Tenant & Org Hierarchy	Module1Page.jsx
M2	Identity & RBAC	Module2Page.jsx
M3	Organizational Breakdown Structure (OBS)	Module22Page.jsx
M4	Macro Process, SIPOC, RACSI & E2E Process Registry	Module18Page.jsx
M5	Change Management Charter Registry	Module19Page.jsx
M6	AI Use Case Library & Governance	Module16Page.jsx
M7	Initiative (CM Project) Registry	Module3Page.jsx
M8	Work Breakdown Structure & Gantt	Module17Page.jsx
M9	Stakeholder & Impact Mapping	Module4Page.jsx
M10	ADKAR Engine	Module5Page.jsx
M11	Emotional & Transition Layer (Bridges / Kübler-Ross)	Module6Page.jsx
M12	Change Risk Register	Module13Page.jsx
M13	Sponsor & Coalition	Module7Page.jsx
M14	Communication Planning & Execution	Module8Page.jsx
M15	Training & Capability Building	Module9Page.jsx
M16	Resistance Management	Module10Page.jsx
M17	Manager-as-Coach Enablement	Module11Page.jsx
M18	Journey Map / Visual Core	Module15Page.jsx
M19	Stakeholder Journeys, Touchpoints & Analytics	Module20Page.jsx
M20	Metrics & Analytics Dashboard	Module14Page.jsx
M21	Reinforcement & Sustainment	Module12Page.jsx
M22	Field Notes	Module21Page.jsx

The sidebar groups these into three sections: **Platform & Governance** (M1–M6 — tenant setup, identity, and the reference data every project draws on), **Change Management Program** (M7–M22 — the working lifecycle of a single Change Management Project, in the order a practitioner actually touches them), and **Ask journi** — Query Data and Query Features (Section 6.3), two cross-application capabilities deliberately left outside the M1–M22 sequence since neither belongs to

one module: both query across the whole tenant, RBAC-scoped to whoever is asking, rather than operate within a single module's own data.

2. Overall Description

2.1 Product Perspective

journi is a self-contained, single-tenant-installable web application, not a module of a larger suite. It runs as a Node.js server process (bundled frontend + REST API) backed by a local SQLite database file, distributed today as a Windows-installable package (`install.bat` / `start-journi.bat`) but architecturally portable to any environment able to run Node.js 18+. It has no required external service dependency — the optional exception is the AI Use Case Library's Real LLM Provider Connection (Section 6.6, M6), which is opt-in and falls back to a deterministic built-in generator when not configured.

2.2 Product Functions (Summary)

- Multi-tenant organizational hierarchy (Group → Organization → Projects) with hard data isolation between Organizations (Section 2, M1).
- Role-based access control with a runtime-editable Permission Matrix and a justification-governed audit trail for every score/state change (Section 3, M2).
- A 16-module Change Management Program lifecycle covering stakeholder mapping, ADKAR readiness, emotional/transition tracking, sponsorship, communications, training, resistance, coaching, risk, journey mapping, analytics, and sustainment (M7-M22).
- A shared, cross-cutting reference layer — Macro Processes/SIPOC/RACSI, WBS & Gantt, OBS, and a Change Management Charter Registry — that every program module draws on rather than duplicating (M3-M6, M8).
- A governed, tiered (Assistive/Augmented — never Autonomous) AI Use Case Library plugged into most modules (M6).
- Multilingual (English/French/Arabic, including full RTL) UI with tenant-default and personal-override language precedence.
- Client-side CSV export on high-traffic tables and an in-app Notification Center surfacing live-computed alert conditions.

2.3 User Classes and Characteristics

See Section 3.2 (RBAC) for the authoritative role table. In summary: platform-wide administrators (Super Admin), organization/group administrators, project-scoped practitioners (Change Manager, PMO, Trainer, Communications Practitioner), team-scoped People Managers/Coaches, read-only Sponsors and Executive Viewers, and Employees with self-service, submission-only access to their own data.

2.4 Operating Environment

- **Server:** Node.js ≥ 18 (tested through Node 24), running an Express HTTP server on a configurable port (default 4000), serving both the built frontend (static assets) and the REST API from the same origin.

- **Database:** a single local SQLite file (`server/data/journi.db`), opened via one of two interchangeable drivers — see Section 3.3.
- **Client:** any evergreen desktop browser (Chrome, Edge, Firefox); no mobile-specific layout is shipped beyond standard responsive breakpoints, though Module M17's UI is deliberately lightweight for frontline-supervisor use on a phone browser.
- **OS:** primary packaging target is Windows 10/11 (`install.bat`), but the Node/Express/SQLite stack is OS-agnostic; the same source runs on macOS/Linux with `npm install && npm start` in `server/`.

2.5 Design and Implementation Constraints

- **Frontend:** React 18 (function components + hooks only), Vite as the build tool, React Router for client-side routing, Tailwind CSS for styling, all state read from a single React Context (`AppStateContext`) rather than a state-management library.
- **Backend:** Express, minimal middleware, a single persisted JSON document per tenant-scope rather than a normalized relational schema (Section 4).
- **Persistence portability:** the backend must run without requiring a native-compiled dependency to succeed at `npm install` — this is why two interchangeable SQLite drivers exist (Section 3.3); a rebuild targeting only modern Node (≥ 22 , where `node:sqlite` is stable) could drop the fallback, but the dual-driver approach is the current constraint for Windows install reliability across a wide range of installed Node versions.
- **No required cloud dependency:** the reference build must remain fully functional offline, with the sole opt-in exception of the Real LLM Provider Connection.
- **Localization-first:** every user-facing string must exist in `translations.js` for all three languages; no hardcoded UI string is acceptable outside that file.


2.6 Assumptions and Dependencies

- A single `journi` installation serves one physical/virtual machine and one SQLite file; horizontal scaling or multi-instance deployment is out of scope for the reference build (Section 8.3 discusses what a production re-platform would need).
 - The application assumes trusted network access to the machine it runs on (e.g. a LAN or a single user's desktop) — the reference build does not implement TLS termination, rate limiting, or a WAF; a production, internet-facing deployment must add these at the infrastructure layer.
 - Demo/seed data (Section 9) is fictional and is not a substitute for real organizational data before go-live, per the Closing Notes of the predecessor Functional Specification.
-

3. System Architecture

3.1 High-Level Architecture

journi is a single Node.js process that both serves the compiled frontend and exposes the API the frontend calls, backed by one local SQLite file:

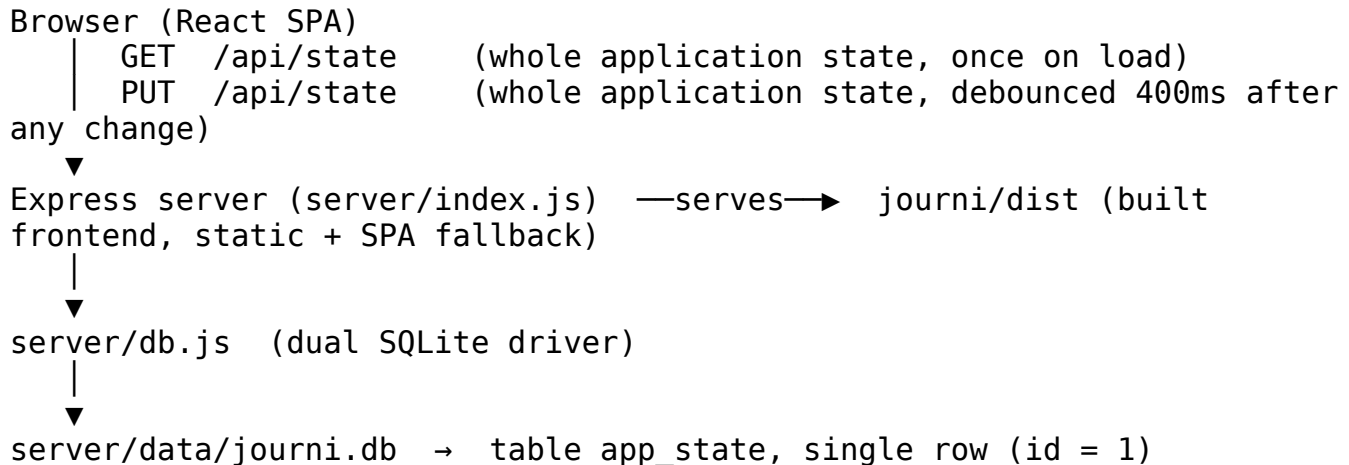

There is deliberately no per-entity REST surface: the entire application's data — every organization, project, and sub-record — lives in one JSON document, and the client and server exchange that whole document rather than individual resources. Section 3.4 explains why, and what a normalized-schema rebuild would need to change.

3.2 Frontend Architecture

- **Framework:** React 18, function components and hooks only, built with Vite.
- **Routing:** React Router; each of the 22 modules is a top-level route (/app/m1 ... /app/m22), rendered inside a shared Layout (TopBar + Sidebar + routed content).
- **State:** a single React Context, AppStateContext (journi/src/state/AppStateContext.jsx), is the sole source of truth for all persisted application data (Section 4) and exposes every mutation as a function via useAppState() — no separate state-management library, no per-page local copies of server data.
- **Component library:** a small shared set used across all 22 module pages — PageHeader, Modal (the standard Add/Edit dialog shell), Badge (status/tone pill), EmptyState, ExportCsvButton, AiSuggestionBox (the standard AI-use-case card, Section 6.6), ProgressBar, JustifyPanel (the stage-then-justify governance widget, Section 6.6.5), RequireProject / RequireRole (route guards).
- **Internationalization:** journi/src/i18n/ — a single translations.js dictionary keyed by string id, each with en/fr/ar values; useI18n() resolves the active language and returns a t(key) function. Arabic renders full right-to-left, including navigation, tables and the Journey Map chart, not just mirrored text direction.
- **Data-entry pattern:** every module's Create/Edit flow follows the same shape — a modal state of { mode: 'add' | 'edit', id? } | null, a form state seeded

from a `BLANK_*` constant (add) or the selected record (edit), and a `submit()` that branches into `addSubItem` or `updateSubItem` (Section 4.3) — a deliberate, repeated convention so a developer who has read one module’s CRUD code has read all of them.

3.3 Backend Architecture & Persistence Model

Server: a single Express app (`server/index.js`) with one JSON body-parsing middleware (25MB limit, raised well above Express’s 100kb default since a data-rich tenant’s full state can run to several MB) and no CORS, session, or authentication middleware of any kind — see the security note in Section 8.2.

Dual SQLite driver (`server/db.js`): *journi*’s own Windows-installability requirement — `npm install` must succeed without a native C++ toolchain on a machine that may be running anything from Node 18 to the very latest release — is met by trying two interchangeable drivers in order:

1. **node:sqlite** (Node’s built-in `DatabaseSync`, stable from Node 22.5+) — zero npm dependency, tried first.
2. **better-sqlite3** — kept as an optionalDependency specifically so a failed native build (e.g. no Visual Studio Build Tools on a fresh Windows machine, or no prebuilt binary for a very new Node ABI) never aborts `npm install` as a whole; it is the fallback for Node versions below 22.5.

If neither driver loads, the server fails fast with one actionable error at import time rather than an unintelligible crash later. `driver.supportsPragma` distinguishes the two — only `better-sqlite3` receives `PRAGMA journal_mode = WAL`.

Schema — one table, one row, a JSON-blob key-value store rather than a normalized relational schema:

```
CREATE TABLE IF NOT EXISTS app_state (
  id          INTEGER PRIMARY KEY CHECK (id = 1),
  data        TEXT,           -- JSON.stringify of the entire frontend
  `data` object (Section 4)
  current_user_id TEXT,
  scope       TEXT,           -- JSON.stringify of { orgId, cmProjectId }
)
  updated_at   TEXT NOT NULL
)
```

This is a deliberate design choice, not an oversight: the frontend’s own evolving state shape (`migrateOrSeed()` in `AppStateContext.jsx`) is treated as the single source of truth for what the data looks like, so a normalized SQL schema would be a second, driftable copy of the same shape. A production re-platform that needs per-entity querying, reporting joins, or multi-writer concurrency should normalize this into real tables (Section 8.3 discusses the tradeoff explicitly) — but should preserve the JSON field shapes in Section 4 as the schema-design input, since every module’s frontend code is written directly against them.

Storage location: `${JOURNI_DATA_DIR:-<server>/data}/journi.db`, directory auto-created if missing.

3.4 State Synchronization

Persistence is debounced client-side, not per-mutation, and every write is a full-document overwrite:

1. On app load, the client fetches `GET /api/state` once. If the backend already holds data, it replaces the initial in-memory demo seed (rendered immediately for a no-flash first paint) with the server's data, `currentUserId`, and `scope`.
2. Every subsequent state change re-arms a 400ms debounce timer; when it elapses, the client sends the **entire** `current { data, currentUserId, scope }` object as the body of `PUT /api/state`, coalescing bursts of rapid edits (e.g. typing in a field) into one write.
3. The server does not merge or patch — it JSON-stringifies the body and upserts the single `app_state` row. There is no optimistic-locking or versioning at the transport level: the last write to finish wins.
4. A failed save is swallowed silently and simply retried on the next state change; nothing is queued client-side beyond ordinary React state.

A developer tracing “why did my edit not save”: check that the 400ms debounce elapsed, that `loadedFromServer` was already true when the edit happened (edits made before the initial `GET /api/state` resolves are held in memory and included in the next debounced save once it does), and that the server process could reach its SQLite file.

3.5 Deployment & Installation

The distributed package (`deliverables/journi_fullstack_windows.zip`) ships source only — `journi/` (frontend source, no `node_modules` or `dist`) and `server/` (backend source, no `node_modules`) — plus `install.bat`, `start-journi.bat`, and `WINDOWS_INSTALL.md`. `install.bat` runs `npm install` in both `journi/` and `server/`, then `npm run build` in `journi/` to produce `journi/dist`, which `server/index.js` serves statically with an SPA fallback (any unmatched path returns `index.html` so client-side routing works on a hard refresh/deep link). `start-journi.bat` launches `node server/index.js`, which listens on `process.env.PORT || 4000` and logs the resolved SQLite file path on startup. A rebuild targeting a different OS needs only `npm install && npm run build` (in `journi/`) and `npm start` (in `server/`) — the batch files are a Windows-convenience wrapper around otherwise standard Node tooling.

3.6 Internationalization Architecture

Every user-facing string is keyed in `journi/src/i18n/translations.js` with `en/fr/ar` values — no hardcoded UI string is acceptable outside that file (Section 2.5). Language precedence, resolved on every sign-in and every Organization switch: (1) the signed-in user's own explicit language preference, if set; (2) the newly-scoped Organization's configured Default Language (set on M1 by a Super Admin, Group Admin, or Organization Admin); (3) English as the platform fallback. A manual in-session language switch applies immediately but is session-local only — it never overwrites the stored user preference or the Organization default, and is re-resolved from the precedence order above on the next sign-in or Organization switch. Arabic renders full right-to-left: navigation, tables, and the Journey Map's chart mirror correctly, not just text direction.

3.7 Access Control Architecture

See Section 6.6.1–6.6.3 (M2) for the full Permission Matrix and Justification Governance functional requirements; this section summarizes the architecture. RBAC is enforced **entirely client-side** (`journi/src/utils/rbac.js`) — the API itself performs no authorization check of any kind (Section 5.2, Section 8.2). Nine roles (`super_admin`, `group_admin`, `org_admin`, `sponsor`, `change_manager`, `people_manager`, `practitioner`, `employee`, `executive`) are each scoped to one level of the Group → Organization → Project hierarchy. Each write/manage capability check (`canWrite`, `canManageHierarchy`, `canManageUsers`, `canActivateAiForOrg`, `canManageCharters`, `canManageAiUseCases`, `canManageTemplates`, `canRequestProjectAiOverride`) reads first from the runtime-editable Permission Matrix (`data.rolePermissions`, a role × capability grid seeded with sensible defaults and editable in place by a Super Admin on M2), falling back to hardcoded default logic only where a matrix entry is missing — so the matrix is a fail-safe override, never a bypass of the underlying model.

3.8 Retrieval-Augmented Generation (RAG) Architecture

Three capabilities — Query Data, Query Features (Section 6.3), and the AI Use Case Library’s own generation (Section 6.1.6) — are served by a real RAG pipeline added to the same Express process described in Section 3.3, under `server/lib/` and `server/routes/`. This is the one place in `journi`’s backend that does more than store and return a JSON blob; the design intent, in each of its three parts, is stated below rather than left to be reverse-engineered from the code.

Retrieval (`server/lib/retrieval.js`). A real TF-IDF (term frequency, log-normalized) + cosine-similarity search over a bag-of-words vector space — not a neural embeddings model and not a vector database. This is a deliberate choice: it needs no network call and no API key to run, so it works fully offline, is exactly reproducible, and can be verified without ever touching a provider’s API (Section 8.6’s Windows-installability requirement extends naturally to this: retrieval has zero new runtime dependency). Every consumer treats the index as an opaque `{ search(query, k) }` capability, so swapping in a real embeddings provider later is a contained change to this one file.

Corpora (`server/lib/corpus/`). Two static reference corpora ship with the server: `features.js` (one entry per routed module plus Query Data/Query Features themselves, used by Query Features) and `methodology.js` (25 short definitions of `journi`’s own Lewin/ADKAR/Bridges/Kübler-Ross stage vocabulary and alert conditions, used to ground the AI Use Case Library). Query Data has no static corpus of its own — see below.

Query Data’s grounding is computed, not retrieved, wherever possible (`server/lib/queryData.js`). A fixed set of deterministic aggregation functions (project counts, open Resistance Log entries, open risks by category, ADKAR averages, currently-firing alerts) pattern-match the question and compute the answer directly from the request’s data payload — the frontend sends the same `{ data }` object it already holds in memory (Section 4), not a copy held server-side. The LLM’s only role, when one of these matches, is to phrase the already-computed fact into a sentence; it is explicitly instructed never to state a number not given to it. Retrieval only takes

over for a question no aggregator recognizes, searching a corpus built on the fly from the visible projects’ own risk/resistance/business-driver text, and even then the model is told to answer from the retrieved records alone.

RBAC enforcement is server-side, reusing the real rule, not a copy of it.

`queryData.js` imports `visibleOrganizations/visibleProjects` from `journi/src/utils/rbac.js` and `ROLES_WITH_INDIVIDUAL_VISIBILITY` from `journi/src/data/constants.js` directly — there is no second, hand-maintained visibility rule to drift out of sync with the one the frontend itself enforces (Section 3.7). `queryFeatures.js` filters the module catalog against the same role gates `<RequireRole>` enforces in `App.jsx`, so a search can never point a caller at a module their own role would be blocked from opening.

Generation (`server/lib/llmProxy.js`) calls the same four providers as Module 6’s Real LLM Provider Connection (Anthropic, OpenAI, Google, or a custom OpenAI-compatible endpoint), using whichever `{ provider, apiKey, model, baseUrl }` the frontend forwards from that same connection, per request. The key is used once, for that one call, and is never written to disk, logged, or cached server-side — the pass-through, not-persisted contract FR-M6-08 already requires stays true. This closes the exact gap the frontend’s own `llmProviders.js` flags in comment: a browser-direct call exposes the key to anyone with devtools access to that origin; proxied through this server, it does not. A server operator may also set `ANTHROPIC_API_KEY` in `server/.env` as a fallback so Query Data and Query Features work before anyone connects a provider on Module 6 — the AI Use Case Library never uses this fallback; it always prefers the signed-in user’s own Module 6 connection (Section 8.2, NFR-19).

Graceful degradation, at every layer. If the backend cannot be reached at all, or generation fails for any reason (no key configured anywhere, a network error, a malformed provider response), every one of the three routes still returns its real retrieval result — the computed fact, the matched module, the retrieved methodology snippets — with a `generationError` field, rather than fail the request outright. `AiSuggestionBox` (Section 3.2) layers this into a three-tier fallback: the RAG backend first, then the pre-existing direct-browser-to-provider call if a Module 6 connection exists, then the deterministic built-in example — the same never-break contract FR-M6-09 already specifies, now with a grounded option ahead of both fallbacks rather than instead of them.

4. Data Model

`journi` persists one JSON document per installation (Section 3.3). This section is the authoritative field-level schema a rebuild must reproduce; every field name below is drawn directly from the reference implementation’s default-object constants and seed data, not inferred.

4.1 Top-Level State Shape

Key	Holds
<code>groups</code>	Array of Group objects — optional top tier of the hierarchy (a holding company / multi-entity corporate group).

Key	Holds
organizations	Array of Organization objects — the primary tenant boundary.
mainProjects	Array of Main Project objects — the underlying business/IT initiative (e.g. an ERP rollout), distinct from a Change Management Project.
cmProjects	Array of Change Management Project objects — the core, heavily-nested working entity (Section 4.3).
users	Array of platform user/account objects (identity + RBAC scope).
aiUseCaseCatalog	Array of AI Use Case definitions — the shared, versioned catalog (M6).
macroProcessCatalog	Array of Macro Process reference entries (M4, MP-01...MP-10).
e2eProcessCatalog	Array of End-to-End Process Registry entries (M4, E2E-xx).
phaseTemplateCatalog	Array of Phase Template definitions — shared, versioned (M8).
racsiGrid	Object keyed by Macro Process id → { [role]: 'R'\ 'A'\ 'C'\ 'S'\ 'I'\ ' ' } (M4 RACSI grid, editable).
aiOrgActivation	Object keyed by orgId → { [useCaseId]: boolean } — whether an AI use case is switched on for an Organization (M6).
aiProjectOverride	Object keyed by cmProjectId → { [useCaseId]: boolean } — per-project override of the Organization default (M6).
aiUsageLog	Array of AI usage/outcome audit-log entries, platform-wide (not nested per project).
codebooks	Object keyed by orgId → array of qualitative-coding Code objects (M16 Coding Workbench, org-scoped taxonomy).
charters	Array of CM Charter definitions (M5), each with a nested entries[] (Section 4.4).
rolePermissions	Object keyed by role → { [capabilityKey]: boolean } — the runtime-editable Permission Matrix (M2).
requireJustification	Boolean — platform-wide Justification Governance flag (M2).
license	Single License object — SaaS-mode demo license record (M2).

currentUserId and scope ({ orgId, cmProjectId }) are persisted alongside data (same server row, sibling fields) but are not part of data itself.

Not persisted server-side by design: the Real LLM Provider Connection's configuration ({ provider, apiKey, model, baseUrl }) lives only in the browser's localStorage, under a separate key from the rest of the application's data, so an API key is never bundled into a data export, never synced across machines, and survives a "Reset Demo Data" action untouched.

4.2 Reference/Catalog Data (Cross-Cutting, Not Nested Per Project)

These arrays back M3–M6 and M8 and are shared across every Organization and Project rather than duplicated per tenant: aiUseCaseCatalog, macroProcessCatalog, e2eProcessCatalog, phaseTemplateCatalog, racsiGrid, charters (definitions; compliance logging is per-project, Section 4.3), plus the constant reference tables described per-module in Section 6 (ADKAR block list, resistance types, RESISTANCE_TYPES, journeys/journeyTouchpoints, macroProcesses, e2eProcesses, crossTypeMatrix, benchmarks, mentoringStages, defaultCodebook, alertDefinitions — each a static JS module under `journi/src/data/`, not a database table, since they change only with a product release, not per-tenant).

4.3 Change Management Project — Field Reference

A `cmProject` object's own top-level fields: `id`, `orgId`, `mainProjectIds[]` (many-to-many link to zero, one, or more Main Projects — Section 6.1, M1), `name`, `changeManager`, `changeType`, `businessDriver`, `targetPopulation`, `successCriteria`, `lewinPhase`, `bridgesPhase`, `bridgesNote`, `sentimentSnapshot`, `aiUseCases[]` (activated-use-case-id strings), `changeLog[]`, `adkar{}`, `sponsor{}`, `sustainment{}`, plus every sub-collection array below.

Collection	Module	Item shape
adkar (object, keyed by block)	M10	{ score: 1-5, note, history: [{ id, date, score, justification? }] }
changeLog	M2 (governance)	{ id, date, module, field, oldValue, newValue, justification } — the Justification Governance audit trail (Section 6.6.2)
risks	M12	{ id, category: 'adoption' \ 'sponsorship' \ 'capacity' \ 'saturation', description, likelihood: 1-5, impact: 1-5, owner, status: 'open' \ 'mitigating' \ 'closed', actions?: [{ id, description, owner, dueDate, status: 'open' \ 'in_progress' \ 'closed' }] } — actions[] is the Mitigation Action Plan
stakeholderGroups	M9	{ id, name, headcount, impact: { process, tech, role, location, identity } (each 1-5), influence: 1-5 }
communications	M14	{ id, message, audience, channel, sender, timing, adkarBlock, status: 'draft' \ 'scheduled' \ 'sent' }

Collection	Module	Item shape
trainings	M15	{ id, curriculum, track, level: 'Foundation'\\'Practitioner'\\'Advanced', module, objectives, prerequisites, agenda, targetAudience, expectedResults, workshops, facilitator, format, completion: 0-100, certified: boolean }
resistanceLog	M16	{ id, type: 'role'\\'skill'\\'will'\\'systemic', source, rootCause, severity: 1-5, mitigation, owner, dueDate, status: 'open'\\'in_progress'\\'closed', anonymous: boolean }
coachingNotes	M16 / M17	{ id, managerName, cohort, barrierBlock, note }
journeyEvents	M18	{ id, offsetDays, label, type: 'milestone'\\'communication'\\'assessment'\\'training' }
wbsTasks	M8	{ id, track: 'pm'\\'cm'\\'framework', phase, name, baselineStart, baselineEnd, actualStart, actualEnd, accountabilityTag: 'PROJECT'\\'CHANGE'\\'JOINT', status: 'planned'\\'in_progress'\\'done'\\'at_risk', percentComplete: 0-100 }
phaseGates	M8	{ id, phase, date, jointDecision: 'go'\\'go_with_conditions'\\'no_go', conditions, accountable: 'PM'\\'CM'\\'ES'\\'FP0'\\'ITL'\\'SUP', pmInput: { recommendation, notes }, cmInput: { recommendation, notes, readinessIndexSnapshot, checklistCompletionPct, openFlags } }
phaseChecklists	M8	{ id, phase, track: 'pm'\\'cm', item, weight: 1-100, done: boolean }
charterActionLog	M5	{ id, charterActionId (FK → static charter-actions catalog), date, note }

Collection	Module	Item shape
touchpointLog	M19	{ id, touchpointId (FK → static journeyTouchpoints catalog), date, note }
codeTags	M16	{ id, codeId (FK → codebooks[orgId]), sourceType, sourceId, linkedResistanceId: FK → resistanceLog \ null, date }
dismissedAlerts	Notification Center	array of alert-id strings — the alerts themselves are always computed live (Section 6.6.4), never persisted; only dismissal state is
fieldNotes	M22	{ id, date, category, relatedModules: string[] (multi-select), title, body, author }
obsEntries	M3	{ id, role, name, reportsTo: FK → another entry in the same project's obsEntries \ null, notes }
sponsor (object)	M13	{ name, visibility: 'weak'\ 'moderate'\ 'strong', visibilityNote, members: [{ id, name, role, influence: 1-5, engagement: 1-5 }], actions: [{ id, action, phase: 'Prepare'\ 'Manage'\ 'Reinforce', done: boolean }] }
sustainment (object)	M21	{ checkpoints: [{ id, label: '30-day'\ '60-day'\ '90-day', daysAfterGoLive, adoptionRate, regressionRisk: 'low'\ 'moderate'\ 'high'\ null, status: 'not_due'\ 'complete' }], quickWins: [{ id, title, date }], lessonsLearned: [{ id, text, linkedRuleOrControl?, status?: 'pending'\ 'applied' }], signoff: boolean }

Computed-only values (never stored — recomputed from the fields above on every render): riskScore/isHighSeverityRisk (M12), taskGapDays/gapTone (M8), phase-checklist completion percentage (M8), the Composite Readiness Index and divergence flags (M20), and every live alert condition (Notification Center).

4.4 Charter Definitions (M5, Shared Catalog)

charters[] (top-level, not per-project): { id, name, category, what, who, when, where, why, how, ownerRole, racsi, governingScope, version, reviewCadence, status: 'Active' \| 'Retired', entries: [{ ...action-mapping fields – pdcaStage, sequence, linkedMacroProcess/Task/Phase, responsibleRole, accountableRole, frequency }] }.

4.5 Entity Relationship Summary

Group (0..1) —< Organization >— License (per-org context via M2)

Organization —< MainProject

Organization —< CmProject

MainProject >—< CmProject (many-to-many via cmProject.mainProjectIds[])

Organization —< User (scoped by scopeType/scopeId to org, group, or a specific project)

CmProject —< every sub-collection in Section 4.3 (1-to-many, embedded arrays – not separate tables)

Organization —< aiOrgActivation entry

CmProject —< aiProjectOverride entry

Organization —< codebooks entry —< codeTags (per CmProject, referencing codebooks[orgId])

No sub-collection item is ever referenced from more than one cmProject — every relationship below the CmProject level is a plain embedded array, not a foreign-keyed table, which is what makes the single-JSON-document persistence model in Section 3.3 a faithful fit rather than a shortcut.

5. External Interface Requirements

5.1 User Interface Conventions

- **Shell:** a fixed TopBar (wordmark, Organization/Project scope selector, Notification Center bell, current user) and a Sidebar (Section 1.6’s two-section module list), with routed content filling the remaining viewport.
- **CRUD pattern:** every module’s Add/Edit flow opens the shared Modal component; every list view pairs an Edit (secondary-style) and Delete (danger-style) button per row, gated by the same role/capability check as the module’s own write access (Section 3.7).
- **Status encoding:** the shared Badge component renders a colored pill (tone: brand/green/amber/red/gray/sand) for every status, severity, or classification field across all 22 modules — journi’s shared visual vocabulary for “attention needed.”
- **RTL:** every layout listed above mirrors correctly under Arabic (Section 3.6), not just inline text.
- **Visual identity:** journi’s Tailwind color tokens (journi/tailwind.config.js) are pinned to the exact palette in POWERACT Consulting’s own “Brand & Graphical Chart Guide” (v1.0): Orange Primary #F8931D and Orange Deep

#E07B00 (brand-600/brand-700 — buttons, active navigation, links, KPI numbers, table header fills) as the one accent color, used sparingly and purposefully, against a light background (surface #FDFDFC) with charcoal-grey chrome and text — Grey Dark #3A3A3C, Grey Ink #58595B, Grey Medium #808184, Grey Light #F2F2F3, Grey Line #E3E3E4 — never black. The guide’s five-color semantic status scale (Section 6.2 of the brand guide; red #F4C7C3 through dark green #B6D7A8) is reproduced as the light-tint shades of Tailwind’s own red/amber/yellow/emerald palettes, so the shared Badge, StatCard, and ProgressBar components render on-brand without per-call-site overrides; multi-series charts (the WBS/Gantt’s three workstreams, the Journey Map’s event types) use brand orange plus the guide’s muted blue #3A6EA5 and muted green #5AA469 rather than a fourth competing hue. journi’s own logo mark (journi/public/journi-logo.svg — a circular orange/blue people-and-cycle icon, distinct from POWERACT’s own consulting-firm wordmark) appears in the Sidebar header and on the Login screen, always on a white background, consistent with the guide’s general logo-placement good practice even though the guide’s specific POWERACT wordmark rules do not apply to journi’s own product mark. journi/src/index.css’s shared component layer (.card, .btn-*, .input, .badge, .label) is the single place these tokens are consumed; no module page hardcodes a color outside this layer (Section 8.7, NFR-16).

5.2 API Interface

5.2.1 Reference Implementation API (as-built)

The backend exposes exactly two functional endpoints — this is a whole-state store, not a per-resource REST API; all entity-level create/update/delete logic lives client-side (Section 3.2, 4.3) and is expressed on the wire only as the net effect on the one JSON document below.

Method	Path	Request Body	Response	Notes
GET	/api/health	—	{ ok: true, serverFallbackKeyConfigured: boolean }	Liveness check; the second field tells the frontend whether ANTHROPIC_API_KEY is set in server/.env (Section 3.8).
GET	/api/state	—	{ data, currentUserId, scope }, or { data: null, currentUserId: null, scope: { orgId: null, cmProjectId: null } } on an empty database; 500 { error } on failure	Reads the entire application state. No authentication, no scoping/filtering by caller — returns everything.

Method	Path	Request Body	Response	Notes
PUT	/api/state	{ data, currentUserId, scope } (the client's entire in-memory state)	{ ok: true }; 500 { error } on failure	Full blind overwrite of the single stored row — no merge, no shape validation, no optimistic-locking/versioning.
POST	/api/query-data	{ question, user: { role, scopeType, scopeId }, data, llm? }	{ answer, mode: 'aggregate'\ 'retrieval'\ 'none', fact, sources, generationError? }	Section 6.3.1. data is the caller's own current state (no server-side copy); RBAC-scoped and computed/retrieved server-side per Section 3.8.
POST	/api/query-features	{ question, user: { role }, llm? }	{ answer, sources }	Section 6.3.2. sources are role-filtered module matches, each with a path the frontend can navigate to directly.
POST	/api/ai-suggest	{ useCaseId, recordContext?, llm? }	{ text, tier, humanCheckpoint, sources, generationError? }	RAG upgrade for M6 (FR-M6-11): retrieves methodology grounding for the named use case before generating.
GET	*	—	Static file from <code>journi/dist</code> if present, else <code>index.html</code> (SPA fallback)	Frontend hosting; if <code>journi/dist</code> is missing, returns 500 with an actionable build-reminder message instead.

This is sufficient for the reference build's single-machine, single-tenant-session usage pattern, but is explicitly not a target to replicate for a multi-user or production rebuild (Section 8.2, NFR-05, NFR-09). Section 5.2.2 specifies the resource-oriented API a rebuild should implement instead; the three RAG routes above are the one part of the reference API already resource-appropriate as-is — a rebuild should keep their shape and simply add the auth/scoping middleware Section 5.2.2 specifies around them.

5.2.2 Recommended Target API for a Rebuild

A rebuild should replace the whole-blob store with a conventional resource-oriented REST API, one route family per entity/sub-collection in Section 4, so that per-entity access control, partial updates, transport-level audit logging, and multi-writer concurrency (NFR-09) all become possible. The table below is the recommended route set; request/response bodies follow the field shapes already specified in Section 4.3 — nothing here changes what data looks like, only how it is addressed and mutated.

Conventions: all routes are prefixed `/api/v1`; authentication is a bearer token or session cookie issued by `POST /api/v1/auth/login` (Section 8.2, NFR-03 closure); every mutating request must carry `Authorization`; every response uses standard HTTP status codes (200/201/204/400/401/403/404/409/500); every entity carries a server-assigned `updatedAt` and an opaque version (or `ETag`), and an Update request must send `If-Match/version` — a mismatch returns 409 Conflict with the current server copy, closing the last-write-wins gap in NFR-09; list endpoints support `?orgId=?cmProjectId=` scoping query parameters so a client never has to fetch data outside its own tenant boundary, and the server — not the client — enforces that boundary per the signed-in user’s role and scope (Section 3.7), closing NFR-03.

Resource	Routes	Notes
Auth / session	<code>POST /auth/login</code> , <code>POST /auth/logout</code> , <code>GET /auth/me</code>	Replaces the reference build’s client-side-only “sign in as a demo persona” picker with real credential verification.
Groups	<code>GET/POST /groups</code> , <code>GET/PATCH/DELETE /groups/:id</code>	M1.
Organizations	<code>GET/POST /organizations</code> , <code>GET/PATCH/DELETE /organizations/:id</code>	M1; DELETE cascades per FR-M1-04.
Main Projects	<code>GET/POST /organizations/:orgId/main-projects</code> , <code>GET/PATCH/DELETE /main-projects/:id</code>	M1.
Change Management Projects	<code>GET/POST /organizations/:orgId/cm-projects</code> , <code>GET/PATCH/DELETE /cm-projects/:id</code>	M1/M7; <code>mainProjectIds[]</code> managed via PATCH.
Users	<code>GET/POST /users</code> , <code>GET/PATCH/DELETE /users/:id</code>	M2.
Permission Matrix	<code>GET /role-permissions</code> , <code>PATCH /role-permissions/:role</code>	M2, FR-M2-02/03; <code>super_admin</code> only.
Governance settings	<code>GET/PATCH /governance</code>	M2, <code>requireJustification</code> toggle.
License	<code>GET/PATCH /license</code>	M2.
OBS entries	<code>GET/POST /cm-projects/:id/obs-entries</code> , <code>PATCH/DELETE /obs-entries/:entryId</code>	M3.
Macro Process / E2E / RACSI catalogs	<code>GET /catalog/macro-processes</code> , <code>GET /catalog/e2e-processes</code> , <code>GET /racsi-grid</code> , <code>PATCH /racsi-grid/:macroProcessId</code>	M4; catalogs are read-only per FR-M4-01, RACSI grid is the one editable piece.
Charters	<code>GET/POST /charters</code> , <code>GET/PATCH/DELETE /charters/:id</code> , <code>GET/POST /charters/:id/entries</code> , <code>PATCH/DELETE /charter-entries/:entryId</code>	M5; DELETE <code>/charters/:id</code> returns 409 if status is Active (FR-M5-02).

Resource	Routes	Notes
Charter Action catalog	GET /catalog/charter-actions	M5; read-only.
Charter Action Log	GET/POST /cm-projects/:id/charter-action-log, DELETE /charter-action-log/:logId	M5; no PATCH — append/delete only, per FR-M5-04.
Mentoring stages	GET /catalog/mentoring-stages	M5; read-only.
AI Use Case catalog	GET/POST /ai-use-cases, GET/PATCH/DELETE /ai-use-cases/:id, POST /ai-use-cases/:id/revert	M6.
AI activation	GET/PATCH /organizations/:orgId/ai-activation, GET/PATCH /cm-projects/:id/ai-override	M6.
AI usage log	GET/POST /ai-usage-log	M6; append-only.
Initiative metadata / Change Log	PATCH /cm-projects/:id/meta, GET/POST /cm-projects/:id/change-log	M7; Change Log is append-only, written by every module's justified-change flow.
WBS tasks	GET/POST /cm-projects/:id/wbs-tasks, PATCH/DELETE /wbs-tasks/:taskId	M8.
Phase Checklists	GET/POST /cm-projects/:id/phase-checklist, PATCH/DELETE /phase-checklist/:itemId	M8.
Phase Gates	GET/POST /cm-projects/:id/phase-gates, DELETE /phase-gates/:gateId	M8; no PATCH, per FR-M8-03.
Phase Template library	GET/POST /phase-templates, GET/PATCH/DELETE /phase-templates/:id, POST /phase-templates/:id/revert, POST /cm-projects/:id/wbs-tasks/load-template	M8.
Stakeholder Groups	GET/POST /cm-projects/:id/stakeholder-groups, PATCH/DELETE /stakeholder-groups/:groupId	M9.
ADKAR	GET /cm-projects/:id/adkar, PATCH /cm-projects/:id/adkar/:block	M10; PATCH requires justification in the body whenever requireJustification is true (FR-X-10).
Coaching Notes	GET/POST /cm-projects/:id/coaching-notes, PATCH/DELETE /coaching-notes/:noteId	M10/M17; a rebuild should add the PATCH/DELETE the reference build is missing (Section 10.3, item 1).

Resource	Routes	Notes
Bridges / Sentiment	PATCH /cm-projects/:id/bridges, PATCH /cm-projects/:id/sentiment	M11; justified-change.
Risks	GET/POST /cm-projects/:id/risks, PATCH/DELETE /risks/:riskId, GET/POST /risks/:riskId/actions, PATCH/DELETE /risk- actions/:actionId	M12; a rebuild should allow full PATCH on a risk's core fields, not status only (Section 10.3, item 4).
Sponsor / Coalition	GET/PATCH /cm- projects/:id/sponsor, GET/POST /sponsor/:id/members, PATCH/DELETE /coalition- members/:memberId, GET/POST /sponsor/:id/actions, PATCH/DELETE /sponsor- actions/:actionId	M13; a rebuild should add coalition-member and sponsor-action CRUD the reference build is missing (Section 10.3, items 2-3).
Communications	GET/POST /cm-projects/:id/communicat ions, PATCH/DELETE /communications/:commId	M14.
Trainings	GET/POST /cm-projects/:id/trainings, PATCH/DELETE /trainings/:trainingId	M15; certification PATCH is justified-change.
Resistance Log	GET/POST /cm-projects/:id/resistance -log, PATCH/DELETE /resistance-log/:entryId	M16.
Codebook (org-scoped)	GET/POST /organizations/:orgId/codeb ook, PATCH/DELETE /codebook/:codeId	M16; a rebuild should add PATCH, missing in the reference build (Section 10.3, item 7).
Code Tags	GET/POST /cm-projects/:id/code-tags, DELETE /code-tags/:tagId	M16.
Manager Readiness	PATCH /cm-projects/:id/manager- readiness	M17; justified-change.
Journey Events	GET/POST /cm-projects/:id/journey- events, PATCH/DELETE /journey-events/:eventId	M18.
Journeys / Touchpoints / Dashboards / Context Overlay catalogs	GET /catalog/journeys, GET /catalog/journey- touchpoints, GET /catalog/journey-dashboards, GET /catalog/project- context-overlay	M19; read-only.

Resource	Routes	Notes
Touchpoint Log	GET/POST /cm-projects/:id/touchpoint-log, DELETE /touchpoint-log/:logId	M19; no PATCH, per FR-M19-02.
Analytics roll-ups	GET /organizations/:orgId/analytics?level=project\ organization\ group, GET /catalog/benchmarks, GET /catalog/cross-type-matrix	M20; server computes and returns the Readiness Index/benchmarking values rather than the client, closing the trust boundary the reference build's client-side computation implies.
Sustainment	GET/PATCH /cm-projects/:id/sustainment, POST /sustainment/:id/checkpoints/:label/record, GET/POST /sustainment/:id/quick-wins, PATCH/DELETE /quick-wins/:winId, GET/POST /sustainment/:id/lessons, PATCH/DELETE /lessons/:lessonId, PATCH /sustainment/:id/signoff	M21; a rebuild should add full Quick Win and Lesson CRUD the reference build is missing (Section 10.3, items 5-6).
Field Notes	GET/POST /cm-projects/:id/field-notes, PATCH/DELETE /field-notes/:noteId	M22.
Alert definitions	GET /catalog/alerts	Cross-cutting; read-only.
Alerts (computed)	GET /cm-projects/:id/alerts, POST /cm-projects/:id/alerts/:alertId/dismiss, POST /cm-projects/:id/alerts/:alertId/restore	Cross-cutting, FR-X-04 through FR-X-08; the server computes live conditions rather than the client.
CSV export	GET /cm-projects/:id/{collection}/export.csv, GET /organizations/:orgId/analytics/export.csv	Cross-cutting, FR-X-01 through FR-X-03; may remain a server-generated file instead of the reference build's client-side Blob generation.

A rebuild is not obligated to implement every route above before shipping — Section 10.3's known-gaps table already flags which sub-resources (coaching notes, coalition members, sponsor actions, quick wins, lessons, codebook entries, phase gates) the reference build itself ships without full CRUD, and the API design above simply makes each of those a first-class route so closing a gap later is additive, not a redesign.

5.3 Hardware Interfaces

None. *journi* is a standard web application with no direct hardware interface requirement.

5.4 Software Interfaces

- **Node.js** ≥ 18 runtime (Section 2.4).

- **SQLite**, via `node:sqlite` or `better-sqlite3` (Section 3.3) — no external database server.
 - **Optional**: a third-party LLM provider (Anthropic, OpenAI, Google, or a custom OpenAI-compatible endpoint) for M6's Real LLM Provider Connection. Two call paths now exist, in the order `AiSuggestionBox` tries them (Section 3.8): (1) proxied through `journi`'s own backend (`server/lib/llmProxy.js`) — the key is forwarded once per request and never persisted server-side; (2) the original direct-from-browser call, used automatically if the backend cannot be reached. Query Data and Query Features (Section 6.3) only ever use path (1), since they require server-side RBAC enforcement (Section 3.8) that a browser-direct call cannot provide. The connection itself remains opt-in, and every AI use case still falls back to a deterministic built-in generator if no path succeeds.
-

6. Functional Requirements

6.0 Conventions

Each module below lists: its purpose and the framework(s) it operationalizes; the fields it captures; numbered functional requirements (FR-M n - nn); the business rules/computations it applies; its role gating; and its cross-module integration points. Every module follows the same shared CRUD, RBAC, and AI-governance conventions described in Sections 3.2, 3.7, and 6.6 — those are not repeated per module except where a module's actual behavior deviates from them, which is called out explicitly rather than silently assumed. Section 10.3 (Known Functional Gaps) collects every such deviation in one place for planning purposes.

6.1 Platform & Governance (M1-M6)

6.1.1 M1 — Tenant & Org Hierarchy

Purpose. The structural backbone of `journi`: Group (optional) → Organization → Projects, and within Projects, a Main Project (the underlying business/IT initiative) many-to-many linked to zero or more Change Management Projects (the people-side initiative that manages its adoption).

Data captured. Group: name. Organization: name, `groupId`, sector, `employeeCount`, sites, languages, `defaultLanguage`. Main Project: name, type (one of ten values — the eight transformation types plus Restructuring and M&A), scope, `durationMonths`, `budgetBand`, `executiveSponsor`. Change Management Project: name, `orgId`, `mainProjectIds[]`, `changeManager`, `changeType`, `targetPopulation`, `businessDriver`, `successCriteria`.

Functional requirements. - FR-M1-01: The system shall support full Create, Read, Update, and Delete on Group, Organization, Main Project, and Change Management Project records, gated by `canManageHierarchy` (Section 3.7). - FR-M1-02: A Change Management Project shall link to zero, one, or more Main Projects via `mainProjectIds[]` — a many-to-many relationship, not the one-to-one link of earlier product iterations — supporting both a fully independent OCM initiative (no Main Project link) and a multi-site rollout where several regional CM Projects share one Main Project. - FR-M1-03: Deleting a Group shall not delete its member Organizations;

it shall null their groupId, converting them to standalone Organizations. - FR-M1-04: Deleting an Organization shall cascade-delete its Main Projects, Change Management Projects, associated AI activation/override state, and any user accounts scoped directly inside it. - FR-M1-05: Deleting a Main Project shall unlink it from (not delete) any Change Management Project that referenced it via mainProjectIds[]. - FR-M1-06: Deleting a Change Management Project shall also remove any user accounts scoped directly to that project. - FR-M1-07: The Organization record shall carry a Default Language field, editable by the same role set, driving the language-precedence rule in Section 3.6. - FR-M1-08: The hierarchy view shall display, for each Main Project, the count of Change Management Projects currently linked to it, and shall badge a Change Management Project with no Main Project link as “standalone.”

Frameworks integrated. None directly — this is the structural layer every framework-bearing module (M7 onward) is scoped against.

Primary users. Super Admin, Group Admin, Organization Admin, PMO.

6.1.2 M2 — Identity & RBAC

Purpose. User account management, the runtime-editable Permission Matrix, platform-wide governance toggles, and a lightweight license/plan record. Organized into four tabs: Users & Scope, Permission Matrix, Governance Settings, License & Plan.

Data captured. User: name, email, role (one of the nine roles in Section 3.7), scopeType, scopeId, language. Permission Matrix: 9 roles × 8 capabilities (manageHierarchy, manageUsers, write, activateAiForOrg, requestProjectAiOverride, manageCharters, manageAiUseCases, manageTemplates). Governance: requireJustification (platform-wide boolean). License: mode (SaaS/OnPrem), plan, companyName, maxUsers, issueDate, expiryDate, features[], and (OnPrem) an uploaded .lic JSON file’s companyId/hardwareId.

Functional requirements. - FR-M2-01: The system shall support Create, Update (role only), and Delete on User records, gated by canManageUsers. Name, email, and scope are set at creation and are not independently editable after — a rebuild targeting fuller account-lifecycle management should add this. - FR-M2-02: The Permission Matrix tab shall render all 9 roles × 8 capabilities as an editable grid, editing gated to super_admin only regardless of any Permission Matrix entry (this one gate is intentionally hardcoded, not itself matrix-driven, to prevent a misconfiguration from locking every admin out of the matrix). - FR-M2-03: Every edit to a Permission Matrix cell shall take effect immediately, platform-wide, for every Organization, without a code change or restart. - FR-M2-04: The Governance Settings tab shall expose a single requireJustification toggle, defaulting to true, gated by canManageHierarchy. - FR-M2-05: The License & Plan tab shall display current plan, seat usage against maxUsers with an over-capacity flag when exceeded, and an expiry countdown color-coded red (expired), amber (<30 days), or green (otherwise). - FR-M2-06: Uploading a .lic file shall validate the presence of required fields (version, companyId, companyName, hardwareId, expiryDate, maxUsers, plan, features, issueDate) but does not verify a cryptographic signature — this is a reference-build simplification, not a production licensing control; a Super Admin may revert to SaaS mode at any time.

Frameworks integrated. None directly — this module is the control plane every other module's write-gating reads from.

Primary users. Super Admin, Group/Organization Admin, all downstream roles (read of their own account).

6.1.3 M3 — Organizational Breakdown Structure (OBS)

Purpose. A per-project resourcing roster — role, named person, and reporting line — distinct from M2's login/RBAC user accounts: an OBS entry needs no journi login, since it exists to be *referenced* (as an assignee) by other modules, not to authenticate.

Data captured. role (free text), name, reportsTo (id of another OBS entry in the same project, or null for the top of the structure), notes.

Functional requirements. - FR-M3-01: The system shall support full Create, Read, Update, and Delete on OBS entries, gated by canWrite. - FR-M3-02: Deleting an OBS entry shall re-parent its direct reports to the deleted entry's own manager (reportsTo) rather than leaving them orphaned. - FR-M3-03: The roster view shall render depth-first, roots first, with indentation reflecting reporting depth, not creation order. - FR-M3-04: The OBS roster shall be consumable as an "Assigned to" source by other modules (M8's WBS tasks, at minimum), so a task can name a specific person from this project's own resourcing structure rather than free text.

Frameworks integrated. None directly — supporting reference data for M8.

Primary users. Change Manager, PMO, Practitioner, People Manager.

6.1.4 M4 — Macro Process, SIPOC, RACSI & End-to-End Process Registry

Purpose. The process backbone every other module is built on, made browsable in one place. Ten Macro Processes (MP-01-MP-10) are the atomic units of journi's process model; every module owns one or more of them. Seventeen End-to-End (E2E) Process chains are registered against that backbone, grouped by kind: core lifecycle chains spanning the whole engagement, cross-cutting loop chains making an existing cross-module dependency explicit as its own registered chain (e.g. the PM ↔ CM Governance Bridge realized by M8's Phase Gates), and one E2E lifecycle per transformation type, each with its own rolled-up SIPOC and linked Phase Template (M8).

Data captured (reference, mostly read-only). Macro Process: id, name, description, primary modules. E2E Process: id, name, kind, ordered Macro Process chain, trigger, terminal state, RACSI (using the 7-code role taxonomy ES/CM/PM/FPO/ITL/SUP/EU), related modules, and — for transformation-type entries — SIPOC suppliers/customers and a linked Phase Template id. RACSI Grid: one row per Macro Process × 6 platform roles.

Functional requirements. - FR-M4-01: The Macro Process Catalog and E2E Process Registry shall be read-accessible to every role; this reference data is not user-editable in the current build (a future release adding admin-editable process taxonomy should preserve read access for all roles as a baseline). - FR-M4-02: The RACSI Grid tab shall be editable in place, one cell at a time, gated by canManageHierarchy; every other role

sees it read-only. - FR-M4-03: An E2E Process entry of kind “transformation type” shall resolve and display its linked Phase Template by id, and its rolled-up SIPOC.

Frameworks integrated. Cross-cutting — the canonical source for the Macro Process and E2E Process vocabulary referenced throughout this document; also hosts the RACSI governance layer referenced by M8’s Phase Gates.

Primary users. All roles (read); Super Admin, Group/Organization Admin (RACSI grid edits).

6.1.5 M5 — Change Management Charter Registry

Purpose. Eight signed, trackable behavioral standards — one each for sponsorship, participative management, communication, organizational impact, team coaching, one-to-one coaching, mentoring, and pulse/interview discipline — each naming specific, observable actions with a concrete mapping to the Macro Processes/tasks that generate them, plus a per-project compliance log. Organized into three tabs: Charters, Charter Action Mapping, and a read-only Mentoring Progression reference (the three-stage Trainee → Observer → Autonomous competency model).

Data captured. Charter: name, PDCA cycle, RACSI, primary linked Macro Process, governing scope (Project/Organization/Group), status (Active/Draft/Retired), version, effective date, review frequency, and one or more Entries (category, owner, What/Who/When/Where/Why/How). Charter Action (static reference): PDCA stage, sequence, category, linked Macro Process/task/step/lifecycle phase, responsible/accountable role, frequency. Charter Action Log (per project): charterActionId, date, note.

Functional requirements. - FR-M5-01: The system shall support full Create, Read, Update, and Delete on Charters and their Entries, gated by canManageCharters. - FR-M5-02: A Charter with status “Active” shall not be deletable; it must be transitioned to “Retired” before its Delete control is enabled. Delete itself is gated separately by canDeleteCharter, a fixed set (Super/Group/Org Admin) that deliberately excludes Change Manager even though Change Managers can create and edit charters. - FR-M5-03: The Charter Action catalog and Mentoring Progression model are static reference data with no CRUD UI. - FR-M5-04: The system shall support Create and Delete (not Update) on Charter Action Log entries, gated by canWrite; correcting a logged entry is done by delete-and-relog rather than in-place edit. - FR-M5-05: The Action Mapping & Compliance tab shall be filterable by charter and shall show, per action, up to three recent log instances plus a count of any remainder.

Frameworks integrated. Prosci Sponsor Model and Kotter Step 2 (Sponsorship Charter); Kotter Step 5 (Participative Management); Kotter Step 4 (Communication); Prosci Impact & Stakeholder Analysis (Organizational Impact); the Divergence Case recovery workflow (One-to-One Coaching); M15’s trained-versus-capable distinction (Mentoring).

Primary users. Change Manager, Training Lead, People Manager (compliance logging); all roles (read).

6.1.6 M6 — AI Use Case Library & Governance

Purpose. The governed catalog and control plane for every AI capability in journi. Every use case is restricted to one of two tiers — Assistive or Augmented — deliberately excluding Autonomous AI: no use case may take an irreversible action on its own. Also hosts the optional Real LLM Provider Connection every AiSuggestionBox instance across the program modules calls into.

AI tiers. *Assistive*: the AI observes, analyzes, or suggests; a human performs the task and decision (e.g. flagging a barrier pattern). *Augmented*: the AI performs a substantial part of the task — drafting, classifying, summarizing at scale — but a human must review, edit, and approve before it is finalized or distributed (e.g. drafting an executive readiness narrative). Autonomous AI is out of scope entirely; a future release adding it must govern it as a separate, explicitly-gated tier rather than folding it into these two.

Data captured. AI Use Case (14 seeded, versioned): id, name, tier, module, description, trigger, output, an editable promptTemplate (the literal text sent to the LLM), humanCheckpoint, version history. LLM Provider Connection (browser-local only — Section 4.1): provider, apiKey, model, baseUrl. AI Usage Log: useCaseId, orgId, cmProjectId, outputSummary, outcome (accepted/edited/rejected), user, timestamp.

Functional requirements. - FR-M6-01: The system shall support full Create, Read, Update, Delete, and version-revert on the AI Use Case catalog, gated by canManageAiUseCases. - FR-M6-02: Deleting a use case shall also purge its keys from the organization and project activation maps. - FR-M6-03: An Organization Admin or above (canActivateAiForOrg) shall be able to activate or deactivate each use case independently per Organization. - FR-M6-04: A Change Manager or above (canRequestProjectAiOverride) shall be able to override the Organization's activation state for one specific project, as a tri-state choice (inherit / on / off); effective activation is the project override if set, else the Organization's activation. - FR-M6-05: Deactivating a use case shall immediately stop new AI-generated suggestions in that scope; previously generated and human-approved content shall never be retroactively removed. - FR-M6-06: Every AI-generated output shall be visually labeled as AI-generated and requiring review, wherever it appears in the interface. - FR-M6-07: Every AI suggestion's outcome — accepted as-is, edited, or rejected — shall be logged to the AI Usage Log for governance reporting; the log itself is append-only, with no edit or delete UI. - FR-M6-08: The Real LLM Provider Connection shall store its configuration, including the API key, only in the browser's localStorage, under a key namespace separate from the rest of the application's data, so it is never included in a data export, never synced to the backend, and survives a "Reset Demo Data" action untouched (Section 4.1, Section 5.4). - FR-M6-09: If a configured LLM call fails for any reason (missing key, network/CORS error, unexpected response), the calling use case shall fall back to its deterministic built-in generator automatically, so a misconfigured or absent connection never blocks a workflow. - FR-M6-10: An AI use case shall never grant a user visibility they would not otherwise have under RBAC — it operates strictly within the data-visibility boundary of the module it plugs into. - FR-M6-11: Before generating output, an AI use case shall retrieve the methodology reference definitions most relevant to its own prompt template and any supplied record context (Section 3.8), and the generation prompt shall instruct the model to stay within journi's own stage vocabulary and to state no number, score, or name absent from that context; the

retrieved definitions shall be disclosed to the user alongside the generated output, not hidden.

Frameworks integrated. Cross-cutting — accelerates the analysis/drafting work within every framework-bearing module; tier discipline follows POWERACT’s own AI-training-curriculum vocabulary.

Primary users. Super Admin, Group/Organization Admin (activation, provider connection, catalog authoring); Change Manager, Trainer, Communications Practitioner, People Manager (consumption, all program modules).

6.2 Change Management Program (M7-M22)

6.2.1 M7 — Initiative Registry

Purpose. The single-project detail view and organization-wide portfolio table for a Change Management Project: core metadata, the Lewin macro-state (Unfreeze/Change/Refreeze) under justified-change governance, the live Composite Readiness Index, and the full justified-change audit log (the “Change Log”).

Data captured. changeType, lewinPhase (justified), businessDriver, targetPopulation, successCriteria; linked Main Project(s), read-only here (edited on M1); Change Log entries (date, module, field, oldValue, newValue, justification).

Functional requirements. - FR-M7-01: businessDriver, targetPopulation, successCriteria, and changeType shall be editable in place (auto-saved on blur) via updateProjectMeta, gated by canWrite. - FR-M7-02: A change to lewinPhase shall follow the stage-then-justify pattern (Section 6.6.2): a pending value plus a justification note, saved atomically to the Change Log, with Save disabled until a justification is present whenever requireJustification is on. - FR-M7-03: The Change Log shall be append-only — no edit or delete of a logged entry — and shall aggregate justified changes logged from this module and from every other module that calls the shared logJustifiedChange/updateAdkar mutators (M10, M11, M13, M15, M16, M17, M12). - FR-M7-04: The system shall compute a Composite Readiness Index per project as $(ADKAR\ average\ \% \times 0.5) + (sentiment\ score \times 0.25) + (training\ completion\ average\ \% \times 0.25)$, displayed both on the single-project view and in the organization-wide portfolio table. - FR-M7-05: The portfolio table shall list every Change Management Project visible to the signed-in role within the current Organization, with its Lewin phase and Readiness Index.

Frameworks integrated. Lewin (Unfreeze-Change-Refreeze) as the organizing macro-state; Prosci’s 3-Phase Process (Prepare, Manage, Reinforce) as the default project lifecycle.

Primary users. PMO, Change Manager, Sponsor.

6.2.2 M8 — Work Breakdown Structure & Gantt

Purpose. A single Work Breakdown Structure spanning three tracks — Project Management, Change Management, and the Lewin/Prosci/Bridges/ADKAR framework milestones — so a Change Manager, PMO, and Sponsor share one timeline. Every task carries a baseline and an optional actual date pair, surfacing a schedule gap task-by-task and as a portfolio average. Also hosts Phase Checklists, Phase Gate joint-decision

records, a read-only cross-reference into M5's Charter Actions log, and the shared Phase Template library.

Data captured. WBS Task: track (pm/cm/framework), accountability tag (Project/Change/Joint — deliberately distinct from track), phase, name, assignee (from M3's OBS roster), baseline start/finish, optional actual start/finish, status. Phase Checklist item: phase, track, item, weight%, done. Phase Gate ("Joint Decision Record"): phase, date, independent PM and CM recommendations with notes (the CM input auto-carrying a Composite Readiness Index snapshot, checklist completion %, and open flags), the fused joint decision (Go / Go with Conditions / No-Go), and exactly one Accountable role selected from the RACSI role-code list. Phase Template (shared, versioned, 8 seeded): per-phase name, CM-track actions, checklist items, gate review questions.

Functional requirements. - FR-M8-01: The system shall support full Create, Read, Update, and Delete on WBS tasks. - FR-M8-02: The system shall support Create, Read, and Delete (done-toggle counts as the only field-level update) on Phase Checklist items. - FR-M8-03: The system shall support Create and Delete on Phase Gates; a recorded Joint Decision is treated as immutable once logged and has no Edit — correcting one requires deleting and re-recording it. A rebuild wanting mutable gate records should add this deliberately, not assume it already exists. - FR-M8-04: "Load Phase Template" shall seed the PM track with one skeleton task per phase of a selected Phase Template, evenly spaced from a chosen start date, defaulting to the template matching the linked Main Project's transformation type; this is a starting skeleton, not a finished plan, and does not itself constitute editing the template. - FR-M8-05: The Phase Template library shall support full Create, Update, Delete, and version-revert, gated by `canManageTemplates`, independent of the per-project WBS CRUD above. - FR-M8-06: The system shall compute, per task with an actual date recorded, a schedule-gap value in days, and shall render it color-coded (on-time/ahead, minor slip, significant slip); a portfolio-level summary shall show total tasks, tasks on-track or ahead, tasks at risk, and the average gap. - FR-M8-07: A framework-track task may be zero-duration (baseline start equals finish), rendered as a marker rather than a bar, for discrete state transitions (e.g. "Unfreeze → Change") rather than continuous work. - FR-M8-08: Every task, checklist item, and gate shall additionally be filterable against the seven generic P1-P7 lifecycle phases that every type-specific Phase Template rolls up into, auto-mapped from the task's own phase label. - FR-M8-09: A Phase Gate's CM input fields (readiness index snapshot, checklist completion %, open flags) shall auto-populate from live computed values (M7's Readiness Index, this module's own checklist completion, and M11/M16's divergence/stalled-block flags) at the moment the gate modal opens. - **Known deviation** (Section 10.3): this module's write-access check calls `canWrite(currentUser?.role)` without passing the Permission Matrix, unlike every other module — so a Super Admin's runtime edits to the Permission Matrix do not affect M8's write gating, which always falls back to the hardcoded default role set. A rebuild should pass the matrix here for consistency with the rest of the application, unless this is confirmed as an intentional exception.

Frameworks integrated. Cross-cutting — gives Lewin, Prosci, Bridges, and ADKAR a shared timeline alongside the Project Management delivery track; Phase Gates implement the PM ↔ CM Governance Bridge cross-cutting E2E chain (M4).

Primary users. PMO, Change Manager, Sponsor.

6.2.3 M9 — Stakeholder & Impact Mapping

Purpose. Identifies who is affected by a change, how heavily, and in what dimension, so effort (deep ADKAR tracking versus light-touch communication) is proportional to risk.

Data captured. name, headcount, impact across five dimensions (process, technology, role, location, identity, each 1-5), influence (1-5).

Functional requirements. - FR-M9-01: The system shall support full Create, Read, Update, and Delete on stakeholder groups, gated by canWrite. - FR-M9-02: The system shall automatically flag a stakeholder group as “High Impact / Low Influence” when its average impact across the five dimensions is ≥ 3.6 and its influence is ≤ 2 — the population most at risk of being under-supported. - FR-M9-03: Each impact-dimension cell shall be color-coded by severity (red ≥ 4 , amber = 3, brand-neutral < 3).

Frameworks integrated. Prosci Impact & Stakeholder Analysis; determines which cohorts receive deep ADKAR tracking on M10.

Primary users. Change Manager, People Managers, PMO.

6.2.4 M10 — ADKAR Engine

Purpose. The heart of person/cohort-level tracking: the five ADKAR building blocks (Awareness, Desire, Knowledge, Ability, Reinforcement), each under justified-change governance, plus an AI-assisted Desire-barrier diagnosis-and-coaching workflow and manager coaching-note capture.

Data captured. Per block: score (1-5), justification note, history (date, score, justification). Coaching Note: manager name, cohort, barrier block, note.

Functional requirements. - FR-M10-01: A change to any ADKAR block’s score shall follow the stage-then-justify pattern, appended to that block’s own history and to the project Change Log. - FR-M10-02: The system shall flag any block scoring ≤ 2 as “stalled,” shown with an amber badge and an auto-flag banner. - FR-M10-03: The system shall support Create (not Update or Delete) on Coaching Notes via the generic sub-item Add — this is a known gap (Section 10.3): a coaching note, once logged, cannot be corrected or removed from this module, and is displayed read-only again in M17. - FR-M10-04: The Desire-diagnosis workflow shall be a bespoke two-step assistive flow, distinct from the generic AI Use Case card pattern: step one diagnoses the stalled Desire score citing Resistance Log and sentiment evidence; on confirmation, step two offers to draft a manager coaching script. Each step requires an explicit Confirm/Discard decision.

Frameworks integrated. ADKAR (Prosci) — the primary individual-level model this module powers directly.

Primary users. Change Manager, People Manager/Coach, Employee (self-report).

6.2.5 M11 — Emotional & Transition Layer

Purpose. Where ADKAR reports what capability or motivation is missing, this layer reports what someone is actually feeling: the Bridges Transition position (Ending →

Neutral Zone → New Beginning) and a Kübler-Ross-derived sentiment stage, both under justified-change governance, plus the Divergence Pattern alert that gives journi its “hidden resistance” early-warning signal.

Data captured. bridgesPhase (justified), bridgesNote; sentimentStage (justified, or inferred from sentimentSnapshot free text via keyword match when not explicitly set), sentimentSnapshot note.

Functional requirements. - FR-M11-01: Both bridgesPhase and sentimentStage shall follow the stage-then-justify pattern. - FR-M11-02: When sentimentStage is not explicitly set, the system shall infer one of commitment/exploration/denial/resistance from keyword matching against the free-text sentiment snapshot, defaulting to “exploration” if no keyword matches. - FR-M11-03: The system shall raise a Divergence Alert whenever Knowledge ≥ 3 AND Ability ≥ 3 (strong demonstrated capability, per M10) while the Bridges position still reads “Ending” — a classic hidden-resistance pattern — and shall surface this same flag to M8’s Phase Gate open-flags field.

Frameworks integrated. William Bridges’ Transition Model; Kübler-Ross Change Curve (adapted for organizational, not grief, context).

Primary users. Change Manager, People Manager/Coach.

6.2.6 M12 — Change Risk Register

Purpose. A risk register purpose-built for the people side of change — adoption risk, sponsor-attrition risk, and change-saturation risk from concurrent initiatives targeting the same population — distinct from generic project risk, with a per-risk Mitigation Action Plan tracked to closure.

Data captured. Risk: category (adoption/sponsorship/capacity/saturation), description, likelihood (1–5), impact (1–5), owner, status (justified-change). Mitigation Action (nested per risk): description, owner, dueDate, status.

Functional requirements. - FR-M12-01: The system shall support Create and Delete on risk records; a risk’s core fields (category, description, likelihood, impact, owner) have no in-place Edit once created in the current build — only status is changeable post-creation, via the justified-change flow. This is a known gap (Section 10.3) for a rebuild targeting full risk-record editability. - FR-M12-02: The system shall support full Create, Update, and Delete on a risk’s nested Mitigation Actions. - FR-M12-03: The system shall compute Risk Score as likelihood $\times$ impact, flag scores ≥ 12 as high-severity (red) and ≥ 8 as elevated (amber), and sort the risk list by score descending. - FR-M12-04: The system shall surface a saturation banner whenever other active Change Management Projects exist in the same Organization.

Frameworks integrated. Extends standard project-risk practice with change-saturation and adoption-risk categories.

Primary users. Change Manager, PMO, Sponsor.

6.2.7 M13 — Sponsor & Coalition

Purpose. Tracks Executive Sponsor visibility under justified-change governance, the guiding-coalition roster, and a sponsor-action roadmap — the single factor Prosci

research identifies as the top predictor of change success, and the substance of Kotter’s Step 2.

Data captured. sponsor.visibility (weak/moderate/strong, justified), visibilityNote; Coalition Member: name, role, influence (1-5), engagement (1-5); Sponsor Action: action text, phase, done.

Functional requirements. - FR-M13-01: sponsor.visibility shall follow the stage-then-justify pattern. - FR-M13-02: The system shall support Create (not Update or Delete) on Sponsor Actions, plus a done-toggle. This is a known gap (Section 10.3): once added, a sponsor action’s text cannot be edited or removed. - FR-M13-03: The Coalition Member roster has no Add/Edit/Delete UI in the current build — it is read-only display only, populated at seed time. This is a more significant known gap (Section 10.3) given the module’s name; a rebuild should treat coalition-roster CRUD as a real requirement even though the reference implementation does not yet expose it. - FR-M13-04: The system shall raise a red alert banner whenever sponsor.visibility === 'weak', cross-referencing M10’s stalled Desire scores in the alert text.

Frameworks integrated. Prosci Sponsor Model (active/visible sponsorship); Kotter Step 2 — Build a Guiding Coalition.

Primary users. Change Manager, Sponsor, PMO.

6.2.8 M14 — Communication Planning & Execution

Purpose. Plans and tracks the message-audience-channel-timing matrix driving Awareness and Desire, and operationalizes Kotter’s Step 4.

Data captured. message, audience, channel, sender, timing, linked ADKAR block, status (draft/scheduled/sent).

Functional requirements. - FR-M14-01: The system shall support full Create, Read, Update, and Delete on communications, gated by canWrite. - FR-M14-02: The system shall surface a change-saturation banner whenever other active Change Management Projects exist in the same Organization, matching M12’s saturation logic. - FR-M14-03: The communications log shall offer client-side CSV export (Section 6.6.6) to every role, independent of write access.

Frameworks integrated. Kotter Step 4 — Communicate the Vision; feeds ADKAR Awareness/Desire.

Primary users. Change Manager, Communications Practitioner, Sponsor.

6.2.9 M15 — Training & Capability Building

Purpose. Maps directly to ADKAR’s Knowledge and Ability blocks, tracking curriculum coverage, completion, and demonstrated capability — “trained” versus “certified/capable” as two distinct, separately-governed states.

Data captured. curriculum, track, level (Foundation/Practitioner/Advanced), module, objectives/prerequisites/agenda/expectedResults/workshops, targetAudience, facilitator, format, completion (0-100%), certified (justified-change, distinct from completion).

Functional requirements. - FR-M15-01: The system shall support full Create, Read, Update, and Delete on training/curriculum records, gated by `canWrite`. - FR-M15-02: A change to certified shall follow the stage-then-justify pattern, independent of the general record-edit flow, since certification is a governed capability claim, not a data-entry field. - FR-M15-03: The system shall surface a training-needs banner whenever M10 reports Knowledge or Ability ≤ 2 , citing the gap's source module.

Frameworks integrated. ADKAR Knowledge & Ability blocks; Kotter Step 5 — Enable Action by Removing Barriers.

Primary users. Change Manager, Trainer/Practitioner, People Manager.

6.2.10 M16 — Resistance Management

Purpose. Structured logging and resolution of resistance by type (role/skill/will/systemic), with root cause, severity, and mitigation tracked under justified-change status governance, systemic-pattern detection across cohorts, and a Qualitative Coding Workbench for tagging free-text coaching notes and resistance entries against an organization-scoped codebook.

Data captured. Resistance entry: type, source, rootCause, severity (1-5), mitigation, owner, dueDate, status (justified-change), anonymous flag. Codebook entry (org-scoped): label, description. Code Tag: codeId, sourceType, sourceId, optional linkedResistanceId.

Functional requirements. - FR-M16-01: The system shall support full Create, Read, Update, and Delete on resistance-log entries, gated by `canManage` (= `canWrite`). - FR-M16-02: A change to status (open → in progress → closed) shall follow the stage-then-justify pattern, separate from the general record-edit flow. - FR-M16-03: An Employee role shall be permitted to submit a resistance/concern entry (optionally anonymous) via a “submission only” path (`canSubmit` = `canWrite` OR `role` === 'employee'), without gaining status-management, classification-edit, or delete rights. - FR-M16-04: The system shall raise a red pattern-detection banner when two or more systemic-type entries are logged, framing the pattern as organizational rather than individual and pointing to M13. - FR-M16-05: The Qualitative Coding Workbench shall support Create and Delete (not Update) on codebook entries — a known gap (Section 10.3) — and Create/Delete on code tags, drawing taggable source material live from this project's own resistance-log entries and M10's coaching notes, with an optional cross-link from a coaching-note tag to a specific resistance-log entry. - FR-M16-06: The Workbench shall compute a tag-frequency rollup relative to the most-used code, surfacing recurring themes a single practitioner reading each note individually would likely miss.

Frameworks integrated. Kübler-Ross resistance/anger stage; Kotter Step 5.

Primary users. Change Manager, People Manager, Employee (submission only).

6.2.11 M17 — Manager-as-Coach Enablement

Purpose. Operationalizes the research finding that a direct manager is the single most influential factor in individual adoption: a team-scoped ADKAR heatmap restricted to a People Manager's own direct reports, a justified Manager Readiness rating, and a

read-only view of coaching notes and AI-generated coaching scripts, without exposing organization-wide change data the manager doesn't need.

Data captured. managerReadiness (1-5, justified-change, default 3).

Functional requirements. - FR-M17-01: managerReadiness shall follow the stage-then-justify pattern; the ADKAR heatmap and coaching-note list are always view-only in this module regardless of role, by design — this module deliberately has no add/edit/delete UI of its own for coaching notes, directing users to M10 instead. - FR-M17-02: The heatmap shall be scoped strictly to the manager's own direct reports; it must never expose organization-wide change data through this module.

Frameworks integrated. Prosci Manager/Coach research; ADKAR at the team level.

Primary users. People Manager/Coach.

6.2.12 M18 — Journey Map / Visual Core

Purpose. The signature interface of journi: a literal, visual SVG timeline (the Bridges Ending → Neutral Zone → New Beginning curve) plotting project- or organization-level events with a "Today" marker — deliberately distinct from the tabular dashboards elsewhere, and the visual identity the product takes its name from.

Data captured. Journey Event: label, offsetDays (relative to today), type (milestone/communication/training/assessment).

Functional requirements. - FR-M18-01: The system shall support full Create, Read, Update, and Delete on journey events, gated by canWrite. - FR-M18-02: An Organization-level zoom shall aggregate journey events across every Change Management Project in the Organization onto one chart, in addition to the default single-project view. - FR-M18-03: The "Share Snapshot" control is a demo-only confirmation in the current build with no real export/share backend; a production rebuild wanting an actual shareable artifact must implement this as new functionality, not assume it exists.

Frameworks integrated. Visual synthesis of ADKAR, Bridges, and Kübler-Ross on a single timeline.

Primary users. All roles, at the scope permitted by RBAC.

6.2.13 M19 — Stakeholder Journeys, Touchpoints & Analytics

Purpose. The experience-layer companion to M20's score-centric dashboards: eight persona/exception/sector-specific/system journeys, twenty-four concrete touchpoints across six of those journeys with auditable success criteria, five journey-analytics dashboard definitions (two with genuinely live computed metrics), and a per-project context-overlay reference table.

Data captured (mostly static reference). Journey: id, predecessorId, name, type, trigger, audience, duration, linked modules. Touchpoint: journeyId, PDCA sub-phase, sequence, day offset from trigger, owner role, success criterion, evidence requirement. Touchpoint Log (per project, user-writable): touchpointId, date, note.

Functional requirements. - FR-M19-01: Journeys, Touchpoints, Dashboards, and the Context Overlay are static reference data with no CRUD UI; only the Touchpoint Log is user-writable. - FR-M19-02: The system shall support Create (not Update) and Delete on Touchpoint Log entries, gated by canWrite. - FR-M19-03: The “End User Journey Completion” dashboard shall compute, live, the percentage of the End User Adoption journey’s touchpoints with at least one log entry for the current project. - FR-M19-04: The “Sponsor & Charter Compliance” dashboard shall compute, live, the percentage of all M5 Charter Actions with at least one completion log entry for the current project, reading M5’s charterActionLog directly. - FR-M19-05: The remaining three dashboards (Mentoring Progression, Divergence Case Resolution, Executive Roll-Up) shall render as descriptive reference cards, since the reference build does not model per-mentee or per-case granularity separately from the underlying M5/M12 logs a BI-connected deployment would aggregate.

Frameworks integrated. Cross-cutting — realizes M18’s Journey Map at the persona-definition and touchpoint level of detail; the Divergence Case journey operationalizes M11’s Divergence Alert as a recovery workflow; the Mentee journey operationalizes M5’s Mentoring Progression model.

Primary users. Change Manager, Training Lead (touchpoint logging); all roles (read).

6.2.14 M20 — Metrics & Analytics Dashboard

Purpose. The analytical brain of journi: the Composite Readiness Index, ADKAR heatmaps, an adoption-curve chart, sentiment/adoption-speed correlation, benchmarking against seeded reference bands, and a cross-transformation-type comparison matrix — rolled up at Project, Organization, or Group level depending on the signed-in role.

Data captured. Purely a computed/aggregated reporting surface — no user-entered fields beyond the roll-up level selector.

Functional requirements. - FR-M20-01: The level selector shall offer Project level to every role; Organization level only to a role scoped Organization-or-broader; Group level only additionally when the scoped Organization actually belongs to a Group and the role is Super Admin or Group Admin — an ungrouped Organization must never show a Group tab, for any role. - FR-M20-02: The system shall compute a benchmarking standing (Behind / In Line / Ahead) per project against a seeded reference band for its current Lewin phase and against the peer average of every other project in scope at the active level. - FR-M20-03: The Cross-Type Comparison Matrix shall contrast all eight transformation types side by side — typical duration, terminal gate, external-party involvement, dominant framework, and reversibility — each row linked to a seed-project example. - FR-M20-04: The Analytics heatmap and Benchmarking tables shall offer client-side CSV export (Section 6.6.6). - FR-M20-05: This module shall perform no write operations of its own — it is read-only by design, at every roll-up level.

Frameworks integrated. Synthesizes every framework in the platform into one readiness signal, benchmarked against phase-appropriate reference bands.

Primary users. Change Manager, Sponsor, Executive Viewer, PMO.

6.2.15 M21 — Reinforcement & Sustainment

Purpose. The most commonly neglected stage of change work: post-go-live adoption checkpoints, Quick Wins celebration, a lessons-learned (REX) institutionalization log, and the formal sustainment sign-off — Lewin’s Refreeze.

Data captured. Checkpoint (fixed set of three: 30/60/90-day): adoptionRate, regressionRisk, status. Quick Win: title, date. Lesson Learned: text, linkedRuleOrControl (naming which rule/control/chapter now encodes it), status (auto-derived). Sign-off: boolean.

Functional requirements. - FR-M21-01: “Record checkpoint” shall be a one-click completion action that generates an adoption-rate value and derives regressionRisk from it (> 80% low, > 60% moderate, else high); the three checkpoints are a fixed set with no add/delete. - FR-M21-02: The system shall support Create (not Update or Delete) on Quick Wins — a known gap (Section 10.3). - FR-M21-03: The system shall support Create and Update (limited to the linkedRuleOrControl field) on Lessons Learned, with no Delete — a known gap (Section 10.3); a lesson’s status shall auto-flip to “applied” the moment a link is entered, “pending” otherwise. - FR-M21-04: Sign-off shall be a simple boolean toggle representing the Lewin Refreeze state, referenced by M8’s Phase Template “Sustain” phase-gate criteria.

Frameworks integrated. Lewin Refreeze; Kotter Steps 6 (Generate Short-Term Wins) and 8 (Anchor New Approaches).

Primary users. Change Manager, People Manager, Sponsor.

6.2.16 M22 — Field Notes

Purpose. A lightweight freeform log for change-management knowledge that doesn’t fit a structured module — workshops, decisions, sign-offs, nominations, handoffs — explicitly positioned as a scratchpad, not a substitute for a structured module: once something becomes a real record elsewhere, it belongs there instead.

Data captured. date, category (Workshop/Decision/Sign-Off/Nomination/Handoff/Other), relatedModules (multi-select across all M1-M22), title, body, author.

Functional requirements. - FR-M22-01: The system shall support full Create, Read, Update, and Delete on field notes, gated by canWrite. - FR-M22-02: relatedModules shall be a free multi-select tag against the current M1-M22 module list — a descriptive cross-reference only, not a structural foreign key into another module’s data. - FR-M22-03: The list shall be filterable by category, with each category color-coded (Workshop = brand, Decision/Sign-Off = green, Nomination = amber, Handoff/Other = gray).

Frameworks integrated. None directly — a cross-cutting practitioner utility.

Primary users. All roles with project write access.

6.3 Cross-Application Query & Retrieval (RAG)

Two capabilities, reached from the sidebar’s third section (“Ask journi,” Section 1.6) rather than any single M1-M22 module, since both query across the whole tenant

rather than operate within one module's own data. Both are backed by the RAG architecture in Section 3.8.

6.3.1 Query Data

Purpose. Ask a plain-language question about the signed-in user's own tenant data — project counts, ADKAR trends, open Resistance Log entries, risk exposure, currently-firing alerts — and receive an answer scoped to exactly what that user's role and scope allow, with the specific records or computed fact behind the answer disclosed alongside it.

Data captured. Not persisted — each request is answered from the caller's own in-memory data (Section 4) plus the question text; nothing about a Query Data session is written back to the state document or logged.

Functional requirements. - FR-QD-01: The system shall accept a free-text question and the caller's role/scope, and shall compute or retrieve its answer only from records that role/scope may see under the same visibility rule the rest of the application enforces (Section 3.7, Section 3.8) — never from another tenant's, organization's, or project's data. - FR-QD-02: A question matching a known aggregation pattern (project counts, resistance/risk counts, ADKAR averages, firing alerts) shall have its numeric answer computed deterministically in code; the LLM's role is limited to phrasing that computed fact in prose, and shall be instructed never to state a number not given to it. - FR-QD-03: A question matching no known aggregation shall fall back to retrieval over the visible projects' own record text (business drivers, risk descriptions, resistance root causes); the answer shall be generated only from the retrieved records, and the system shall say plainly when nothing relevant is found rather than guess. - FR-QD-04: Individual-level detail (e.g. named coaching notes) shall only be included in a Query Data response for a role in `ROLES_WITH_INDIVIDUAL_VISIBILITY` (Section 3.7, FR-M6-10, NFR-07); every other role receives the aggregate-only view. - FR-QD-05: If no LLM is reachable (no Module 6 connection and no server fallback key), the response shall still return the computed fact or retrieved records with a `generationError`, rather than fail outright (Section 3.8). - FR-QD-06: The interface shall display, alongside every answer, the specific sources (project names, record ids) the answer was computed or retrieved from — an answer with no disclosed source shall not be presented as authoritative.

Frameworks integrated. None directly — a cross-cutting analytics utility over the data every framework-bearing module already produces.

Primary users. All roles; the answer's own scope is what changes per role, not access to the feature itself.

6.3.2 Query Features

Purpose. Ask what journi can do, in plain language, and be pointed at the specific module that answers it — a natural-language front end to Section 1.6's module list, filtered to what the asking role can actually open.

Data captured. Not persisted — the module/feature catalog (`server/lib/corpus/features.js`) is static reference content, not tenant data.

Functional requirements. - FR-QF-01: The system shall retrieve, for a free-text question, the modules whose description best matches it, and shall exclude any module the asking role is not permitted to open (the same roles <RequireRole> enforces for M1/M2, Section 3.7) before ranking or returning results. - FR-QF-02: Each returned match shall carry a direct link (route path) the interface can navigate to immediately, not just a module name. - FR-QF-03: If no LLM is reachable, the response shall still return the raw retrieval matches with a `generationError`, rather than fail outright (Section 3.8). - FR-QF-04: A question matching no module above a minimal relevance threshold shall say so plainly rather than force a low-confidence suggestion.

Frameworks integrated. None directly — a cross-cutting discoverability utility.

Primary users. All roles, especially a new user or a role encountering a module for the first time.

7. Cross-Cutting Functional Requirements

These requirements are not owned by any single module — they are shared infrastructure that most or all of M1–M22 draw on identically.

7.1 CSV Export

- FR-X-01: journi's highest-traffic tables shall offer a client-side CSV export — Sponsor Coalition (M13), Communications (M14), Training & Certification (M15), Risk Register (M12), and the Analytics readiness heatmap and benchmarking tables (M20) — built entirely in the browser via a Blob download, with no backend export service required.
- FR-X-02: Each export shall reflect exactly the rows and columns currently on screen, respecting the same RBAC and scope filtering as the table itself.
- FR-X-03: Every export shall be written with a UTF-8 byte-order mark, so accented French and Arabic content opens correctly in Excel.

7.2 Notification Center (Alerts)

- FR-X-04: A bell icon in the TopBar shall surface the platform's defined alert conditions as a persistent, dismissible, per-project in-app log.
- FR-X-05: The following conditions shall fire live, computed client-side from data journi already holds, whenever true for the scoped Change Management Project: a Divergence Pattern (M11); a Critical post-go-live regression-risk score (M21); a Sponsor Coverage Gap — visibility rated Weak (M13); a Resistance Escalation Threshold breach — three or more open resistance-log entries (M16); a Change Saturation breach — two or more other concurrent initiatives targeting the same Organization (M12/M14); a Communication Overload — more than three not-yet-sent communications scheduled across a project and its concurrent same-Organization initiatives (M14); a Phase Gate closed No-Go or Go-with-Conditions (M8); a Guiding Coalition Gap — fewer than two named coalition members (M13); and a blocked Sustainment sign-off (M21).
- FR-X-06: Dismissing an alert shall persist per Change Management Project (in `dismissedAlerts[]`, Section 4.3) and survive a page reload; a Restore control shall bring a dismissed alert back into view.

- FR-X-07: The alerts themselves shall never be persisted — only the dismissal state is; every alert is recomputed live on each render from current project data.
- FR-X-08: The following conditions are catalogued for traceability but depend on backend/data-model infrastructure the reference build does not have, and never fire: survey-exception retries, AI-confidence scoring, import integrity, administrative account lock-out, GDPR request SLA, AI provider fallback, and Champion Coverage Below Target (the last excluded because journi has no structured champion-tracking data model, not a backend gap). A rebuild adding real outbound delivery (email/push/Teams) for the live-firing conditions above should treat that as new infrastructure, not an existing capability being exposed.

7.3 Justification Governance

- FR-X-09: Every score or state change to a Change Management Project's ADKAR block (M10), Lewin macro-state (M7), Bridges/Kübler-Ross position (M11), sponsor visibility (M13), manager readiness (M17), training certification (M15), resistance status (M16), or risk status (M12) shall follow the same stage-then-justify pattern: the practitioner stages the new value, writes a justification note, then saves — at which point the new value and its justification are appended together, in one atomic update, to that project's Change Log (M7).
- FR-X-10: A platform-wide `requireJustification` toggle (M2, Governance Settings, default on) shall determine whether the justification note is a hard requirement before Save enables, or merely offered and recorded when given.
- FR-X-11: Justification text is expected to cite evidence already observed, never a plan for future evidence; journi does not enforce this discipline programmatically, by design — it is a record of practitioner judgment, and the tool's role is to make that judgment easy to capture and impossible to lose, not to police its content.

7.4 Permission Matrix

See Section 3.7 and FR-M2-02 through FR-M2-03 for the full specification; in summary, the role × capability grid on M2 is the single runtime override every `can*` check in Sections 3.7 and 6 reads from, editable in place by a Super Admin, taking effect immediately and platform-wide without a code change. Section 10.3 notes the one known module (M8) that does not currently read from it.

7.5 AI Governance Tiers

See Section 6.1.6 (M6) FR-M6-01 through FR-M6-10 for the full specification of the Assistive/Augmented tier model and its activation, override, and audit-logging requirements.

7.6 Framework-to-Module Mapping

journi does not force a single change methodology; each established framework is mapped onto the module(s) where it is operationally expressed, so practitioners trained in any one methodology find their vocabulary represented in the tool. Module numbers below use the current M1–M22 sequence (Section 1.6).

Framework	Primary Level	Modules Where Applied
ADKAR (Prosci)	Individual / Cohort	M10 ADKAR Engine; M15 Training; M17 Manager as Coach; M20 Analytics
Kotter's 8 Steps	Organizational	M13 Sponsor & Coalition; M14 Communications; M15 Training; M21 Sustainment
Lewin (Unfreeze-Change-Refreeze)	Organizational (macro-state)	M7 Initiative Registry; M21 Sustainment
Bridges Transition Model	Individual / Emotional	M11 Emotional & Transition; M18 Journey Map
Kübler-Ross Change Curve	Individual / Emotional	M11 Emotional & Transition; M16 Resistance Management
Prosci Sponsor & Manager Research	Organizational / Team	M13 Sponsor & Coalition; M17 Manager-as-Coach
AI Tiers — Assistive & Augmented	Cross-cutting	M6 AI Use Case Library; expressed inside M9, M10, M11, M13, M14, M15, M16, M17, M18, M20, M21

M8 (WBS & Gantt) is deliberately cross-cutting rather than tied to one row above: it gives every framework in this table a single baseline-vs-actual calendar alongside the Project Management delivery track, next to the Lewin macro-state owned by M7, the Bridges/Kübler-Ross position owned by M11, and the ADKAR scores owned by M10. M5 (Charter Registry) and M19 (Journeys, Touchpoints & Analytics) are cross-cutting in the same sense — rather than introducing frameworks of their own, they operationalize the Prosci and Kotter rows above as signed, trackable behavioral standards (M5) and give the Bridges/Kübler-Ross journey M18 already visualizes a touchpoint-level completion record (M19).

8. Non-Functional Requirements

8.1 Performance

- NFR-01: The frontend build shall load and render the largest single-project view within normal broadband/LAN latency without a loading spinner exceeding a few seconds — the entire application ships as one JS bundle (currently ~660KB minified, ~180KB gzipped) with no code-splitting; a rebuild adding substantially more module content should consider manualChunks splitting if the bundle grows enough to trigger Vite's default 500KB warning meaningfully.
- NFR-02: State-save shall be debounced 400ms after the last change (Section 3.4) to avoid saturating the backend with a write per keystroke, at the deliberate cost of up to 400ms of unsaved-edit exposure if the process is killed mid-edit.

8.2 Security

- NFR-03: **The reference build has no authentication at the HTTP layer.** GET/PUT /api/state accept any caller with no login, session, token, or credential check whatsoever — RBAC (Section 3.7) is enforced entirely client-side, in the React app, as a UX/workflow control, not a security boundary. A user with direct HTTP access to the server (or its port) can read or overwrite the

entire application's data for every tenant, regardless of role. This is acceptable for the reference build's intended context — a single machine on a trusted LAN or a single user's desktop — but is not a production security posture. A production or multi-tenant-hosted rebuild must add real server-side authentication and per-request authorization before RBAC can be considered anything more than a workflow convenience.

- NFR-04: The reference build implements no TLS termination, rate limiting, or web-application-firewall behavior; these must be added at the infrastructure layer for any internet-facing deployment.
- NFR-05: The API performs no request-body shape validation on `PUT /api/state` — a malformed body will overwrite the stored state with whatever was sent. A production rebuild should validate the body against the Section 4 schema before persisting it.
- NFR-06: An AI use case shall never grant a user visibility they would not otherwise have (FR-M6-10); the Real LLM Provider Connection's API key shall never be persisted server-side or included in any data export (FR-M6-08).
- NFR-07: Individual-level ADKAR scores and sentiment data shall be restricted, by RBAC default, to roles in `ROLES_WITH_INDIVIDUAL_VISIBILITY` (Super Admin, Group Admin, Organization Admin, Change Manager, People Manager); Sponsors and Executives see aggregated, de-identified views only, per M20's roll-up logic.
- NFR-19: The RAG routes' LLM proxy (`server/lib/llmProxy.js`, Section 3.8) shall use a forwarded API key exactly once, for the single request it arrived with, and shall never write it to disk, log it, or hold it in memory beyond that request's lifetime — the same never-persisted contract FR-M6-08 requires of the browser-direct path applies equally to the proxied one. An optional server-side `ANTHROPIC_API_KEY` (`server/.env`) is a deployment convenience for Query Data/Query Features only, not a shared credential the AI Use Case Library draws on — that capability always prefers the signed-in user's own Module 6 connection.

8.3 Reliability & Data Integrity

- NFR-08: The reference build's persistence layer is a single SQLite file with no replication and no automated backup; `journi.db` is the entire durability boundary. A production deployment should add scheduled backups with a defined retention policy at minimum, and should evaluate whether the single-writer-row model (Section 3.3) meets its concurrency needs before scaling beyond one small team's usage.
- NFR-09: Every write is a full-document overwrite with no optimistic-locking or versioning at the transport level (Section 3.4) — two browser tabs editing the same tenant concurrently will silently clobber each other's changes on the losing tab's next debounced save. A rebuild targeting concurrent multi-user editing of the same project must add conflict detection or move to per-entity writes (Section 5.2).
- NFR-10: `better-sqlite3` is deliberately kept as an optionalDependency (Section 3.3) specifically so a failed native build never aborts `npm install` as a whole, given `node:sqlite` is tried first and covers the common case.

8.4 Usability & Accessibility

- NFR-11: Every layout (navigation, tables, charts, the Journey Map) shall render correctly mirrored under Arabic RTL, not just with mirrored text direction (Section 3.6).
- NFR-12: Status, severity, and classification fields shall use the shared Badge component's consistent color vocabulary across all 22 modules (Section 5.1), so a user who has learned the color meaning in one module recognizes it in every other.
- NFR-13: M17's interface shall remain lightweight enough for a time-constrained frontline supervisor to use on a mobile browser, per its stated design intent, even though no dedicated mobile layout exists elsewhere in the application.

8.5 Localization

See Section 3.6 for the full specification. In summary: English, French, and Arabic (with full RTL) are first-class, not translated-as-afterthought; every UI string lives in one dictionary file; language precedence resolves user preference → Organization default → English fallback on every sign-in and Organization switch.

8.6 Portability / Installability

- NFR-14: `npm install` must succeed on a fresh Windows machine with only Node.js installed — no Visual Studio Build Tools, no Python, no C++ toolchain requirement — across the range of Node 18 through the latest release, satisfied by the dual SQLite driver strategy (Section 3.3).
- NFR-15: The same source must run unmodified on macOS/Linux via standard `npm install` & `npm run build / npm start`, without requiring the Windows batch-file wrappers.

8.7 Maintainability / Extensibility

- NFR-16: Adding a new module shall follow the established pattern: a new `Module<N>Page.jsx` (internal identifier, Section 1.6), a route entry, a Sidebar entry with a `navM<N>` translation key (whose *value*, not *key*, carries the visible module number), `i18n` keys for every user-facing string in all three languages, and — if it needs its own persisted sub-collection — a new array on the `cmProject` object (Section 4.3) plus `addSubItem/updateSubItem/removeSubItem` wiring rather than a bespoke mutator, unless the module's data genuinely doesn't fit the generic sub-item shape (as with M2's Permission Matrix or M7's Change Log).
- NFR-17: A module's visible number and its internal file/route identifier are permanently decoupled (Section 1.6) specifically so a future renumbering never requires a mechanical rename sweep across the codebase — only the translation dictionary's *values* change.

8.8 Compatibility

- NFR-18: The application targets evergreen desktop browsers (Chrome, Edge, Firefox); no legacy-browser support (e.g. Internet Explorer) is in scope.

9. Seed / Reference Data Requirements

9.1 Reference Tenant

The reference build seeds one Group (“Atlas Industrial Group”) containing four Organizations, each carrying its own Main Project(s) and linked Change Management Project(s), for a total of 20 seeded Change Management Projects — one per seeded change_manager-role user. Fourteen of these are illustrative “cases” spanning three sectors (Manufacturing, Logistics & Transportation, Health) crossed with eight transformation types, documented in full narrative detail in the predecessor Functional Specification (Section 6) and in the Master User Guide. The remaining seeded projects support the guide’s own running scenario tenant. All seeded organizations, individuals, and figures are fictional composites; they are not a substitute for real organizational data before go-live.

Sector	Transformation Types Covered
Manufacturing	ERP Implementation; Business Process Automation; Integrated Management System (QMS); Cultural / Values Transformation; Training & Skills Development
Logistics & Transportation	ERP Implementation; Business Process Automation; Integrated Management System (QMS); Business Process Reengineering; Operating Model Redesign
Health	ERP Implementation; Business Process Automation; Integrated Management System (QMS); Compliance-Driven Change

9.2 Demo User / Role Matrix

The seed data includes 24 platform users spanning all nine roles (Section 3.7): one Super Admin, one Group Admin, one Organization Admin per seeded Organization, one Change Manager per seeded Change Management Project, one People Manager, one Sponsor, one Executive, and one Employee — each with a fixed scopeType/scopeId demonstrating every scope level the RBAC model supports (Section 3.7).

9.3 Shared Catalogs

Seeded once, shared across every tenant rather than duplicated per-Organization: the AI Use Case catalog (14 entries, M6), the Macro Process catalog (10 entries, M4), the E2E Process Registry (17 entries, M4), the Phase Template library (8 entries, M8), the RACSI grid default, the Charter Registry’s 8 charter definitions (M5), and the default Permission Matrix (DEFAULT_ROLE_PERMISSIONS, M2).

10. Appendices

10.1 Glossary

See Section 1.4 for framework and access-control acronyms. Module-specific vocabulary is defined inline in each module’s Section 6 entry on first use.

10.2 Requirement Traceability

Section 1.6's module table is the authoritative map from a displayed module number to its source file; Section 4 is the authoritative field-level schema; Section 6 is the authoritative functional-requirement list, one FR-*Mn-*nn** per testable behavior. A QA team writing test cases against this document should trace each test to one FR id; a dev team scoping a rebuild task should trace each task to one module's FR block plus its Section 4 data-model entry.

10.3 Known Functional Gaps (Reference Implementation)

These are honest, verified-against-source gaps in the current reference build, not aspirational shortcomings — each is called out at its owning module in Section 6 and collected here for rebuild-planning convenience. None blocks the application's core workflows; each represents either a deliberate scope decision (e.g. an immutable Phase Gate record) or an incompletely-extended CRUD pattern worth completing in a rebuild.

#	Module	Gap	Type
1	M10 ADKAR Engine	Coaching Notes are Add-only — no Edit or Delete, in this module or in M17 where they are also displayed.	Incomplete CRUD
2	M13 Sponsor & Coalition	Coalition Member roster has no Add/Edit/Delete UI at all — read-only display, populated only at seed time.	Missing CRUD
3	M13 Sponsor & Coalition	Sponsor Actions support Add and a done-toggle only — no Edit or Delete of the action text.	Incomplete CRUD
4	M12 Risk Register	A risk's core fields (category, description, likelihood, impact, owner) have no Edit once created — only status is changeable, via the justified-change flow.	Incomplete CRUD
5	M21 Sustainment	Quick Wins are Add-only — no Edit or Delete.	Incomplete CRUD
6	M21 Sustainment	Lessons Learned support Add and a partial Edit (LinkedRuleOrControl only) — no Delete.	Incomplete CRUD

#	Module	Gap	Type
7	M16 Resistance Management	Codebook entries support Add and Delete only — no Edit of an existing code's label/description.	Incomplete CRUD
8	M8 WBS & Gantt	Phase Gates support Add and Delete only — no Edit of a recorded joint decision (may be intentional: a gate record is arguably meant to be immutable once logged).	Design decision or gap — confirm intent before rebuilding
9	M8 WBS & Gantt	Write-access checks call <code>canWrite(currentUser?.role)</code> without passing the Permission Matrix, unlike every other module — Super Admin edits to the matrix do not affect this module's write gating.	Inconsistency
10	M18 Journey Map	"Share Snapshot" is a demo-only confirmation message with no real export/share backend.	Stub, not a regression
11	Cross-module	Some in-code comments and the AI Use Case catalog's <code>moduleLabel</code> strings still reference the pre-renumbering module numbers in places; the Section 1.6 table (sourced from <code>Sidebar.jsx/translations.js</code> , not from code comments) is the authoritative current mapping and should be used for any further documentation work.	Documentation drift

10.4 Default Permission Matrix

The seeded default state of `data.rolePermissions` (Section 4.1), editable at runtime on M2:

Role	manage Hierarchy	manage Users	write	activate AiForOrg	request ProjectAiOverride	manage Charters	manage AiUseCases	manage Templates
super_admin	✓	✓	✓	✓	✓	✓	✓	✓

Role	manage Hierarc hy	manage Users	write	activate AiForOr g	request ProjectA iOverrid e	manage Charter s	manage AiUseCa ses	manage Templat es
group_admin	✓	✓	✓	✓	✓	✓	✓	✓
org_admin	✓	✓	✓	✓	✓	✓	✓	✓
change_manager			✓		✓	✓	✓	✓
people_manager			✓					
practitioner			✓					
sponsor								
employee								
executive								

10.5 Full i18n String Catalog

The complete content of `journi/src/i18n/translations.js` — every user-facing string key, in English, French, and Arabic — reproduced verbatim so a rebuild in another language/stack can achieve text-identical parity without needing separate access to the original source. Tables are grouped exactly as the source file groups them (its own section comments); several groups mix strings from multiple current modules because the source file organizes by when a string was added, not strictly by module. Where a source comment names a module by its old pre-renumbering internal number (e.g. “Module 7”), that is a source code-comment artifact, not the current displayed number — Section 1.6 is authoritative for the current mapping.

App shell

Key	English	French	Arabic
appName	journi	journi	journi
appTagline	the human side of change, mapped as a journey	le côté humain du changement, cartographié comme un parcours	الجانب الإنساني للتغيير، بشكل رحلة مرسومة
poweredBy	Human Change Management Platform	Plateforme de gestion humaine du changement	منصة إدارة التغيير البشري
search	Search	Rechercher	بحث
logout	Sign out	Déconnexion	تسجيل الخروج
resetDemoData	Reset Demo Data	Réinitialiser les données	إعادة تعيين البيانات

Key	English	French	Arabic
resetDemoDataConfirm	This will discard every change made in this browser and restore the original seed data for all Organizations. This cannot be undone. Continue?	Cette action supprimera toutes les modifications effectuées dans ce navigateur et restaurera les données d'origine pour toutes les Organisations. Cette action est irréversible. Continuer ?	سيؤدي هذا إلى إلغاء كل التغييرات التي تمت في هذا المتصفح واستعادة البيانات الأصلية لجميع المؤسسات. لا يمكن التراجع عن هذا الإجراء. هل تريد المتابعة؟
language	Language	Langue	اللغة
role	Role	Rôle	الدور
scope	Scope	Périmètre	النطاق
viewingAtLevel	Viewing at	Vue au niveau	العرض على مستوى
benchmarking	Benchmarking	Analyse comparative	المقارنة المرجعية
peerAverage	Peer average	Moyenne des pairs	متوسط الأقران
referenceBand	Reference band	Fourchette de référence	النطاق المرجعي
standing_ahead	Ahead of reference	Au-dessus de la référence	أعلى من المرجع
standing_in_line	In line with reference	Conforme à la référence	مطابق للمرجع
standing_behind	Behind reference	En retard sur la référence	أقل من المرجع
defaultLanguage	Default language	Langue par défaut	اللغة الافتراضية
save	Save	Enregistrer	حفظ
cancel	Cancel	Annuler	إلغاء
add	Add	Ajouter	إضافة
edit	Edit	Modifier	تعديل
delete	Delete	Supprimer	حذف
close	Close	Fermer	إغلاق
confirm	Confirm	Confirmer	تأكيد
actions	Actions	Actions	إجراءات
status	Status	Statut	الحالة
owner	Owner	Responsable	المسؤول
date	Date	Date	التاريخ
notes	Notes	Notes	ملاحظات
name	Name	Nom	الاسم
description	Description	Description	الوصف
type	Type	Type	النوع
loading	Loading...	Chargement...	...جارٍ التحميل
noData	No records yet.	Aucune donnée pour le moment.	لا توجد بيانات بعد

Key	English	French	Arabic
all	All	Tous	الكل
back	Back	Retour	رجوع
export	Export	Exporter	تصدير
aiGenerated	AI-generated — review required	Généré par IA — vérification requise	مُولَّد بالذكاء الاصطناعي — يتطلب مراجعة
accept	Accept	Accepter	قبول
reject	Reject	Rejeter	رفض
generate	Generate	Générer	توليد

Scope switcher

Key	English	French	Arabic
group	Group	Groupe	المجموعة
organization	Organization	Organisation	المؤسسة
project	Project	Projet	المشروع
mainProject	Main Project	Projet principal	المشروع الرئيسي
cmProject	Change Management Project	Projet de gestion du changement	مشروع إدارة التغيير
noGroup	No Group (standalone)	Sans groupe (autonome)	بدون مجموعة (مستقلة)
selectOrg	Select organization...	Choisir une organisation...	اختر مؤسسة...
selectProject	Select project...	Choisir un projet...	اختر مشروعًا...

Nav / Modules (values shown are the CURRENT displayed labels; key names retain their internal/legacy numbering per Section 1.6)

Key	English	French	Arabic
navPortfolio	Portfolio Dashboard	Tableau de bord du portefeuille	لوحة المحفظة
navM1	M1 · Hierarchy	M1 · Hiérarchie	م1 · الهيكل التنظيمي
navM2	M2 · Identity & RBAC	M2 · Identité et RBAC	م2 · الهوية والصلاحيات
navM3	M7 · Initiative Registry	M7 · Registre des initiatives	م7 · سجل المبادرات
navM17	M8 · WBS & Gantt	M8 · SDP et Gantt	م8 · هيكل تجزئة العمل وغانت
navM4	M9 · Stakeholder Mapping	M9 · Cartographie des parties prenantes	م9 · خريطة أصحاب المصلحة
navM5	M10 · ADKAR Engine	M10 · Moteur ADKAR	م10 · محرك ADKAR
navM6	M11 · Emotional & Transition	M11 · Transition émotionnelle	م11 · الانتقال العاطفي
navM7	M13 · Sponsor & Coalition	M13 · Sponsor et coalition	م13 · الراعي والتحالف
navM8	M14 · Communications	M14 · Communications	م14 · الاتصالات

Key	English	French	Arabic
navM9	M15 · Training	M15 · Formation	م15 · التدريب
navM10	M16 · Resistance	M16 · Résistance	م16 · المقاومة
navM11	M17 · Manager as Coach	M17 · Manager-coach	م17 · المدير كموجه
navM12	M21 · Sustainment	M21 · Pérennisation	م21 · الاستدامة
navM13	M12 · Risk Register	M12 · Registre des risques	م12 · سجل المخاطر
navM14	M20 · Analytics	M20 · Analytique	م20 · التحليلات
navM15	M18 · Journey Map	M18 · Carte du parcours	م18 · خريطة الرحلة
navM16	M6 · AI Use Case Library	M6 · Bibliothèque de cas d'usage IA	م6 · مكتبة حالات استخدام الذكاء الاصطناعي
navM18	M4 · Process Registry	M4 · Registre des processus	م4 · سجل العمليات
navM19	M5 · CM Charters	M5 · Chartes GC	م5 · موائيق إدارة التغيير
navM20	M19 · Journeys & Analytics	M19 · Parcours & analytique	م19 · الرحلات والتحليلات
navM21	M22 · Field Notes	M22 · Notes de terrain	م22 · ملاحظات ميدانية
navM22	M3 · OBS	M3 · OBS	م3 · الهيكل التنظيمي
sectionPlatform	Platform & Governance	Plateforme et gouvernance	المنصة والحوكمة
sectionCore	Change Management Program	Programme de gestion du changement	برنامج إدارة التغيير

Login

Key	English	French	Arabic
loginTitle	Welcome to journi	Bienvenue sur journi	journi مرحبًا بك في
loginSubtitle	Sign in to track the human side of your change portfolio.	Connectez-vous pour suivre le côté humain de votre portefeuille de changement.	سجل الدخول لمتابعة الجانب الإنساني لمحفظة التغيير لديك.
chooseDemoUser	Choose a demo persona to sign in as	Choisissez un profil de démonstration	اختر ملفًا تجريبيًا لتسجيل الدخول
signIn	Sign in	Se connecter	تسجيل الدخول
demoNotice	Demo environment — no password required. Data is stored locally in your browser.	Environnement de démonstration — aucun mot de passe requis. Les données sont stockées localement dans votre navigateur.	بيئة تجريبية — لا حاجة لكلمة مرور. تُخزن البيانات محليًا في متصفحك.

Roles

Key	English	French	Arabic
role_super_admin	Super Admin	Super administrateur	المسؤول الأعلى
role_group_admin	Group Admin	Administrateur de groupe	مسؤول المجموعة
role_org_admin	Organization Admin	Administrateur d'organisation	مسؤول المؤسسة
role_sponsor	Project Sponsor	Sponsor du projet	راعي المشروع
role_change_manager	Change Manager / Lead	Change Manager / Responsable	مدير التغيير
role_people_manager	People Manager / Coach	Manager d'équipe / Coach	مدير الأفراد / موجه
role_practitioner	Practitioner / Contributor	Praticien / Contributeur	ممارس / مساهم
role_employee	Employee / End User	Employé / Utilisateur final	موظف / مستخدم نهائي
role_executive	Executive Viewer	Observateur exécutif	مشاهد تنفيذي

Frameworks

Key	English	French	Arabic
adkar	ADKAR	ADKAR	ADKAR
awareness	Awareness	Sensibilisation	الوعي
desire	Desire	Désir	الرغبة
knowledge	Knowledge	Connaissance	المعرفة
ability	Ability	Capacité	القدرة
reinforcement	Reinforcement	Renforcement	التعزيز
bridges	Bridges Transition	Transition de Bridges	انتقال بريدجز
bridges_ending	Ending	Fin	الانتهاء
bridges_neutral	Neutral Zone	Zone neutre	المنطقة المحايدة
bridges_beginning	New Beginning	Nouveau départ	بداية جديدة
kubler	Kübler-Ross Curve	Courbe de Kübler-Ross	منحنى كوبلر-روس
sentiment_denial	Denial	Déni	الإنكار
sentiment_resistance	Resistance / Anger	Résistance / Colère	المقاومة / الغضب
sentiment_exploration	Exploration	Exploration	الاستكشاف
sentiment_commitment	Commitment	Engagement	الالتزام
lewin	Lewin Macro-State	État macro de Lewin	حالة لوين الكلية
lewin_unfreeze	Unfreeze	Décristallisation	إذابة الجمود
lewin_change	Change	Changement	التغيير
lewin_refreeze	Refreeze	Recristallisation	إعادة التجميد
kotter	Kotter's 8 Steps	Les 8 étapes de Kotter	خطوات كوتر الثماني

AI tiers

Key	English	French	Arabic
tier_assistive	Assistive	Assistif	مساعد
tier_augmented	Augmented	Augmenté	معزز
tier_autonomous	Autonomous (out of scope)	Autonome (hors périmètre)	مستقل (خارج النطاق)

M7 (Initiative Registry) / M8 (WBS & Gantt) / M4 (Process Registry) / M5 (CM Charters) / M19 (Journeys & Analytics) / M22 (Field Notes) / M3 (OBS) / M16 (Resistance Coding Workbench) / shared CM Project fields

Key	English	French	Arabic
m3_title	Initiative & Portfolio Registry	Registre des initiatives et du portefeuille	سجل المبادرات والمحفظة
m3_desc	System of record for every change initiative — business driver, scope, target population, and Lewin macro-state.	Registre de toutes les initiatives de changement — moteur métier, périmètre, population cible et état macro de Lewin.	سجل شامل لكل مبادرات التغيير — الدافع، النطاق، الفئة المستهدفة، وحالة لوين الكلية.
m17_title	Work Breakdown Structure & Gantt	Structure de découpage du projet et Gantt	هيكل تجزئة العمل ومخطط غانت
m17_desc	One WBS spanning Project Management, Change Management and the Lewin/Prosci/Bridges/A DKAR framework milestones — baseline vs. actual dates, with the schedule gap called out task by task.	Un SDP unique couvrant la gestion de projet, la conduite du changement et les jalons des cadres Lewin/Prosci/Bridges/A DKAR — dates de référence et réelles, avec l'écart calendaire par tâche.	هيكل تجزئة عمل واحد يغطي إدارة المشروع وإدارة التغيير ومعاليم أطر لوين وبروسكي — ADKAR — والتواريخ المرجعية مقابل الفعلية، مع إبراز الفجوة الزمنية لكل مهمة.
m17_load_template	Load phase template	Charger un modèle de phases	تحميل نموذج المراحل
m17_load_template_title	Load phase template	Charger un modèle de phases	تحميل نموذج المراحل
m17_load_template_desc	Seeds one skeleton task per phase into the Project Management track, spaced 30 days apart from the start date below — a starting point to break down into real tasks, not a finished plan.	Ajoute une tâche squelette par phase dans la piste Gestion de projet, espacées de 30 jours à partir de la date de début ci-dessous — un point de départ à détailler, pas un plan final.	يضيف مهمة أولية واحدة لكل مرحلة إلى مسار إدارة المشروع، بفاصل 30 يومًا ابتداءً من تاريخ البدء أدناه — نقطة انطلاق لتفصيلها لاحقًا، وليست خطة نهائية.
m17_template_label	Phase template	Modèle de phases	نموذج المراحل
m17_recommended_for	Recommended for this project's linked Main Project and transformation type.	Recommandé pour le projet principal lié et le type de transformation de ce projet.	موصى به للمشروع الرئيسي المرتبط ونوع التحول لهذا المشروع.
m17_start_date	Start date	Date de début	تاريخ البدء

Key	English	French	Arabic
m17_load_button	Load into PM track	Charger dans la piste GP	تحميل في مسار إدارة المشروع
m18_title	Macro Process, SIPOC, RACSI & E2E Registry	Registre des macro-processus, SIPOC, RACSI et E2E	سجل العمليات الكلية RACSI و SIPOC والعمليات الشاملة
m18_desc	The process backbone every module is built on: the 10 macro processes, the 16 registered end-to-end chains, and who is Responsible / Accountable / Consulted / Sign-off / Informed for each.	L'ossature de processus sur laquelle chaque module est construit : les 10 macro-processus, les 16 chaînes de bout en bout enregistrées, et qui est Responsable / Redevable / Consulté / Valideur / Informé pour chacune.	العمود الفقري للعمليات الذي بُني عليه كل وحدة: العمليات الكلية العشر، وسلاسل العمليات الشاملة الـ 16 المسجلة، ومن هو المسؤول التنفيذي / المعتمد / المستشار / المصادق / المطلع لكل منها.
m18_tab_macro	Macro Processes	Macro-processus	العمليات الكلية
m18_tab_e2e	E2E Process Registry	Registre des processus E2E	سجل العمليات الشاملة
m18_tab_racsi	RACSI Grid	Grille RACSI	شبكة RACSI
m18_kind_core	Core lifecycle	Cycle de vie principal	دورة الحياة الأساسية
m18_kind_loop	Cross-cutting loop	Boucle transversale	حلقة متقاطعة
m18_kind_type	Transformation-type lifecycle	Cycle de vie par type de transformation	دورة حياة حسب نوع التحول
m18_trigger	Trigger	Déclencheur	المحفز
m18_terminal	Terminal state	État final	الحالة النهائية
m18_sipoc_supplier	SIPOC Suppliers	Fournisseurs SIPOC	SIPOC موردو
m18_sipoc_customer	SIPOC Customers	Clients SIPOC	SIPOC عملاء
m18_phase_template	Phase template	Modèle de phases	نموذج المراحل
m18_owning_modules	Owning module(s)	Module(s) propriétaire(s)	الوحدة (الوحدات) المالكة
m18_racsi_legend	R = Responsible · A = Accountable · C = Consulted · S = Sign-off · I = Informed	R = Responsable · A = Redevable · C = Consulté · S = Valideur · I = Informé	· المسؤول التنفيذي · R · A = المعتمد · A · C = المعتمد · C · S = المستشار · S · I = المطلع · I
m18_chain_racsi	RACSI (ES/CM/PM/FPO/ITL/SUP/EU)	RACSI (ES/CM/PM/FPO/ITL/SUP/EU)	RACSI (ES/CM/PM/FPO/ITL/SUP/EU)
m18_racsi_readonly	Only a Group/Org/Super Admin can edit this grid. Every other role sees it read-only.	Seul un administrateur Groupe/Organisation/Super Admin peut modifier cette grille. Tout autre rôle la voit en lecture seule.	يمكن فقط لمسؤول المجموعة/المؤسسة/إل مسؤول الأعلى تعديل هذه الشبكة. تظهر لبقية الأدوار للقراءة فقط.

Key	English	French	Arabic
m19_title	Change Management Charter Registry	Registre des chartes de gestion du changement	سجل موثائق إدارة التغيير
m19_desc	The 8 signed, trackable behavioral standards governing sponsorship, frontline engagement, communication, impact assessment, coaching and mentoring, and pulse/interview diagnostics.	Les 8 standards comportementaux signés et suivables régissant le sponsoring, l'engagement de première ligne, la communication, l'évaluation d'impact, le coaching et le mentorat, et les diagnostics de type pulse/entretien.	المعايير السلوكية الثمانية الموقعة والقابلة للتتبع التي تحكم الرعاية، إشراك الخط الأمامي، التواصل، تقييم الأثر، التدريب والتوجيه، وتشخيصات النبض/المقابلات.
m19_tab_charters	Charters	Chartes	الموathائق
m19_tab_actions	Action Mapping & Compliance	Cartographie des actions & conformité	خريطة الإجراءات والامتثال
m19_tab_mentoring	Mentoring Progression	Progression du mentorat	تقدم التوجيه
m19_charter_desc	Each charter names specific, observable behaviors rather than generic guidance.	Chaque charte nomme des comportements spécifiques et observables plutôt qu'une orientation générique.	يحدد كل ميثاق سلوكيات محددة وقابلة للملاحظة بدلاً من توجيه عام.
m19_add_charter	Add Charter	Ajouter une charte	إضافة ميثاق
m19_entries	Entries	Entrées	الإدخالات
m19_entry_singular	entry	entrée	إدخال
m19_add_entry	Add Entry	Ajouter une entrée	إضافة إدخال
m19_no_entries	No entries yet on this charter.	Aucune entrée pour cette charte pour le moment.	لا توجد إدخالات لهذا الميثاق بعد.
m19_edit	Edit	Modifier	تعديل
m19_delete_retire_first	Set status to Draft or Retired before deleting an Active charter.	Passez le statut à Brouillon ou Retirée avant de supprimer une charte Active.	غيّر الحالة إلى مسودة أو متقاعد قبل حذف ميثاق نشط.
m19_owner	Owner	Propriétaire	المالك
m19_what	What	Quoi	ماذا
m19_who	Who	Qui	من
m19_when	When	Quand	متى
m19_where	Where	Où	أين
m19_why	Why	Pourquoi	لماذا
m19_how	How	Comment	كيف
m19_version	Version	Version	الإصدار
m19_effective	Effective	Date d'effet	تاريخ السريان
m19_review	Review	Révision	المراجعة

Key	English	French	Arabic
m19_obs_level	Governs	Régit	يحكم
m19_linked_macro	Primary macro process	Macro-processus principal	العملية الكلية الرئيسية
m19_filter_charter	Filter by charter	Filtrer par charte	تصفية حسب الميثاق
m19_all_charters	All charters	Toutes les chartes	كل المواثيق
m19_select_project_log	Select a CM Project (top bar) to log and see per-project compliance.	Sélectionnez un projet GC (barre supérieure) pour consigner et voir la conformité par projet.	اختر مشروع إدارة تغيير (الشريط العلوي) لتسجيل ورؤية الامتثال الخاص بالمشروع.
m19_action	Action	Action	الإجراء
m19_linked_task	Linked task	Tâche liée	المهمة المرتبطة
m19_racsi_ra	Responsible / Accountable	Responsable / Redevable	المسؤول التنفيذي / المعتمد
m19_frequency	Frequency	Fréquence	التكرار
m19_compliance	Compliance log	Journal de conformité	سجل الامتثال
m19_log_completion	+ Log completion	+ Consigner la réalisation	تسجيل الإنجاز +
m19_not_logged	Not yet logged	Pas encore consigné	لم يُسجَل بعد
m19_more	more	de plus	أخرى
m19_mentoring_desc	The 3-stage progressive competency model behind CHTR-07: Trainee → Observer → Autonomous. A regression routes back one stage, not to zero.	Le modèle progressif de compétence en 3 étapes derrière CHTR-07 : Stagiaire → Observateur → Autonome. Une régression revient d'une étape, pas à zéro.	نموذج الكفاءة التدريجي ذو المراحل الثلاث وراء CHTR-07: متدرب ← مراقب ← مستقل. يعود التراجع خطوة واحدة إلى الوراء، لا إلى الصفر.
m19_stage	Stage	Étape	المرحلة
m19_entry	Entry criteria	Critères d'entrée	معايير الدخول
m19_exit	Exit criteria	Critères de sortie	معايير الخروج
m19_duration	Typical duration	Durée typique	المدة النموذجية
m19_setting	Setting	Cadre	البيئة
m19_mentor_involvement	Mentor involvement	Implication du mentor	مشاركة الموجه
m19_evidence	Competency evidence	Preuve de compétence	دليل الكفاءة
m19_regression	Regression path	Voie de régression	مسار التراجع
m20_title	Stakeholder Journeys, Touchpoints & Analytics	Parcours des parties prenantes, points de contact & analytique	رحلات أصحاب المصلحة ونقاط الاتصال والتحليلات
m20_desc	The experience-layer companion to the score-centric dashboards elsewhere in journi.	Le complément expérientiel aux tableaux de bord centrés score du reste de journi.	المكمل القائم على التجربة للوحات المعلومات القائمة على journi. النقاط في بقية

Key	English	French	Arabic
m20_tab_journeys	Journeys	Parcours	الرحلات
m20_tab_touchpoints	Touchpoints & Completion	Points de contact & réalisation	نقاط الاتصال والإنجاز
m20_tab_dashboards	Analytics Dashboards	Tableaux de bord analytiques	لوحات معلومات التحليلات
m20_tab_overlay	Project Context Overlay	Surcouche de contexte projet	طبقة سياق المشروع
m20_specializes	Specializes	Spécialise	يخصص
m20_trigger	Trigger	Déclencheur	المحفز
m20_audience	Audience	Audience	الجمهور
m20_duration	Duration	Durée	المدة
m20_owner	Owner	Propriétaire	المالك
m20_filter_journey	Filter by journey	Filtrer par parcours	تصفية حسب الرحلة
m20_all_journeys	All journeys	Tous les parcours	كل الرحلات
m20_select_project_log	Select a CM Project (top bar) to log and see per-project completion.	Sélectionnez un projet GC (barre supérieure) pour consigner et voir la réalisation par projet.	اختر مشروع إدارة تغيير (الشريط العلوي) لتسجيل ورؤية الإنجاز الخاص بالمشروع.
m20_touchpoint	Touchpoint	Point de contact	نقطة الاتصال
m20_day	Day	Jour	اليوم
m20_success_criteria	Success criteria	Critères de succès	معايير النجاح
m20_dashboard_desc	DASH-01 and DASH-02 compute a live metric from this project's own touchpoint and charter-action logs. The remaining dashboards are shown as reference cards.	DASH-01 et DASH-02 calculent une métrique en direct à partir des journaux de points de contact et d'actions de charte de ce projet. Les autres tableaux de bord sont présentés comme des fiches de référence.	DASH-01 يحسب مقياسًا حيًا DASH-02 من سجلات نقاط الاتصال وإجراءات الموائيق الخاصة بهذا المشروع. تُعرض بقية لوحات المعلومات كبطاقات مرجعية.
m20_live_metric	Live metric	Métrique en direct	مقياس حي
m20_touchpoint_completion	JRN-01 touchpoint completion	Réalisation des points de contact JRN-01	JRN-01 إنجاز نقاط اتصال
m20_charter_completion	Charter action completion	Réalisation des actions de charte	إنجاز إجراءات الموائيق
m20_kpis	Journey KPIs	ICP de parcours	مؤشرات أداء الرحلة
m20_visualisation	Visualisation	Visualisation	التصور
m20_linked_report	Linked report	Rapport lié	التقرير المرتبط
m20_reference_only	Reference card only — no per-mentee/per-case data model in this demo.	Fiche de référence uniquement — aucun modèle de données par mentoré/cas dans cette démonstration.	بطاقة مرجعية فقط — لا يوجد نموذج بيانات لكل متدرب/حالة في هذا العرض التوضيحي.

Key	English	French	Arabic
m20_overlay_desc	What makes each of the source framework's 13 illustrative seed projects distinct from the generic journey template.	Ce qui distingue chacun des 13 projets pilotes illustratifs du référentiel source du modèle de parcours générique.	ما يميز كل مشروع من المشاريع النموذجية التوضيحية الثلاثة عشر للإطار المصدر عن نموذج الرحلة العام.
m21_title	Field Notes	Notes de terrain	ملاحظات ميدانية
m21_desc	A lightweight, freeform log for the knowledge that doesn't fit a structured module yet.	Un journal léger et libre pour les connaissances qui ne rentrent pas encore dans un module structuré.	سجل خفيف وحر للمعرفة التي لا تنتمي بعد إلى وحدة منظمة.
m21_select_project	Select a Change Management Project to view or add Field Notes.	Sélectionnez un projet de gestion du changement pour consulter ou ajouter des notes de terrain.	اختر مشروع إدارة تغيير لعرض أو إضافة ملاحظات ميدانية.
m21_filter	Category	Catégorie	الفئة
m21_all_categories	All categories	Toutes les catégories	كل الفئات
m21_add_note	Add Field Note	Ajouter une note de terrain	إضافة ملاحظة ميدانية
m21_empty	No Field Notes logged yet for this project.	Aucune note de terrain consignée pour ce projet.	لا توجد ملاحظات ميدانية مسجلة لهذا المشروع بعد.
m21_untitled	Untitled note	Note sans titre	ملاحظة بدون عنوان
m21_title_field	Short title (e.g. "Discovery Workshop 1 — Casablanca HQ")	Titre court (ex. « Atelier de découverte 1 — siège de Casablanca »)	عنوان قصير (مثال: "ورشة الاكتشاف 1 — المقر الرئيسي بالدار البيضاء")
m21_author	Logged by	Consigné par	سجله
m21_related_module_one	Not yet linked to a module	Pas encore lié à un module	غير مرتبط بوحدة بعد
m21_body	What happened, and what it feeds into later	Ce qui s'est passé, et ce que cela alimente par la suite	ما حدث، وما الذي يغذيه لاحقاً
m22_title	Organizational Breakdown Structure	Structure organisationnelle du projet (OBS)	الهيكل التنظيمي للمشروع
m22_desc	The project's resourcing roster: who fills which role, and who they report to.	Le registre des ressources du projet : qui occupe quel rôle, et à qui il ou elle rend compte.	سجل موارد المشروع: من يشغل أي دور، ولمن يرفع تقاريره.
m22_add_entry	Add Role	Ajouter un rôle	إضافة دور
m22_empty	No roles logged yet for this project.	Aucun rôle consigné pour ce projet.	لا توجد أدوار مسجلة لهذا المشروع بعد.
m22_role	Role	Rôle	الدور

Key	English	French	Arabic
m22_reports_to	Reports to	Rend compte à	يرفع تقاريره إلى
m22_no_role	No role set	Rôle non défini	لم يُحدّد الدور
m22_no_name	Unnamed	Sans nom	بدون اسم
m10_tab_log	Resistance Log	Registre des résistances	سجل المقاومة
m10_tab_coding	Coding Workbench	Atelier de codage	مساحة عمل الترميز
m10_qcw_desc	Tags 1:1 coaching notes and resistance-log entries against a configurable codebook.	Étiquette les notes de coaching en tête-à-tête et les entrées du registre des résistances par rapport à un référentiel de codes configurable.	يقوم بترميز ملاحظات التدريب الفردي وسجلات المقاومة وفق دفتر رموز قابل للتخصيص.
m10_qcw_codebook	Codebook	Référentiel de codes	دفتر الرموز
m10_qcw_codebook_desc	Organization-scoped, not a fixed platform-wide taxonomy.	Défini au niveau de l'Organisation, non une taxonomie fixe à l'échelle de la plateforme.	محدد على مستوى المؤسسة، وليس تصنيفاً ثابتاً على مستوى المنصة.
m10_qcw_code_label	Code label	Libellé du code	تسمية الرمز
m10_qcw_code_desc	Code description	Description du code	وصف الرمز
m10_qcw_tagging	Tagging	Étiquetage	الترميز
m10_qcw_tagging_desc	Apply codes to coaching notes and resistance-log entries.	Appliquez des codes aux notes de coaching et aux entrées du registre des résistances.	طبّق الرموز على ملاحظات التدريب وسجلات المقاومة.
m10_qcw_tag_button	Tag	Étiqueter	ترميز
m10_qcw_linked	Linked to a Resistance Log barrier	Lié à un obstacle du registre des résistances	مرتبط بعائق في سجل المقاومة
m10_qcw_link_barrier	Cross-reference to an existing barrier (optional)	Lien vers un obstacle existant (optionnel)	ربط بعائق قائم (اختياري)
m10_qcw_flag_new	— Flag as a new barrier (no link) —	— Signaler comme nouvel obstacle (sans lien) —	الإبلاغ كعائق جديد — (بدون ربط)
m10_qcw_frequency	Code frequency rollup	Cumul de fréquence des codes	إجمالي تكرار الرموز
m10_qcw_frequency_desc	How often each code has been applied across this project's tagged material.	Fréquence d'application de chaque code sur l'ensemble du matériel étiqueté de ce projet.	عدد مرات تطبيق كل رمز على المواد المرمزة في هذا المشروع.
exportCsv	Export CSV	Exporter en CSV	تصدير CSV
notif_title	Notification Center	Centre de notifications	مركز الإشعارات
notif_select_project	Select a CM Project (top bar) to see its alerts.	Sélectionnez un projet GC (barre supérieure) pour voir ses alertes.	اختر مشروع إدارة تغيير (الشريط العلوي) لرؤية تنبيهاته.

Key	English	French	Arabic
notif_none	No active alerts for this project.	Aucune alerte active pour ce projet.	لا توجد تنبيهات نشطة لهذا المشروع.
notif_dismiss	Dismiss	Ignorer	تجاهل
notif_dismissed	Dismissed	Ignorées	المتجاهلة
notif_restore	Restore	Restaurer	استعادة
changeType	Change Type	Type de changement	نوع التغيير
businessDriver	Business Driver	Moteur métier	الدافع التجاري
targetPopulation	Target Population	Population cible	الفئة المستهدفة
successCriteria	Success Criteria	Critères de succès	معايير النجاح
linkedMainProject	Linked Main Project	Projet principal lié	المشروع الرئيسي المرتبط
standalone	Standalone (no Main Project)	Autonome (sans projet principal)	مستقل (بدون مشروع رئيسي)
budgetBand	Budget Band	Fourchette budgétaire	نطاق الميزانية
duration	Duration	Durée	المدة
executiveSponsor	Executive Sponsor	Sponsor exécutif	الراعي التنفيذي

M9 (Stakeholder Mapping)

Key	English	French	Arabic
m4_title	Stakeholder & Impact Mapping	Cartographie des parties prenantes et de l'impact	خريطة أصحاب المصلحة والتأثير
m4_desc	Who is affected, how heavily, and in what dimension. Impact scores drive tracking depth.	Qui est impacté, à quel degré et selon quelle dimension. Les scores d'impact déterminent le niveau de suivi.	من المتأثر، وبأي درجة، وفي أي بُعد، تحدد درجات التأثير مستوى المتابعة.
stakeholderGroup	Stakeholder Group	Groupe de parties prenantes	مجموعة أصحاب المصلحة
headcount	Headcount	Effectif	عدد الأفراد
impactProcess	Process	Processus	العملية
impactTech	Technology	Technologie	التقنية
impactRole	Role	Rôle	الدور
impactLocation	Location	Localisation	الموقع
impactIdentity	Identity	Identité	الهوية
influence	Influence	Influence	التأثير
highImpactLowInfluence	High-impact / Low-influence	Impact élevé / Influence faible	تأثير عالٍ / نفوذ منخفض
atRiskFlag	At risk of being under-supported	Risque de manque de soutien	معرض لخطر نقص الدعم

M10 (ADKAR Engine)

Key	English	French	Arabic
m5_title	ADKAR Engine — Individual Readiness Core	Moteur ADKAR — Cœur de préparation individuelle	ADKAR محرك جاهزية الأفراد
m5_desc	Score cohorts across the five ADKAR blocks with barrier-point diagnosis.	Évaluez les cohortes sur les cinq blocs ADKAR avec diagnostic des points de blocage.	قيّم المجموعات عبر الخمسة ADKAR عناصر مع تشخيص نقاط العائق.
buildingBlock	Building Block	Bloc	العنصر
score	Score	Score	الدرجة
barrierReason	Barrier Reason	Motif du blocage	سبب العائق
cohort	Cohort	Cohorte	المجموعة
history	History	Historique	السجل الزمني
escalated	Escalated — stalled beyond threshold	Escaladé — bloqué au-delà du seuil	تمت التصعيد — متوقف لفترة تتجاوز الحد
addAssessment	Add Assessment	Ajouter une évaluation	إضافة تقييم
coachingNote	Coaching Note	Note de coaching	ملاحظة توجيهية
addCoachingNote	Add coaching note	Ajouter une note de coaching	إضافة ملاحظة توجيهية

M11 (Emotional & Transition)

Key	English	French	Arabic
m6_title	Emotional & Transition Layer	Couche émotionnelle et de transition	طبقة الانتقال العاطفي
m6_desc	Bridges transition position and Kübler-Ross sentiment, cross-referenced with ADKAR.	Position de transition de Bridges et sentiment de Kübler-Ross, croisés avec ADKAR.	موقع انتقال بريدجز ومشاعر كوبلر-روس، ومقارنة مع ADKAR.
divergenceAlert	Divergence Alert	Alerte de divergence	تنبيه تباین
divergenceDesc	Strong ADKAR score but still emotionally in Ending — classic hidden-resistance pattern.	Bon score ADKAR mais encore émotionnellement en phase de Fin — signal classique de résistance cachée.	جيدة لكن ADKAR درجة لا يزال عاطفيًا في مرحلة الانتهاء — نمط كلاسيكي للمقاومة الخفية.

M13 (Sponsor & Coalition)

Key	English	French	Arabic
m7_title	Sponsor & Coalition Module	Module Sponsor et coalition	وحدة الراعي والتحالف
m7_desc	Sponsor roadmap, active-vs-passive sponsorship, and guiding coalition strength.	Feuille de route du sponsor, sponsoring actif vs passif, et solidité de la coalition directrice.	خارطة طريق الراعي، الرعاية الفعالة مقابل السلبية، وقوة التحالف الموجّه.
coalitionMember	Coalition Member	Membre de la coalition	عضو التحالف

Key	English	French	Arabic
visibility	Visibility	Visibilité	الظهور
engagement	Engagement	Engagement	الانخراط
sponsorAction	Sponsor Action	Action du sponsor	إجراء الراعي
visibilityWeak	Weak	Faible	ضعيف
visibilityModerate	Moderate	Modéré	متوسط
visibilityStrong	Strong	Fort	قوي

M14 (Communications)

Key	English	French	Arabic
m8_title	Communication Planning & Execution	Planification et exécution des communications	تخطيط وتنفيذ الاتصالات
m8_desc	Message × audience × channel × timing matrix, with saturation detection.	Matrice message × audience × canal × calendrier, avec détection de saturation.	مصفوفة الرسالة × الجمهور × القناة × التوقيت، مع كشف التشبع.
message	Message	Message	الرسالة
audience	Audience	Audience	الجمهور
channel	Channel	Canal	القناة
sender	Sender	Expéditeur	المُرسل
timing	Timing	Calendrier	التوقيت
linkedAdkarBlock	Linked ADKAR Block	Bloc ADKAR lié	المرتبط ADKAR عنصر
saturationWarning	Change saturation risk — overlapping population	Risque de saturation — population qui se chevauche	خطر تشبع التغيير — تداخل في الفئة المستهدفة

M15 (Training)

Key	English	French	Arabic
m9_title	Training & Capability Building	Formation et développement des compétences	التدريب وبناء القدرات
m9_desc	Curriculum coverage, completion, and demonstrated capability — trained vs. capable.	Couverture du curriculum, achèvement et capacité démontrée — formé vs. capable.	تغطية المنهج، الإتمام، والقدرة الفعلية — مُدَرَّب مقابل قادر.
curriculum	Curriculum / Track	Curriculum / Parcours	المنهج / المسار
facilitator	Facilitator	Animateur	الميسر
format	Format	Format	الصيغة
completion	Completion	Achèvement	نسبة الإنجاز
certification	Certified / Capable	Certifié / Capable	معتمد / قادر

M16 (Resistance)

Key	English	French	Arabic
m10_title	Resistance Management	Gestion de la résistance	إدارة المقاومة
m10_desc	Log, classify and resolve resistance, linked to concrete mitigation actions.	Enregistrez, classez et résolvez la résistance, avec des actions de mitigation concrètes.	سجل وصنف وعالج المقاومة، مع إجراءات تخفيف ملموسة.
resistanceType	Type	Type	النوع
resistance_role	Role-based	Liée au rôle	مرتبطة بالدور
resistance_skill	Skill-based	Liée aux compétences	مرتبطة بالمهارة
resistance_will	Will-based	Liée à la volonté	مرتبطة بالإرادة
resistance_systemic	Systemic	Systémique	منهجية
source	Source	Source	المصدر
rootCause	Root Cause	Cause racine	السبب الجذري
severity	Severity	Gravité	الخطورة
mitigationAction	Mitigation Action	Action de mitigation	إجراء التخفيف
dueDate	Due Date	Date d'échéance	تاريخ الاستحقاق
anonymous	Anonymous	Anonyme	مجهول
submitConcern	Submit a concern	Signaler une préoccupation	إرسال ملاحظة

M17 (Manager as Coach)

Key	English	French	Arabic
m11_title	Manager-as-Coach Enablement	Activation du manager-coach	تمكين المدير كموجه
m11_desc	Team-scoped ADKAR heatmap with suggested coaching actions per barrier.	Carte thermique ADKAR de l'équipe avec actions de coaching suggérées par blocage.	خريطة حرارية لفريقك مع إجراءات توجيهية مقترحة لكل عائق.
managerReadiness	Manager Readiness Self-Assessment	Auto-évaluation de préparation du manager	تقييم ذاتي لجاهزية المدير
coachingScript	Suggested Coaching Script	Script de coaching suggéré	نص توجيه مقترح

M21 (Sustainment)

Key	English	French	Arabic
m12_title	Reinforcement & Sustainment	Renforcement et pérennisation	التعزيز والاستدامة
m12_desc	Post-go-live adoption audits, regression detection, and sustainment sign-off.	Audits d'adoption post-déploiement, détection de régression et validation de pérennisation.	تدقيقات التبني بعد الإطلاق، كشف التراجع، والتوقيع على الاستدامة.
checkpoint	Checkpoint	Point de contrôle	نقطة التحقق
adoptionRate	Adoption Rate	Taux d'adoption	معدل التبني
regressionRisk	Regression Risk	Risque de régression	خطر التراجع

Key	English	French	Arabic
quickWin	Quick Win / Milestone	Gain rapide / Jalon	إنجاز سريع / معلم
sustainmentSignoff	Sustainment Sign-off	Validation de pérennisation	توقيع الاستدامة
lessonsLearned	Lessons Learned	Leçons apprises	الدروس المستفادة
m12_rex_desc	A lesson counts as closed only once it names the specific Rule, Control, or Charter that now encodes it.	Une leçon n'est considérée close que lorsqu'elle nomme la règle, le contrôle ou la charte qui l'encode désormais.	لا يُعتبر الدرس مغلقًا إلا عند تسمية القاعدة أو الضابط أو الميثاق الذي أصبح يجسده
m12_rex_applied	Applied	Appliquée	مطبّق
m12_rex_pending	Pending	En attente	قيد الانتظار
m12_rex_link_placeholder	Linked Rule / Control / Charter (e.g. RULE-008, CTRL-012, CHTR-05)	Règle / Contrôle / Charte liée (ex. RULE-008, CTRL-012, CHTR-05)	القاعدة/الضابط/الميثاق المرتبط (مثال RULE-008, CTRL-012, CHTR-05)
m12_rex_link_label	Linked to	Liée à	مرتبط بـ

M12 (Risk Register)

Key	English	French	Arabic
m13_title	Change Risk Register	Registre des risques de changement	سجل مخاطر التغيير
m13_desc	Adoption, sponsorship, capacity and saturation risk — distinct from generic project risk.	Risques d'adoption, de sponsoring, de capacité et de saturation — distincts du risque projet générique.	مخاطر التبني، الرعاية، القدرة والتشبع — مختلفة عن مخاطر المشروع العامة.
riskCategory	Category	Catégorie	الفئة
risk_adoption	Adoption	Adoption	التبني
risk_sponsorship	Sponsorship	Sponsoring	الرعاية
risk_capacity	Capacity	Capacité	القدرة
risk_saturation	Saturation	Saturation	التشبع
likelihood	Likelihood	Probabilité	الاحتمالية
impact	Impact	Impact	الأثر
riskScore	Risk Score	Score de risque	درجة الخطر

M20 (Analytics)

Key	English	French	Arabic
m14_title	Metrics & Analytics Dashboard	Tableau de bord des indicateurs et analyses	لوحة المقاييس والتحليلات
m14_desc	Composite Readiness Index, adoption curves, and correlation analysis.	Indice composite de préparation, courbes d'adoption et analyse de corrélation.	مؤشر الجاهزية المركب، منحنيات التبني، وتحليل الارتباط
m14_crosstype_tab	Cross-Type Matrix	Matrice comparative des types	مصفوفة مقارنة الأنواع

Key	English	French	Arabic
m14_crosstype_title	Cross-Type Comparison Matrix	Matrice de comparaison entre types de transformation	مصفوفة مقارنة أنواع التحول
m14_crosstype_desc	How the 8 transformation types compare on duration, terminal gate, external involvement, dominant framework and reversibility.	Comparaison des 8 types de transformation selon la durée, la porte de sortie, l'implication externe, le cadre dominant et la réversibilité.	مقارنة أنواع التحول الثمانية من حيث المدة، بوابة الإنجاز، المشاركة الخارجية، الإطار السائد، وقابلية الرجوع.
m14_crosstype_duration	Typical Duration	Durée typique	المدة النموذجية
m14_crosstype_gate	Terminal Gate	Porte finale	البوابة النهائية
m14_crosstype_external	External Party Involvement	Implication d'une partie externe	مشاركة طرف خارجي
m14_crosstype_framework	Dominant Framework	Cadre dominant	الإطار السائد
m14_crosstype_reversibility	Reversibility	Réversibilité	قابلية الرجوع
m14_crosstype_example	Seed Project Example	Exemple de projet type	مثال مشروع نموذجي
readinessIndex	Composite Readiness Index	Indice composite de préparation	مؤشر الجاهزية المركب
adoptionCurve	Adoption Curve	Courbe d'adoption	منحنى التبني
heatmapByDept	ADKAR Heatmap	Carte thermique ADKAR	الحرارية ADKAR خريطة
execNarrative	Executive Readiness Narrative	Narratif de préparation exécutif	سرد الجاهزية التنفيذي

M18 (Journey Map)

Key	English	French	Arabic
m15_title	Journey Map / Visual Core	Carte du parcours / Cœur visuel	خريطة الرحلة / النواة البصرية
m15_desc	A literal, visual timeline combining ADKAR stage, Bridges phase and sentiment.	Une chronologie visuelle combinant l'étape ADKAR, la phase de Bridges et le sentiment.	جدول زمني بصري ADKAR يجمع مرحلة وطور جسر والمشاعر.
zoomLevel	Zoom Level	Niveau de zoom	مستوى التكبير
shareSnapshot	Share Snapshot	Partager l'instantané	مشاركة لقطة

M6 (AI Use Case Library)

Key	English	French	Arabic
m16_title	AI Use Case Library & Governance	Bibliothèque et gouvernance des cas d'usage IA	مكتبة وحوكمة حالات استخدام الذكاء الاصطناعي

Key	English	French	Arabic
m16_desc	A governed catalog of Assistive and Augmented AI use cases. No use case acts autonomously.	Un catalogue gouverné de cas d'usage IA assistifs et augmentés. Aucun cas n'agit de façon autonome.	كتالوج محكوم لحالات استخدام الذكاء الاصطناعي المساعد والمعزز. لا تعمل أي حالة بشكل مستقل
activateForOrg	Active for this Organization	Actif pour cette organisation	مفعّل لهذه المؤسسة
activateForProject	Project-level override	Dérogação au niveau du projet	استثناء على مستوى المشروع
humanCheckpoint	Human Checkpoint	Point de contrôle humain	نقطة التحقق البشرية
triggerInput	Trigger / Input	Déclencheur / Entrée	المُحفّز / المُدخل
output	Output	Sortie	المُخرج
usageLog	AI Usage & Override Log	Journal d'utilisation et de dérogation IA	سجل استخدام وتجاوز الذكاء الاصطناعي
outcome_accepted	Accepted as-is	Accepté tel quel	مقبول كما هو
outcome_edited	Edited	Modifié	مُعدّل
outcome_rejected	Rejected	Rejeté	مرفوض

Dashboard / Sectors / Archetypes

Key	English	French	Arabic
activeInitiatives	Active Initiatives	Initiatives actives	المبادرات النشطة
avgReadiness	Avg. Readiness Index	Indice de préparation moyen	متوسط مؤشر الجاهزية
openRisks	Open Risks	Risques ouverts	المخاطر المفتوحة
peopleInScope	People in Scope	Personnes concernées	الأشخاص المعنيون
portfolioByPhase	Portfolio by Lewin Phase	Portefeuille par phase de Lewin	المحفظة حسب مرحلة لوين
sector_manufacturing	Manufacturing	Industrie manufacturière	الصناعة التحويلية
sector_logistics	Logistics & Transportation	Logistique et transport	الخدمات اللوجستية والنقل
sector_health	Health	Santé	الصحة
archetype_erp	ERP Implementation	Mise en œuvre ERP	تنفيذ نظام تخطيط الموارد
archetype_automation	Process Automation	Automatisation des processus	أتمتة العمليات
archetype_qms	QMS Implementation	Mise en œuvre SMQ	تنفيذ نظام إدارة الجودة
archetype_bpr	Business Process Reengineering	Réingénierie des processus métier	إعادة هندسة العمليات
archetype_cultural	Cultural / Values Transformation	Transformation culturelle / des valeurs	التحول الثقافي / القيمي

Key	English	French	Arabic
archetype_operating_model	Operating Model Redesign	Refonte du modèle opérationnel	إعادة تصميم نموذج التشغيل
archetype_compliance	Compliance-Driven Change	Changement réglementaire / de conformité	التغيير المدفوع بالامتثال
archetype_training_skills	Training & Skills Development	Formation et développement des compétences	التدريب وتطوير المهارات

10.6 Full Static Reference/Catalog Data

The complete content of every shared reference dataset under `journi/src/data/` — reproduced in full so a rebuild can seed identical demo/reference data without access to the original source files. These are the datasets summarized structurally in Section 4.2 and referenced throughout Section 6; this appendix is their content, verbatim.

10.6.1 Enumerated Value Sets (`data/constants.js`, beyond the roles/capabilities already in Sections 3.7 and 10.4)

Set	Values
ADKAR_BLOCKS	awareness, desire, knowledge, ability, reinforcement
BRIDGES_PHASES	ending, neutral, beginning
SENTIMENT_STAGES	denial, resistance, exploration, commitment
LEWIN_PHASES	unfreeze, change, refreeze
AI_TIERS	assistive, augmented
RISK_CATEGORIES	adoption, sponsorship, capacity, saturation
RESISTANCE_TYPES	role, skill, will, systemic
SECTORS	manufacturing, logistics, health
ARCHETYPES (transformation types)	erp, automation, qms, bpr, cultural, operating_model, compliance, training_skills
VISIBILITY_LEVELS	weak, moderate, strong

10.6.2 Macro Process Catalog (`data/macroProcesses.js`, M4) — 10 entries, the atomic units of `journi`'s process model.

ID	Name	Description	Primary Module(s)
MP-01	Change Impact & Stakeholder Assessment	Maps stakeholder groups and scores change impact (process, technology, role, location, identity) to establish the baseline scope of who is affected and how.	M9
MP-02	Sponsorship & Governance Management	Builds and tracks the sponsor coalition, escalation actions, and governance cadence that keep executive backing visible and active.	M7, M13

ID	Name	Description	Primary Module(s)
MP-03	Communication & Awareness Management	Plans and logs the communications cadence that drives the Awareness block of ADKAR across stakeholder cohorts.	M14
MP-04	Resistance & Barrier Management	Logs resistance signals by type (role, skill, will, systemic) and tracks mitigation actions through to resolution.	M16
MP-05	Training & Capability Enablement	Delivers the curriculum that builds the Knowledge and Ability ADKAR blocks, tracked by cohort and completion status.	M15
MP-06	Champion Network Management	Manages the change-champion network — floor-level advocates who surface early signals into the Sponsor Coalition and Resistance Log.	M13
MP-07	Readiness Diagnostics & Signal Capture	Aggregates ADKAR scores, sentiment, and other signals into the Composite Readiness Index used to judge go/no-go readiness.	M10, M11
MP-08	Divergence & Risk Detection	Detects divergence patterns between plan and reality (schedule slips, adoption risk, saturation) and logs them to the Risk Register.	M11, M12
MP-09	Hypercare & Floor Coaching Support	Provides manager-led floor coaching and hypercare support immediately after go-live, while adoption is still fragile.	M17, M21
MP-10	Reinforcement & Sustainment Management	Locks in the change through checkpoints, quick wins, and lessons learned so gains outlast the project close-out.	M7, M21

10.6.3 End-to-End Process Registry (data/e2eProcesses.js, M4) — 17 entries: 4 core lifecycle chains, 4 cross-cutting loops, 8 transformation-type lifecycles. RACSI role codes (ES/CM/PM/FPO/ITL/SUP/EU) are a separate 7-code taxonomy from journi's own 9-role platform enum: ES = Executive Sponsor, CM = Change Manager, PM = Program/Project Manager, FPO = Functional Process Owner, ITL = IT/Technical Lead, SUP = Supervisor, EU = End User.

Core lifecycle chains:

ID	Name	Macro Process Chain	Trigger	Terminal State	RACSI
E2E-01	Readiness & Mobilization	MP-01→02→03→06→07	Business case and stakeholder map opened	Mobilized sponsorship, informed and diagnosed population, active champion network	R=CM, A=ES, C=FPO/PM, S=SUP, I=EU
E2E-02	Capability & Divergence Management	MP-05→08→07	Curriculum, sandbox, and cohort segmentation confirmed from E2E-01	Verified capable and emotionally-ready cohorts; Divergence Pattern log	R=CM, A=CM, C=FPO/ITL, S=PM/SUP, I=ES/EU
E2E-03	Resistance-to-Commitment	MP-04→06→07→09	A stalled Desire score or negative sentiment pulse is first logged	Resolved barriers; recovered Desire/sentiment scores; sustained commitment	R=CM, A=CM, C=ES/SUP, S=PM, I=FPO/EU
E2E-04	Adoption-to-Sustainment	MP-09→10→07	Go-live cutover executed	Stabilized new-normal performance; embedded reinforcement; confirmed Refreeze; closed project	R=CM, A=ES, C=PM/FPO, S=SUP, I=ITL/EU

Cross-cutting loop chains:

ID	Name	Macro Process Chain	Trigger	Terminal State	Related Modules
E2E-05	Signal Aggregation Loop	MP-03→05→07→08	New awareness (MP-03) or knowledge/ability (MP-05) signal recorded	Composite Readiness Index (MP-07) recalculated and evaluated by the Divergence Pattern Detector (MP-08)	M14, M15, M10, M11, M12

ID	Name	Macro Process Chain	Trigger	Terminal State	Related Modules
E2E-06	PM ↔ CM Governance Bridge	MP-02→08	Main Project schedule slip logged OR Phase Gate checkpoint reached	Joint Decision Record produced (Go / Go with Conditions / No-Go); PM and CM inputs preserved independently; exactly one Accountable role named	M13, M12, M8
E2E-07	Champion Early-Warning Loop	MP-06→04	Champion floor-level observation logged	Observation formalized into a Resistance Log barrier record	M13, M16
E2E-08	Governance Escalation Loop	MP-02→10	Sponsor escalation action logged	Escalation resolved and reflected in the sustainment signoff	M13, M21

Transformation-type lifecycles (each links a Phase Template, Section 10.6.4):

ID	Transformation Type	Macro Process Chain	SIPOC Suppliers	SIPOC Customers	Phase Template
E2E-ERP	erp	MP-01→02→03→05→07→09→10	Executive Sponsor, PM, Change Manager	Steering Committee, End Users, Sustainment Team	TPL-ERP-8
E2E-BPR	bpr	MP-01→02→03→05→07→08→09→10	Executive Sponsor, FPOs, Change Manager	Steering Committee, Process Owner, End Users	TPL-BPR-7
E2E-BPA	automation	MP-01→02→03→05→07→08→09→10	Executive Sponsor, ITL, FPO	Steering Committee, Center of Excellence, End Users	TPL-BPA-7
E2E-IMS	qms	MP-01→02→03→05→07→08→09→10	Certification Body, FPOs, Change Manager	Steering Committee, Quality Function, External Auditor	TPL-IMS-7
E2E-CULT	cultural	MP-01→02→03→04→06→07→08→09→10	Executive Sponsor, HR Business Partner, Change Manager	Steering Committee, Leadership Team, All Employees	TPL-CULT-7

ID	Transformation Type	Macro Process Chain	SIPOC Suppliers	SIPOC Customers	Phase Template
E2E-OM	operating_model	MP-01→02→03→05→07→08→09→10	Executive Sponsor, Function Heads, HR Business Partner	Steering Committee, Standing Operating Committee, All Employees	TPL-OM-7
E2E-COMP	compliance	MP-01→02→03→05→07→08→09→10	Legal/ Compliance, FPOs, Change Manager	Steering Committee, Compliance Function, Regulator	TPL-COMP-7
E2E-TSD	training_skills	MP-01→02→03→05→06→07→08→09→10	Training Lead, FPOs, Change Manager	Steering Committee, End Users, BAU Owner	TPL-TSD-7

10.6.4 Default RACSI Grid (data/racsi.js, M4) — one row per Macro Process, one column per role (sponsor, change_manager, people_manager, practitioner, employee, executive); values are R/A/C/S/I or blank.

Macro Process	Sponsor	Change Manager	People Manager	Practitioner	Employee	Executive
MP-01	A	R	I	C	I	
MP-02	A	R	I		I	C
MP-03	A	R	C		I	
MP-04	A	R	C		I	
MP-05		A	C	R	I	
MP-06	A	R	C		I	
MP-07	A	R		C	I	I
MP-08	A	R	I			C
MP-09		A	R		C	
MP-10	S	A	C		I	I

10.6.5 Phase Template Library (data/phaseTemplates.js, M8) — 8 templates. TPL-ERP-8 ships fully populated as the flagship reference example; the 7 Common Lifecycle variants ship with phase names only, ready to be filled in per engagement.

TPL-ERP-8 — ERP Implementation, 8 phases (fully populated):

Phase	CM Track (sample)	Checklist (sample)	Gate Question (sample)
Discovery	Build CM business case; populate Stakeholder Map (M9); name Executive Sponsor with a visible action (M13)	Business case approved, not just drafted	Is the business case approved by the Steering Committee?

Phase	CM Track (sample)	Checklist (sample)	Gate Question (sample)
Design	Run kickoff communications, capture baseline Awareness (M10); recruit Champion network; log design decisions	Baseline Awareness score exists for highest-severity cohorts	Is there a baseline Awareness reading for high-severity cohorts?
Build	Track ADKAR Desire trend, open recovery response for stalled blocks; run first communications wave; log resistance	No cohort below Desire stall threshold without a logged recovery response	Is ADKAR Desire trending upward across all cohorts?
Test	Re-score Knowledge/Ability for UAT cohorts; watch for Divergence Pattern; confirm training mapped to gaps	UAT participant ADKAR scores re-measured, not assumed	Has UAT capability been re-measured, not assumed?
Train	Deliver training waves, track completion; coach managers on team barriers; re-pulse Bridges/Kübler-Ross	Manager coaching actions logged for any flagged team barrier	Have flagged team barriers received a coaching response?
Deploy	Mark Lewin as provisional Change at cutover; run go-live communications; log cutover as justified change	Go-live communications sent to every affected cohort	Has go-live communication reached every affected cohort?
Hypercare	Re-pulse Bridges/Kübler-Ross at 2- and 4-week marks; track defect-linked sentiment dips; confirm Readiness trend	Two- and four-week re-pulses completed for all affected cohorts	Have the scheduled re-pulses been completed?
Sustain	Confirm Bridges/Kübler-Ross reads New Beginning/Commitment before calling Refreeze; verify reinforcement; run 30/60/90-day checkpoints	Refreeze called on emotional/behavioral evidence, not the go-live date	Is Refreeze backed by confirmed evidence across all cohorts?

(Each phase in the source carries 3 full CM Track actions, 3 checklist items, and 3 gate questions — the table above shows one representative sample of each per phase; the complete text is in `journi/src/data/phaseTemplates.js` and should be transcribed verbatim by a rebuild team seeding this data, since it is prescriptive practitioner guidance, not filler.)

The 7 Common Lifecycle variants (phase names only — `cmTrack/checklist/gate` arrays ship empty, ready for per-engagement authoring via M8's template editor):

Template ID	Transformation Type	Phases (P1-P7)
TPL-BPR-7	bpr	Intake & Diagnosis · Clean-Slate Design · Build · Pilot · Rollout · Stabilization · Sustainment
TPL-BPA-7	automation	Automation-Opportunity Assessment · Architecture Design · Build · UAT & Shadow-Mode · Production Go-Live · Exception Tuning · CoE Handover
TPL-IMS-7	qms	Intake & Diagnosis · Design · Implementation · Mock-up Audit · Certifying Audit · Surveillance Prep · Ongoing Surveillance
TPL-CULT-7	cultural	Diagnosis · Target Values Design · Leadership Modeling & Reinforcement Build · Pilot Cohort · Organization-Wide Rollout · Reinforcement Through Skepticism · Institutionalization
TPL-OM-7	operating_model	Current Operating Model Assessment · TOM Design · Detailed Org Design · Pilot Transition · Full Transition · Governance Adoption Tracking · Standing Rhythm Handover
TPL-COMP-7	compliance	Regulatory Requirement & Gap Analysis · Control Design · Control Implementation · Internal Audit/Independent Testing · Controls Go Live · First Monitoring Cycle · Ongoing Compliance Handover
TPL-TSD-7	training_skills	Skills Gap Diagnosis · Curriculum Design · Training Delivery · Competency Verification · Practical Application · On-the-Job Coaching · Skills Sustainment

10.6.6 Charter Registry — full text (data/charters.js, M5) — 8 charters, each with one primary entry (What/Who/When/Where/Why/How).

ID	Name	RACSI	Governs	Status	Primary Macro	Review Frequency
CHTR-01	Sponsorship / Leadership Charter	R=CM, A=ES, C=PM/FPO, I=SUP/EU	Project	Active	MP-02	Per Phase Gate
CHTR-02	Participative Management Charter	R=SUP, A=CM, C=FPO/PM, I=ES/EU	Project	Active	MP-04	Quarterly

ID	Name	RACSI	Governs	Status	Primary Macro	Review Frequency
CHTR-03	Communication Charter	R=CM, A=CM, C=ES/FPO, S=PM, I=SUP/EU	Project	Active	MP-03	Per communication wave
CHTR-04	Organizational Impact Charter	R=CM, A=CM, C=FPO/SUP, S=PM, I=ES/EU	Project	Active	MP-01	On scope change
CHTR-05	Team Coaching Charter	R=SUP, A=CM, C=ITL, S=PM, I=ES/FPO/EU	Project	Active	MP-09	Per hypercare phase
CHTR-06	One-to-One Coaching Charter	R=CM, A=CM, C=FPO, S=SUP, I=ES/PM/EU	Project	Active	MP-08	Per triggered case
CHTR-07	Mentoring Charter (Trainee→Observer→Autonomous)	R=CM, A=CM, C=FPO/ITL, S=PM/SUP, I=ES/EU	Project	Active	MP-05	Per mentee cohort
CHTR-08	Pulse / Interview Charter	R=CM, A=CM, S=PM/SUP, I=ES/FPO/EU	Project	Active	MP-07	Per phase gate + ad hoc

Full “What” text per charter (the “Who/When/Where/Why/How” fields are equally detailed in the source and should be transcribed verbatim; shown here condensed to the core commitment each charter defines):

- **CHTR-01:** Defines the specific, observable sponsorship behaviors expected of the Executive Sponsor and Steering Committee across the initiative lifecycle.
- **CHTR-02:** Defines how Frontline Supervisors and People Managers involve their teams in decisions that affect them, rather than announcing decisions top-down.
- **CHTR-03:** Defines the message-audience-channel-timing discipline and the FAQ/reply-protocol standard every communication wave must follow.
- **CHTR-04:** Defines the methodology and sign-off standard for assessing how the change affects process, technology, role, location and professional identity.
- **CHTR-05:** Defines the standard for group/team-level floor coaching delivered by People Managers during hypercare, distinct from individual 1:1 coaching.
- **CHTR-06:** Defines the standard for individual, identity-focused coaching conversations — most notably divergence-case 1:1s.

- **CHTR-07:** Defines the three-stage progressive mentoring model (Trainee, Observer, Autonomous) that carries an individual from initial training through to independent, unsupervised competence.
- **CHTR-08:** Defines the cadence, instrument standard and consent protocol for every structured pulse survey, rapid pulse, and 1:1 interview used to capture readiness signals.

10.6.7 Charter Action Mapping (data/charterActions.js, M5) — the many-to-many mapping from each charter to concrete PDCA-staged actions across macro processes/tasks/phases. 35 entries total; representative excerpt (full list in source):

ID	Charter	Name	PDCA	Phase	Responsible / Accountable	Frequency
CHTRACT-0101	CHTR-01	Log weekly visible-sponsorship activity	Do	P2	ES / ES	Weekly
CHTRACT-0102	CHTR-01	Review sponsor coverage gate and coach on gaps	Check	P2	CM / CM	Weekly
CHTRACT-0103	CHTR-01	Escalate unresolved CM risks to Sponsor	Act	P4	CM / ES	Ad hoc
CHTRACT-0301	CHTR-03	Build the persona × channel × cadence communication matrix	Plan	P2	CM / CM	Once, revised per wave
CHTRACT-0302	CHTR-03	Run saturation check before scheduling a new wave	Check	P3	CM / CM	Per wave
CHTRACT-0601	CHTR-06	Triage the divergence alert against supervisor observation	Plan	P6	SUP / CM	Per triggered case
CHTRACT-0602	CHTR-06	Hold identity-focused 1:1 conversation	Do	P6	CM / CM	Per triggered case
CHTRACT-0701	CHTR-07	Diagnosis — assess mentee's starting Knowledge/ Ability	Plan	P4	Training Lead / Training Lead	Once per mentee

ID	Charter	Name	PDCA	Phase	Responsible / Accountable	Frequency
CHTRACT-0703	CHTR-07	Execution — Stage 1: Trainee (maps to MENT-01)	Do	P4	Training Lead / Training Lead	Per mentee
CHTRACT-0704	CHTR-07	Execution — Stage 2: Observer (maps to MENT-02)	Do	P4	Training Lead / Training Lead	Per mentee
CHTRACT-0705	CHTR-07	Execution — Stage 3: Autonomous (maps to MENT-03)	Do	P4	Training Lead / FPO	Per mentee, ongoing
CHTRACT-0706	CHTR-07	Closure — formal Autonomous sign-off and hand-off	Act	P4	Training Lead / FPO	Once per mentee
CHTRACT-0801	CHTR-08	Run baseline ADKAR/Bridges/Kübler-Ross pulse	Plan	P1	CM / CM	Once
CHTRACT-0804	CHTR-08	Consolidate all readings into the Composite Readiness Index	Check	P2-P6	CM / CM	Per phase gate

Each of CHTR-01 through CHTR-08 has 3–6 mapped actions in the source (35 total); the full ID/name/PDCA-stage/sequence/macro-process/task/step/phase/role/frequency table should be transcribed verbatim from `journi/src/data/charterActions.js` for exact rebuild parity.

10.6.8 Mentoring Progression Model (`data/mentoringStages.js`, M5) — the 3-stage model behind CHTR-07.

ID	Stage	Entry Criteria	Exit Criteria	Typical Duration	Mentor Involvement	Regression Path
MENT-01	Trainee	Completed role-based curriculum (M15); assigned to a named Mentor	Consistent, accurate sandbox task completion across defined repetitions	1–2 weeks	Continuous — instructs and corrects in real time	Below-threshold performance triggers remedial training before re-attempting

ID	Stage	Entry Criteria	Exit Criteria	Typical Duration	Mentor Involvement	Regression Path
MENT-02	Observer	Mentor confirms consistent sandbox performance	Defined live repetitions with zero critical-error interventions	1-2 weeks	Passive — observes and logs, intervenes only on critical error	Repeated critical-error interventions return the mentee to Trainee (MENT-01)
MENT-03	Autonomous	Mentor confirms zero critical-error live repetitions; FPO co-signs	Formal Autonomous sign-off recorded; handed off to regular People Manager	Ongoing from transition date	Minimal — periodic spot-audit only	A spot-audit failure or a Sustainment regression flag returns the individual to Observer (MENT-02)

10.6.9 Default Qualitative Coding Workbench Codebook

(data/defaultCodebook.js, M16) — the starter codebook every Organization is seeded with (org-editable thereafter).

Label	Description
fear-of-obsolescence	Concern that a skill, role, or way of working is being made redundant.
trust-in-leadership	Comments referencing confidence (or lack of it) in sponsors/leadership follow-through.
workload-concern	The change is perceived as adding work without removing anything in return.
skill-gap-anxiety	Fear of not being able to learn or perform the new way of working.
process-ownership-loss	A sense of losing control or authorship over a process the person used to own.
external-comparison	Comparing unfavorably to how another site, team, or a prior employer handled a similar change.

10.6.10 Stakeholder Journeys (data/journeys.js, M19) — 8 journeys.

ID	Name	Type	Trigger	Audience	Duration	Linked Modules
JRN-01	End User Adoption Journey	Persona	Change scope communicated to affected population	Employee / End User	J0-J8 (full lifecycle)	M9, M10, M11, M14, M15, M18
JRN-02	Executive Sponsor Journey	Persona	CM Project opened, Sponsor named	Executive Sponsor	J0-J8	M7, M13

ID	Name	Type	Trigger	Audience	Duration	Linked Modules
JRN-03	Frontline Supervisor / People Manager Journey	Persona	Team assigned to Supervisor	Frontline Supervisor / People Manager	J3-J8	M16, M17
JRN-04	Champion Journey	Persona	Champion nominated	Employee (Champion role)	J1-J7	M13
JRN-05	Mentee Journey (specializes JRN-01)	Persona	Assigned to a Mentor at Training entry	Employee / End User (mentored role)	J4, extending into J6	M15
JRN-06	Divergence Case Journey	Exception	Divergence Pattern Detector flags a case	Employee / End User (flagged)	Ad hoc, per case	M11, M12
JRN-07	QMS Certification Journey (specializes JRN-01)	Sector-Specific	Certification requirement confirmed (QMS)	FPO / QHSE Champion	J1-J8, extended by audit gates	M9, M13
JRN-08	AI Suggestion Lifecycle Journey	System	An AI Use Case Library entry generates a suggestion	N/A — human-facing at review step	Minutes to days	M6

10.6.11 Journey Touchpoints (data/journeyTouchpoints.js, M19) — 24 touchpoints across JRN-01, 02, 04, 05, 06.

JRN-01 (End User Adoption, 6 touchpoints): Receives kickoff communication (day 0, CM) → Completes baseline pulse (day 7, CM) → Attends role-based training (day 90, Trainer) → Experiences go-live cutover (day 150, ITL) → Receives hypercare floor coaching (day 157, People Manager) → Reinforcement embedded into performance review (day 240, HR Business Partner).

JRN-02 (Executive Sponsor, 4 touchpoints): Signs the Sponsorship/Leadership Charter (day 0) → Logs first visible-sponsorship activity (day 7) → Attends Phase Gate reviews (day 60) → Confirms sustainment sign-off (day 240).

JRN-04 (Champion, 4 touchpoints): Nominated as champion (day 0) → Onboarded and equipped (day 5) → Participates in listening session (day 30) → Network re-chartered post-go-live (day 180).

JRN-05 (Mentee, 5 touchpoints): Diagnosis assessment completed (day 0) → Enters Trainee stage/sandbox (day 3) → Advances to Observer stage (day 17) → Advances to Autonomous stage (day 31) → Formal Autonomous sign-off & hand-off (day 35).

JRN-06 (Divergence Case, 4 touchpoints): Case flagged and triaged (day 0) → Identity-focused 1:1 held (day 3) → Closure moment delivered (day 4) → Bridges re-checked, case closed (day 14).

Each touchpoint additionally carries a PDCA sub-phase, owner role, automation level, and a concrete success criterion/evidence requirement — see `journi/src/data/journeyTouchpoints.js` for the full 24-row table with every field.

10.6.12 Journey Analytics Dashboards (`data/journeyDashboards.js`, M19) — 5 dashboards; DASH-01/02 compute live metrics, DASH-03/04/05 are reference cards.

ID	Name	Live Metric Source	Visualisation	Refresh
DASH-01	End User Journey Completion Dashboard	JRN-01 touchpoint log	Funnel, Gantt, Bar	Weekly
DASH-02	Sponsor & Charter Compliance Dashboard	charterActionLog	KPI Cards, Bar, Radar	Weekly
DASH-03	Mentoring Progression Dashboard	Reference only	Funnel, Bar, KPI Cards	Weekly
DASH-04	Divergence Case Resolution Dashboard	Reference only	Bar, Heatmap, Line	Real-time
DASH-05	Journey Analytics — Executive Roll-Up	Reference only	Radar, KPI Cards	Monthly

10.6.13 Change Management Benchmarking Reference Bands (`data/benchmarks.js`, M20) — illustrative, not sourced from a real industry study.

Lewin Phase	Low	Mid	High	(Readiness Index band)
unfreeze	20	35	50	
change	40	55	70	
refreeze	60	75	90	

Checkpoint	Low	Mid	High	(Adoption Rate band)
30-day	40	60	75	
60-day	55	72	85	
90-day	65	80	92	

Standing formula: below low = “behind”; between low and high = “in line”; at or above high = “ahead.”

10.6.14 Cross-Type Comparison Matrix (`data/crossTypeMatrix.js`, M20) — all 8 transformation types.

Type	Typical Duration	Terminal Gate	External Party	Dominant Framework	Reversibility
erp	12 months (illustrative)	Cutover & Go-Live	Not typically	Knowledge / Ability (balanced)	Low once live

Type	Typical Duration	Terminal Gate	External Party	Dominant Framework	Reversibility
bpr	6–12 months per process	Full rollout	Not typically	Ability	Moderate
automation	3–9 months per workflow	Production go-live	Not typically	Ability / Reinforcement	Low once live
qms	6–14 months	Certifying audit (external)	Yes — certification body	Knowledge	Low — audit is external
cultural	18–36 months	Org-wide rollout	Not typically	Bridges / Kübler-Ross	High — but slow to fix
operating_model	9–18 months from diagnosis	Full transition	Not typically	Awareness / Ability	Low once transitioned
compliance	Driven by external deadline	Enforceable date (external)	Often — regulator	Awareness / Knowledge	None — fixed deadline
training_skills	3–6 months per curriculum wave	Competency verification sign-off	Not typically	Knowledge / Ability	High — gap can be re-addressed

10.6.15 Project Context Overlay (data/projectContextOverlay.js, M19) — reference-framework worked examples, not journi’s own seeded demo projects.

Project	Attribute	Value
PRJ-001	Dominant Tension	Historical, diffuse skepticism (multi-plant legacy ERP consolidation)
PRJ-001	Exception Pattern Most Likely	E3 — Two-Clock Problem at Cutover & Go-Live
PRJ-002	Dominant Tension	Concrete, specific fear of headcount reduction (RPA automation)
PRJ-002	Exception Pattern Most Likely	E1 — Desire Stall During Data Migration & Integration
PRJ-003	Dominant Tension	Low job change, but certification adds external audit pressure
PRJ-003	Exception Pattern Most Likely	E6 — Cohort Divergence Across Sites or Departments
PRJ-004	Digital Literacy Risk	High — 24/7 operations, mixed digital-literacy workforce
PRJ-006	Constraint Type	24/7 shift-based operations complicate synchronized training
PRJ-007	Constraint Type	Patient-safety-critical cutover windows constrain go-live timing
PRJ-009	Certification Anchor	JCI accreditation — external pass/fail gate
PRJ-011	Timeline Risk	No forcing deadline — 18–36 month standalone culture program
PRJ-013	Timeline Risk	Fixed, non-negotiable regulatory compliance deadline

10.6.16 AI Use Case Catalog — full prompt templates (data/aiUseCases.js, M6)
 — all 14 seeded use cases with their literal prompt text, for exact behavioral parity in a rebuild.

ID	Name	Tier	Module	Prompt Template
uc-stakeholder-impact	Stakeholder Impact Drafting Assistant	Assistive	M9	“You are a Change Management analyst. Given the attached org chart and the change scope description below, propose per-group impact scores (1-5) across Process, Technology, Role, Location, and Identity, and group affected staff into 3-6 named cohorts. Return a short table, not prose. Do not invent org units not present in the input.”
uc-adkar-barrier	ADKAR Barrier Diagnosis Assistant	Assistive	M10	“Read the open-text survey response below. Identify which single ADKAR block ... it most likely reflects a barrier in, and summarize the barrier in one short phrase (e.g. ‘Desire — fear of role redundancy’). If the text does not clearly indicate a barrier, say so rather than guessing.”

ID	Name	Tier	Module	Prompt Template
uc-cohort-summarizer	Cohort Readiness Summarizer	Augmented	M10	“Given the five ADKAR block scores (1-5) for this cohort below, write a 3-4 sentence readiness narrative suitable for a Sponsor update: name the strongest and weakest blocks, state the overall trajectory, and avoid restating the raw numbers verbatim. Plain business prose, no bullet points.”
uc-sentiment-classifier	Sentiment & Emotion Classifier	Augmented	M11	“Classify each pulse-survey comment below into exactly one of: Denial, Resistance/Anger, Exploration, Commitment ... Return one classification per comment with a one-line justification quoting the relevant phrase. If a comment is ambiguous between two stages, pick the earlier one.”
uc-divergence-detector	Divergence Pattern Detector	Assistive	M11	“Given a cohort’s ADKAR Knowledge and Ability scores and its current Bridges transition reading below, state in one sentence whether this looks like the Divergence Pattern ... and, if so, recommend a loss-focused conversation rather than additional training.”

ID	Name	Tier	Module	Prompt Template
uc-sponsor-recommender	Sponsor Action Recommender	Assistive	M13	“Given this sponsor’s current visibility score and their most recent logged sponsorship actions below, suggest one concrete next action ... that would most improve visibility. One sentence, specific, not generic advice.”
uc-comm-draft	Communication Draft Generator	Augmented	M14	“Draft a message for the persona, channel, and language specified below ... Match tone and length to the channel — an email can run 150-200 words, a chat/SMS-style channel under 40. Do not include a subject line unless the channel is email. Plain text only.”
uc-saturation-advisor	Change Saturation Advisor	Assistive	M14	“Given the list of scheduled communications below (date, target population, initiative), identify any population that would receive more than one significant communication within the same week from different initiatives, and suggest a specific alternate week for the lower-priority one. List conflicts only.”

ID	Name	Tier	Module	Prompt Template
uc-training-mapper	Training Gap-to-Curriculum Mapper	Assistive	M15	“Given the ADKAR Knowledge and Ability scores below for this cohort, and the list of available curriculum tracks, recommend which 1-3 tracks would most directly close the gap. Reference the track names exactly as given; do not invent tracks that aren’t in the list.”
uc-coaching-script	Manager Coaching Script Generator	Assistive	M17	“Write a short coaching talking-points script (4-6 bullet points) a people manager could use in a 1:1 to address the flagged ADKAR barrier described below. Tone: supportive, specific to the barrier named, not generic change-management platitudes. Include one open-ended question the manager should ask.”

ID	Name	Tier	Module	Prompt Template
uc-resistance-classifier	Resistance Root-Cause Classifier	Assistive	M16	“Classify the logged resistance description below into exactly one of: Role (concern about job/role security), Skill (concern about ability to perform), Will (unwillingness despite capability), or Systemic (structural/process obstacle outside the individual’s control). One-word classification plus a one-sentence justification quoting the description.”
uc-regression-predictor	Regression Risk Predictor	Augmented	M21	“Given the post-go-live usage trend data below ..., produce a regression-risk score from 1 (low) to 5 (high) and a two-sentence explanation naming the specific trend that drove the score. Do not score above 3 unless the data shows an actual declining trend, not just a low absolute level.”

ID	Name	Tier	Module	Prompt Template
uc-exec-narrative	Executive Readiness Narrative Generator	Augmented	M20	“Write a 4-5 sentence executive-summary narrative for a Steering Committee update, given the Composite Readiness Index and the underlying ADKAR/sentiment/training figures below. Lead with the headline number and trend, name the single biggest risk or blocker if one is evident in the data, and close with the recommended next checkpoint. No jargon beyond what a non-CM executive would recognize.”
uc-journey-annotation	Journey Map Annotation Assistant	Assistive	M18	“Given the timeline event described below (what changed, and when), suggest a short annotation label (under 8 words) suitable for a visual journey map marker. Favor concrete, specific labels (‘UAT go-live delayed 2 weeks’) over vague ones (‘timeline change’).”

10.6.17 Alert Definitions (data/alertDefinitions.js, Notification Center) — all 16 catalogued conditions; see Section 7.2 for which 9 compute live in the reference build and why the other 7 do not.

ID	Name	Severity	SLA	Recipient Roles
ALT-001	Divergence Pattern Detected	High	Acknowledge within 48h	CM

ID	Name	Severity	SLA	Recipient Roles
ALT-002	Regression Risk Score Critical	Critical	Acknowledge within 24h	CM, SUP
ALT-003	Sponsor Coverage Gap	Medium	Acknowledge within 5 business days	PMO, ES
ALT-004	Resistance Escalation Threshold Breached	High	Acknowledge within 3 business days	CM, ES
ALT-005	Survey Exception Escalated to Admin	Medium	Resolve within 1 business day	Admin
ALT-006	Champion Coverage Below Target	Low	Review within 14 days	CM
ALT-007	AI Use Case Confidence Below Threshold	Informational	Review at next session	CM
ALT-008	Change Saturation Threshold Breached	Medium	Review within 10 business days	PMO
ALT-009	Phase Gate No-Go / Conditional	High	Review within 3 business days	PM, CM, PMO
ALT-010	Guiding Coalition Gap	Medium	Review within 10 business days	PMO, ES
ALT-011	Communication Overload Detected	Low	Review within 5 business days	CM, PMO
ALT-012	Import Integrity Check Failed	Medium	Resolve within 1 business day	ITL
ALT-013	Administrative Account Locked	High	Review within 4 business hours	Super Admin
ALT-014	GDPR Request SLA at Risk	High	Review within 5 business days of receipt	Super Admin
ALT-015	Sustainment Sign-Off Blocked	Medium	Review within 5 business days	CM, ES
ALT-016	AI Provider Fallback Triggered	Informational	Review at next session	ITL

10.7 UI Visual Reference

Full-page screenshots of every one of journi’s 22 modules, the two Query Data/Query Features pages (Section 6.3), and one showing the shared Add/Edit modal pattern (Section 3.2) in use — all captured against the seeded Atlas Industrial Group demo tenant. These give a rebuild team an actual visual reference to match — layout, density, the Sidebar/TopBar shell, table and badge styling — alongside the prose UI conventions in Section 5.1. The palette shown is POWERACT Consulting’s own, exactly as specified in its “Brand & Graphical Chart Guide” (Section 5.1).

M1 — Tenant & Org Hierarchy


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

M1 · Hierarchy

Group → Organization → Projects. Every Change Management Project carries an optional link to zero, one, or more Main Projects.

Group: **Atlas Industrial Group**
Edit Delete

Organization Atlas Industrial Group

Atlas Industrial Group — Casablanca Plant Cluster

Manufacturing · 3,100 employees · 4 sites · FR, AR
Default language: FR

MAIN PROJECT

S/4HANA Unification Program
ERP Implementation
Edit Delete

16mo · €4.2M band · COO, Atlas Industrial Group
↳ 1 linked CM project

CHANGE MANAGEMENT PROJECT

Atlas ERP People Readiness Program
Unfreeze Edit Delete

Change Manager, Atlas ERP Program
↳ Linked Main Project: S/4HANA Unification Program

Order-to-Cash RPA & Workflow Automation
Process Automation
Edit Delete

8mo · €950K band · CFO, Atlas Industrial Group
↳ 1 linked CM project

Atlas Automation Adoption Track
Unfreeze Edit Delete

Change Manager, Atlas Automation Track
↳ Linked Main Project: Order-to-Cash RPA & Workflow Automation

ISO 9001:2015 QMS Digitalization
QMS Implementation
Edit Delete

10mo · €620K band · VP Quality, Atlas Industrial Group
↳ 1 linked CM project

Atlas Quality Culture Program
Change Edit Delete

Change Manager, Atlas Quality Program
↳ Linked Main Project: ISO 9001:2015 QMS Digitalization

Safety-First Leadership Culture Program
Cultural / Values Transformation
Edit Delete

12mo · €310K band · CEO, Atlas Industrial Group
↳ 1 linked CM project

Atlas Safety-First Leadership Culture Program
Change Edit Delete

Change Manager, Atlas Safety Culture Program
↳ Linked Main Project: Safety-First Leadership Culture Program

M1 Tenant & Org Hierarchy

M2 — Identity & RBAC


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

M2 · Identity & RBAC

Role-based access control scoped to Group / Organization / Project. Self-service sign-ups land as pending Employee accounts until approved.

Users & Scope
Permission Matrix
Governance Settings
License & Plan

NAME	ROLE	SCOPE	LANGUAGE	ACTIONS
Amina Idrissi amina.idrissi@journi.app	Super Admin	platform Platform	EN	Delete
Youssef Bennani youssef.bennani@atlas-industrial.example	Group Admin	group Atlas Industrial Group	FR	Delete
Sara El Fassi sara.elfassi@atlas-industrial.example	Organization Admin	organization Atlas Industrial Group — Casablanca Plant Cluster	FR	Delete
Karim Ziani karim.ziani@maghreb-logistics.example	Organization Admin	organization Maghreb Logistics Hub	FR	Delete
Dr. Leila Amrani leila.amrani@meridia-health.example	Organization Admin	organization Meridia Health Network	EN	Delete
Nadia Chraïbi nadia.chraïbi@atlas-industrial.example	Change Manager / ...	project Atlas ERP People Readiness Program	FR	Delete
Omar Tazi omar.tazi@atlas-industrial.example	Change Manager / ...	project Atlas Automation Adoption Track	FR	Delete
Fatima Zahra Naciri fz.naciri@atlas-industrial.example	Change Manager / ...	project Atlas Quality Culture Program	FR	Delete
Yassine Berrada yassine.berrada@atlas-industrial.example	Change Manager / ...	project Atlas Safety-First Leadership Culture Program	FR	Delete
Imane Fassi-Fihri imane.fassifihri@atlas-industrial.example	Change Manager / ...	project Tangier Plant Adoption Program	FR	Delete
Hicham Alaoui hicham.alaoui@maghreb-logistics.example	Change Manager / ...	project Maghreb ERP Transition Program	FR	Delete

M2 Identity & RBAC

M3 — Organizational Breakdown Structure


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach
...

Organizational Breakdown Structure

The project's resourcing roster: who fills which role, and who they report to — distinct from M2 Users, since an OBS entry does not need a Journi login at all.

No roles logged yet for this project.

+ Add Role

M3 OBS

M4 — Macro Process, SIPOC, RACSI & E2E Process Registry


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach
...

Macro Process, SIPOC, RACSI & E2E Registry

The process backbone every module is built on: the 10 macro processes, the 16 registered end-to-end chains (core lifecycle, cross-cutting loops, and one per transformation type), and who is Responsible / Accountable / Consulted / Sign-off / Informed for each.

Macro Processes
E2E Process Registry
RACSI Grid

ID	NAME	DESCRIPTION	OWNING MODULE(S)
MP-01	Change Impact & Stakeholder Assessment	Maps stakeholder groups and scores change impact (process, technology, role, location, identity) to establish the baseline scope of who is affected and how.	M9
MP-02	Sponsorship & Governance Management	Builds and tracks the sponsor coalition, escalation actions, and governance cadence that keep executive backing visible and active.	M7 M13
MP-03	Communication & Awareness Management	Plans and logs the communications cadence that drives the Awareness block of ADKAR across stakeholder cohorts.	M14
MP-04	Resistance & Barrier Management	Logs resistance signals by type (role, skill, will, systemic) and tracks mitigation actions through to resolution.	M16
MP-05	Training & Capability Enablement	Delivers the curriculum that builds the Knowledge and Ability ADKAR blocks, tracked by cohort and completion status.	M15
MP-06	Champion Network Management	Manages the change-champion network — floor-level advocates who surface early signals into the Sponsor Coalition and Resistance Log.	M13
MP-07	Readiness Diagnostics & Signal Capture	Aggregates ADKAR scores, sentiment, and other signals into the Composite Readiness Index used to judge go/no-go readiness.	M10 M11
MP-08	Divergence & Risk Detection	Detects divergence patterns between plan and reality (schedule slips, adoption risk, saturation) and logs them to the Risk Register.	M11 M12
MP-09	Hypercare & Floor Coaching Support	Provides manager-led floor coaching and hypercare support immediately after go-live, while adoption is still fragile.	M17 M21
MP-10	Reinforcement & Sustainment Management	Locks in the change through checkpoints, quick wins, and lessons learned so gains outlast the project close-out.	M7 M21

M4 Process Registry

M5 — Change Management Charter Registry


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

Change Management Charter Registry
The 8 signed, trackable behavioral standards governing sponsorship, frontline engagement, communication, impact assessment, coaching and mentoring, and pulse/interview diagnostics — with their concrete action mapping and per-project compliance log, so charter governance is trackable, not just aspirational.

Charters
Action Mapping & Compliance
Mentoring Progression

Each charter names specific, observable behaviors rather than generic guidance — click a charter to see its full What/Who/When/Where/Why/How.

CHTR-01

Sponsorship / Leadership Charter

Active

1 entry

CHTR-02

Participative Management Charter

Active

1 entry

CHTR-03

Communication Charter

Active

1 entry

CHTR-04

Organizational Impact Charter

Active

1 entry

CHTR-05

Team Coaching Charter

Active

1 entry

CHTR-06

One-to-One Coaching Charter

Active

M5 CM Charters

M6 — AI Use Case Library & Governance


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

AI Use Case Library & Governance
A governed catalog of Assistive and Augmented AI use cases. No use case acts autonomously.

LLM Provider Connection

Not connected — using built-in example generators

Journi has no backend: connecting sends your API key and every generated prompt directly from this browser to the provider you choose. The key is stored only in this browser's local storage — never in the seeded demo data, and never cleared by "Reset Demo Data." Do not use a production key on a shared or public machine. Once connected, every AI Use Case across the app calls this provider instead of its canned example text; the review/accept/edit/reject checkpoint is unchanged either way.

PROVIDER

MODEL

Anthropic (Claude)
Claude Sonnet 4.5 (recommended for Journi)

API KEY

sk-ant-...

Connect

Catalog & Governance

AI Usage & Override Log

+ Add AI Use Case

Stakeholder Impact Drafting Assistant
Assistive
M9 Stakeholder & Impact Mapping
v1

Drafts suggested impact scores and cohort segmentation from the org chart and change scope.

Trigger / Input: Org chart import + change scope definition
Output: Suggested per-group impact scores (process/tech/role/location/identity) and cohort segmentation

Human Checkpoint: Change Manager confirms or edits every score before it is saved

Edit
History (1)
Delete

ADKAR Barrier Diagnosis Assistant
Assistive
M10 ADKAR Engine
v1

Suggests a likely barrier reason code from open-text survey responses (e.g. "Desire — fear of role redundancy").

Trigger / Input: Open-text survey / pulse responses
Output: Suggested barrier reason code per stalled ADKAR block

Human Checkpoint: Change Manager confirms or re-codes before it enters the record

Edit
History (1)
Delete

M6 AI Use Case Library

M7 — Initiative Registry


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

Initiative & Portfolio Registry

System of record for every change initiative — business driver, scope, target population, and Lewin macro-state.

Atlas ERP People Readiness Program
S/4HANA Unification Program
16mo · €4.2M band · COO, Atlas Industrial Group

Linked Main Project

CHANGE TYPE

LEWIN MACRO-STATE

technology

Unfreeze

BUSINESS DRIVER
Unify fragmented plant-level ERPs into a single source of truth ahead of group-wide reporting consolidation.

TARGET POPULATION
~1,200 plant and back-office staff (finance, procurement, planning, warehouse supervisors)

SUCCESS CRITERIA
90% of target population trained and certified; finance close cycle reduced by 3 days; adoption rate >85% at day 90.

Composite Readiness Index

40%

Change Manager, Atlas ERP Program
Bridges Transition
Lewin Macro-State

Ending
Unfreeze

Justification & Change Log
Every scored or state-changing update to this project's Lewin, ADKAR, Bridges and Kübler-Ross readings, with the evidence recorded behind it.

DATE	MODULE	FIELD	CHANGE	JUSTIFICATION
2026-08-07	M10 · ADKAR Engine	Desire	1 → 2	Data migration phase revealed historical skepticism
2026-08-06	M10 · ADKAR Engine	Ability	1 → 2	First hands-on sandbox session run with the finance pilot group; still short of a full practice environment.

M7 Initiative Registry

M8 — Work Breakdown Structure & Gantt


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

Work Breakdown Structure & Gantt

One WBS spanning Project Management, Change Management and the Lewin/Prosci/Bridges/ADKAR framework milestones — baseline vs. actual dates, with the schedule gap called out task by task.

TOTAL TASKS
22

ON TRACK / AHEAD
3
gap ≤ 0 days

AT RISK (>7D SLIP)
0

AVG. SCHEDULE GAP
+2d

Lifecycle phase (REQ-021): All phases
Load phase template
Manage Templates
+ Add WBS task

TASK	Jun 26	Jul 26	Aug 26	Sep 26	Oct 26	Nov 26	Dec 26	Jan 27	Feb 27	Mar 27	Apr 27	May 27	Jun 27	Jul 27	GAP
Project Management															
Stand up tenant hierarchy & g... Phase 0															+2d
Complete initiative profile & b... Phase 1															on time
Confirm delivery scope & bud... Phase 2															+2d
Expand the portfolio Phase 3															—
Confirm the Readiness Index a... Phase 4															—
Benchmark against portfolio p... Phase 5															—
Provision users & verify RBAC Phase 6															—
Configure Permission Matrix &... Phase 7															—
Change Management															
Register & link the Change Ma... Phase 0															on time

M8 WBS and Gantt

M9 — Stakeholder & Impact Mapping


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

Stakeholder & Impact Mapping

Who is affected, how heavily, and in what dimension. Impact scores drive tracking depth.

+ Stakeholder Group

STAKEHOLDER GROUP	HEADCOUNT	PROCESS	TECHNOLOGY	ROLE	LOCATION	IDENTITY	INFLUENCE	STATUS
Finance & Procurement (HQ)	210	5	5	3	1	2	4	Edit Delete
Plant Warehouse Supervisors	90	4	4	3	3	4	2	High-impact / Low-influence Edit Delete
Production Planning	140	5	4	4	2	3	3	Edit Delete
Shop-floor Supervisors (all 3 plants)	260	3	4	3	4	4	2	High-impact / Low-influence Edit Delete

M6 · AI Use Case Library
Stakeholder Impact Drafting Assistant — not activated for this scope. An Organization Admin can enable it in M6.

M9 Stakeholder Mapping

M10 — ADKAR Engine


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

ADKAR Engine — Individual Readiness Core

Score cohorts across the five ADKAR blocks with barrier-point diagnosis.

Awareness Escalated — stalled beyond threshold
1 2 3 4 5
BARRIER REASON — JUSTIFY THIS SCORE
Town halls held; shop-floor supervisors still under-informed
History:
baseline: 1
2026-08-04: 2 — "First-wave town hall held at Ain Seba; awareness lifted from a standing start."
2026-08-05: 3 — "Second wave of town halls completed at all three plants; awareness confirmed via post-session pulse survey."

Desire Escalated — stalled beyond threshold
1 2 3 4 5
BARRIER REASON — JUSTIFY THIS SCORE
Job-security concerns after prior automation announcement
History:
baseline: 1
2026-08-07: 2 — "Data migration phase revealed historical skepticism"

Knowledge Escalated — stalled beyond threshold
1 2 3 4 5
BARRIER REASON — JUSTIFY THIS SCORE
Training curriculum not yet launched
History:
baseline: 1
2026-08-06: 2 — "Initial curriculum walkthrough session held with pilot cohort; foundational training materials now published."

Ability Escalated — stalled beyond threshold
1 2 3 4 5
BARRIER REASON — JUSTIFY THIS SCORE
No hands-on practice environment available yet
History:
baseline: 1
2026-08-06: 2 — "First hands-on sandbox session run with the finance pilot group; still short of a full practice environment."

Reinforcement Escalated — stalled beyond threshold
1 2 3 4 5
BARRIER REASON — JUSTIFY THIS SCORE
Go-live still 9 months out; too early to reinforce
History:
baseline: 1

Escalated — stalled beyond threshold: Desire, Knowledge, Ability, Reinforcement — automatically flagged to the Change Manager for review.

M10 ADKAR Engine

M11 — Emotional & Transition Layer


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

Emotional & Transition Layer

Bridges transition position and Kübler-Ross sentiment, cross-referenced with ADKAR.

Bridges Transition

1. Ending
2. Neutral Zone
3. New Beginning

NOTES — WHAT YOU'RE OBSERVING AT THIS STAGE

Ending phase, entering Neutral Zone for early-adopter finance team

Kübler-Ross Curve

Denial
Resistance / Anger
Exploration
Commitment

NOTES — SENTIMENT SNAPSHOT

Mixed Denial/Resistance among shop-floor supervisors; Exploration among finance leadership

Sentiment & Emotion Classifier

AI-generated — review required

Generate — Sentiment & Emotion Classifier

Divergence Pattern Detector

AI-generated — review required

Generate — Divergence Pattern Detector

M11 Emotional and Transition

M12 — Change Risk Register


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

Change Risk Register

Adoption, sponsorship, capacity and saturation risk — distinct from generic project risk.

Portfolio cross-reference: population also targeted by Atlas Automation Adoption Track, Atlas Quality Culture Program, Atlas Safety-First Leadership Culture Program — potential saturation risk.

Export CSV **+ Category**

CATEGORY	DESCRIPTION	LIKELIHOOD	IMPACT	RISK SCORE	OWNER	STATUS
Saturation	Change saturation — concurrent Process Automation initiative targets an overlapping population	4	4	16	Change Manager, Atlas ERP Program	0... Mitigation actions (0) Delete
Adoption	Union sensitivities around headcount perception in consolidated back-office roles	3	4	12	HR Business Partner	0... Mitigation actions (0) Delete
Capacity	Multi-site rollout sequencing risk across 3 plants with different legacy-system maturity	3	3	9	PMO	0... Mitigation actions (0) Delete

M12 Risk Register

M13 — Sponsor & Coalition


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach
...

Sponsor & Coalition Module

Sponsor roadmap, active-vs-passive sponsorship, and guiding coalition strength.

COO, Atlas Industrial Group
Guiding coalition formed (COO, 3 plant directors, Finance VP); visibility rated Moderate — plant-floor presence still limited
VISIBILITY
Weak Moderate Strong

Coalition Member [Export CSV](#)

NAME	ROLE	INFLUENCE	ENGAGEMENT
COO	Executive Sponsor		
Plant Director — Ain Sebaâ	Coalition Member		
Plant Director — Nouaceur	Coalition Member		
Plant Director — Mohammedia	Coalition Member		
Finance VP	Coalition Member		

Sponsor Action — Roadmap

☒ Kick-off town-hall at each-of-3 plants [Prepare](#)

☐ Monthly plant-floor walk with visible Q&A [Manage](#)

☐ Sponsor-led go/no-go review at each cutover [Manage](#)

Sponsor Action [Add](#)

Sponsor Action Recommender

AI-generated — review required [ASSISTIVE](#)

[Generate — Sponsor Action Recommender](#)

M13 Sponsor and Coalition

M14 — Communication Planning & Execution


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach
...

Communication Planning & Execution

Message x audience x channel x timing matrix, with saturation detection.

Change saturation risk — overlapping population
3 other active initiative(s) in this organization may be targeting an overlapping population: Atlas Automation Adoption Track, Atlas Quality Culture Program, Atlas Safety-First Leadership Culture Program.

[Export CSV](#) [+ Message](#)

MESSAGE	AUDIENCE	CHANNEL	TIMING	LINKED ADKAR BLOCK	STATUS		
Why S/4HANA: unifying our plants for one source of truth	All target population	Town Hall	Prepare phase — completed	Awareness	sent	Edit	Delete
What changes for your role on day one	Finance & Procurement	Team Briefing	M+2	Awareness	scheduled	Edit	Delete
No headcount reduction tied to this program — Q&A recording	Shop-floor Supervisors	Intranet + Toolbox Talk	M+1	Desire	draft	Edit	Delete

Communication Draft Generator

AI-generated — review required [AUGMENTED](#)

[Generate — Communication Draft Generator](#)

Change Saturation Advisor

AI-generated — review required [ASSISTIVE](#)

[Generate — Change Saturation Advisor](#)

M14 Communications

M15 — Training & Capability Building


journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

Training & Capability Building

Curriculum coverage, completion, and demonstrated capability — trained vs. capable.

Training-needs assessment: Knowledge & Ability gap identified from M10 — see recommendation below.

Export CSV Curriculum / Track

CURRICULUM / TRACK	COHORT	LEVEL	TARGET AUDIENCE	COMPLETION	CERTIFIED / CAPABLE	
S/4HANA Finance Essentials	Finance & Procurement	Foundation		15%	trained only	View details Edit Delete
S/4HANA Production Planning	Planning & Warehouse	Foundation		5%	trained only	View details Edit Delete

Training Gap-to-Curriculum Mapper
AI-generated — review required
Generate — Training Gap-to-Curriculum Mapper
ASSISTIVE

M15 Training

M16 — Resistance Management


journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

Resistance Management

Log, classify and resolve resistance, linked to concrete mitigation actions.

Resistance Log Coding Workbench

0
Role-based

0
Skill-based

1
Will-based

1
Systemic

Type

Will-based Severity: 4/5 in progress Shop-floor Supervisors
Root Cause: Fear that ERP consolidation precedes headcount reduction
Mitigation Action: Joint HR/Union briefing confirming no headcount impact — HR Business Partner (+30d)
Close Edit Delete

Systemic Severity: 3/5 open Cross-plant
Root Cause: Legacy system maturity gap creates uneven readiness across 3 plants
Mitigation Action: Sequenced rollout starting with most digitally mature plant — PMO (+60d)
Mark in progress Edit Delete

Resistance Root-Cause Classifier
AI-generated — review required
Generate — Resistance Root-Cause Classifier
ASSISTIVE

M16 Resistance

M17 — Manager-as-Coach Enablement


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readiness...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

Manager-as-Coach Enablement
Team-scoped ADKAR heatmap with suggested coaching actions per barrier.

Team-scoped ADKAR Heatmap — ~1,200 plant and back-office staff (finance, procurement, planning, warehouse supervisors)
Awareness 3 Desire 2 Knowledge 2 Ability 2 Reinforcement 1
Restricted to this manager's own reporting line — no org-wide change data exposed.

Manager Readiness Self-Assessment
A manager must be ready to lead the change before their team can be.
1 2 3 4 5

Suggested Coaching Script — Manager Coaching Script Generator
AI-generated — review required ASSISTIVE
Generate — Manager Coaching Script Generator

Coaching Note
Plant Director — Nouaceur → Shop-floor Supervisors
Team still associates any system change with the 2024 automation layoffs; recommend small-group listening sessions before more town halls. Desire
Add new coaching notes from M10 · ADKAR Engine.

M17 Manager as Coach


M18 — Journey Map / Visual Core


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readiness...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach

Journey Map / Visual Core
A literal, visual timeline combining ADKAR stage, Bridges phase and sentiment.

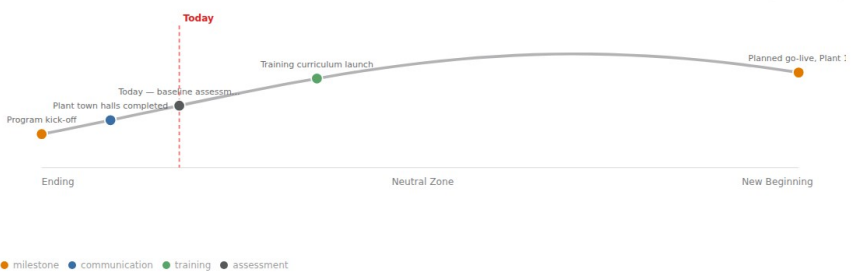Atlas ERP People Readiness Program
Change Management Project
Share Snapshot


- Program kick-off
- Plant town halls completed
- Today — baseline assessment
- Training curriculum launch
- Planned go-live, Plant 1

Journey Map Annotation Assistant
Journey Map Annotation Assistant — not activated for this scope. An Organization Admin can enable it in M6.

Timeline events

Event	Type	Action
-60d Program kick-off	Milestone	Edit Delete
-30d Plant town halls completed	Communication	Edit Delete
+0d Today — baseline assessment	Assessment	Edit Delete

M18 Journey Map

M19 — Stakeholder Journeys, Touchpoints & Analytics


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach
...

Stakeholder Journeys, Touchpoints & Analytics

The experience-layer companion to the score-centric dashboards elsewhere in Journi: 8 persona/exception/system journeys, their concrete touchpoints with success criteria and evidence, 5 journey analytics dashboards, and the project-context overlay distinguishing each case from the generic template.

JOURNEYS
Touchpoints & Completion
Analytics Dashboards
Project Context Overlay

JRN-01
End User Adoption Journey
Persona Journey

The primary persona journey visualized in Module 18's Journey Map — Ending through New Beginning, overlaid with ADKAR block transitions and key events.

Trigger: Change scope communicated to the affected population
Audience: Employee / End User
Duration: J0-J8 (full project lifecycle)
Owner: Change Manager

M9 M10 M11 M14 M15 M18

JRN-02
Executive Sponsor Journey
Persona Journey

Tracks the Sponsor's own journey from initial commitment through visible-sponsorship activity to formal Refreeze sign-off — governed by CHTR-01.

Trigger: CM Project opened, Sponsor named
Audience: Executive Sponsor
Duration: J0-J8 (full project lifecycle)
Owner: Change Manager

M7 M13

JRN-03
Frontline Supervisor / People Manager Journey
Persona Journey

Covers participative-management engagement through hypercare floor coaching — governed by CHTR-02 and CHTR-05.

Trigger: Team assigned to Supervisor for the initiative
Audience: Frontline Supervisor / People Manager
Duration: J3-J8 (Build through Sustainment)
Owner: Change Manager

M16 M17

JRN-04
Champion Journey
Persona Journey

Recruitment through active listening-session participation to network re-chartering; feeds E2E-01 (Readiness & Mobilization) and E2E-03 (Resistance-to-Commitment).

Trigger: Champion nominated
Audience: Employee (Champion role)
Duration: J1-J7 (Discovery through Reinforcement)
Owner: Change Manager

M13

JRN-05
Mentee Journey (Mentoring Charter)
Persona Journey

Specializes: JRN-01 — End User Adoption Journey
The Trainee -> Observer -> Autonomous staged journey (see

JRN-06
Divergence Case Journey
Exception Journey

The Exception E2 recovery path as a journey in its own right — confirm, identity-focused 1:1, closure moment, Bridges re-check; governed by

M19 Journeys and Analytics

M20 — Metrics & Analytics Dashboard


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach
...

Metrics & Analytics Dashboard

Composite Readiness Index, adoption curves, and correlation analysis.

Change Management Project
Organization
Group

Viewing at: Change Management Project

Metrics & Analytics Dashboard
Benchmarking
Cross-Type Matrix

COMPOSITE READINESS INDEX
40%

ADKAR 40%

Kübler-Ross Curve Exploration

Training & Capability Building 10%

Adoption Curve


ADKAR Heatmap — Atlas ERP People Readiness Program
Export CSV

CHANGE MANAGEMENT PROJECT	AWARENESS	DESIRE	KNOWLEDGE	ABILITY	REINFORCEMENT
Atlas ERP People Readiness Program	3	2	2	2	1

Correlation: sentiment vs. adoption speed
Not enough post-go-live checkpoint data yet at this level.

Executive Readiness Narrative
Executive Readiness Narrative Generator — not activated for this scope. An Organization Admin can enable it in M6.

M20 Analytics

M21 — Reinforcement & Sustainment


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...

English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach
...

Reinforcement & Sustainment
Post-go-live adoption audits, regression detection, and sustainment sign-off.

30-day not due
Record checkpoint

60-day not due
Record checkpoint

90-day not due
Record checkpoint

Quick Win / Milestone
No records yet.
Quick Win / Milestone Add

Lessons Learned
D25 REX Institutionalization Log: a lesson counts as closed only once it names the specific Rule, Control, or Charter that now encodes it — not just recorded, but applied.
No records yet.
Lessons Learned
Linked Rule / Control / Charter (e.g. RULE-008, CTRL-012, CHTI) Add

Sustainment Sign-off
Formal hand-off to Business-as-Usual ownership — Lewin's Refreeze. Sign off

Regression Risk Predictor
AI-generated — review required AUGMENTED
Generate — Regression Risk Predictor

M21 Sustainment

M22 — Field Notes


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...

English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach
...

Field Notes
A lightweight, freeform log for the knowledge that doesn't fit a structured module yet — a workshop happened, a decision was made outside Journi, a sign-off landed, a nominee list was drafted. Not a substitute for the structured modules: once something becomes a real record there (a Stakeholder Map entry, an ADKAR score, a Communication), it belongs there. This is for the moments in between.

Category All categories
No Field Notes logged yet for this project. Add Field Note

M22 Field Notes

Query Data (Section 6.3.1)


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach
...

Query Data RBAC-scoped
Ask a plain-language question about this tenant's own data — the answer is scoped to exactly what your role can see.

How many active projects are there?
Ask

How many active projects are there?
How many open resistance log entries are there?
What alerts are currently firing?
What is the average ADKAR score across my projects?

Computed answer
Connect an AI provider on M6 for a phrased answer
There are 15 Change Management Project(s) visible to you.
SOURCES

- Atlas ERP People Readiness Program (unfreeze)
- Atlas Automation Adoption Track (unfreeze)
- Atlas Quality Culture Program (change)
- Atlas Safety-First Leadership Culture Program (change)
- Tangier Plant Adoption Program (unfreeze)
- Tangier Frontline Digital Skills Program (unfreeze)
- Maghreb ERP Transition Program (unfreeze)
- Maghreb Frontline Adoption Program (unfreeze)

Query Data

Query Features (Section 6.3.2)


Journi
Human Change Management Platform

Atlas Industrial Group ...
Atlas ERP People Readine...
English
Amina Idrissi
Super Admin
Reset Demo Data
Sign out

PLATFORM & GOVERNANCE
Portfolio Dashboard
M1 · Hierarchy
M2 · Identity & RBAC
M3 · OBS
M4 · Process Registry
M5 · CM Charters
M6 · AI Use Case Library
CHANGE MANAGEMENT PROGRAM
M7 · Initiative Registry
M8 · WBS & Gantt
M9 · Stakeholder Mapping
M10 · ADKAR Engine
M11 · Emotional & Transition
M12 · Risk Register
M13 · Sponsor & Coalition
M14 · Communications
M15 · Training
M16 · Resistance
M17 · Manager as Coach
...

Query Features Role-filtered
Ask what journi can do, in plain language, and get pointed at the right module.

Where do I score someone stuck on desire?
Ask

Where do I score someone stuck on desire?
How do I set up a Phase Gate?
Where can I see who is on the guiding coalition?
How do I connect an AI provider?


Closest match: ADKAR Engine (Module 10).

M10 ADKAR Engine
Module 10 ADKAR Engine. Module 10, ADKAR Engine: score a cohort across the five ADKAR blocks (Awareness, Desire, Knowledge, Ability, Reinforcement), 1-5 each, with a ...

M12 Risk Register
Module 12 Risk Register. Module 12, Risk Register: adoption, sponsorship, capacity, and saturation risks, each with a likelihood/impact score, owner, and mitigation plan, feedi...

Query Features

Shared CRUD modal pattern (illustrated on M1’s “+ Group” Add dialog — every module’s Add/Edit flow uses this same shell, per Section 3.2)

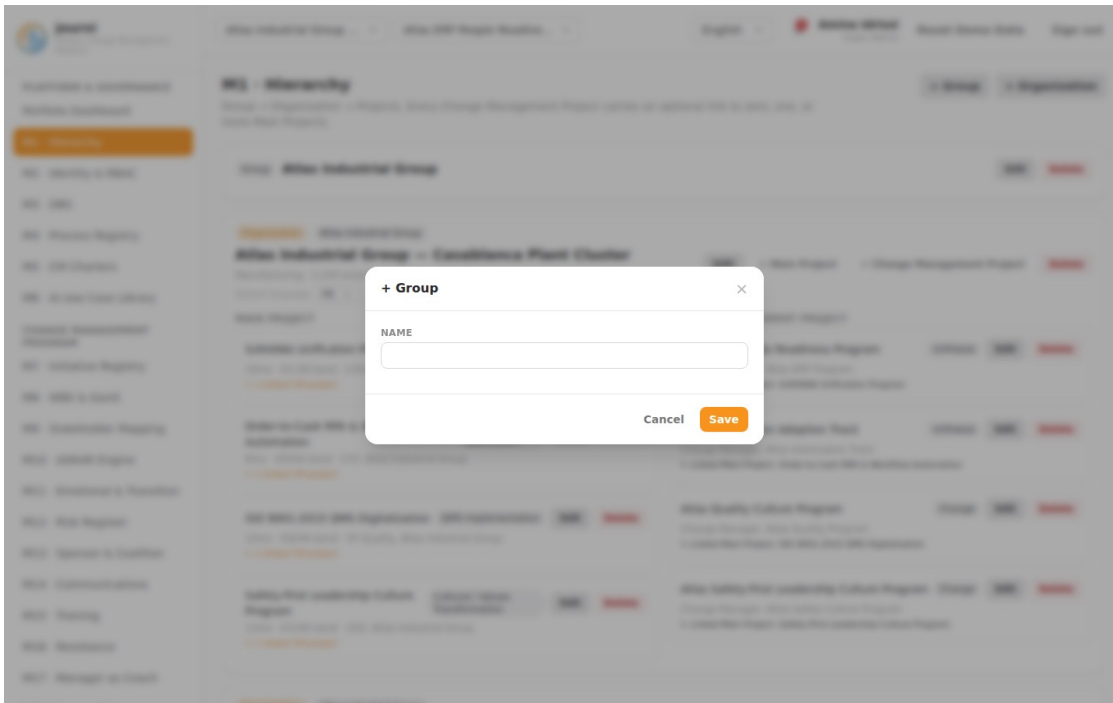

Shared Add/Edit modal example

10.8 Test Plan / Acceptance Criteria

One acceptance test case per functional requirement in Section 6, in Given/When/Then form, so a QA team can verify a rebuild against this document without re-deriving test intent from prose. Every row traces to exactly one FR-Mn-*nn* or FR-X-*nn* id; NFR verification notes follow in Section 10.8.4. Roles referenced are the 9 platform roles (Section 3.7); “a write-capable role” means any role for which the cited capability check returns true under the default Permission Matrix (Section 10.4).

10.8.1 Platform & Governance (M1-M6)

FR	Given	When	Then
FR-M1-01	Signed in as org_admin in a scoped Organization	Creating/editing/deleting a Group, Organization, Main Project, or Change Management Project	The operation succeeds and the record list reflects the change immediately
FR-M1-02	A Change Management Project with an empty mainProjectIds[]	Linking it to two different Main Projects	Both links persist; the project is no longer flagged “standalone”
FR-M1-03	A Group with two member Organizations	Deleting the Group	Both Organizations remain, each with groupId cleared (now standalone)
FR-M1-04	An Organization with Main/CM Projects, AI activation state, and scoped users	Deleting the Organization	All of the above are removed; no orphaned records remain

FR	Given	When	Then
FR-M1-05	A Main Project linked to one Change Management Project	Deleting the Main Project	The Change Management Project persists, now with the link removed (standalone)
FR-M1-06	A Change Management Project with one user scoped directly to it	Deleting the Change Management Project	That user account is also removed
FR-M1-07	An Organization with Default Language = French	A user with no personal language preference signs in	The UI renders in French
FR-M1-08	A Main Project linked to two Change Management Projects, another with none	Viewing the M1 hierarchy	The first shows “2 linked CM projects”; the second is badged “standalone”
FR-M2-01	Signed in as org_admin	Creating a user, then attempting to edit their name/email after creation	Role edits succeed; no UI control exists to edit name/email post-creation
FR-M2-02	Signed in as change_manager (not super_admin)	Viewing the Permission Matrix tab	The grid renders read-only; no edit control is enabled, even if the matrix grants other capabilities to this role
FR-M2-03	super_admin grants people_manager the write capability	Any people_manager user reloads any write-gated module	Write controls that were previously hidden are now visible, with no code deploy
FR-M2-04	requireJustification is toggled off by org_admin	A Change Manager changes an ADKAR score with no justification text	Save succeeds without a justification note
FR-M2-05	A license with maxUsers: 20 and 22 seeded users	Viewing the License & Plan tab	An over-capacity flag is shown; expiry countdown is color-coded per its threshold
FR-M2-06	Uploading a .lic file missing the hardwareId field	Attempting the upload	The upload is rejected for a missing required field (not a signature check)
FR-M3-01	Signed in as change_manager	Adding, editing, and deleting an OBS entry	All three operations succeed and the roster updates
FR-M3-02	An OBS entry “Site Lead” with two direct reports	Deleting “Site Lead”	Both direct reports now report to whoever “Site Lead” reported to (not orphaned)
FR-M3-03	An OBS roster with a 3-level reporting chain, entries added out of order	Viewing the roster	Entries render depth-first, roots first, indented by depth — not in creation order
FR-M3-04	An OBS roster with at least one entry	Opening M8’s “Assigned to” field on a WBS task	The OBS entry appears as a selectable assignee

FR	Given	When	Then
FR-M4-01	Signed in as employee	Viewing the Macro Process Catalog and E2E Process Registry tabs	Both are fully readable; no write control is present for any role
FR-M4-02	Signed in as practitioner (not hierarchy-capable)	Viewing the RACSI Grid tab	The grid renders read-only; a super_admin/group_admin/org_admin sees it editable
FR-M4-03	Viewing E2E-ERP (a “type” entry)	Opening its detail	Its linked Phase Template (TPL-ERP-8) and SIPOC supplier/customer lists resolve and display
FR-M5-01	Signed in as change_manager	Creating a Charter, adding an Entry, editing both, then deleting the Entry	All operations succeed
FR-M5-02	A Charter with status “Active”	Attempting to delete it, then setting status to “Retired” and retrying	First attempt is blocked with an explanatory message; retry after retiring succeeds, and only for Super/Group/Org Admin
FR-M5-03	Any role	Viewing the Charter Action catalog or Mentoring Progression tab	No add/edit/delete control is present for either
FR-M5-04	A logged Charter Action Log entry	Attempting to edit it in place, then deleting and re-logging it	No edit control exists; delete-then-relog succeeds
FR-M5-05	A Charter Action with 5 logged compliance instances	Viewing the Action Mapping & Compliance tab, filtered to that charter	The 3 most recent instances show, plus “+2 more”
FR-M6-01	Signed in as change_manager	Creating, editing, deleting, and reverting a version of an AI Use Case	All four operations succeed
FR-M6-02	A use case activated for two Organizations and one project override	Deleting the use case	Its keys are removed from aiOrgActivation and aiProjectOverride for every Organization/project
FR-M6-03	Signed in as org_admin	Toggling a use case off for the Organization	The use case stops producing new suggestions org-wide
FR-M6-04	A use case active for the Organization	A change_manager sets a project override to “off”	That project’s instances stop suggesting; sibling projects in the same org are unaffected

FR	Given	When	Then
FR-M6-05	A use case with a previously-accepted, human-approved suggestion on record	Deactivating the use case	The prior approved content remains visible; no new suggestions appear
FR-M6-06	Any AI suggestion box, anywhere in the app	Rendered on screen	It carries the “AI-generated — review required” label
FR-M6-07	A user accepts, edits, and rejects three different AI suggestions	Viewing the AI Usage Log	All three outcomes are recorded; none can be edited or deleted from the log
FR-M6-08	A configured LLM provider API key	Exporting/inspecting the backend’s persisted state, or triggering “Reset Demo Data”	The API key is absent from the exported/persisted state and survives the reset (browser-local only)
FR-M6-09	An LLM provider configured with an invalid API key	Triggering any AI use case	The use case falls back to its built-in generator and completes without error
FR-M6-10	An employee role with project-only visibility	Triggering an AI use case on a project they can see	The suggestion never surfaces data outside what that role could already see via RBAC

10.8.2 Change Management Program (M7-M22)

FR	Given	When	Then
FR-M7-01	Signed in as change_manager	Editing businessDriver and clicking away (blur)	The field saves without a separate Save button
FR-M7-02	requireJustification is on	Attempting to change lewinPhase with no justification text	Save stays disabled until justification text is entered
FR-M7-03	A justified Lewin-phase change and an ADKAR score change on the same project	Viewing the Change Log	Both entries appear, each with old value, new value, module, date, and justification; neither is editable
FR-M7-04	A project with ADKAR average 80%, sentiment score 60, training completion 70%	Viewing the Readiness Index	It computes to $80 \times 0.5 + 60 \times 0.25 + 70 \times 0.25 = 72.5$
FR-M7-05	Three Change Management Projects in one Organization, a change_manager scoped to only one	That user views the M7 portfolio table	Only their own project appears (RBAC-scoped), while an org_admin sees all three
FR-M8-01	Signed in as a write-capable role	Adding, editing, and deleting a WBS task	All three succeed
FR-M8-02	A Phase Checklist item	Toggling its done state, then attempting to edit its text	The toggle works; no other field is editable, matching the Create/Delete-only spec

FR	Given	When	Then
FR-M8-03	A recorded Phase Gate	Attempting to edit it, then deleting and re-recording it	No edit control exists; delete-then-re-record succeeds
FR-M8-04	A Main Project of type “erp” with no WBS tasks yet	Clicking “Load Phase Template” with the default selection	TPL-ERP-8 is pre-selected; confirming seeds 8 skeleton PM-track tasks spaced from the chosen start date
FR-M8-05	Signed in as <code>change_manager</code> (has <code>manageTemplates</code>)	Editing a Phase Template’s phase text and reverting to a prior version	Both operations succeed independently of any project’s own WBS data
FR-M8-06	A task with baseline finish in the past and no actual finish recorded	Viewing the WBS table	The task shows a red “significant slip” gap badge, and the portfolio summary’s “at risk” count includes it
FR-M8-07	A framework-track task with baseline start = baseline finish	Viewing the Gantt chart	It renders as a marker, not a bar
FR-M8-08	Tasks with phase labels matching two different P1-P7 mappings	Applying the P3 lifecycle filter	Only tasks (and checklist items, gates) auto-mapped to P3 are shown
FR-M8-09	A project with a stalled ADKAR block and an open Divergence Alert	Opening the Phase Gate “Add” modal	<code>readinessIndexSnapshot</code> , <code>checklistCompletionPct</code> , and <code>openFlags</code> pre-fill from current live values
FR-M9-01	Signed in as a write-capable role	Adding, editing, and deleting a stakeholder group	All three succeed
FR-M9-02	A group with impact scores averaging 4.0 and influence 2	Viewing the stakeholder table	It is flagged “High Impact / Low Influence”
FR-M9-03	Impact cells at values 5, 3, and 2	Viewing the table	They render red, amber, and neutral respectively
FR-M10-01	<code>requireJustification</code> is on	Changing the Awareness block’s score	Save is blocked until justification text is present; on save, both the block’s history and the project Change Log record the change
FR-M10-02	A block scored at 2	Viewing the ADKAR panel	It shows an amber “stalled” badge and the auto-flag banner
FR-M10-03	A logged coaching note	Attempting to edit or delete it from M10	No such control exists (Create-only, a known gap)

FR	Given	When	Then
FR-M10-04	A stalled Desire block	Opening the Desire-diagnosis assistant	Step one produces a diagnosis citing Resistance Log/sentiment evidence; confirming offers a draft coaching script, each step requiring explicit Confirm/Discard
FR-M11-01	requireJustification is on	Changing Bridges phase or sentiment stage	Both follow the same pending-value-plus-justification pattern as M10
FR-M11-02	A sentiment snapshot containing the word "excited" and no explicit sentimentStage set	Viewing the module	The inferred stage reads "commitment" (or the nearest matching keyword category); an unmatched snapshot defaults to "exploration"
FR-M11-03	Knowledge = 4, Ability = 4, Bridges = "ending"	Viewing the module	A Divergence Alert banner appears, and M8's Phase Gate open-flags field reflects it
FR-M12-01	An existing risk	Attempting to edit its category/description/likelihood/impact/owner	No such control exists; only status is changeable, via the justified-change flow (a known gap)
FR-M12-02	A risk with no mitigation actions	Adding, updating the status of, and deleting a mitigation action	All three succeed
FR-M12-03	A risk with likelihood 4, impact 3	Viewing the risk table	Risk Score = 12, shown red (high-severity); the list is sorted by score descending
FR-M12-04	Two other active CM Projects in the same Organization	Viewing the Risk Register	A saturation banner is shown
FR-M13-01	requireJustification is on	Changing sponsor visibility	Follows the stage-then-justify pattern
FR-M13-02	An existing sponsor action	Toggling done, then attempting to edit its text	Toggle works; no edit/delete control exists (a known gap)
FR-M13-03	The Coalition Member table	Attempting to add, edit, or delete a member	No such control exists anywhere in M13 (a known gap)
FR-M13-04	sponsor.visibility = 'weak'	Viewing M13	A red alert banner appears, referencing M10's stalled Desire scores
FR-M14-01	Signed in as a write-capable role	Adding, editing, deleting a communication	All three succeed

FR	Given	When	Then
FR-M14-02	Two other active CM Projects in the same Organization	Viewing the Communications log	A saturation banner is shown, matching M12's condition
FR-M14-03	Signed in as sponsor (read-only role)	Clicking Export CSV on the Communications table	The export succeeds despite no write access
FR-M15-01	Signed in as a write-capable role	Adding, editing, deleting a training record	All three succeed
FR-M15-02	requireJustification is on	Toggling certified	Follows the stage-then-justify pattern, separate from the general edit modal
FR-M15-03	M10 reports Knowledge = 2 for this project	Viewing M15	A training-needs banner appears citing M10 as the gap source
FR-M16-01	Signed in as change_manager (canManage)	Adding, editing, deleting a resistance-log entry	All three succeed
FR-M16-02	An open resistance entry, requireJustification on	Advancing status to "in progress"	Follows the stage-then-justify pattern
FR-M16-03	Signed in as employee	Submitting an anonymous concern	Submission succeeds; the same user cannot change status, classification, or delete any entry
FR-M16-04	Two systemic-type entries logged	Viewing the Resistance Log	A red pattern-detection banner appears, pointing to M13
FR-M16-05	The org codebook	Adding a code, then attempting to edit its label	Add succeeds; no edit control exists (a known gap); a code tag can be added/deleted and optionally cross-linked to a resistance entry
FR-M16-06	Three tags using code A, one using code B	Viewing the frequency rollup	Code A's bar renders larger, proportioned against the most-used code
FR-M17-01	requireJustification is on	Changing Manager Readiness	Follows the stage-then-justify pattern; the ADKAR heatmap and coaching-note list show no add/edit/delete control regardless of the signed-in role
FR-M17-02	A people_manager with 3 direct reports out of 40 project staff	Viewing the M17 heatmap	Only the 3 direct reports' data appears
FR-M18-01	Signed in as a write-capable role	Adding, editing, deleting a journey event	All three succeed

FR	Given	When	Then
FR-M18-02	Two CM Projects in the same Organization, each with journey events	Switching the zoom selector to "Organization"	Events from both projects render on one chart
FR-M18-03	Any user	Clicking "Share Snapshot"	A confirmation message appears; no file or link is actually produced
FR-M19-01	Any role	Viewing Journeys, Touchpoints, Dashboards, Context Overlay tabs	No add/edit/delete control is present on any of them
FR-M19-02	A write-capable role	Logging a touchpoint completion, then attempting to edit it, then deleting it	Log and delete succeed; no edit control exists
FR-M19-03	6 of JRN-01's touchpoints logged out of 6 total	Viewing DASH-01	It computes and displays 100%
FR-M19-04	4 of 35 total Charter Actions logged for this project	Viewing DASH-02	It computes the live percentage from charterActionLog, matching that ratio
FR-M19-05	Viewing DASH-03, 04, 05	No touchpoint/case data exists for these	They render as static reference cards, not live metrics
FR-M20-01	A change_manager (project-scoped) and an org_admin viewing the same ungrouped Organization	Both open M20's level selector	The Change Manager sees only Project; the Org Admin sees Project and Organization but never Group
FR-M20-02	A project's Readiness Index below its Lewin-phase reference band's low threshold	Viewing Benchmarking	Standing shows "Behind"
FR-M20-03	Viewing the Cross-Type Matrix	For each of the 8 transformation types	Duration, terminal gate, external involvement, dominant framework, reversibility, and a seed-project link are all shown
FR-M20-04	Any role	Clicking Export CSV on the Analytics heatmap or Benchmarking table	The export succeeds
FR-M20-05	Any role, including write-capable ones	Viewing any M20 tab	No add/edit/delete control exists anywhere in the module
FR-M21-01	The 30-day checkpoint, not yet recorded	Clicking "Record checkpoint"	An adoption rate is generated and regressionRisk derives from it per the stated thresholds; no manual field entry is offered
FR-M21-02	An existing Quick Win	Attempting to edit or delete it	No such control exists (a known gap)

FR	Given	When	Then
FR-M21-03	A Lesson Learned with no linkedRuleOrControl	Adding a link value, then attempting to delete the lesson	Status flips to “applied” on adding the link; no delete control exists (a known gap)
FR-M21-04	Sign-off is currently false	Toggling it	It flips to true/false with no other side effect beyond the boolean state
FR-M22-01	Signed in as a write-capable role	Adding, editing, deleting a field note	All three succeed
FR-M22-02	A field note tagged to M9 and M14	Viewing the note	Both tags display as descriptive labels; no navigation or foreign-key behavior is implied
FR-M22-03	Notes across 3 different categories	Filtering by “Decision”	Only Decision-category notes show, color-coded green

10.8.3 Cross-Cutting Requirements

FR	Given	When	Then
FR-X-01	The Sponsor Coalition, Communications, Training, Risk Register, or Analytics tables	Clicking Export CSV	A CSV file downloads client-side, with no server round-trip
FR-X-02	A table filtered/sorted to a subset of its rows	Exporting	The CSV contains exactly the filtered/visible rows and columns, respecting RBAC scope
FR-X-03	A communications record containing French/Arabic accented text	Exporting and opening in Excel	Accented characters render correctly (UTF-8 BOM present)
FR-X-04	An active project with at least one live alert condition true	Viewing the TopBar bell icon	The alert appears in a persistent, dismissible list
FR-X-05	Each of the 9 live-computable conditions (Divergence Pattern, Critical Regression Risk, Sponsor Coverage Gap, Resistance Escalation, Change Saturation, Communication Overload, Phase Gate No-Go/Conditional, Guiding Coalition Gap, blocked Sustainment sign-off)	Its underlying data condition becomes true	The corresponding alert fires without a page reload
FR-X-06	An active alert	Dismissing it, then reloading the page	It stays dismissed; a Restore control brings it back

FR	Given	When	Then
FR-X-07	Two open resistance entries becoming three	Viewing the Notification Center without any explicit save action	The Resistance Escalation alert appears automatically, confirming it is computed live, not stored
FR-X-08	Any of the 7 non-live conditions (survey-exception retries, AI-confidence scoring, import integrity, account lock-out, GDPR SLA, AI provider fallback, Champion Coverage)	Any state change in the app	None of these 7 ever fire, by design
FR-X-09	requireJustification on, an ADKAR/Lewin/Bridges/sentiment/sponsor-visibility/readiness/certification/resistance-status/risk-status change staged	Saving	The new value and justification are appended together, atomically, to the Change Log
FR-X-10	requireJustification toggled off by an admin	Staging the same kind of change with no justification	Save succeeds without a justification note
FR-X-11	A justification note is entered	Saving	journi accepts and stores the text verbatim; it performs no content validation against “evidence already observed”

10.8.4 Non-Functional Requirement Verification Notes

NFR	Verification approach
NFR-01	Load the built bundle over a throttled connection profile; confirm first meaningful paint of the largest module view completes without a multi-second stall.
NFR-02	Make 5 rapid successive edits to the same field within 400ms; confirm exactly one PUT /api/state fires, timed ~400ms after the last edit.
NFR-03	Attempt GET/PUT /api/state directly (e.g. via curl) with no credentials; confirm the reference build accepts it — then confirm a rebuild targeting NFR-03 closure rejects it without a valid session/token.
NFR-04	Confirm no TLS/rate-limiting/WAF behavior exists in the reference build’s own process (these are expected to be infrastructure-layer, not application-layer).

NFR	Verification approach
NFR-05	Send a PUT /api/state body missing required fields or with an invalid type; confirm the reference build stores it as-is (documenting the gap), and confirm a rebuild rejects it with 400.
NFR-06	Confirm no AI suggestion ever renders data outside the viewer's RBAC scope; confirm an exported/persisted state file never contains an LLM provider API key.
NFR-07	Sign in as sponsor/executive; confirm ADKAR/sentiment views show aggregated data only, never an individual/cohort-level breakdown reserved for ROLES_WITH_INDIVIDUAL_VISIBILITY.
NFR-08	Confirm journi.db is a single file with no replication configured in the reference build; document backup/retention as a deployment-owner responsibility.
NFR-09	Open the same project in two browser tabs, edit the same field differently in each within the debounce window; confirm the reference build's last write silently wins, and confirm a rebuild against Section 5.2.2 returns 409 Conflict on the losing write instead.
NFR-10	Simulate a better-sqlite3 native build failure (e.g. remove its prebuilt binary) on a machine with Node ≥ 22.5 ; confirm npm install still succeeds and the server starts on node:sqlite.
NFR-11	Switch language to Arabic; confirm the Sidebar, every table, and the M18 Journey Map chart all mirror layout direction, not just text.
NFR-12	Sample 5 different modules' status/severity badges of the same semantic meaning (e.g. "high severity"); confirm consistent color use across all 5.
NFR-13	Load M17 on a narrow mobile-width viewport; confirm the layout remains usable without horizontal scrolling or unreadably small controls.
NFR-14	On a fresh Windows VM with only Node.js 18 installed and no Visual Studio Build Tools, run install.bat; confirm it completes successfully.
NFR-15	On a clean macOS or Linux machine, run npm install && npm run build in journi/ and npm install && npm start in server/ with no batch-file wrapper; confirm the app starts and serves correctly.
NFR-16	Add a new module following the pattern in NFR-16's own text (new page + route + Sidebar entry + i18n keys + sub-collection wiring); confirm no existing module's behavior changes as a side effect.
NFR-17	Change a module's displayed number in translations.js only (not its file name or route); confirm no other file requires a corresponding edit.

NFR	Verification approach
NFR-18	Load the app in Chrome, Edge, and Firefox current-stable releases; confirm no console errors and consistent rendering across all three.

10.9 Closing Notes

The module set and hierarchy described in this document are designed to scale from a single standalone Change Management Project run by one consultant, up to a multi-Organization Group portfolio managed by a central Center of Excellence, without changing the underlying data model. A rebuild team's practical next steps, in order: (1) stand up the target resource-oriented API (Section 5.2.2) and a persistence layer preserving the Section 4 field shapes, since every module's frontend logic assumes that shape; (2) rebuild the 22 module pages against Section 6's functional requirements and Section 10.7's visual reference, reusing the shared component/CRUD conventions in Section 3.2 rather than inventing per-module patterns; (3) seed reference/demo data from Sections 9 and 10.6 and localized strings from Section 10.5 for parity with the reference build; (4) verify against Section 10.8's test plan; (5) close the gaps in Section 10.3 opportunistically as each owning module is rebuilt, rather than as a separate pass; (6) treat Section 8.2's authentication gap as the first production-hardening item before any internet-facing deployment, implementing the auth routes and per-request authorization described in Section 5.2.2.