Assignment No	**10**
Title	**Connecting to mySQL and performing various operatins on table**
Objective	**Connect** **Create Database** **Create Table Customer(customer_id primary key,customer_name,Address)** **Insert values 10 rows** **show all the rows using select query** **update a city from 'Bombay' to 'Mumbai'** **Delete a row with customer_id =1**
Roll No	**MCA2649**

1) Connect With Database

Source Code:-

```
var mysql = require('mysql2');
var con = mysql.createConnection({
    host: "localhost",
    user: "root",
    password: "password",
    port: 3301
});
    con.connect(function(err) {
        if (err) throw err;
        console.log("Connected! to mysql");
    }
);
```

Output:-

```
PS D:\MCA2649\WT2649> node dbconnect.js
Connected! to mysql
```

2)Create Database

Source Code:-

```
var mysql = require('mysql2');
var con = mysql.createConnection({
    host: "localhost",
    user: "root",
    password: "password",
    port: 3301
});
    con.connect(function(err) {
        if (err) throw err;
        console.log("Connected! to mysql");
    }
);

con.query("CREATE DATABASE newdb", function (err)
{
    if (err) throw err;
    console.log("newdb Database created");
});
```

Output:-

```
PS D:\MCA2649\WT2649> node dbconnect.js
Connected! to mysql
newdb Database created
```

3)Create Table Insert Into Table

Source Code:-

```
var mysql = require('mysql2');
var con = mysql.createConnection({
    host: "localhost",
    user: "root",
    password: "password",
    database: "newdb",
    port: 3301
});
    con.connect(function(err) {
        if (err) throw err;
        console.log("Connected!");
        var sql = "CREATE TABLE customer(cutid int primary key, custname
varchar(55), address varchar(255))";
        con.query(sql, function (err) {
            if (err) throw err;
            console.log("Table created");
        });
    }
);
```

Output:-

```
PS D:\MCA2649\WT2649> node dbtable.js
Connected!
Table created
```

4) One Insert Into Table

Source Code:-

```
var mysql = require('mysql2');
var con = mysql.createConnection({
    host: "localhost",
    user: "root",
    password: "password",
    database: "newdb",
    port: 3301
});
```

```
con.connect(function(err) {
    if (err) throw err;
    console.log("Connected!");
    var sql = "INSERT INTO customer VALUES(1301, 'Satish Rathod', 'mumbai')";
    con.query(sql, function (err) {
        if (err) throw err;
        console.log("one row inserted");
    });
```

Output:-

```
PS D:\MCA2649\WT2649> node dbinsert.js
one row inserted
```


5)Multipal Row Insert Into Table

Source Code:-

```
var mysql = require('mysql2');
var con = mysql.createConnection({
    host: "localhost",
    user: "root",
    password: "password",
    database: "newdb",
    port: 3301
});


    var stmt = "INSERT INTO customer (cutid, custname, address) VALUES ?"
    let custdata = [
        [1302, 'Tejas Parker', 'pune'],
        [1303, 'Vishal Chauhan', 'nagpur'],
        [1304, 'Mahesh Rawat', 'nashik'],
    ];
    con.query(stmt, [custdata], function (err)
    {
        if (err) throw err;
        console.log("multiple rows inserted");
    });
```

Output:-

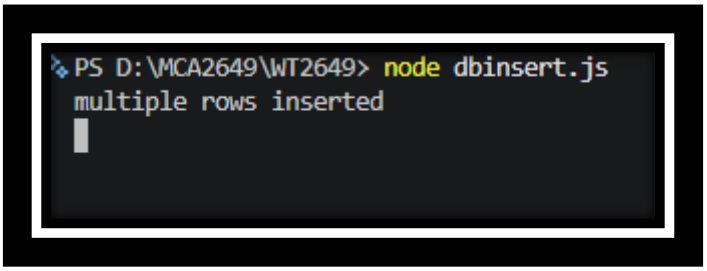


6) show all the rows using select query

Source Code:-

```
var mysql = require('mysql2');
var con = mysql.createConnection({
    host: "localhost",
    user: "root",
    password: "password",
    database: "newdb",
    port: 3301
});

con.query("SELECT * FROM customer", function (err, rows) {
    if (err) throw err;
    console.table(rows);
    con.end();
});
```

Output:-

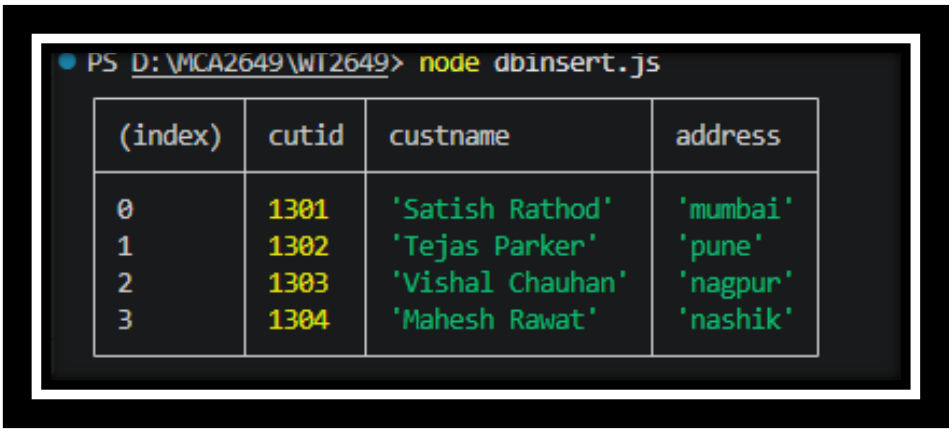

```
PS D:\MCA2649\WT2649> node dbinsert.js
```

(index)	cutid	custname	address
0	1301	'Satish Rathod'	'mumbai'
1	1302	'Tejas Parker'	'pune'
2	1303	'Vishal Chauhan'	'nagpur'
3	1304	'Mahesh Rawat'	'nashik'

7)update a city from 'Bombay' to 'Mumbai'

Source Code:-

```
var mysql = require('mysql2');
var con = mysql.createConnection({
    host: "localhost",
    user: "root",
    password: "password",
    database: "newdb",
    port: 3301
});

con.query(
    "UPDATE customer SET address = ? WHERE address = ?",
    ["Bombay", "mumbai"],
    function (err, result) {
        if (err) throw err;
        console.log("row(s) updated");
        con.end();
    }
);
```

Output:-

```
PS D:\MCA2649\WT2649> node dbinsert.js
1 row(s) updated
PS D:\MCA2649\WT2649>
```

8)Delete a row with customer_id =1303

Source Code:-

```
var mysql = require('mysql2');
var con = mysql.createConnection({
    host: "localhost",
    user: "root",
    password: "password",
    database: "newdb",
    port: 3301
});

con.query(
    "DELETE FROM customer WHERE cutid = ?",
    [1303],
    function (err, result) {
        if (err) throw err;
        console.log(`${result.affectedRows} row(s) deleted`);
        con.end();
    }
);
```

Output:-

```
PS D:\MCA2649\WT2649> node dbinsert.js
1 row(s) deleted
PS D:\MCA2649\WT2649>
```