

METHODOLOGY

Statistical Stopping Criteria for Active Learning in Systematic Review Screening

Max W Callaghan^{1,2*} and Finn Müller-Hansen¹

*Correspondence:

callaghan@mcc-berlin.net

¹Mercator Research Institute on Global Commons and Climate Change, Torgauer Straße, 10829 Berlin, Germany

Full list of author information is available at the end of the article

Abstract

Active learning for systematic review screening promises to reduce the human effort required to identify relevant documents for a systematic review. Machines and humans work together, with the human providing training data, and the machine optimising the documents a human screens, so that they can identify all relevant documents after viewing only a fraction of the total documents. However, current approaches lack robust stopping criteria, so that reviewers do not know when they have seen all or a certain proportion of relevant documents. This means that such systems are hard to implement in live reviews. This paper introduces a workflow for working with robust and flexible statistical stopping criteria, that offer real work reductions on the basis of a given confidence level of reaching a given recall. The stopping criteria is shown on test datasets to achieve a reliable level of recall, while still providing consistent work reductions, while other methods proposed are shown to provide inconsistent recall and work reductions across datasets.

Keywords: Systematic Review; Machine Learning; Active Learning; Stopping Criteria

Background

Machine learning for evidence synthesis is a growing field, where machine learning enabled interventions are introduced at various points in the workflow, in order to reduce the human effort required to produce systematic reviews and other forms of evidence synthesis. A major strand of the literature works on screening - the identification of relevant documents in a set of documents whose relevance is uncertain [1]. For this task, several papers have developed or evaluated active learning.

Active learning is an iterative process where documents screened by humans are used to train a machine learning model to predict the relevance of unseen papers [2]. The most relevant studies are passed back to the human and rated, generating more labels to feed back to the machine. By prioritising those studies most likely to be relevant, a human reviewer most often identifies all relevant studies - or a given proportion of relevant studies (recall) - before having seen all the documents in the corpus. The proportion of documents not yet seen by the human when they reach the given recall threshold are referred to as the work saved.

In live review settings, however, the recall remains unknown until all documents have been screened. In order for work to really be saved, reviewers have to stop screening while uncertain about the recall. This is particularly problematic in systematic reviews because low recall increases the risk of publication bias. The lack of appropriate stopping criteria has therefore been identified as a research gap [3],

although some approaches have been suggested. These fall into the following categories

- **Sampling criteria:** Reviewers estimate the number of relevant documents by taking a random sample at the start of the process. They stop when this number, or a given proportion of it, has been reached [4]
- **Heuristics:** Reviewers stop when a given number of irrelevant articles are seen in a row [5].
- **Pragmatic criteria:** Reviewers stop when they run out of time [6].

We show in this paper how the first two criteria are inadequate. We argue that the inadequacy lies in the unreliability - particularly across different domains, or datasets with different properties - both of the work saved and the recall achieved. Not achieving the desired level of recall is a particular challenge for systematic review screening. In systematic reviews, the larger the proportion of the relevant literature is not considered, the greater the risk of publication bias. Without the reliable or reportable achievement of a desired level of recall, AL systems in live reviews remain challenging.

This study proposes a system for estimating the recall based on random sampling of remaining documents. We draw on the literature on binomial distributions [7], to illustrate how AL users can predefine a threshold in terms of uncertainty and recall, and use this to transparently save work with machine learning, while making a statement like “There is a <5% chance that we achieve a recall under 95%”.

The information retrieval literature discusses similar stopping criteria for ranking algorithms like BM25 and variants [?, 8]. However, the estimators they use to determine the recall rely on the specific ranking functions and depend on their search input. Therefore, the quality of the estimation depends on the adequacy of the model. Our approach, on the contrary, is independent of model choice or model performance.

We evaluate this stopping criteria on real-world systematic review datasets on which active learning systems have previously been tested.

Methods

Existing Stopping Criteria for Active Learning

We start by explaining the sampling and heuristic based stopping criteria before showing with toy data how the criteria fall short. Then we introduce our own suggested stopping criteria, and show its benefits with toy data, before testing all criteria on real world datasets.


Sampling Based Stopping Criteria

The stopping criterion suggested by [4] involves establishing the Baseline Inclusion Rate (BIR), by taking a random sample at the beginning of screening. This is used to estimate the number of relevant documents in the whole dataset. Reviewers continue to screen until this number, or a proportion of it corresponding to the desired level of recall, is reached.

However, the estimation of the BIR fails to take into account the sampling uncertainty. Figure 1.a shows for 50 random samples of 2,000 documents from 20,000

on cross-domain reliability

cochrane handbook

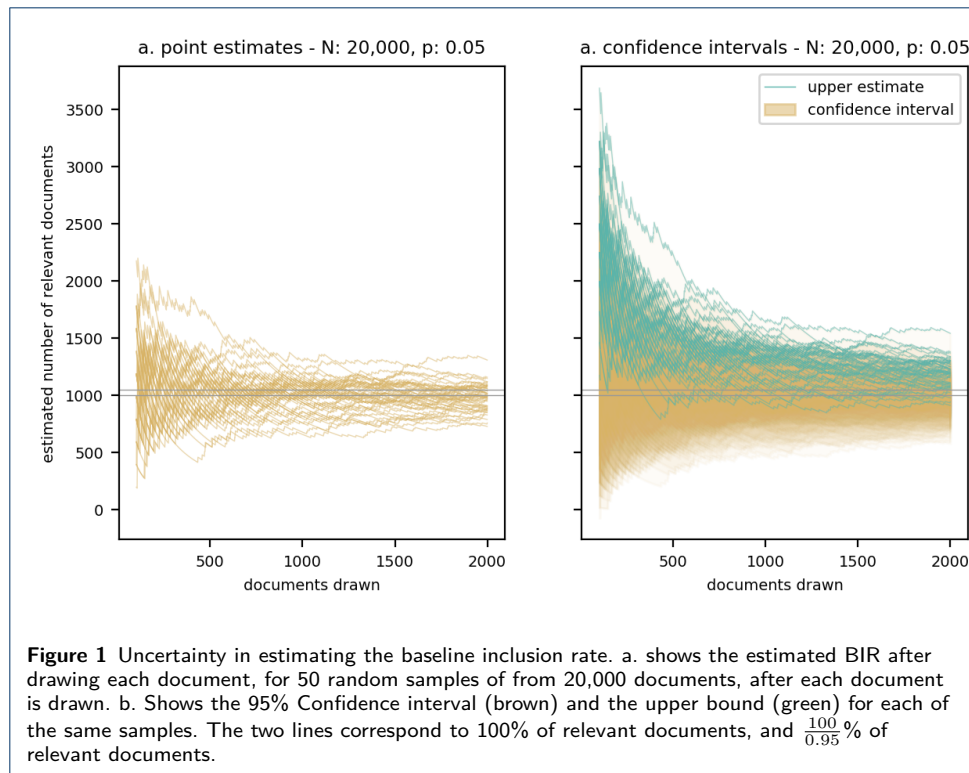

documents (where 5% of documents are relevant), the predicted number of documents after each document drawn. Depending on the luck of the draw, one might estimate the true number of documents as being

- much higher than the true value, meaning that the stopping criterion would never be reached - and no work could be saved
- much lower than the true value, meaning that the stopping criterion would be reached before the desired level of recall was actually achieved

We can estimate the uncertainty of a binomial outcome using an Agresti-Coull confidence interval (which has been shown to be conservative at levels near 0 [7]). Figure 1.b shows the 95% confidence interval (brown) and its upper bound (green) in the same set of random draws. Where the green line is above the above the lower (upper) grey line, identification of 100% (95%) of the estimated number of studies would be impossible, and no work would be saved.

Figure 2 explores different scenarios of true relevance and probability thresholds, showing that the higher the true proportion of relevant documents, the fewer documents one would have to sample to make the identification of a given fraction (the true number of relevant results divided by the upper estimate) possible. Even with a relatively high proportion of relevant documents, and a sample of 500, all relevant documents would have to be identified to have a 95% likelihood of achieving 95% recall. With low proportions of relevant documents, only an 80% recall can be estimated with confidence, even after a sample of 2000, and subsequently identifying all relevant documents. N.B, these results ignore the random element of sample order, which explains the variation on figure 1. They show upper confidence bounds for accurate estimates of relevance.

this is less relevant here, go back to literature and see if another is better

Why does it behave like this, is there a theoretical maximum for each? something to do with absolute values? a Bug? Is uncertainty a function of being near to 0?

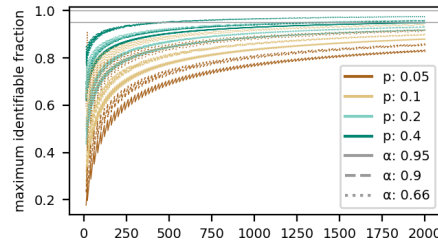


Figure 2 Maximum identifiable fraction of relevant results under different levels of true relevance p and confidence thresholds α . Maximum identifiable fraction is the true number of relevant documents divided by the upper estimate.

Heuristic Based Stopping Criteria

Some studies give the example of heuristic based stopping criteria based on drawing a given number of irrelevant articles in a row [5] [+REFS]. We take this as a proxy for estimating that the proportion of documents remaining in the unseen documents is low. We find this a promising intuition, but argue that 1) it ignores uncertainty, as discussed in relation to the previous method; and 2) it misunderstands the significance of a low proportion of relevant documents in estimating the recall.

Figure 3 illustrates this second point. We show two scenarios with identical low proportions of relevant documents (note that estimating a proportion lower than 0.02 with 95% confidence requires 160 consecutive irrelevant documents). Recall is not simply a function of the relevance of unseen documents, but also of the number of unseen documents. This also means that where machine learning has performed well (as in the top figure), low proportions of irrelevant documents in those that remain are indicative of lower recall than where ML has performed less well.

Other stopping criteria

[9] Develop a “simple, operational stopping criterion”: stopping after half the documents have been screened. Although the criterion worked in their experiment, it is unclear how this could be generalised, and its development depended on knowledge of the true relevance values. [10] note that “the reviewer can elect to end the process of classifying documents at any point, recognizing that stopping before reviewing all documents involves a trade-off of lower recall for reduced workload”, although clearly the reviewer lacks information about probable recall. [8] adopt a more complicated stopping criterion which allows the user to target a specific level of recall. However, reviewers are not given the opportunity to specify a confidence level, and for two of the four datasets in which they tested their criteria, the median achieved recall at a stopping criteria targeting 95% recall was below 95%. [?] also present an innovative stopping criteria, but it does not take into account uncertainty, and produces results *near* a target recall threshold. These last examples are promising developments, but [are not ready for live reviews because hard to understand/communicate?? do not give uncertainty about reaching a threshold]

Parameter	Description	Estimation
N	Total number of studies	<i>Observed</i>
S	Number of studies coded by humans	<i>Observed</i>
U	Number of studies not yet coded by humans	<i>Observed</i> ($N - S$)
p_S	relevance of documents rated by humans	<i>Observed</i>
α	Acceptable uncertainty level	<i>Given</i>
κ		
n	Number of randomly drawn documents	<i>Observed</i>
\tilde{n}		
$\hat{\kappa}$		
\hat{R}	Estimated recall	
\hat{R}	Minimum estimated recall at a given confidence threshold	

Table 1 Parameters

A Statistical Stopping Criterion for Active Learning

Figure 4 shows a workflow for the approach proposed in this paper. The random sampling occurs at the end of the process, and is used to estimate the number of relevant documents remaining and the total number of relevant documents. The rationale is to limit the uncertainty to a subsection of the dataset: that which has not yet been screened. As reviewers continue to draw random documents, the uncertainty range decreases, and the proportion of the data about which one is uncertain also decreases.

Table 1 shows the parameters, known, estimated, and given, available during the random sampling process and required to estimate recall. Expanding on what was stated before, recall - at a given confidence threshold is a function of 1) the upper estimate of the relevance of remaining documents, 2) The estimated relevance of all documents in the dataset, 3) The proportion of documents not yet seen.

Figure 5 shows the minimum estimated recall for a set of confidence intervals, along with the actual recall (in grey) for a case where 800 out of 2,000 documents have been reviewed, 2% of remaining documents are relevant, and 20% of all documents are relevant. We see that after 95% recall has actually been achieved, but before 100% of documents have been seen, we can be confident at each of the given confidence levels that 95% of relevant documents have been identified. All estimates of recall only reach 100% after all documents have been seen, as it is not possible to exclude the possibility, at any given confidence level, that the proportion of relevant documents is greater than 0. Figure 6 shows the various trajectories of a 95% minimum recall (blue) and actual recall (grey) given the same parameters for 200 random samples.

That the blue lines consistently meet a 95% threshold to the right of the grey lines indicates that reviewers have to see more than 95% of relevant documents in order to be confident that they have achieved their threshold. We call the number of documents it is necessary to review to establish with confidence that reviewers have achieved 95% recall after they have already achieved 95% recall the *additional burden*.

In figure 7, we investigate how the total number of documents and the proportion of relevant documents affect the additional burden. We demonstrate the additional burden decreases with increasing total numbers of documents. With decreasing relevance of the remaining documents (holding the recall constant at 95%, this means that fewer documents remain unseen), the additional burden increases. This implies that where the machine learning has more successfully identified documents

Actually maybe this is possible if we work with whole numbers? How does that change things?

Use the number of documents seen instead of p ?

how? Non-linearly?

and reduced burden, the additional burden required to establish the level of recall is higher. This is because the proportion of documents not seen is greater, so uncertainty around the relevance of that proportion has a greater impact on the estimation of recall.

When to move to random sampling remains an open question. Our current approach is to use the predicted relevance of the machine learning model as a guide. We calculate the [minimum/maximum] estimated recall based on observing the predicted relevance level in [x] random documents. If the estimated recall would be below the threshold, then we begin drawing random documents.

The stopping criteria explained here is

Evaluation

We evaluate each of the three criteria discussed on real world test data. With each method, we run 100 runs and record

- **Actual Recall:** The recall when the stopping criteria is met
- **WS-SC:** Work saved when the stopping criteria is met ^[1]
- **Additional Burden:** The proportion of the literature that need to be screened in order to *be confident* that 95% recall has been achieved, after 95% of documents have actually been identified.
- **Missed Recall:** The amount by which, if any, the recall target was missed - in percentage points

We operationalise the heuristic stopping criteria with 50, 100, and 200 irrelevant records in a row. For simplicity, we use a basic SVM model [REFS], with 1-2 word n-grams in the document abstracts used as input data. We start with random samples of [100, 200, and 500] documents.

As the intention is to evaluate stopping criteria, rather than machine learning approaches, we focus on additional burden and missed recall. These parameters correspond to the tradeoff inherent in stopping criteria: stopping too early means missing the recall target, stopping too late means undergoing additional burden than was actually required to meet the target.

We use the collection of systematic reviews used to develop machine learning applications for document screening by Aaron Cohen and co-authors in 2006 [11], along with PB COPD, and FASTREAD . We feel that testing on datasets with different properties and from different domains is key to establishing criteria appropriate for general use. In this way we can show how well the criteria perform even when the model performs badly.

Results

Discussion

Conclusion

We argue that the stopping criteria proposed here has several important advantages.

- The accuracy of results is independent of modelling decisions. When a model fits badly, you have to work more, but you don't miss results without knowing it.

^[1]we do not use work saved over sampling, as it is not axiomatic that seeing 95% of a random sample would achieve 95% recall

- A minimum threshold with uncertainty is understandable and communicable in a live review. It is based solely on arithmetic and simple statistics.
- A minimum threshold better takes into account the undesirability of missed recall.

Competing interests

The authors declare that they have no competing interests.

Author's contributions

Text for this section ...

Acknowledgements

Max Callaghan is supported by a PhD scholarship from the Heinrich Böll Foundation


Author details

¹Mercator Research Institute on Global Commons and Climate Change, Torgauer Straße, 10829 Berlin, Germany.

²Priestley International Centre for Climate, University of Leeds, Leeds, LS2 9JT Leeds, United Kingdom.

References

1. O'Mara-Eves A, Thomas J, McNaught J, Miwa M, Ananiadou S. Using text mining for study identification in systematic reviews: A systematic review of current approaches. *Systematic Reviews*. 2015;4(1):1–22.
2. Settles B. Active Learning Literature Survey. University of Wisconsin-Madison; 2009.
3. Bannach-Brown A, Przybyła P, Thomas J, Rice ASC, Ananiadou S, Liao J, et al. Machine learning algorithms for systematic review: reducing workload in a preclinical review of animal studies and reducing human screening error. *Systematic Reviews*. 2019;8(1):1–12.
4. Shemilt I, Simon A, Hollands GJ, Marteau TM, Ogilvie D, O'Mara-Eves A, et al. Pinpointing needles in giant haystacks: Use of text mining to reduce impractical screening workload in extremely large scoping reviews. *Research Synthesis Methods*. 2014;5(1):31–49.
5. Przybyła P, Brockmeier AJ, Kontonatsios G, Le Pogam MA, McNaught J, von Elm E, et al. Prioritising references for systematic reviews with RobotAnalyst: A user study. *Research Synthesis Methods*. 2018;9(3):470–488.
6. Miwa M, Thomas J, O'Mara-Eves A, Ananiadou S. Reducing systematic review workload through certainty-based screening. *Journal of Biomedical Informatics*. 2014;51:242–253. Available from: <http://dx.doi.org/10.1016/j.jbi.2014.06.005>.
7. Brown LD, Cai TT, DasGupta A. Interval estimation for a Binomial Proportion. *Statistical Science*. 2001;16(2):101–133.
8. Yu Z, Menzies T. FAST 2 : An intelligent assistant for finding relevant papers. *Expert Systems with Applications*. 2019;120:57–71. Available from: <https://doi.org/10.1016/j.eswa.2018.11.021>.
9. Wallace BC, Trikalinos TA, Lau J, Brodley C, Schmid CH. Semi-automated screening of biomedical citations for systematic reviews. *BMC Bioinformatics*. 2010;11.
10. Jonnalagadda S, Petitti D. A new iterative method to reduce workload in systematic review process. *International Journal of Computational Biology and Drug Design*. 2013;6(1/2):5.
11. Cohen AM, Hersh WR, Peterson K, Yen PY. Reducing workload in systematic review preparation using automated citation classification. *Journal of the American Medical Informatics Association*. 2006;13(2):206–219.

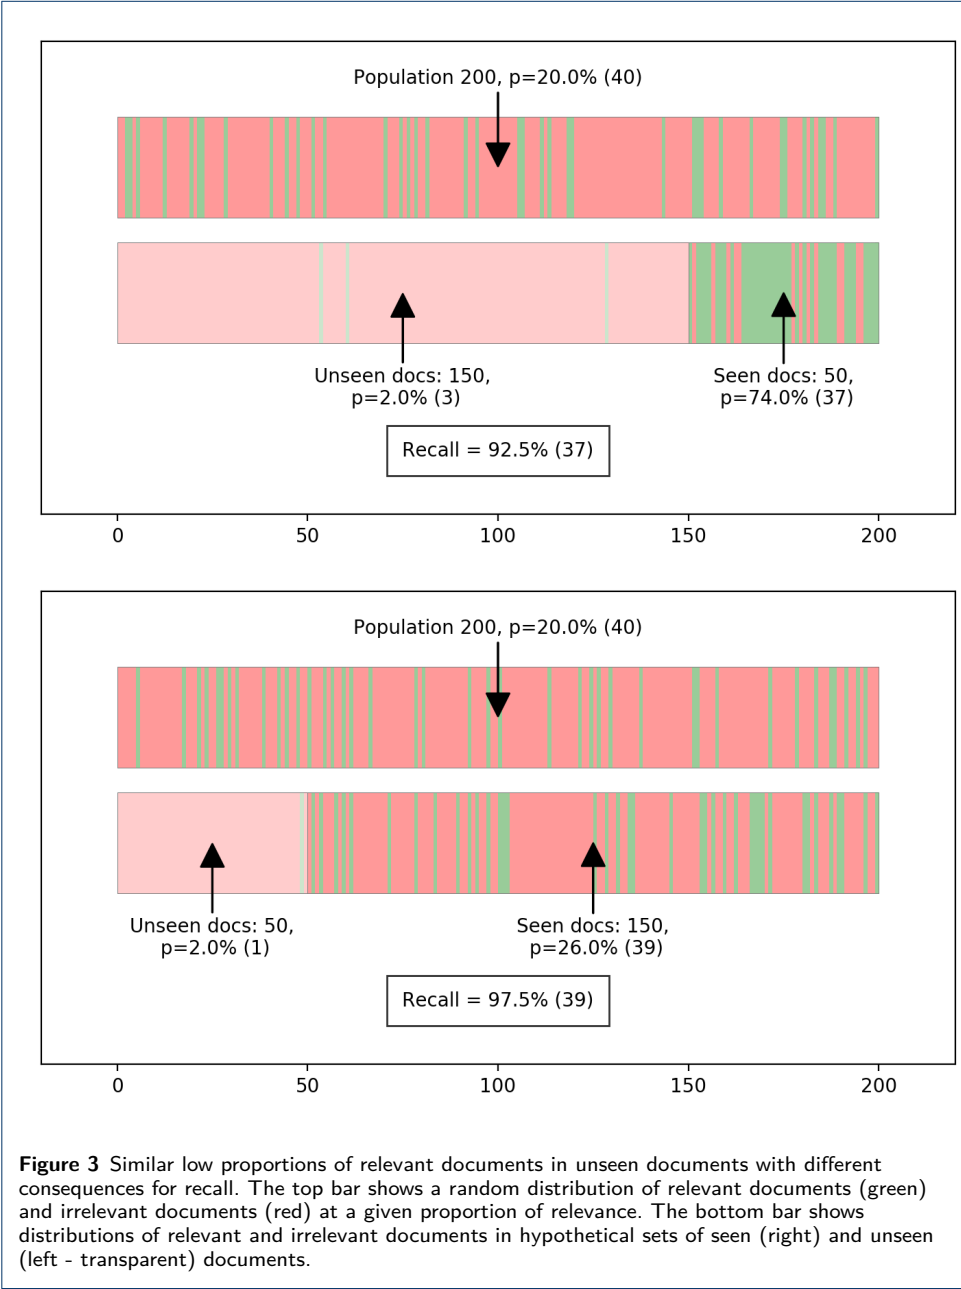

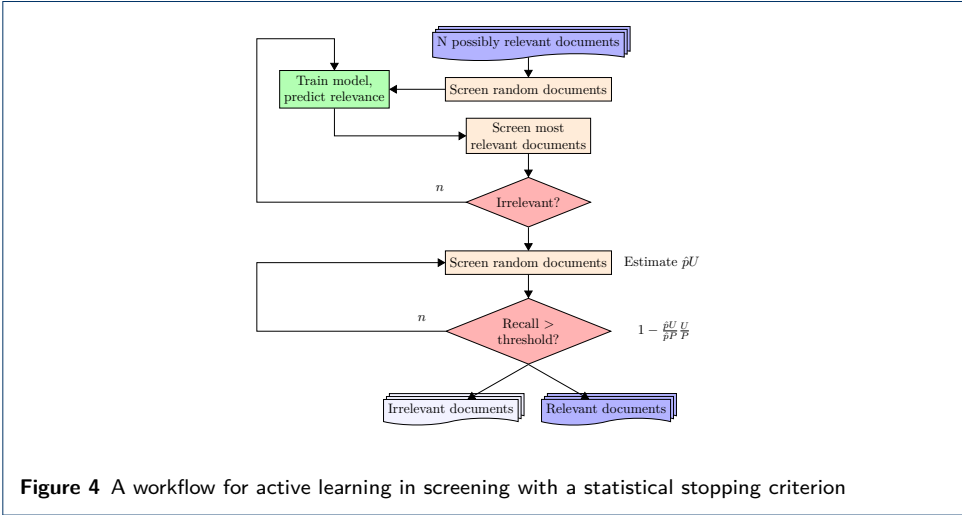


Figure 4 A workflow for active learning in screening with a statistical stopping criterion

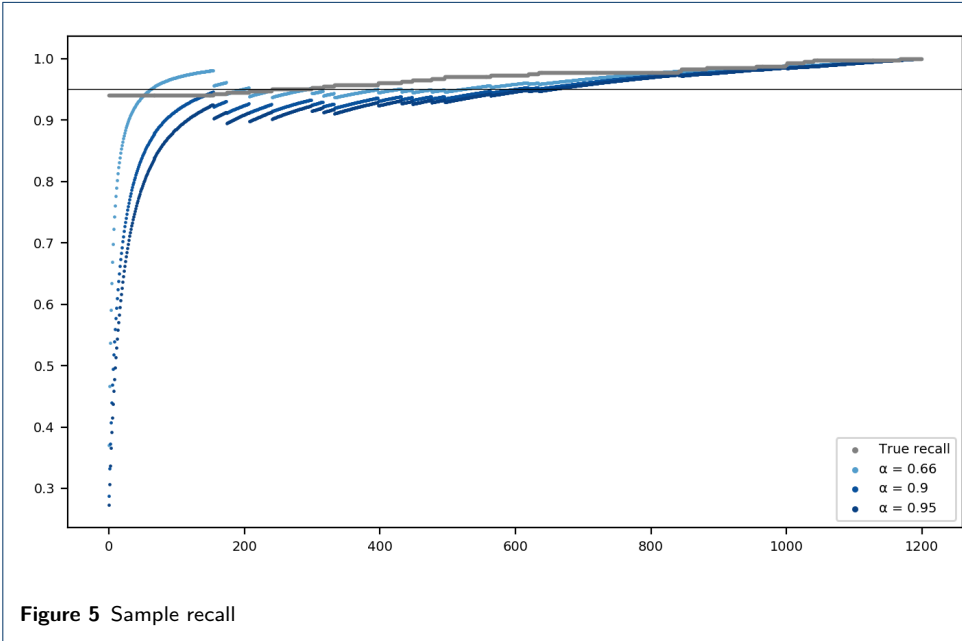


Figure 5 Sample recall

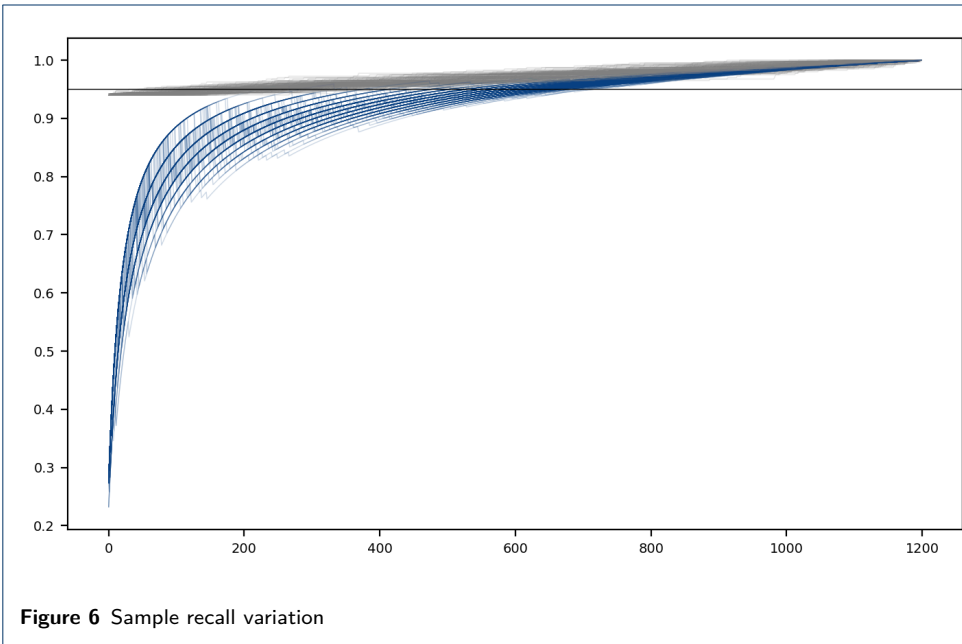


Figure 6 Sample recall variation

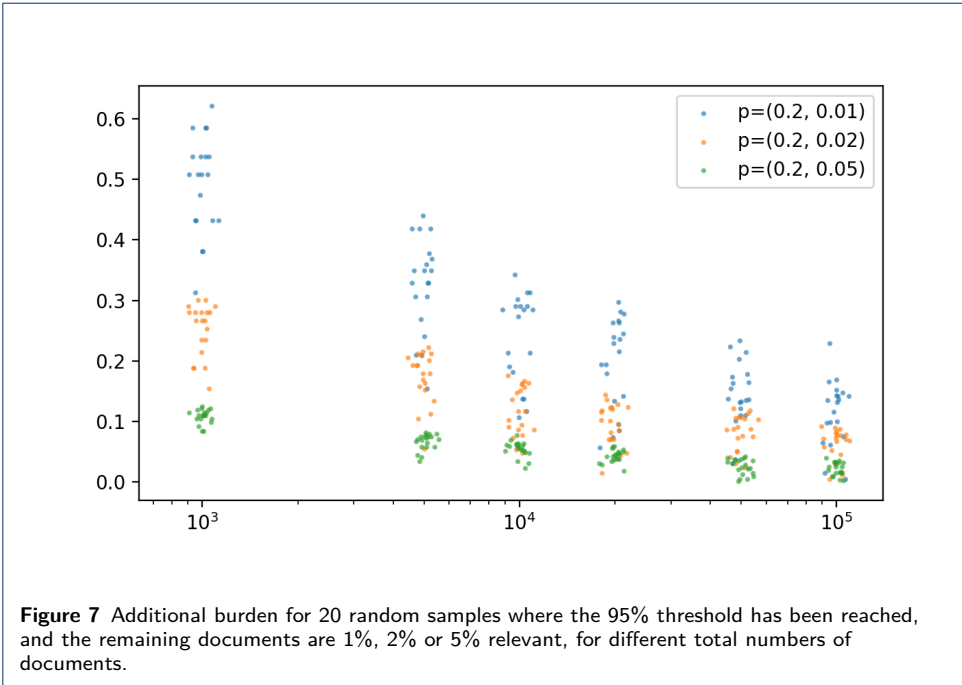


Figure 7 Additional burden for 20 random samples where the 95% threshold has been reached, and the remaining documents are 1%, 2% or 5% relevant, for different total numbers of documents.

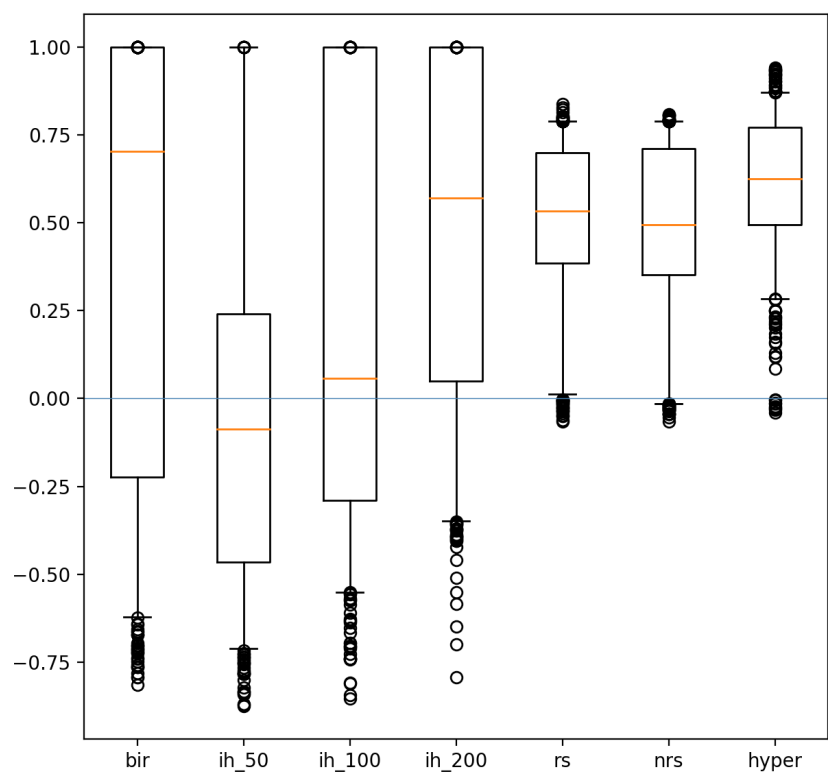


Figure 8 Additional burden ($y > 0$) and missed recall ($y < 0$) for the range of stopping criteria tested.

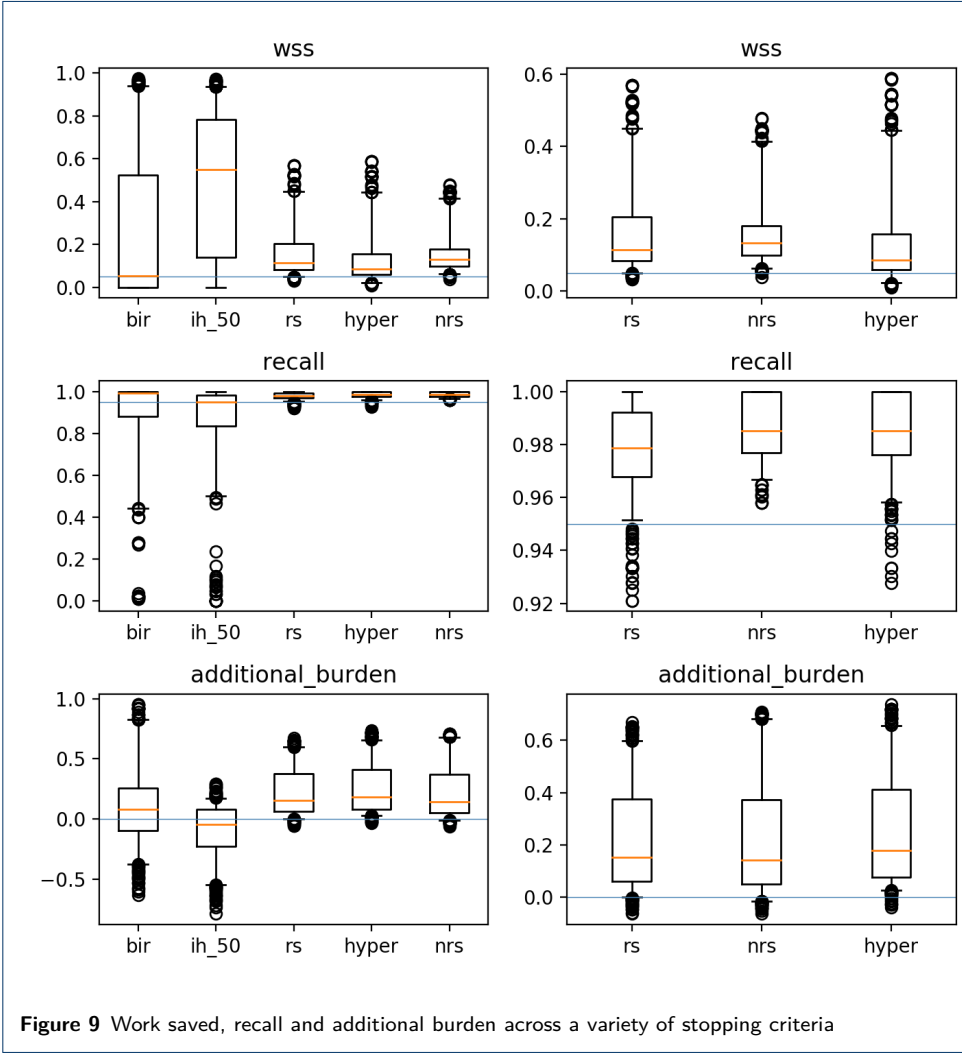


Figure 9 Work saved, recall and additional burden across a variety of stopping criteria

