

# Trusted Application Programming Reference on Portable TEE

The National Institute of Advanced Industrial Science and Technology

2021-12-01

<b>1 Overview of ta-ref</b>	<b>1</b>
1.1 Features	1
1.1.1 What we did on RISC-V	1
1.1.2 Separate GP TEE Internal API	2
1.2 Diagram	2
1.2.1 Dependency of category	2
<b>2 How to Program on ta-ref</b>	<b>3</b>
2.1 Time Functions	3
2.2 Random Functions	3
2.3 Hash Functions	3
2.4 Symmetric Crypto Functions	4
2.5 Asymmetric Crypto Functions	5
2.6 Symmetric Crypto Gcm Functions	6
2.7 Open, Read, Write, Close On Secure Storage	7
<b>3 Preparation before building</b>	<b>8</b>
3.1 Keystone(RISC-V Unleashed)	8
3.1.1 Required Packages	8
3.1.2 Build Keystone	8
3.1.3 Run Keystone examples	9
3.2 OPTEE (ARM64 RPI3)	9
3.2.1 Required Packages	9
3.2.2 Build OPTEE v3.9.0	9
3.2.3 Run OPTEE Examples	10
3.3 SGX (Intel NUC)	11
3.3.1 List of machines which are confirmed to work	11
3.3.2 BIOS Versions which are failed or succeeded in IAS Test	11
3.3.3 BIOS Settings	12
3.3.4 Required Packages	12
3.3.5 Build SGX	12
3.3.6 Run sgx-ra-sample	13
<b>4 Building</b>	<b>16</b>
4.1 Install Doxygen-1.9.2	16
4.2 Install Required Packages	16
4.3 Build and Install	16
4.4 ta-ref with Keystone	16
4.4.1 Cloning source and building	16
4.4.2 Check ta-ref by running test_gp, test_hello, on QEMU	17
4.5 ta-ref with OPTEE	18
4.5.1 Cloning source and building	18
4.5.2 Check ta-ref by running test_gp, test_hello, on QEMU	19

4.6 ta-ref with SGX . . . . .	20
4.6.1 Cloning source and building . . . . .	20
4.6.2 Check ta-ref by running test_gp, test_hello, simulation mode on any pc . . . . .	20
<b>5 Running on Dev Boards . . . . .</b>	<b>22</b>
5.1 Keystone, Unleashed . . . . .	22
5.1.1 Preparation of rootfs on SD Card . . . . .	22
5.1.2 Copying binaries of test_hello and test_gp . . . . .	23
5.1.3 Check test_hello and test_gp on Unleashed . . . . .	24
5.2 OPTEE, RPI3 . . . . .	25
5.2.1 Preparation of rootfs on SD Card . . . . .	25
5.2.2 Copying binaries of test_hello and test_gp to rootfs partition . . . . .	26
5.2.3 Check test_hello and test_gp . . . . .	26
5.3 SGX, NUC . . . . .	27
5.3.1 Copying binaries of test_hello and test_gp to NUC machine . . . . .	27
5.3.2 Check test_hello and test_gp . . . . .	28
<b>6 API Compare With Full-Set of GP API . . . . .</b>	<b>30</b>
6.1 GP API . . . . .	30
<b>7 Class Index . . . . .</b>	<b>32</b>
7.1 Class List . . . . .	32
<b>8 File Index . . . . .</b>	<b>33</b>
8.1 File List . . . . .	33
<b>9 Class Documentation . . . . .</b>	<b>33</b>
9.1 __TEE_ObjectHandle Struct Reference . . . . .	33
9.1.1 Member Data Documentation . . . . .	34
9.2 __TEE_OperationHandle Struct Reference . . . . .	35
9.2.1 Member Data Documentation . . . . .	35
9.3 addrinfo Struct Reference . . . . .	36
9.3.1 Member Data Documentation . . . . .	37
9.4 enclave_report Struct Reference . . . . .	37
9.4.1 Member Data Documentation . . . . .	38
9.5 pollfd Struct Reference . . . . .	38
9.5.1 Member Data Documentation . . . . .	38
9.6 report Struct Reference . . . . .	39
9.6.1 Member Data Documentation . . . . .	39
9.7 sm_report Struct Reference . . . . .	40
9.7.1 Member Data Documentation . . . . .	40
9.8 TEE_Attribute Struct Reference . . . . .	40
9.8.1 Member Data Documentation . . . . .	41
9.9 TEE.Identity Struct Reference . . . . .	42

9.9.1 Member Data Documentation . . . . .	42
9.10 TEE_ObjectInfo Struct Reference . . . . .	43
9.10.1 Member Data Documentation . . . . .	43
9.11 TEE_OperationInfo Struct Reference . . . . .	44
9.11.1 Member Data Documentation . . . . .	44
9.12 TEE_OperationInfoKey Struct Reference . . . . .	45
9.12.1 Member Data Documentation . . . . .	46
9.13 TEE_OperationInfoMultiple Struct Reference . . . . .	46
9.13.1 Member Data Documentation . . . . .	46
9.14 TEE_Param Union Reference . . . . .	47
9.14.1 Member Data Documentation . . . . .	48
9.15 TEE_SEAID Struct Reference . . . . .	48
9.15.1 Member Data Documentation . . . . .	49
9.16 TEE_SEReaderProperties Struct Reference . . . . .	49
9.16.1 Member Data Documentation . . . . .	49
9.17 TEE_Time Struct Reference . . . . .	50
9.17.1 Member Data Documentation . . . . .	50
9.18 TEE_UUID Struct Reference . . . . .	50
9.18.1 Member Data Documentation . . . . .	50
9.19 TEEC_Context Struct Reference . . . . .	51
9.19.1 Detailed Description . . . . .	51
9.19.2 Member Data Documentation . . . . .	51
9.20 TEEC_Operation Struct Reference . . . . .	52
9.20.1 Detailed Description . . . . .	52
9.20.2 Member Data Documentation . . . . .	52
9.21 TEEC_Parameter Union Reference . . . . .	53
9.21.1 Detailed Description . . . . .	53
9.21.2 Member Data Documentation . . . . .	54
9.22 TEEC_RegisteredMemoryReference Struct Reference . . . . .	54
9.22.1 Detailed Description . . . . .	55
9.22.2 Member Data Documentation . . . . .	55
9.23 TEEC_Session Struct Reference . . . . .	56
9.23.1 Detailed Description . . . . .	56
9.23.2 Member Data Documentation . . . . .	56
9.24 TEEC_SharedMemory Struct Reference . . . . .	56
9.24.1 Detailed Description . . . . .	57
9.24.2 Member Data Documentation . . . . .	57
9.25 TEEC_TempMemoryReference Struct Reference . . . . .	58
9.25.1 Detailed Description . . . . .	58
9.25.2 Member Data Documentation . . . . .	58
9.26 TEEC_UUID Struct Reference . . . . .	59
9.26.1 Detailed Description . . . . .	59

9.26.2 Member Data Documentation . . . . .	59
9.27 TEEC.Value Struct Reference . . . . .	60
9.27.1 Detailed Description . . . . .	60
9.27.2 Member Data Documentation . . . . .	60
<b>10 File Documentation . . . . .</b>	<b>61</b>
10.1 ta-ref/api/include/compiler.h File Reference . . . . .	61
10.2 compiler.h . . . . .	61
10.3 ta-ref/api/include/report.h File Reference . . . . .	64
10.4 report.h . . . . .	64
10.5 ta-ref/api/include/tee-common.h File Reference . . . . .	65
10.5.1 Detailed Description . . . . .	65
10.6 tee-common.h . . . . .	66
10.7 ta-ref/api/include/tee-ta-internal.h File Reference . . . . .	66
10.7.1 Detailed Description . . . . .	69
10.7.2 Function Documentation . . . . .	69
10.8 tee-ta-internal.h . . . . .	91
10.9 ta-ref/api/include/tee_api_defines.h File Reference . . . . .	93
10.10 tee_api_defines.h . . . . .	93
10.11 ta-ref/api/include/tee_api_defines_extensions.h File Reference . . . . .	99
10.12 tee_api_defines_extensions.h . . . . .	99
10.13 ta-ref/api/include/tee_api_types.h File Reference . . . . .	101
10.13.1 Typedef Documentation . . . . .	102
10.13.2 Enumeration Type Documentation . . . . .	104
10.14 tee_api_types.h . . . . .	104
10.15 ta-ref/api/include/tee_client_api.h File Reference . . . . .	107
10.15.1 Typedef Documentation . . . . .	109
10.15.2 Function Documentation . . . . .	109
10.16 tee_client_api.h . . . . .	113
10.17 ta-ref/api/include/tee_internal_api.h File Reference . . . . .	116
10.18 tee_internal_api.h . . . . .	116
10.19 ta-ref/api/include/tee_internal_api_extensions.h File Reference . . . . .	116
10.19.1 Function Documentation . . . . .	117
10.20 tee_internal_api_extensions.h . . . . .	118
10.21 ta-ref/api/include/tee_ta_api.h File Reference . . . . .	119
10.21.1 Function Documentation . . . . .	119
10.22 tee_ta_api.h . . . . .	120
10.23 ta-ref/api/include/test_dev_key.h File Reference . . . . .	123
10.23.1 Variable Documentation . . . . .	123
10.24 test_dev_key.h . . . . .	124
10.25 ta-ref/api/include/trace.h File Reference . . . . .	124
10.25.1 Function Documentation . . . . .	125

10.25.2 Variable Documentation . . . . .	126
10.26 trace.h . . . . .	126
10.27 ta-ref/api/include/trace_levels.h File Reference . . . . .	129
10.28 trace_levels.h . . . . .	129
10.29 ta-ref/api/keystone/tee-internal-api-machine.c File Reference . . . . .	130
10.29.1 Function Documentation . . . . .	130
10.30 ta-ref/api/keystone/tee-internal-api.c File Reference . . . . .	132
10.30.1 Function Documentation . . . . .	133
10.30.2 Variable Documentation . . . . .	142
10.31 ta-ref/api/sgx/tee-internal-api.c File Reference . . . . .	142
10.31.1 Function Documentation . . . . .	144
10.31.2 Variable Documentation . . . . .	151
10.32 ta-ref/api/keystone/tee_api_tee_types.h File Reference . . . . .	151
10.33 tee_api_tee_types.h . . . . .	152
10.34 ta-ref/api/optee/tee_api_tee_types.h File Reference . . . . .	154
10.35 tee_api_tee_types.h . . . . .	154
10.36 ta-ref/api/sgx/tee_api_tee_types.h File Reference . . . . .	154
10.37 tee_api_tee_types.h . . . . .	155
10.38 ta-ref/api/keystone/teec_stub.c File Reference . . . . .	157
10.38.1 Function Documentation . . . . .	157
10.39 ta-ref/api/keystone/trace.c File Reference . . . . .	160
10.39.1 Function Documentation . . . . .	161
10.40 ta-ref/api/tee-internal-api-cryptlib.c File Reference . . . . .	162
10.40.1 Function Documentation . . . . .	164
10.41 ta-ref/docs/building.md File Reference . . . . .	176
10.42 ta-ref/docs/gp_api.md File Reference . . . . .	176
10.43 ta-ref/docs/how_to_program_on_ta-ref.md File Reference . . . . .	176
10.44 ta-ref/docs/overview_of_ta-ref.md File Reference . . . . .	176
10.45 ta-ref/docs/preparation.md File Reference . . . . .	176
10.46 ta-ref/docs/running_on_dev_boards.md File Reference . . . . .	176
<b>Index</b>	<b>177</b>

# 1 Overview of ta-ref

## 1.1 Features

### 1.1.1 What we did on RISC-V

- We designed the GP internal API library to be portable.
  - Keystone SDK is utilized because of runtime "Eyrie".
  - The library is ported to Intel SGX as well as RISC-V Keystone.

- Implementation Challenge
  - The combination of GP internal API and cipher suite is big.
    - \* We pick up some important GP internal APIs.
  - Some APIs depend on CPU architecture.
    - \* We separate APIs into CPU architecture dependent / independent.
  - Integrate GP TEE Internal API to Keystone SDK.
    - \* Keystone SDK includes EDL (Enclave Definition Language) named “keedger”.
    - \* Keedger creates the code for OCALL (request from TEE to REE) to check the pointer and boundary.

### 1.1.2 Separate GP TEE Internal API

- CPU architecture dependent
  - Random Generator, Time, Secure Storage, Transient Object(TEE\_GenerateKey)
- CPU architecture independent(Crypto)
  - Transient Object(exclude TEE\_GenerateKey), Crypto Common, Authenticated Encryption, Symmetric/Asymmetric Cipher, Message Digest


Category	CPU (In)Dependent	Functions
Random Number	Dependent	TEE_GenerateRandom
Time	Dependent	TEE_GetREETime, TEE_GetSystemTime
Secure Storage	Dependent	TEE_CreatePersistentObject, TEE_OpenPersistentObject, TEE_ReadObjectData, TEE_WriteObjectData, TEE_CloseObject
Transient Object	Dependent Independent	TEE_GenerateKey, TEE_AllocateTransientObject, TEE_FreeTransientObject, TEE_InitRefAttribute, TEE_InitValueAttribute, TEE_SetOperationKey
Crypto Common	Independent	TEE_AllocateOperation, TEE_FreeOperation
Authenticated Encryption	Independent	TEE_AEInit, TEE_AEUpdateAAD, TEE_AEUpdate, TEE_AEEncryptFinal, TEE_AEDecryptFinal
Symmetric Cipher	Independent	TEE_CipherInit, TEE_CipherUpdate, TEE_CipherDoFinal
Asymmetric Cipher	Independent	TEE_AsymmetricSignDigest, TEE_AsymmetricVerifyDigest
Message Digest	Independent	TEE_DigestUpdate, TEE_DigestDoFinal

## 1.2 Diagram

### 1.2.1 Dependency of category

#### Dependency of category

- Some categories have dependency.
  - Crypto Common
    - Cipher suite must be registered before use.
  - Transient Object
    - The space for a key must be prepared before use.

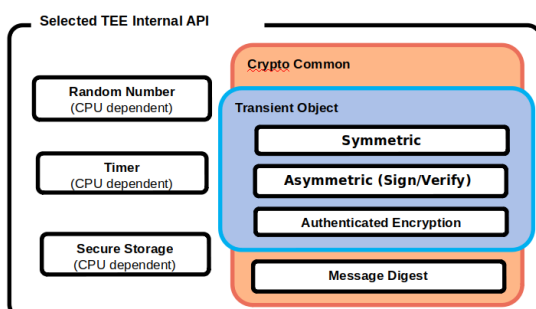

#### Sample Program

```
// Allocate a transient object for keypair
TEE_AllocateTransientObject(TEE_TYPE_ECDSA_KEYPAIR,
KEY_SIZE, &keypair);
// Assemble an attribute for ecc key
TEE_InitValueAttribute(&attr, TEE_ATTR_ECC_CURVE,
TEE_ECC_CURVE_NIST_P256, KEY_SIZE);
// Generate a keypair having that attribute
TEE_GenerateKey(keypair, KEY_SIZE, &attr, 1);

// Allocate sign operation
TEE_AllocateOperation(&handle,
TEE_ALG_ECDSA_P256,
TEE_MODE_SIGN, KEY_SIZE);

// Set the generated key to the sign operation
TEE_SetOperationKey(handle, keypair);

// Sign
uint32 t_siglen = SIG_LENGTH;
TEE_AsymmetricSignDigest(handle, NULL, 0, hash,
hashlen, sig, &siglen);
```

13

## 2 How to Program on ta-ref

### 2.1 Time Functions

This function retrieves the current time as seen from the point of view of the REE, which expressed in the number of seconds and prints the "GP REE second and millisecond".

```
--- start Ree time ---
void gp_ree_time_test(void)
{
    TEE_Time time;
    /* REE time */
    TEE_GetREETime(&time);
    tee_printf ("GP REE time %u sec %u millis\n", time.seconds, time.millis);
}
--- end Ree Time ---
```

This function retrieves the current system time as seen from the point of view of the TA, which expressed in the number of seconds and print the "GP System time second and millisecond".

```
--- start System time ---
void gp_trusted_time_test(void)
{
    TEE_Time time;
    /* System time */
    TEE_GetSystemTime(&time);
    tee_printf ("GP System time %u sec %u millis\n", time.seconds, time.millis);
}
--- end System time ---
```

### 2.2 Random Functions

This function generates the random data by invoking TEE\_GenerateRandom function and it prints the generated random data.

```
--- start Random ---
void gp_random_test(void)
{
    unsigned char rbuf[16];
    TEE_GenerateRandom(rbuf, sizeof(rbuf));
    tee_printf("@random: ");
    for (int i = 0; i < sizeof(rbuf); i++) {
        tee_printf ("%02x", rbuf[i]);
    }
    tee_printf("\n");
}
--- end Random ---
```

### 2.3 Hash Functions

Pseudo code of how to use Message Digest Functions. Keystone uses sha3.c which is almost identical. Ultimate question is whether this should be done in 'Enclave (U-Mode) or Runtime (S-Mode) the library used in keystone.↔ The function performs many operations to achieve message data hash techniques to allocate the handle for a new cryptographic operation. And then finalize the message digest operation to produce the message hash. It prints the hash message.

```
--- start Message Digest ---
void gp_message_digest_test(void)
{
    static unsigned char data[256] = {
        // 0x00, 0x01, ..., 0xff
#include "test.dat"
    };
    unsigned char hash[SHA_LENGTH];
    TEE_OperationHandle handle;
    uint32_t hashlen = SHA_LENGTH;
    TEE_Result rv;
    /* Take hash of test data
    /* sha3_init() in sha3.c */
    rv = TEE_AllocateOperation(&handle, TEE_ALG_SHA256, TEE_MODE_DIGEST, SHA_LENGTH);
    GP_ASSERT(rv, "TEE_AllocateOperation fails");
```



```

/* sha3.update() in sha3.c */
TEE.DigestUpdate(handle, data, sizeof(data));

/* sha3_final() in sha3.c */
rv = TEE.DigestDoFinal(handle, NULL, 0, hash, &hashlen);
GP_ASSERT(rv, "TEE.DigestDoFinal fails");
TEE.FreeOperation(handle);
/* hash value is ready */
// Dump hashed data
tee_printf("hash: ");
for (int i = 0; i < SHA_LENGTH; i++) {
    tee_printf ("%02x", hash[i]);
}
tee_printf("\n");
}
--- end Message Digest ---

```

## 2.4 Symmetric Crypto Functions

Crypto, Authenticated Encryption with Symmetric Key Verification Functions. This function allocates an uninitialized transient object, i.e. a container for attributes. Transient objects are used to hold a cryptographic object (key or key-pair). With the generation of a key, a new cryptographic operation for encrypt and decrypt data is initiated with a symmetric cipher operation. The original data is compared with decrypted data by checking the data and its length.

```

--- start Symmetric Key Encryption ---
void gp_symmetric_key_enc_verify_test(void)
{
    TEE.OperationHandle handle;
    static unsigned char data[CIPHER_LENGTH] = {
        // 0x00, 0x01, ..., 0xff
#include "test.dat"
    };
    uint8_t iv[16];
    unsigned char out[CIPHER_LENGTH];
    uint32_t outlen;
    TEE.ObjectHandle key;
    TEE.Result rv;
    // Generate key
    rv = TEE.AllocateTransientObject(TEE.TYPE_AES, 32*8, &key);
    GP_ASSERT(rv, "TEE.AllocateTransientObject fails");
    rv = TEE.GenerateKey(key, 256, NULL, 0);
    GP_ASSERT(rv, "TEE.GenerateKey fails");
    // Encrypt test data
    rv = TEE.AllocateOperation(&handle, TEE.ALG_AES_CBC_NOPAD, TEE.MODE_ENCRYPT, 256);
    GP_ASSERT(rv, "TEE.AllocateOperation fails");
    rv = TEE.SetOperationKey(handle, key);
    GP_ASSERT(rv, "TEE.SetOperationKey fails");
    TEE.GenerateRandom(iv, sizeof(iv));
    TEE.CipherInit(handle, iv, sizeof(iv));
    //GP_ASSERT(rv, "TEE.AEInit fails");
    outlen = CIPHER_LENGTH;
    rv = TEE.CipherUpdate(handle, data, CIPHER_LENGTH, out, &outlen);
    GP_ASSERT(rv, "TEE.CipherUpdate fails");
    TEE.FreeOperation(handle);
    // Dump encrypted data
    tee_printf("@cipher: ");
    for (int i = 0; i < CIPHER_LENGTH; i++) {
        tee_printf ("%02x", out[i]);
    }
    tee_printf("\n");
    // Decrypt it
    rv = TEE.AllocateOperation(&handle, TEE.ALG_AES_CBC_NOPAD, TEE.MODE_DECRYPT, 256);
    GP_ASSERT(rv, "TEE.AllocateOperation fails");
    rv = TEE.SetOperationKey(handle, key);
    GP_ASSERT(rv, "TEE.SetOperationKey fails");
    TEE.CipherInit(handle, iv, sizeof(iv));
    //GP_ASSERT(rv, "TEE.AEInit fails");
    outlen = CIPHER_LENGTH;
    rv = TEE.CipherUpdate(handle, out, CIPHER_LENGTH, out, &outlen);
    GP_ASSERT(rv, "TEE.CipherUpdate fails");
    TEE.FreeOperation(handle);
    TEE.FreeTransientObject(key);
    // Dump data
    tee_printf("decrypted to: ");
    for (int i = 0; i < CIPHER_LENGTH; i++) {
        tee_printf ("%02x", out[i]);
    }
    tee_printf("\n");
    // Verify decrypted data against original one
    int verify_ok;
    verify_ok = !memcmp(out, data, CIPHER_LENGTH);
    if (verify_ok) {

```

```

        tee_printf("verify ok\n");
    } else {
        tee_printf("verify fails\n");
    }
}
--- end Symmetric Key Encryption ---

```

## 2.5 Asymmetric Crypto Functions

Crypto, Sign and Verify with Asymmetric Key Verification Functions. Cryptographic Operations for API Message Digest Functions. The function performs cryptographic operation for API Message. To achieve this, the function allocates a handle for a new cryptographic operation, to finalize the message digest operation and to produce the message hash. The Hashed data is signed with signature key within an asymmetric operation. The original Hashed Data and Signed hashed data is compared for ok status.

```

--- start Asymmetric Key Signed ---
void gp.asymmetric_key_sign_test(void)
{
    static unsigned char data[256] = {
        // 0x00,0x01,...,0xff
#include "test.dat"
    };
    unsigned char hash[SHA_LENGTH];
    unsigned char sig[SIG_LENGTH];
    TEE.OperationHandle handle;
    uint32_t hashlen = SHA_LENGTH;
    TEE.Result rv;

    // Take hash of test data
    /* Calculate hash */
    /* sha3_init() in sha3.c */
    rv = TEE.AllocateOperation(&handle, TEE.ALG_SHA256, TEE.MODE_DIGEST, SHA_LENGTH);
    GP_ASSERT(rv, "TEE.AllocateOperation fails");
    /* sha3_update() in sha3.c */
    TEE.DigestUpdate(handle, data, sizeof(data));

    /* sha3_final() in sha3.c */
    rv = TEE.DigestDoFinal(handle, NULL, 0, hash, &hashlen);
    GP_ASSERT(rv, "TEE.DigestDoFinal fails");
    /* free up */
    TEE.FreeOperation(handle);
    /* Get the signature */
    // Dump hashed data
    tee_printf("@digest: ");
    for (int i = 0; i < SHA_LENGTH; i++) {
        tee_printf ("%02x", hash[i]);
    }
    tee_printf("\n");
    uint32_t siglen = SIG_LENGTH;
    TEE.ObjectHandle keypair;
    // Sign hashed data with the generated keys
    /* set ecdsa_p256 key */
    rv = TEE.AllocateOperation(&handle, TEE.ALG_ECDSA_P256, TEE.MODE_SIGN, 256);
    GP_ASSERT(rv, "TEE.AllocateOperation fails");
    // Generate keypair
    rv = TEE.AllocateTransientObject(TEE.TYPE_ECDSA_KEYPAIR, 256, &keypair);
    GP_ASSERT(rv, "TEE.AllocateTransientObject fails");
    TEE.Attribute attr;
    TEE.InitValueAttribute(&attr,
        TEE.ATTR_ECC_CURVE,
        TEE.ECC_CURVE_NIST_P256,
        256);
    rv = TEE.GenerateKey(keypair, 256, &attr, 1);
    GP_ASSERT(rv, "TEE.GenerateKey fails");
    rv = TEE.SetOperationKey(handle, keypair);
    GP_ASSERT(rv, "TEE.SetOperationKey fails");
    /* Keystone has ecdsa_p256_sign() Equivalent in openssl is EVP_DigestSign() */
    rv = TEE.AsymmetricSignDigest(handle, NULL, 0, hash, hashlen, sig, &siglen);
    GP_ASSERT(rv, "TEE.AsymmetricSignDigest fails");

    /* free up */
    TEE.FreeOperation(handle);
    /* Get the signature */
    // Dump signature
    tee_printf("@signature: ");
    for (uint32_t i = 0; i < siglen; i++) {
        tee_printf ("%02x", sig[i]);
    }
    tee_printf("\n");
    // Verify signature against hashed data
    /* set ecdsa_p256 key */

```

```

rv = TEE.AllocateOperation(&handle, TEE_ALG_ECDSA_P256, TEE_MODE_VERIFY, 256);
GP_ASSERT(rv, "TEE.AllocateOperation fails");
rv = TEE.SetOperationKey(handle, keypair);
GP_ASSERT(rv, "TEE.SetOperationKey fails");
/* Keystone has ecdsa_p256_verify() Equivalent in openssl is EVP_DigestVerify() */
TEE_Result verify_ok;
verify_ok = TEE.AsymmetricVerifyDigest(handle, NULL, 0, hash, hashlen, sig, siglen);
/* free up */
TEE.FreeOperation(handle);
tee_printf("@@TEE.FreeOperation: \n");
TEE.FreeTransientObject(keypair);

if (verify_ok == TEE_SUCCESS) {
    tee_printf("verify ok\n");
} else {
    tee_printf("verify fails\n");
}
}
/* Check verify_ok for success of verification */
--- end Asymmetric Key Signed ---

```

## 2.6 Symmetric Crypto Gcm Functions

This function encrypt and decrypt the test data. The function allocates an uninitialized transient object, i.e. a container for attributes. Transient objects are used to hold a cryptographic object (key or key-pair). With the generation of a key, a new cryptographic operation for encrypt and decrypt data is initiated with a symmetric cipher operation. The data is also checked whether it is completely encrypted or decrypted. The original data is compared with decrypted data by checking the data and cipher length.

```

--- start Symmetric Key GCM ---
void gp_symmetric_key_gcm_verify_test(void)
{
    TEE.OperationHandle handle;
    static unsigned char data[CIPHER_LENGTH] = {
        // 0x00, 0x01, ..., 0xff
#include "test.dat"
    };
    uint8_t iv[16];
    unsigned char out[CIPHER_LENGTH];
    uint32_t outlen;
    unsigned char tag[16];
    TEE.ObjectHandle key;
    TEE_Result rv;
    // Generate key
    rv = TEE.AllocateTransientObject(TEE_TYPE_AES, 256, &key);
    GP_ASSERT(rv, "TEE.AllocateTransientObject fails");
    rv = TEE.GenerateKey(key, 256, NULL, 0);
    GP_ASSERT(rv, "TEE.GenerateKey fails");
    // Encrypt test data
    rv = TEE.AllocateOperation(&handle, TEE_ALG_AES_GCM, TEE_MODE_ENCRYPT, 256);
    GP_ASSERT(rv, "TEE.AllocateOperation fails");
    rv = TEE.SetOperationKey(handle, key);
    GP_ASSERT(rv, "TEE.SetOperationKey fails");
    TEE.GenerateRandom(iv, sizeof(iv));
    /* Equivalent in openssl is EVP_EncryptInit_ex() */
    rv = TEE.AEInit(handle, iv, sizeof(iv), 16*8, 16, 16);
    GP_ASSERT(rv, "TEE.AEInit fails");
    /* Equivalent in openssl is EVP_EncryptUpdate() */
    // rv = TEE.AEUpdateAAD(handle, aad, 16);
    // GP_ASSERT(rv, "TEE.AEUpdateAAD fails");
    unsigned int taglen = 16;
    memset(tag, 0, 16);
    outlen = CIPHER_LENGTH;
    /* Equivalent in openssl is EVP_EncryptFinal() */
    rv = TEE.AEEncryptFinal(handle, data, 256, out, &outlen, tag, &taglen);
    TEE.FreeOperation(handle);
    /* Get the auth.tag */
    // Dump encrypted data and tag
    tee_printf("@cipher: ");
    for (int i = 0; i < CIPHER_LENGTH; i++) {
        tee_printf("%02x", out[i]);
    }
    tee_printf("\n");
    tee_printf("@tag: ");
    for (int i = 0; i < 16; i++) {
        tee_printf("%02x", tag[i]);
    }
    tee_printf("\n");
    // Decrypt it
    rv = TEE.AllocateOperation(&handle, TEE_ALG_AES_GCM, TEE_MODE_DECRYPT, 256);
    GP_ASSERT(rv, "TEE.AllocateOperation fails");

```

```

rv = TEE.SetOperationKey(handle, key);
GP_ASSERT(rv, "TEE.SetOperationKey fails");
/* Equivalent in openssl is EVP.DecryptInit.ex() */
rv = TEE.AEInit(handle, iv, sizeof(iv), 16*8, 16, 16);
GP_ASSERT(rv, "TEE.AEInit fails");
// rv = TEE.AEUpdateAAD(handle, aad, 16);
// GP_ASSERT(rv, "TEE.AEUpdateAAD fails");
unsigned char decode[CIPHER_LENGTH];
outlen = 256;
/* Equivalent in openssl require two functions
   EVP.CIPHER.CTX.ctrl(tag) and EVP.DecryptFinal(others) */
rv = TEE.AEDecryptFinal(handle, out, 256, decode, &outlen, tag, 16);
GP_ASSERT(rv, "TEE.AEDecryptFinal fails");
TEE.FreeOperation(handle);
TEE.FreeTransientObject(key);
// Dump data and tag
tee.printf("decrypted to: ");
for (int i = 0; i < CIPHER_LENGTH; i++) {
    tee.printf ("%02x", decode[i]);
}
tee.printf("\n");

// Verify decrypted data against original one
/* Check verify_ok for success of decrypting and authentication */
int verify_ok;
verify_ok = !memcmp(decode, data, CIPHER_LENGTH);
if (verify_ok) {
    tee.printf("verify ok\n");
} else {
    tee.printf("verify fails\n");
}
}
--- end Symmetric Key GCM ---

```

## 2.7 Open, Read, Write, Close On Secure Storage

Core Functions, Secure Storage Functions. Pseudo code of how to use Secure Storage. These could be implemented using ocall on Keystone. Almost identical to open(), clone(), read(), write() in POSIX API. The function creates a persistent object for reading and writing the data. The created data individually for read and write are compared for data length. If the length of both the objects are same, the function prints "verify ok" and prints "verify fails" if it is not the same.

```

--- start Secure storage ---
void gp_secure_storage_test(void)
{
    static unsigned char data[] = {
        // 0x00,0x01,...,0xff
#include "test.dat"
    };
    static unsigned char buf[DATA_LENGTH];
    TEE.Result rv;
    /* write */
    TEE.ObjectHandle object;
    rv = TEE.CreatePersistentObject(TEE.STORAGE_PRIVATE,
                                   "FileOne", strlen("FileOne"),
                                   (TEE.DATA_FLAG_ACCESS_WRITE
                                    | TEE.DATA_FLAG_OVERWRITE),
                                   TEE.HANDLE_NULL,
                                   NULL, 0,
                                   &object);
    GP_ASSERT(rv, "TEE.CreatePersistentObject fails");
    memcpy(buf, data, DATA_LENGTH);
    /* fill the date in buffer */
    rv = TEE.WriteObjectData(object, (const char *)data, DATA_LENGTH);
    GP_ASSERT(rv, "TEE.WriteObjectData fails");
    TEE.CloseObject(object);
--- write file end ---
    /* clear buf */
    memset(buf, 0, DATA_LENGTH);
--- read file start ---
    /* read */
    rv = TEE.OpenPersistentObject(TEE.STORAGE_PRIVATE,
                                   "FileOne", strlen("FileOne"),
                                   TEE.DATA_FLAG_ACCESS_READ,
                                   &object);
    GP_ASSERT(rv, "TEE.OpenPersistentObject fails");
    uint32_t count;
    rv = TEE.ReadObjectData(object, (char *)buf, DATA_LENGTH, &count);

    GP_ASSERT(rv, "TEE.ReadObjectData fails");
    TEE.CloseObject(object);
}

```

```

/* use the data in buffer */
tee_printf("%d bytes read: ", count);
for (uint32_t i = 0; i < count; i++) {
    tee_printf ("%02x", buf[i]);
}
tee_printf("\n");
/* Compare read data with written data */
int verify_ok;
verify_ok = !memcmp(buf, data, DATA_LENGTH);
if (verify_ok) {
    tee_printf("verify ok\n");
} else {
    tee_printf("verify fails\n");
}
}
--- end Secure storage ---

```

## 3 Preparation before building

### 3.1 Keystone(RISC-V Unleashed)

Keystone is an open-source TEE framework for RISC-V processors. For more details check,

- <http://docs.keystone-enclave.org/en/latest>

#### 3.1.1 Required Packages

Install following Packages

```

apt-get update
apt-get install -y autoconf automake autotools-dev bc bison build-essential curl expat libexpat1-dev flex
gawk gcc git gperf libgmp-dev libmpc-dev libmpfr-dev libtool texinfo tmux patchutils zlib1g-dev wget
bzip2 patch vim-common lbzip2 python pkg-config libglib2.0-dev libpixman-1-dev libssl-dev screen
device-tree-compiler expect make self unzip cpio rsync cmake

```

#### 3.1.2 Build Keystone

Download the keystone sources

```

git clone https://github.com/keystone-enclave/keystone.git
cd keystone
git checkout v0.3
./fast-setup.sh
make
source source.sh
./sdk/scripts/init.sh
./sdk/examples/hello/vault.sh
./sdk/examples/hello-native/vault.sh
./tests/tests/vault.sh
make image

```

RISC-V Toolchain:

- When you execute `./fast-setup.sh`, the toolchain for RISC-V has been installed at `$KEYSTONE_DIR/riscv/bin` and it adds to your PATH.

### 3.1.3 Run Keystone examples

Launch QEMU console

```
./scripts/run-gemu.sh
Welcome to Buildroot
```

Login to console with user=root, passwd=sifive

```
buildroot login: root
Password:
$
```

Run hello example

```
$ insmod keystone-driver.ko
[ 365.354299] keystone_driver: loading out-of-tree module taints kernel.
[ 365.364279] keystone_enclave: keystone enclave v0.2
$
$ ./hello/hello.ke
Verifying archive integrity... 100% All good.
Uncompressing Keystone vault archive 100%
hello, world!
```

Poweroff the console incase, if you want to exit.

```
$ poweroff
```

## 3.2 OPTEE (ARM64 RPI3)

OP-TEE is a Trusted Execution Environment (TEE) designed as companion to a non-secure Linux kernel running on Arm. Lets build OPTEE for QEMU and Raspberry Pi3 Model B development board. For more details check,

- <https://optee.readthedocs.io/en/latest/>

### 3.2.1 Required Packages

Install following packages on Ubuntu 18.04

```
sudo dpkg --add-architecture i386
sudo apt-get update -y
sudo apt-get install -y android-tools-adb android-tools-fastboot autoconf \
    automake bc bison build-essential ccache cscope curl device-tree-compiler \
    expect flex ftp-upload gdisk iasl libattr1-dev libc6:i386 libcap-dev \
    libfdt-dev libftdi-dev libglib2.0-dev libhidapi-dev libncurses5-dev \
    libpixman-1-dev libssl-dev libstdc++6:i386 libtool libz1:i386 make \
    mtools netcat python python-crypto python3-crypto python-pyelftools \
    python3-pycryptodome python3-pyelftools python3-serial vim-common \
    rsync unzip uuid-dev xdg-utils xterm xz-utils zlib1g-dev \
    git python3-pip wget cpio \
    texlive texinfo \
sudo pip3 install pycryptodomex
```

### 3.2.2 Build OPTEE v3.9.0

Configure git

```
git config --global user.name "dummy"
git config --global user.email "dummy@gmail.com"
git config --global color.ui false
mkdir ~/bin
curl https://storage.googleapis.com/git-repo-downloads/repo > ~/bin/repo && \
chmod a+x ~/bin/repo
```

### 3.2.2.1 Download Toolchains

```
export TOOLCHAIN_DIR=${HOME}/toolchains
sudo apt-get install -y wget xz-utils
mkdir -p ${TOOLCHAIN_DIR}/aarch64 ${TOOLCHAIN_DIR}/aarch32
wget http://192.168.100.100:2000/gcc-arm-8.3-2019.03-x86_64-arm-linux-gnueabi.tar.xz -o /dev/null -O
aarch32.tar.xz && \
tar xf aarch32.tar.xz --strip-components=1 -C ${TOOLCHAIN_DIR}/aarch32
wget http://192.168.100.100:2000/gcc-arm-8.3-2019.03-x86_64-aarch64-linux-gnu.tar.xz -o /dev/null -O
aarch64.tar.xz && \
tar xf aarch64.tar.xz --strip-components=1 -C ${TOOLCHAIN_DIR}/aarch64
export PATH=${TOOLCHAIN_DIR}/aarch64/bin:${TOOLCHAIN_DIR}/aarch32/bin:${PATH}
```

### 3.2.2.2 Clone and Build OPTEE v3.9.0 for QEMU

Clone optee version 3.9.0 for QEMU

```
mkdir optee-3.9.0-qemu
cd optee-3.9.0-qemu
~/bin/repo init -u https://github.com/knknkn1162/manifest.git -m qemu.v8.xml -b 3.9.0
~/bin/repo sync -j4 --no-clone-bundle
ln -s ~/toolchains toolchains
cd build
make
```

If build is successful, the rootfs can be found as follows

```
ls -l ../out-br/images/rootfs.cpio.gz
```

### 3.2.2.3 Clone and Build OPTEE v3.9.0 for RPI3

Copy the following lines into "optee-rpi3.sh" script

```
#!/bin/bash -u
export OPTEE_VER=$1
export OPTEE_DIR=${PWD}/optee.${OPTEE_VER}-rpi3
mkdir ${OPTEE_DIR} || true
cd ${OPTEE_DIR}
~/bin/repo init -u https://github.com/knknkn1162/manifest.git -m rpi3.xml -b ${OPTEE_VER}
~/bin/repo sync -j4 --no-clone-bundle
ln -s ~/toolchains ${OPTEE_DIR}/. || true
echo 'CONFIG_CMDLINE="console=ttyAMA0,115200 kgdboc=ttyAMA0,115200 root=/dev/mmcblk0p2 rootfstype=ext4
noinitrd rw rootwait init=/lib/systemd/systemd"' > build/defconfig-cmdline.txt
cd build
make OPTEE_CLIENT_BIN_ARCH_EXCLUDE=/boot
LINUX_DEFCONFIG_COMMON_FILES=${OPTEE_DIR}/linux/arch/arm64/configs/bcmrpi3_defconfig
${OPTEE_DIR}/build/kconfigs/rpi3.conf ${OPTEE_DIR}/build/defconfig-cmdline.txt
BR2_PACKAGE_OPTEE_OS_EXT=n BR2_PACKAGE_OPTEE_TEST_EXT=n BR2_PACKAGE_OPTEE_EXAMPLES_EXT=n
BR2_TOOLCHAIN_EXTERNAL_GCC_8=y BR2_TOOLCHAIN_EXTERNAL_HEADERS_4_19=y BR2_HOST_GCC_AT_LEAST_8=y
BR2_TOOLCHAIN_HEADERS_AT_LEAST="4.19" -j' nproc'
```

Run the script as follows

```
chmod +x optee-rpi3.sh
./optee-rpi3.sh 3.9.0
```

If build is successful, the rootfs can be found as follows

```
ls -l ../out-br/images/rootfs.cpio.gz
```

## 3.2.3 Run OPTEE Examples

### 3.2.3.1 Launching QEMU Console

Run following commands from OPTEE build directory

```
cd $OPTEE_DIR/build
make run
```

Once above command is success, QEMU is ready

```
* QEMU is now waiting to start the execution
* Start execution with either a 'c' followed by <enter> in the QEMU console or
* attach a debugger and continue from there.
*
* To run OP-TEE tests, use the xtest command in the 'Normal World' terminal
* Enter 'xtest -h' for help.
```

```
cd /TEE/demo/rpi3/optee.3.9.0.qemu/build/./out/bin &&
/TEE/demo/rpi3/optee.3.9.0.qemu/build/./qemu/aarch64-softmmu/qemu-system-aarch64 \
-nographic \
-serial tcp:localhost:54320 -serial tcp:localhost:54321 \
-smp 2 \
-s -S -machine virt,secure=on -cpu cortex-a57 \
-d unimp -semihosting-config enable,target=native \
-m 1057 \
-bios bl1.bin \
-initrd rootfs.cpio.gz \
-kernel Image -no-acpi \
-append 'console=ttyAMA0,38400 keep.bootcon root=/dev/vda2' \
-object rng-random,filename=/dev/urandom,id=rng0 -device
virtio-rng-pci,rng=rng0,max-bytes=1024,period=1000 -netdev user,id=vmnic -device
virtio-net-device,netdev=vmnic
QEMU 3.0.93 monitor - type 'help' for more information
(qemu) c
Now Optee started to boot from another tab on the Terminal
```

### 3.2.3.2 Run hello world example

Once boot completed it displays following message, then enter "root" to login to the shell

```
Welcome to Buildroot, type root or test to login
buildroot login: root
$
$ optee.example.hello.world
Invoking TA to increment 42
TA incremented value to 43
```

Poweroff the console in case, if you want to exit.

```
$ poweroff
```

## 3.3 SGX (Intel NUC)

Intel(R) Software Guard Extensions (Intel(R) SGX) is an Intel technology for application developers who is seeking to protect selected code and data from disclosure or modification. For more details check,

- <https://github.com/intel/linux-sgx/blob/master/README.md>

### 3.3.1 List of machines which are confirmed to work

1. Intel NUC7PJYH - Intel(R) Celeron(R) J4005 CPU @ 2.00GHz
2. Intel NUC7PJYH - Intel(R) Pentium(R) Silver J5005 CPU @ 1.50GHz
3. Intel NUC9VXQNX - Intel(R) Xeon(R) E-2286M CPU @ 2.40GHz (Partially working)

### 3.3.2 BIOS Versions which are failed or succeeded in IAS Test

1. BIOS Version JYGLKCPX.86A.0050.2019.0418.1441 - IAS Test was Failed
2. BIOS Version JYGLKCPX.86A.0053.2019.1015.1510 - IAS Test was Failed
3. BIOS Version JYGLKCPX.86A.0057.2020.1020.1637 - IAS Test was Success
4. BIOS Version QNCFLX70.0034.2019.1125.1424 - IAS Test was Failed
5. BIOS Version QNCFLX70.0059.2020.1130.2122 - IAS Test was Success

Update BIOS from:

- <https://downloadcenter.intel.com/download/29987/BIOS-Update-JYGLKCPX->
- <https://downloadcenter.intel.com/download/30069/BIOS-Update-QNCFLX70->



### 3.3.3 BIOS Settings

1. Make sure you are running with latest version BIOS
2. Make sure you enabled SGX support in BIOS
3. Make sure Secure Boot disabled in BIOS

Refer: <https://github.com/intel/sgx-software-enable/blob/master/README.md>

### 3.3.4 Required Packages

Intall following packages on Ubuntu 18.04

```
sudo apt-get install build-essential ocaml ocamlbuild automake autoconf libtool wget python libssl-dev git
cmake perl libssl-dev libcurl4-openssl-dev protobuf-compiler libprotobuf-dev debhelper cmake reprepro
expect unzip sshpass
```

### 3.3.5 Build SGX

There are 3 components which need to be build for SGX

1. linux-sgx
2. linux-sgx-driver
3. sgx-ra-sample

#### 3.3.5.1 SGX SDK

Clone and build

```
git clone https://github.com/intel/linux-sgx.git -b sgx.2.10
cd linux-sgx
git checkout sgx.2.10
./download_prebuilt.sh
sudo cp external/toolset/ubuntu18.04/{as,ld,ld.gold,objdump} /usr/local/bin/
make -j`nproc` sdk_install.pkg DEBUG=1
```

Install SGX SDK

```
sudo ./linux/installer/bin//sgx_linux_x64_sdk.${version}.bin
```

where \${version} is a string something similar to 2.10.100.2.

Answer the question with no and input the install dir as /opt/intel

Build and Install SGX PSW packages

See here: <https://github.com/intel/linux-sgx#install-the-intelr-sgx-psw>

```
source /opt/intel/sgxsdk/environment
make deb_psw.pkg DEBUG=1
rm ./linux/installer/deb/*/*sgx-dcap-pccs*.deb
sudo dpkg -i ./linux/installer/deb/*/*.deb
```

Install SGX PSW packages from Intel Repository

See here: <https://github.com/intel/linux-sgx#install-the-intelr-sgx-psw-1>

Using the local repo is recommended, since the system will resolve the dependencies automatically.

Check at page no.7, [https://download.01.org/intel-sgx/sgx-linux/2.9/docs/Intel\\_SGX\\_Installation\\_Guide\\_Linux\\_2.9\\_Open\\_Source.pdf](https://download.01.org/intel-sgx/sgx-linux/2.9/docs/Intel_SGX_Installation_Guide_Linux_2.9_Open_Source.pdf)

```
sudo apt install libsgx-enclave-common libsgx-epid libsgx-launch libsgx-urts libsgx-uae-service
libsgx-quote-ex
```

If you see below error,

Errors were encountered while processing:  
/tmp/apt-dpkg-install-pCB0cR/04-libsgx-headers.2.12.100.3-bionic1.amd64.deb

Here is the fix

```
sudo apt -o Dpkg::Options::="--force-overwrite" --fix-broken install
```

### 3.3.5.2 Build and Install SGX Driver

See [linux-sgx-driver](#).

Caveat: Whenever updating kernel, don't forget rebuilding this driver with new version of the kernel header. (There are a few linux-sgx-driver-dkms repo, though I've experienced troubles with them.)

Clone and build

```
$ git clone https://github.com/intel/linux-sgx-driver.git
$ cd linux-sgx-driver
$ make
```

Install SGX driver

```
$ sudo mkdir -p "/lib/modules/"`uname -r`"/kernel/drivers/intel/sgx"
$ sudo cp isgx.ko "/lib/modules/"`uname -r`"/kernel/drivers/intel/sgx"
$ sudo sh -c "cat /etc/modules | grep -Fxq isgx || echo isgx >> /etc/modules"
$ sudo /sbin/depmod
$ sudo /sbin/modprobe isgx
```

When modprobe fails with "Operation is not permitted", disable secure boot in BIOS. So that the unsigned kernel driver can be installed. If it is success, reboot your machine and verify `sudo lsmod | grep isgx` if it shows `isgx.ko`

## 3.3.6 Run sgx-ra-sample

### 3.3.6.1 Build sgx-ra-sample

Clone and build OpenSSL 1.1.c

```
wget https://www.openssl.org/source/openssl-1.1.1c.tar.gz
tar xf openssl-1.1.1c.tar.gz
cd openssl-1.1.1c/
./config --prefix=/opt/openssl/1.1.1c --openssldir=/opt/openssl/1.1.1c
make
sudo make install
cd ..
```

Clone and build sgx-ra-sample

```
git clone https://github.com/intel/sgx-ra-sample.git
cd sgx-ra-sample/
./bootstrap
./configure --with-openssldir=/opt/openssl/1.1.1c
make
```

### 3.3.6.2 Prepare for IAS Test

1. Obtain a subscription key for the Intel SGX Attestation Service Utilizing Enhanced Privacy ID (EPID). See here: <https://api.portal.trustedservices.intel.com/EPID-attestation>
2. Download Intel\_SGX\_Attestation\_RootCA.pem from above portal.
3. Edit settings file and update the file with your own values obtained from portal.

```
@@ -15,14 +15,14 @@ QUERY_IAS_PRODUCTION=0
# Your Service Provider ID. This should be a 32-character hex string.
# [REQUIRED]

-SPID=0123456789ABCDEF0123456789ABCDEF
+SPID=EF9AE4A8635825B88751C8698CB370B4

# Set to a non-zero value if this SPID is associated with linkable
# quotes. If you change this, you'll need to change SPID,
# IAS_PRIMARY_SUBSCRIPTION_KEY and IAS_SECONDARY_SUBSCRIPTION_KEY too.

-LINKABLE=0
```

### 3.3.6.3 Run IAS Test

Open another terminal and run "run-client"

Copyright © The National Institute of Advanced Industrial Science and Technology (AIST)

```
e1e1cc6e87388143712c1f15593ec5fdea02ce426139c461cfd6cc63025124ed5ea5c0160fdb59ea65e97449d44d78355018
c54f11290930d8464096723fc0e25421fb0849a156ce0af973af0324a86bdb583501f0779e86d108afe02faa6c73c6d6035
e8d4c8ba3478ca58779dd26f015d31dff046e8d74fe680100004af4eed5e48babde1db56dc88ab96a689de24c33ad955ca33
86d9bf9fb842d2ef2f09883e9dead7e5c58c841181e987599532e769b3e1445a570c7b7fc5d866906d5064770919001a47b3
f4dde0635451047a0d1fc8a3971525866fa07da59e3cce44e71eba19a8a00e265ecc04dc5529a942afe6dd222045e746411c
d4c89541a432de0c7464ba8d54e775f1530098a3fc4876c140028e12edcd0e3df1b176271f74207b54b0bd76a9d4b3549f8b
b950a492a64a4949eaaa8192432d99eabebd46eb56507a675c184de8ee6c53461753cf123bb9e26ddfb8422e4c130efe7c5d
f3f328cb02945bfa575f79e376d9aac40da397e9cdcb449f223842bec9e07e4b2c736409ed964799ac9cf51a71f0cbdf91f9
4bd362e761ae35ed27d2872112caf2476846e397141106d9898b96295fa969dbd9b48c7dd8f27c5ba1bb1d6bb20aad86346
695c8f18efe073e9424382f3f73757ee99e95c30da5dd47d94185eda2b97613b0872a622c58f4f2dd91d1e4d876ac8e40a18
60a
-----
---- Enclave Trust Status from Service Provider -----
Enclave TRUSTED
```

### 3.3.6.4 Possible wget Error

Server may invoke wget command to get some files from intel servers. If the server side fails with following error

```
Connecting to api.trustedservices.intel.com (api.trustedservices.intel.com)|40.87.90.88|:443... connected.
ERROR: cannot verify api.trustedservices.intel.com's certificate, issued by 'CN=COMODO RSA Organization
Validation Secure Server CA,O=COMODO CA Limited,L=Salford,ST=Greater Manchester,C=GB':
Unable to locally verify the issuer's authority.
To connect to api.trustedservices.intel.com insecurely, use '--no-check-certificate'.
```

then add a line

```
ca-certificate = /etc/ssl/certs/ca-certificates.crt
```

to /etc/wgetrc file as super user, then test again.

### 3.3.6.5 BIOS Updating

If BIOS version is outdated, IAS may not succeed. So when you are done with BIOS update, the sgx driver would be required to make and install again.

Update BIOS from:

- <https://downloadcenter.intel.com/download/29987/BIOS-Update-JYGLKCPX->
- <https://downloadcenter.intel.com/download/30069/BIOS-Update-QNCFLX70->

### 3.3.6.6 Run LocalAttestation

Running SDK code samples in simulation mode

```
source /opt/intel/sgxsdk/environment
cd linux-sgx/SampleCode/LocalAttestation
make SGX_MODE=SIM
cd bin
./app
succeed to load enclaves.
succeed to establish secure channel.
Succeed to exchange secure message...
Succeed to close Session...
```

Running in hardware mode (It works when you have latest BIOS and SGX support is enabled in BIOS)

```
source /opt/intel/sgxsdk/environment
cd linux-sgx/SampleCode/LocalAttestation
make SGX_MODE=HW
cd bin
./app
succeed to load enclaves.
succeed to establish secure channel.
Succeed to exchange secure message...
Succeed to close Session...
```

## 4 Building

### 4.1 Install Doxygen-1.9.2

This PDF was generated using Doxygen version 1.9.2. To install doxygen-1.9.2 following procedure is necessary.

### 4.2 Install Required Packages

Install following packages on Ubuntu 18.04

```
sudo apt install doxygen-latex graphviz texlive-full texlive-latex-base latex-cjk-all
```

Above packages required to generate PDF using doxygen.

### 4.3 Build and Install

```
git clone https://github.com/doxygen/doxygen.git
cd doxygen
mkdir build
cd build
cmake -G "Unix Makefiles" ..
make
sudo make install
```

### 4.4 ta-ref with Keystone

Make sure Keystone and other dependant sources have been built

#### 4.4.1 Cloning source and building

Install required packages

```
sudo apt-get update
sudo apt-get install -y clang-tools-6.0 libclang-6.0-dev cmake ocaml expect screen sshpass
```

Setup Env

```
export KEYSTONE_DIR=<path to your keystone directory>
export PATH=$PATH:$KEYSTONE_DIR/riscv/bin
```

Clone and Build KEYEDGE

```
GIT_SSL_NO_VERIFY=1 git clone --recursive https://192.168.100.100/rinkai/keyedge.git
cd keyedge
git checkout f9406aba2117147cc54462ede4766e26f028ced9
make
```

Clone and Build KEEDGER8R

```
GIT_SSL_NO_VERIFY=1 git clone --recursive https://192.168.100.100/rinkai/keedger8r.git
cd keedger8r
make
sed -i 's/MAX_EDGE_CALL 10$/MAX_EDGE_CALL 1000/' ${KEYSTONE_DIR}/sdk/lib/edge/include/edge.common.h
make -C ${KEYSTONE_DIR}/sdk/lib clean all
```

Clone the source

```
git clone https://192.168.100.100/rinkai/ta-ref.git
cd ta-ref
git checkout teep-device-tb-slim
git submodule sync --recursive
git submodule update --init --recursive
```

Build

```
export KEYSTONE_DIR=<path to keystone directory>
export KEYSTONE_SDK_DIR=${KEYSTONE_DIR}/sdk
export KEYEDGE_DIR=<path to keyedge directory>
export KEEDGER8R_DIR=<path to keedger8r directory>
source env/keystone.sh
make build test-bin MACHINE=HIFIVE TEST_DIR=test.hello
make build test-bin MACHINE=HIFIVE TEST_DIR=test.gp
```

#### 4.4.2 Check ta-ref by running test\_gp, test\_hello, on QEMU

Copy the test\_hello and test\_gp programs to QEMU.

##### 4.4.2.1 Launch QEMU Console

```
cd $KEYSTONE_DIR
./scripts/run-qemu.sh
Welcome to Buildroot
```

##### 4.4.2.2 test\_hello

Run test\_hello

```
cp test_hello/keystone/Enclave/Enclave.eapp.riscv $KEYSTONE_DIR/buildroot.overlay/root/test_hello/
cp test_hello/keystone/Enclave/App.client $KEYSTONE_DIR/buildroot.overlay/root/test_hello/
cp $KEYSTONE_SDK_DIR/rts/eyrie/eyrie-rt $KEYSTONE_DIR/buildroot.overlay/root/test_hello/
insmod keystone-driver.ko
./App.client Enclave.eapp.riscv eyrie-rt
hello world!
```

##### 4.4.2.3 test\_gp

Run test\_gp

```
cp test_gp/keystone/Enclave/Enclave.eapp.riscv $KEYSTONE_DIR/buildroot.overlay/root/test_gp/
cp test_gp/keystone/Enclave/App.client $KEYSTONE_DIR/buildroot.overlay/root/test_gp/
cp $KEYSTONE_SDK_DIR/rts/eyrie/eyrie-rt $KEYSTONE_DIR/buildroot.overlay/root/test_gp/
insmod keystone-driver.ko
./App.client Enclave.eapp.riscv eyrie-rt
main start
TEE.GenerateRandom(0x000000003FFFFEE0, 16): start
@[SE] getrandom buf fff41844 len 16 flags 0 -> 16
@random: 5ea8741bd8a3b298cf53d214eca693fb
TEE.GetREETime(): start
@[SE] gettimeofday 77 sec 865873 usec -> 0
@GP REE time 77 sec 865 millis
TEE.GetSystemTime(): start
@GP System time 100063195 sec 609 millis
TEE.CreatePersistentObject(): start
@[SE] open file FileOne flags 241 -> 3 (0)
TEE.WriteObjectData(): start
@[SE] write desc 3 buf 480d0 len 256-> 256
TEE.CloseObject(): start
@[SE] close desc 3 -> 0
TEE.OpenPersistentObject(): start
@[SE] open file FileOne flags 0 -> 3 (0)
TEE.ReadObjectData(): start
@[SE] read desc 3 buf fff41664 len 256-> 256
TEE.CloseObject(): start
@[SE] close desc 3 -> 0
256 bytes read: 000102030405060708090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f20212223242526272829
2a2b2c2d2e2f303132333435363738393a3b3c3d3f
verify ok
TEE.AllocateOperation(): start
TEE.FreeOperation(): start
TEE.DigestDoFinal(): start
TEE.FreeOperation(): start
hash: 9b04c091da96b997afb8f2585d608aeb9c4a904f7d52c8f28c7e4d2dd9fba5f
TEE.AllocateTransientObject(): start
TEE.GenerateKey(): start
TEE.GenerateRandom(0x000000003FFFFD88, 32): start
@[SE] getrandom buf fff41844 len 16 flags 0 -> 16
@[SE] getrandom buf fff41844 len 16 flags 0 -> 16
TEE.AllocateOperation(): start
TEE.GenerateRandom(0x000000003FFFFED0, 16): start
@[SE] getrandom buf fff41844 len 16 flags 0 -> 16
TEE.CipherInit(): start
TEE.CipherUpdate(): start
TEE.FreeOperation(): start
@cipher: e94431cd22a6029185d0dbb1a17b5d62843bfeef25591583d2d668ec6fed1c692f88ce4754d690c346c8d9f2726
630e0386abf4e45699a2ca2b34b344eaa454bc489c
TEE.AllocateOperation(): start
```

```

TEE.CipherInit(): start
TEE.CipherUpdate(): start
TEE.FreeOperation(): start
TEE.FreeTransientObject(): start
decrypted to: 000102030405060708090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f202122232425262728292a
2b2c2d2e2f303132333435363738393a3b3c3d3e3f
verify ok
TEE.AllocateTransientObject(): start
TEE.GenerateKey(): start
TEE.GenerateRandom(0x000000003FFFFC68, 32): start
@[SE] getRandom buf fff41844 len 16 flags 0 -> 16
@[SE] getRandom buf fff41844 len 16 flags 0 -> 16
TEE.AllocateOperation(): start
TEE.GenerateRandom(0x000000003FFFFEC8, 16): start
@[SE] getRandom buf fff41844 len 16 flags 0 -> 16
TEE.AEInit(): start
TEE.AEEncryptFinal(): start
TEE.FreeOperation(): start
@cipher: c23e9ce04589e80a66debe23a788ae5393bdc8e875e87e1bcf2b2d998f6418ccc6ee4ab112fdbfc5175868691e
fb40781a318ff439d30b49cc9f726886ad42d5be15
@tag: a551f999317b3fbd1eea7b622ce2caee
TEE.AllocateOperation(): start
TEE.AEInit(): start
TEE.AEDecryptFinal(): start
TEE.FreeOperation(): start
TEE.FreeTransientObject(): start
decrypted to: 000102030405060708090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f202122232425262728292a
2b2c2d2e2f303132333435363738393a3b3c3d3e3f
verify ok
TEE.AllocateOperation(): start
TEE.FreeOperation(): start
TEE.DigestDoFinal(): start
TEE.FreeOperation(): start
@digest: 9b04c091da96b997afb8f2585d608aeb9c4a904f7d52c8f28c7e4d2dd9fba5f
TEE.AllocateOperation(): start
TEE.AllocateTransientObject(): start
TEE.InitValueAttribute(): start
TEE.GenerateKey(): start
TEE.GenerateRandom(0x000000003FFFFE28, 32): start
@[SE] getRandom buf fff41844 len 16 flags 0 -> 16
@[SE] getRandom buf fff41844 len 16 flags 0 -> 16
TEE.AsymmetricSignDigest(): start
TEE.FreeOperation(): start
@signature: d6e6b6e54db8b6a62fc1927886938bead27f4813f19ce77182e3016b5426bcad067ca98cd75f9dfddafe9eb0
655c48df992d3ad674db69d831f26ae63caf1405
TEE.AllocateOperation(): start
TEE.AsymmetricVerifyDigest(): start
TEE.FreeOperation(): start
@@TEE.FreeOperation:
TEE.FreeTransientObject(): start
verify ok
main end

```

## 4.5 ta-ref with OPTEE

Make sure optee.3.9.0.rpi3 has been built already.

### 4.5.1 Cloning source and building

#### Clone the source

```

git clone https://192.168.100.100/rinkai/ta-ref.git
cd ta-ref
git checkout teep-device-tb-slim
git submodule sync --recursive
git submodule update --init --recursive

```

#### Build

```

export OPTEE_DIR=<path to optee.3.9.0.rpi3>
source env/optee.rpi3.sh
make build test-bin MACHINE=RPI3 TEST_DIR=test_hello
make build test-bin MACHINE=RPI3 TEST_DIR=test_gp

```

### 4.5.2 Check ta-ref by running test\_gp, test\_hello, on QEMU

Copy the test\_hello and test\_gp programs to QEMU buildroot directory

```
mkdir -p optee.3.9.0.qemu/out-br/target/home/gitlab/out/{test_hello,test_gp}
cp ta-ref/test_hello/optee/App/optee_ref.ta optee.3.9.0.qemu/out-br/target/home/gitlab/out/test_hello/
cp ta-ref/test_hello/optee/Enclave/a6f77c1e-96fe-4a0e-9e74-262582a4c8f1.ta
  optee.3.9.0.qemu/out-br/target/home/gitlab/out/test_hello/
cp ta-ref/test_gp/optee/App/optee_ref.ta optee.3.9.0.qemu/out-br/target/home/gitlab/out/test_gp/
cp ta-ref/test_gp/optee/Enclave/a6f77c1e-96fe-4a0e-9e74-262582a4c8f1.ta
  optee.3.9.0.qemu/out-br/target/home/gitlab/out/test_gp/a6f77c1e-96fe-4a0e-9e74-262582a4c8f1.ta
cp ./test_gp/optee/Enclave/Enclave.nm /TEE/demo/rpi3/optee.3.9.0.qemu/out-br/target/home/gitlab/out/test_gp/
```

#### 4.5.2.1 test\_hello

Run test\_hello

```
cp /home/gitlab/out/test_hello/
cp a6f77c1e-96fe-4a0e-9e74-262582a4c8f1.ta /home/gitlab/out/
ln -s /home/gitlab/out/a6f77c1e-96fe-4a0e-9e74-262582a4c8f1.ta
  /lib64/optee.armtz/a6f77c1e-96fe-4a0e-9e74-262582a4c8f1.ta
./optee_ref.ta
--- enclave log start---
ecall.ta.main() start
hello world!
ecall.ta.main() end
--- enclave log end---
```

If executed successfully, you see above messages

#### 4.5.2.2 test\_gp

Run test\_gp

```
cd /home/gitlab/out/test_gp/
cp a6f77c1e-96fe-4a0e-9e74-262582a4c8f1.ta /home/gitlab/out/
ln -s /home/gitlab/out/a6f77c1e-96fe-4a0e-9e74-262582a4c8f1.ta
  /lib64/optee.armtz/a6f77c1e-96fe-4a0e-9e74-262582a4c8f1.ta
./optee_ref.ta
start TEEC.InvokeCommand
--- enclave log start---
ecall.ta.main() start
@random: fe0c7d3ee9b9bd5e63b8a0cce29af7eb
@GP REE time 1612156259 sec 390 millis
@GP System time 249187 sec 954 millis
256 bytes read: 000102030405060708090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f20212223242526272829
2a2b2c2d2e2f303132333435363738393a3b3c3d3e3f404142434445464748494a4b4c4d4e4f505152535455565758595a5b
5c5d5e5f606162636465666768696a6b6c6d6e6f707172737475767778797a7b7c7d7e7f808182838485868788898a8b8c8d
8e8f909192939495969798999a9b9c9d9e9fa0a1a2a3a4a5a6a7a8a9aaabacadaeafb0b1b2b3b4b5b6b7b8b9babbbcbdbefc
c0c1c2c3c4c5c6c7c8c9cacbcccdcecfcd0d1d2d3d4d5d6d7d8d9dadbdcdddedfe0e1e2e3e4e5e6e7e8e9eaebeceedeef0f1
f2f3f4f5f6f7f8f9fafbfcfdfeff
verify ok
hash: 40aff2e9d2d8922e47afd4648e6967497158785fbd1da870e7110266bf944880
@cipher: 30a558176172c53be4a2ac320776de105da79c29726879fe67d06b629f065731285f8a90f8a521ce34ecee51e1
5e928d157ea10d149bb687dd78be79469c28696506283edcda527fcd86f6a47e852bbc3488df3fc651b46b034faf4ab5f12f
51a285478ea01e58d40e8177d415be243df93b23cdf889feb91fa3be8906fe190d836fe61168aed0473406be1054dd88a381
ef25381d920ea3780ba74fb1cfe1434cbd168de8386dcc2e2b92eee0fc432f3c0514f462cbeaf96753b174a4a673f323e671
61272fe932ead4bc95770fcc130dd5877b521d6a79f961eeadd1680042f69257ccf9368927aa170176af8ac211dd22161997
7224837232dad970220f4
decrypted to: 000102030405060708090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f202122232425262728292a
2b2c2d2e2f303132333435363738393a3b3c3d3e3f404142434445464748494a4b4c4d4e4f505152535455565758595a5b5c
5d5e5f606162636465666768696a6b6c6d6e6f707172737475767778797a7b7c7d7e7f808182838485868788898a8b8c8d8e
8f909192939495969798999a9b9c9d9e9fa0a1a2a3a4a5a6a7a8a9aaabacadaeafb0b1b2b3b4b5b6b7b8b9babbbcbdbefc0
c1c2c3c4c5c6c7c8c9cacbcccdcecfcd0d1d2d3d4d5d6d7d8d9dadbdcdddedfe0e1e2e3e4e5e6e7e8e9eaebeceedeef0f1f2
f3f4f5f6f7f8f9fafbfcfdfeff
verify ok
@cipher: ff409d8fe203bf0d81de36832b86c702f07edd343f408d3a2fb5ab347b4f72b10031efff0c17b7e0bc56c3f2f95
f53cd0d731ed87eb3e1187b6714a25cfc65082284682b44450941654e7edc99af0f7b037c3ba9ea731036070aa9496e34cfeb
db6845e8aa9955416ba227970d3dd1f8207b5743e1490a7f5fd78d81fce0a24576de06a2f528d49c5b11e79a5cab015806ba
d73f118e205a3645a95b2b330ff9da12e00c693e7ee8cfd04eb0f08c3c657c4fa0ae384ed2d5ab1e15ffc835c3e4cc116cd
1049611f896cf445ab36dc8b39a6fe75d20d45b2273a5d8c2d3b935e3f22bc82b24c952812d66a902155d288d5f26ac6722
fe72498bd72ea523c914c
@tag: 9b357baf76d2632fa7d16231640d6324
decrypted to: 000102030405060708090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f202122232425262728292a
2b2c2d2e2f303132333435363738393a3b3c3d3e3f404142434445464748494a4b4c4d4e4f505152535455565758595a5b5c
```



```
5d5e5f606162636465666768696a6b6c6d6e6f707172737475767778797a7b7c7d7e7f808182838485868788898a8b8c8d8e
8f909192939495969798999a9b9c9d9e9fa0a1a2a3a4a5a6a7a8a9aaabacadaeafb0b1b2b3b4b5b6b7b8b9babbcbdbbfbfc0
c1c2c3c4c5c6c7c8c9cacbcccdcecfcd0d1d2d3d4d5d6d7d8d9daddbcdcdedfe0e1e2e3e4e5e6e7e8e9eaebeceedeefeff0f1f2
f3f4f5f6f7f8f9fafbfcdfefff
verify ok
@digest: 40aff2e9d2d8922e47afd4648e6967497158785fbd1da870e7110266bf944880
@signature: 719fa9898f3423b754675b835268f9b2368b77a429eeabf7369d60d135dee08158c3902fd2ed3c1bf17cb34e
76f2ba25da915fa3970c757962f7533c8d8bad7d
@@TEEFreeOperation:
verify ok
ecall.ta_main() end
--- enclave log end---
res = TEEC_SUCCESS; TEEC_InvokeCommand succeeded!
```

If executed successfully, you see above messages

## 4.6 ta-ref with SGX

Build ta-ref for Intel SGX platforms

### 4.6.1 Cloning source and building

Clone the source

```
git clone https://192.168.100.100/rinkai/ta-ref.git
cd ta-ref
git checkout teep-device-tb-slim
git submodule sync --recursive
git submodule update --init --recursive
```

Build

```
source /opt/intel/sgxsdk/environment
source env/sgx_x64.sh
make build test-bin MACHINE=NUC TEST_DIR=test.hello
make build test-bin MACHINE=NUC TEST_DIR=test.gp
```

### 4.6.2 Check ta-ref by running test.gp, test.hello, simulation mode on any pc

Copy the ta-ref's test.hello & test.gp executables to test directory

#### 4.6.2.1 test.hello

Run test.hello

```
cp test.hello/sgx/Enclave/enclave.signed.so <test directory>
cp test.hello/sgx/App/sgx_app <test directory>
<test directory>/sgx_app
hello world!
Info: Enclave successfully returned.
```

### 4.6.2.2 test\_gp

#### Run test\_gp

```

cp test_gp/sgx/Enclave/enclave.signed.so <test directory>
cp test_gp/sgx/App/sgx_app <test directory>
<test directory>/sgx_app
main start
TEE.GenerateRandom(): start
@random: f35c1d1e4bbf6641c5511c9dc5aaf638
TEE.GetREETime(): start
request to get unix time 1612257364, 199
@GP REE time 1612257364 sec 199 millis
TEE.GetSystemTime(): start
@GP System time 727941859 sec 984 millis
TEE.CreatePersistentObject(): start
request to open FileOne flags 241 -> 3
TEE.WriteObjectData(): start
request to write 256 bytes to descriptor 3
TEE.CloseObject(): start
request to close descriptor 3
TEE.OpenPersistentObject(): start
request to open FileOne flags 0 -> 3
TEE.ReadObjectData(): start
request to read 256 bytes from descriptor 3
TEE.CloseObject(): start
request to close descriptor 3
256 bytes read: 000102030405060708090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f20212223242526272829
2a2b2c2d2e2f303132333435363738393a3b3c3d3e3f404142434445464748494a4b4c4d4e4f505152535455565758595a5b
5c5d5e5f606162636465666768696a6b6c6d6e6f707172737475767778797a7b7c7d7e7f808182838485868788898a8b8c8d
8e8f909192939495969798999a9b9c9d9e9fa0a1a2a3a4a5a6a7a8a9aaabacadaeafb0b1b2b3b4b5b6b7b8b9babbbcbdbef
c0c1c2c3c4c5c6c7c8c9cacbcccdcecfcd0d1d2d3d4d5d6d7d8d9daddbdcdddedfe0e1e2e3e4e5e6e7e8e9eaebeceedeef0f1f
2f3f4f5f6f7f8f9fafbfcfdfefff
verify ok
TEE.AllocateOperation(): start
TEE.FreeOperation(): start
TEE.DigestDoFinal(): start
TEE.FreeOperation(): start
hash: 9b04c091da96b997afb8f2585d608aeb9c4a904f7d52c8f28c7e4d2dd9fba5f
TEE.AllocateTransientObject(): start
TEE.GenerateKey(): start
TEE.GenerateRandom(): start
TEE.AllocateOperation(): start
TEE.GenerateRandom(): start
TEE.CipherInit(): start
TEE.CipherUpdate(): start
TEE.FreeOperation(): start
@cipher: 7427bff21e729a824a239e25332ebd455d18fa6aec1ec6618b77c252f768e0a9345608b0135727568867ce5b0fa
c872f6647787861b88220840281f3944eea456a2769081e6598079b52edc541e2201ffd2e96a6c3e485be25a0ce4f5c07544
aa0c67b3e34bd069b293843daf66db51b751b3c09f2a9c6912c22a6062c8ecbd0effd4698081660e218f6f0c1249e3691a33
e91836953953513040eb29ce709efe50f96e67f07d6a1b00f08beaceb5950f9744b0049cb76ec5ba17a49d7270b60034c47
23bb79dc61d465062b0394e8d93f98c2391ee2b02b7b537b375e0elcc5eeb8eb2e62df839048db0f1fddbd1b7f5c6ef2faa1
a5b305ef045936c9146f8
TEE.AllocateOperation(): start
TEE.CipherInit(): start
TEE.CipherUpdate(): start
TEE.FreeOperation(): start
TEE.FreeTransientObject(): start
decrypted to: 000102030405060708090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f202122232425262728292a
2b2c2d2e2f303132333435363738393a3b3c3d3e3f404142434445464748494a4b4c4d4e4f505152535455565758595a5b5c
5d5e5f606162636465666768696a6b6c6d6e6f707172737475767778797a7b7c7d7e7f808182838485868788898a8b8c8d8e
8f909192939495969798999a9b9c9d9e9fa0a1a2a3a4a5a6a7a8a9aaabacadaeafb0b1b2b3b4b5b6b7b8b9babbbcbdbefc0
c1c2c3c4c5c6c7c8c9cacbcccdcecfcd0d1d2d3d4d5d6d7d8d9daddbdcdddedfe0e1e2e3e4e5e6e7e8e9eaebeceedeef0f0f1f2
f3f4f5f6f7f8f9fafbfcfdfefff
verify ok
TEE.AllocateTransientObject(): start
TEE.GenerateKey(): start
TEE.GenerateRandom(): start
TEE.AllocateOperation(): start
TEE.GenerateRandom(): start
TEE.AEInit(): start
TEE.AEEncryptFinal(): start
TEE.FreeOperation(): start
@cipher: e33f34122c80b9a10002725e4e21542256da7c7cd3f6dd1b62b71cf8308f9e4a0daa50b29880a8f76707c4ed432
549c4da9e68e7930189d2127fdd7aa2379106090814b5deed9a9e161ef0886da03a2a94c3fb9e0faadfd1ce8bb09fb5388bb
23a042944fba269d486aa4f21a91a41968184122520dfc308850059efce660a52adb17361bd52f570bfba05cccad32ffa9ea
c94914725ded073355f28eb3dc30d60f00cfd2de76c3a05df8bef32f302bb4d14b493a3a90b1dee4eba64e625695c4d58ec4
febf8436d62e4cac82fcb00e60c8138af7176995a742b08a572f64e539e9f9850a9f6f33907a829108ca6540332aab53f3f
6a4fd2c3de35c5556a427
@tag: 4c920ce2aef079e468ab24e25730d9d2
TEE.AllocateOperation(): start
TEE.AEInit(): start
TEE.AEDecryptFinal(): start
TEE.FreeOperation(): start
TEE.FreeTransientObject(): start
decrypted to: 000102030405060708090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f202122232425262728292a

```

```

2b2c2d2e2f303132333435363738393a3b3c3d3e3f404142434445464748494a4b4c4d4e4f505152535455565758595a5b5c
5d5e5f606162636465666768696a6b6c6d6e6f707172737475767778797a7b7c7d7e7f808182838485868788898a8b8c8d8e
8f909192939495969798999a9b9c9d9e9fa0a1a2a3a4a5a6a7a8a9aaabacadaeafb0b1b2b3b4b5b6b7b8b9babbbcbdbefc0
c1c2c3c4c5c6c7c8c9cacbcccdcecfdd0d1d2d3d4d5d6d7d8d9dadbdcdddedfe0e1e2e3e4e5e6e7e8e9eaebeceeeff0f1f2
f3f4f5f6f7f8f9fafbfcfdfeff
verify ok
TEE.AllocateOperation(): start
TEE.FreeOperation(): start
TEE.DigestDoFinal(): start
TEE.FreeOperation(): start
@digest: 9b04c091da96b997afb8f2585d608aeb9c4a904f7d52c8f28c7e4d2dd9fba5f
TEE.AllocateOperation(): start
TEE.AllocateTransientObject(): start
TEE.InitValueAttribute(): start
TEE.GenerateKey(): start
TEE.GenerateRandom(): start
TEE.AsymmetricSignDigest(): start
TEE.FreeOperation(): start
@signature: 100b392ce043e9b8dc703088f505dd3083ec47bfc8d59d968a66b54e80464d684d56dc9c44336f08fd96309
79863a2d8fb7cd672a819ef609357e9ac6a3d80e
TEE.AllocateOperation(): start
TEE.AsymmetricVerifyDigest(): start
TEE.FreeOperation(): start
@@TEE.FreeOperation:
TEE.FreeTransientObject(): start
verify ok
main end
Info: Enclave successfully returned.

```

## 5 Running on Dev Boards

### 5.1 Keystone, Unleashed

Make sure Keystone and other dependant sources have been built

#### 5.1.1 Preparation of rootfs on SD Card

Build a modified gdisk which can handle the sifive specific partition types.

Prerequisites: libncursesw5-dev, libpopt-dev

```

$ cd ..
$ sudo apt install libncursesw5-dev lib64ncurses5-dev uuid-dev libpopt-dev build-essential
$ git clone https://192.168.100.100/rinkai/gptfdisk.git
$ cd gptfdisk
$ git checkout -b risc-v-sd 3d6a15873f582803aa8ad3288b3e32d3daff9fde
$ make

```

##### 5.1.1.1 Create SD-card partition manually

```

sudo ./gdisk /dev/mmcblk0
GPT fdisk (gdisk) version 1.0.4
Partition table scan:
  MBR: protective
  BSD: not present
  APM: not present
  GPT: present
Found valid GPT with protective MBR; using GPT.
Command (? for help): n
Partition number (1-128, default 1): 1
First sector (34-15523806, default = 2048) or {+}size{KMGT}:
Last sector (2048-15523806, default = 15523806) or {+}size{KMGT}: 67583
Current type is 'Linux filesystem'
Hex code or GUID (L to show codes, Enter = 8300): 5202
Changed type of partition to 'SiFive bare-metal (or stage 2 loader)'
Command (? for help): n
Partition number (2-128, default 2): 4
First sector (34-15523806, default = 67584) or {+}size{KMGT}:
Last sector (67584-15523806, default = 15523806) or {+}size{KMGT}: 67839
Current type is 'Linux filesystem'

```

```

Hex code or GUID (L to show codes, Enter = 8300): 5201
Changed type of partition to 'SiFive FSBL (first-stage bootloader)'
Command (? for help): n
Partition number (2-128, default 2):
First sector (34-15523806, default = 69632) or {+-}size{KMGTP}: 264192
Last sector (264192-15523806, default = 15523806) or {+-}size{KMGTP}:
Current type is 'Linux filesystem'
Hex code or GUID (L to show codes, Enter = 8300): 8300
Changed type of partition to 'Linux filesystem'
Command (? for help): p
Disk /dev/mmcblk0: 15523840 sectors, 7.4 GiB
Sector size (logical/physical): 512/512 bytes
Disk identifier (GUID): 11A0F8F6-D5DE-4993-8C0D-D543DFBA17AD
Partition table holds up to 128 entries
Main partition table begins at sector 2 and ends at sector 33
First usable sector is 34, last usable sector is 15523806
Partitions will be aligned on 2048-sector boundaries
Total free space is 198366 sectors (96.9 MiB)
Number  Start (sector)    End (sector)  Size      Code  Name
   1            2048          67583    32.0 MiB   5202   SiFive bare-metal (...)
   2         264192       15523806     7.3 GiB   8300   Linux filesystem
   4         67584          67839     128.0 KiB  5201   SiFive FSBL (first-...
Command (? for help): i
Partition number (1-4): 4
Partition GUID code: 5B193300-FC78-40CD-8002-E86C45580B47 (SiFive FSBL (first-stage bootloader))
Partition unique GUID: FC1FBC7C-EC94-4B0A-9DAF-0ED85452B885
First sector: 67584 (at 33.0 MiB)
Last sector: 67839 (at 33.1 MiB)
Partition size: 256 sectors (128.0 KiB)
Attribute flags: 0000000000000000
Partition name: 'SiFive FSBL (first-stage bootloader)'
Command (? for help): i
Partition number (1-4): 1
Partition GUID code: 2E54B353-1271-4842-806F-E436D6AF6985 (SiFive bare-metal (or stage 2 loader))
Partition unique GUID: 2FFF07EF-E44A-4278-A16D-C29697C6653D
First sector: 2048 (at 1024.0 KiB)
Last sector: 67583 (at 33.0 MiB)
Partition size: 65536 sectors (32.0 MiB)
Attribute flags: 0000000000000000
Partition name: 'SiFive bare-metal (or stage 2 loader)'
Command (? for help): wq
Final checks complete. About to write GPT data. THIS WILL OVERWRITE EXISTING
PARTITIONS!!
Do you want to proceed? (Y/N): y
OK; writing new GUID partition table (GPT) to /dev/mmcblk1.
Warning: The kernel is still using the old partition table.
The new table will be used at the next reboot or after you
run partprobe(8) or kpartx(8)
The operation has completed successfully.

```

### 5.1.1.2 Write boot and rootfs files into SD-card

#### Build FSBL for hifive-Unleased board

```

$ git clone https://github.com/keystone-enclave/freedom-u540-c000-bootloader.git
$ cd freedom-u540-c000-bootloader
$ git checkout -b dev-unleashed bbfcc288fb438312af51adef420aa444a0833452
$# Make sure riscv64 compiler set to PATH (export PATH=$KEYSTONE_DIR/riscv/bin:$PATH)
$ make

```

#### Writing fsbl.bin and bbl.bin

```

sudo dd if=freedom-u540-c000-bootloader/fsbl.bin of=/dev/mmcblk0p4 bs=4096 conv=fsync
sudo dd if=$KEYSTONE_DIR/hifive-work/bbl.bin of=/dev/mmcblk0p1 bs=4096 conv=fsync

```

Once files written, insert the SD-card into unleashed

### 5.1.2 Copying binaries of test.hello and test\_gp

```

sudo mount /dev/mmcblk0p1 /media/rootfs/
sudo mkdir /media/rootfs/root/{test.hello,test_gp}
Copy test.hello
sudo cp ta-ref/test.hello/keystone/Enclave/Enclave.eapp.riscv /media/rootfs/root/test.hello/
sudo cp ta-ref/test.hello/keystone/Enclave/App.client /media/rootfs/root/test.hello/
sudo cp $KEYSTONE.SDK_DIR/rts/eyrie/eyrie-rt /media/rootfs/root/test.hello/
Copy test_gp
sudo cp ta-ref/test_gp/keystone/Enclave/Enclave.eapp.riscv /media/rootfs/root/test_gp/
sudo cp ta-ref/test_gp/keystone/Enclave/App.client /media/rootfs/root/test_gp/
sudo cp $KEYSTONE.SDK_DIR/rts/eyrie/eyrie-rt /media/rootfs/root/test_gp/

```

Now, we are ready to test on unleashed board.

### 5.1.3 Check test\_hello and test\_gp on Unleased

1. Insert SD-card into unleashed board
2. Boot Hifive-Unleased board
3. Connect Unleased board with your development machine over USB-Serial cable (/dev/ttyUSB1)
4. Checking on Unleased

Login to serial console with user=root, passwd=sifive

```
buildroot login: root
Password:
$
```

test\_hello:

```
insmod keystone-driver.ko
./App.client Enclave.eapp.riscv eyrie-rt
hello world!
```

test\_gp:

```
insmod keystone-driver.ko
./App.client Enclave.eapp.riscv eyrie-rt
main start
TEE.GenerateRandom(0x000000003FFFFEE0, 16): start
@[SE] getrandom buf fff41844 len 16 flags 0 -> 16
@random: 5ea8741bd8a3b298cf53d214eca693fb
TEE.GetREETime(): start
@[SE] gettimeofday 77 sec 865873 usec -> 0
@GP REE time 77 sec 865 millis
TEE.GetSystemTime(): start
@GP System time 100063195 sec 609 millis
TEE.CreatePersistentObject(): start
@[SE] open file FileOne flags 241 -> 3 (0)
TEE.WriteObjectData(): start
@[SE] write desc 3 buf 480d0 len 256-> 256
TEE.CloseObject(): start
@[SE] close desc 3 -> 0
TEE.OpenPersistentObject(): start
@[SE] open file FileOne flags 0 -> 3 (0)
TEE.ReadObjectData(): start
@[SE] read desc 3 buf fff41664 len 256-> 256
TEE.CloseObject(): start
@[SE] close desc 3 -> 0
256 bytes read: 000102030405060708090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f20212223242526272829
2a2b2c2d2e2f303132333435363738393a3b3c3d3f
verify ok
TEE.AllocateOperation(): start
TEE.FreeOperation(): start
TEE.DigestDoFinal(): start
TEE.FreeOperation(): start
hash: 9b04c091da96b997afb8f2585d608aeb9c4a904f7d52c8f28c7e4d2dd9fba5f
TEE.AllocateTransientObject(): start
TEE.GenerateKey(): start
TEE.GenerateRandom(0x000000003FFFFD88, 32): start
@[SE] getrandom buf fff41844 len 16 flags 0 -> 16
@[SE] getrandom buf fff41844 len 16 flags 0 -> 16
TEE.AllocateOperation(): start
TEE.GenerateRandom(0x000000003FFFFED0, 16): start
@[SE] getrandom buf fff41844 len 16 flags 0 -> 16
TEE.CipherInit(): start
TEE.CipherUpdate(): start
TEE.FreeOperation(): start
@cipher: e94431cd22a6029185d0dbb1a17b5d62843bfeef25591583d2d668ec6fed1c692f88ce4754d690c346c8d9f2726
630e0386abf4e45699a2ca2b34b344eaa454bc489c
TEE.AllocateOperation(): start
TEE.CipherInit(): start
TEE.CipherUpdate(): start
TEE.FreeOperation(): start
TEE.FreeTransientObject(): start
decrypted to: 000102030405060708090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f202122232425262728292a
2b2c2d2e2f303132333435363738393a3b3c3d3e3f
verify ok
TEE.AllocateTransientObject(): start
TEE.GenerateKey(): start
TEE.GenerateRandom(0x000000003FFFFC68, 32): start
@[SE] getrandom buf fff41844 len 16 flags 0 -> 16
@[SE] getrandom buf fff41844 len 16 flags 0 -> 16
TEE.AllocateOperation(): start
TEE.GenerateRandom(0x000000003FFFFEC8, 16): start
@[SE] getrandom buf fff41844 len 16 flags 0 -> 16
```

```

TEE.AEInit(): start
TEE.AEEncryptFinal(): start
TEE.FreeOperation(): start
@cipher: c23e9ce04589e80a66debe23a788ae5393bdc8e875e87e1bcf2b2d998f6418ccc6ee4ab112fdbfc5175868691e
fb40781a318ff439d30b49cc9f726886ad42d5be15
@tag: a551f999317b3fbd1eea7b622ce2caee
TEE.AllocateOperation(): start
TEE.AEInit(): start
TEE.AEDecryptFinal(): start
TEE.FreeOperation(): start
TEE.FreeTransientObject(): start
decrypted to: 000102030405060708090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f202122232425262728292a
2b2c2d2e2f303132333435363738393a3b3c3d3e3f
verify ok
TEE.AllocateOperation(): start
TEE.FreeOperation(): start
TEE.DigestDoFinal(): start
TEE.FreeOperation(): start
@digest: 9b04c091da96b997afb8f2585d608aeb9c4a904f7d52c8f28c7e4d2dd9fba5f
TEE.AllocateOperation(): start
TEE.AllocateTransientObject(): start
TEE.InitValueAttribute(): start
TEE.GenerateKey(): start
TEE.GenerateRandom(0x000000003FFFE28, 32): start
@[SE] getrandom buf fff41844 len 16 flags 0 -> 16
@[SE] getrandom buf fff41844 len 16 flags 0 -> 16
TEE.AsymmetricSignDigest(): start
TEE.FreeOperation(): start
@signature: d6e6b6e54db8b6a62fc1927886938bead27f4813f19ce77182e3016b5426bcad067ca98cd75f9dfddafe9eb0
655c48df992d3ad674db69d831f26ae63caf1405
TEE.AllocateOperation(): start
TEE.AsymmetricVerifyDigest(): start
TEE.FreeOperation(): start
@@TEE.FreeOperation:
TEE.FreeTransientObject(): start
verify ok
main end

```

Test is successful.

## 5.2 OPTEE, RPI3

Make sure OPTEE v3.9.0 and other dependant sources have been built

### 5.2.1 Preparation of rootfs on SD Card

Use following examples to create partitions of boot and roots on SD-card

```

make img-help
$ fdisk /dev/sdx      # where sdx is the name of your sd-card
> p                  # prints partition table
> d                  # repeat until all partitions are deleted
> n                  # create a new partition
> p                  # create primary
> 1                  # make it the first partition
> <enter>            # use the default sector
> +32M               # create a boot partition with 32MB of space
> n                  # create rootfs partition
> p
> 2
> <enter>
> <enter>            # fill the remaining disk, adjust size to fit your needs
> t                  # change partition type
> 1                  # select first partition
> e                  # use type 'e' (FAT16)
> a                  # make partition bootable
> 1                  # select first partition
> p                  # double check everything looks right
> w                  # write partition table to disk.

```

Usually your SD-card detected as /dev/mmcblk0. After partition it looks like below BOOT partition = /dev/mmcblk0p1 rootfs partition = /dev/mmcblk0p2

Write boot file

```
$ mkfs.vfat -F16 -n BOOT /dev/mmcblk0p1
```

```
$ mkdir -p /media/boot
$ sudo mount /dev/mmcblk0p1 /media/boot
$ cd /media
$ gunzip -cd optee_3.9.0_rpi3/out-br/images/rootfs.cpio.gz | sudo cpio -idmv "boot/*"
$ umount boot
```

### Write rootfs

```
$ mkfs.ext4 -L rootfs /dev/mmcblk0p2
$ mkdir -p /media/rootfs
$ sudo mount /dev/mmcblk0p2 /media/rootfs
$ cd rootfs
$ gunzip -cd <your-base-dir>/optee_3.9.0_rpi3/build/./out-br/images/rootfs.cpio.gz | sudo cpio -idmv
$ rm -rf /media/rootfs/boot/*
$ cd .. && sudo umount rootfs
```

If you use CI from AIST, download `rpi3.sdimage` as follows

```
$ wget http://192.168.100.100:2000/optee_rpi3.sdimage.tar.xz
$ tar xf optee_rpi3.sdimage.tar.xz
$ dd if=rpi3.sdimage.bin of=/dev/mmcblk0p2 conv=fsync bs=4096
```

Now SD-card is ready to boot RPI3.

## 5.2.2 Copying binaries of `test_hello` and `test_gp` to rootfs partition

### Copying `test_hello` & `test_gp`

```
$ sudo mount /dev/mmcblk0p2 /media/rootfs
$ sudo mkdir -p /media/rootfs/home/gitlab/out/{test_hello,test_gp}
$ sudo cp ta-ref/test_hello/optee/Enclave/a6f77c1e-96fe-4a0e-9e74-262582a4c8f1.ta
/media/rootfs/home/gitlab/out/test_hello/
$ sudo cp ta-ref/test_gp/optee/App/optee_ref.ta /media/rootfs/home/gitlab/out/test_gp/
$ sudo cp ta-ref/test_gp/optee/Enclave/a6f77c1e-96fe-4a0e-9e74-262582a4c8f1.ta
/media/rootfs/home/gitlab/out/test_gp/a6f77c1e-96fe-4a0e-9e74-262582a4c8f1.ta
$ sudo cp ta-ref/test_gp/optee/Enclave/Enclave.nm /media/rootfs/home/gitlab/out/test_gp/
```

## 5.2.3 Check `test_hello` and `test_gp`

1. Insert SD-card into RPI3 board, then power-on
2. Connect RPI3 board Serial console to your laptop (/dev/ttyUSB0 over minicom)
3. Checking on RPI3

Login to Serial console and enter "root" as username

```
buildroot login: root
Password:
$
```

### `test_hello`:

```
cp /home/gitlab/out/test_hello/
cp a6f77c1e-96fe-4a0e-9e74-262582a4c8f1.ta /home/gitlab/out/
ln -s /home/gitlab/out/a6f77c1e-96fe-4a0e-9e74-262582a4c8f1.ta
/lib64/optee.armtz/a6f77c1e-96fe-4a0e-9e74-262582a4c8f1.ta
./optee_ref.ta
--- enclave log start---
ecall_ta_main() start
hello world!
ecall_ta_main() end
--- enclave log end---
```

If executed successfully, you see above messages

### `test_gp`:

```
cd /home/gitlab/out/test_gp/
cp a6f77c1e-96fe-4a0e-9e74-262582a4c8f1.ta /home/gitlab/out/
```

```

ln -s /home/gitlab/out/a6f77c1e-96fe-4a0e-9e74-262582a4c8f1.ta
    /lib64/optee.armtz/a6f77c1e-96fe-4a0e-9e74-262582a4c8f1.ta
./optee_ref.ta
start TEEC.InvokeCommand
--- enclave log start---
ecall.ta.main() start
@random: fe0c7d3eefb9bd5e63b8a0cce29af7eb
@GP REE time 1612156259 sec 390 millis
@GP System time 249187 sec 954 millis
256 bytes read: 000102030405060708090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f20212223242526272829
2a2b2c2d2e2f303132333435363738393a3b3c3d3e3f404142434445464748494a4b4c4d4e4f505152535455565758595a5b
5c5d5e5f606162636465666768696a6b6c6d6e6f707172737475767778797a7b7c7d7e7f808182838485868788898a8b8c8d
8e8f909192939495969798999a9b9c9d9e9fa0a1a2a3a4a5a6a7a8a9aaabacadaeafb0b1b2b3b4b5b6b7b8b9babbbcbdbef
c0c1c2c3c4c5c6c7c8c9cacbcccdcecf0d1d2d3d4d5d6d7d8d9dadbdcddeedfe0e1e2e3e4e5e6e7e8e9eaebeceedeef0f1f2
f3f4f5f6f7f8f9fafbfcfdfefff
verify ok
hash: 40aff2e9d2d8922e47afd4648e6967497158785fbd1da870e7110266bf944880
@cipher: 30a558176172c53be4a2ac320776de105da79c29726879fe67d06b629f065731285f8a90f8a521ce34ecee51e1
5e928d157ea10d149bb687dd78be79469c28696506283edcda527fcd86f6a47e852bbc3488df3fc651b46b034faf4ab5f12f
51a285478ea01e58d40e8177d415be243df93b23cdf889feb91fa3be8906fe190d836fe61168aed0473406be1054dd88a381
ef25381d920ea3780ba74fb1cfe1434cbd168de8386dce2e2b92eee0fc432f3c0514f462cbeaf96753b174a4a673f323e671
61272fe932ead4bc95770fcc130dd5877b521d6a79f961eeadd1680042f69257ccf9368927aa170176af8ac211dd22161997
7224837232dad970220f4
decrypted to: 000102030405060708090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f202122232425262728292a
2b2c2d2e2f303132333435363738393a3b3c3d3e3f404142434445464748494a4b4c4d4e4f505152535455565758595a5b5c
5d5e5f606162636465666768696a6b6c6d6e6f707172737475767778797a7b7c7d7e7f808182838485868788898a8b8c8d8e
8f909192939495969798999a9b9c9d9e9fa0a1a2a3a4a5a6a7a8a9aaabacadaeafb0b1b2b3b4b5b6b7b8b9babbbcbdbefc0
c1c2c3c4c5c6c7c8c9cacbcccdcecf0d1d2d3d4d5d6d7d8d9dadbdcddeedfe0e1e2e3e4e5e6e7e8e9eaebeceedeef0f1f2
f3f4f5f6f7f8f9fafbfcfdfefff
verify ok
@cipher: ff409d8fe203bf0d81de36832b86c702f07edd343f408d3a2fb5ab347b4f72b10031efff0c17b7e0bc56c3f2f95
f53c0d731ed87eb3e1187b6714a25cfc65082284682b44450941654e7edc99af0f7b037c3ba9ea731036070aa9496e34cfefb
db6845e8aa9955416ba227970d3dd1f8207b5743e1490a7f5fd78d81fce0a24576de06a2f528d49c5b11e79a5cab015806ba
d73f118e205a3645a95b2b330ff9da12e00c693e7ee8cfd04eb0f08c3c657c4fa0ae384ed2d5ab1e15fffc835c3e4cc116cd
1049611f896cf445ab36dc8b393a6fe75d20d45b2273a5d8c2d3b935e3f22bc82b24c952812d66a902155d288d5f26ac6722
fe72498bd72ea523c914c
@tag: 9b357baf76d2632fa7d16231640d6324
decrypted to: 000102030405060708090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f202122232425262728292a
2b2c2d2e2f303132333435363738393a3b3c3d3e3f404142434445464748494a4b4c4d4e4f505152535455565758595a5b5c
5d5e5f606162636465666768696a6b6c6d6e6f707172737475767778797a7b7c7d7e7f808182838485868788898a8b8c8d8e
8f909192939495969798999a9b9c9d9e9fa0a1a2a3a4a5a6a7a8a9aaabacadaeafb0b1b2b3b4b5b6b7b8b9babbbcbdbefc0
c1c2c3c4c5c6c7c8c9cacbcccdcecf0d1d2d3d4d5d6d7d8d9dadbdcddeedfe0e1e2e3e4e5e6e7e8e9eaebeceedeef0f1f2
f3f4f5f6f7f8f9fafbfcfdfefff
verify ok
@digest: 40aff2e9d2d8922e47afd4648e6967497158785fbd1da870e7110266bf944880
@signature: 719fa9898f3423b754675b835268f9b2368b77a429eeabf7369d60d135dee08158c3902fd2ed3c1bf17cb34e
76f2ba25da915fa3970c757962f7533c8d8bad7d
@@TEEFreeOperation:
verify ok
ecall.ta.main() end
--- enclave log end---
res = TEEC.SUCCESS; TEEC.InvokeCommand succeeded!

```

If executed successfully, you see above messages

## 5.3 SGX, NUC

Make sure SGX SDK, sgx driver and other dependant sources have been built and installed on NUC machine

### 5.3.1 Copying binaries of test.hello and test\_gp to NUC machine

Login to NUC machine over SSH (Assuming that SSH enabled on NIC machine). Assuming that ta-ref was natively built on NUC machine at ~/ta-ref

```

ssh <ssh-user>@<IP-Address> 'mkdir -p ~/test_hello,test_gp'
scp ta-ref/test_hello/sgx/Enclave/enclave.signed.so <ssh-user>@<IP-Address>:~/test_hello
scp ta-ref/test_hello/sgx/App/sgx.app <ssh-user>@<IP-Address>:~/test_hello
scp ta-ref/test_gp/sgx/Enclave/enclave.signed.so <ssh-user>@<IP-Address>:~/test_gp
scp ta-ref/test_gp/sgx/App/sgx.app <ssh-user>@<IP-Address>:~/test_gp

```

Now can login to NUC machine for further testing.



### 5.3.2 Check test\_hello and test\_gp

#### Checking test\_hello

```
cd ~/test_hello
./sgx_app
hello world!
Info: Enclave successfully returned.
```

#### Checking test\_gp

```
cd ~/test_gp
./sgx_app
main start
TEE.GenerateRandom(): start
@random: f35c1d1e4bbf6641c5511c9dc5aaf638
TEE.GetREETime(): start
request to get unix time 1612257364, 199
@GP REE time 1612257364 sec 199 millis
TEE.GetSystemTime(): start
@GP System time 727941859 sec 984 millis
TEE.CreatePersistentObject(): start
request to open FileOne flags 241 -> 3
TEE.WriteObjectData(): start
request to write 256 bytes to descriptor 3
TEE.CloseObject(): start
request to close descriptor 3
TEE.OpenPersistentObject(): start
request to open FileOne flags 0 -> 3
TEE.ReadObjectData(): start
request to read 256 bytes from descriptor 3
TEE.CloseObject(): start
request to close descriptor 3
256 bytes read: 000102030405060708090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f20212223242526272829
2a2b2c2d2e2f303132333435363738393a3b3c3d3e3f404142434445464748494a4b4c4d4e4f505152535455565758595a5b
5c5d5e5f606162636465666768696a6b6c6d6e6f707172737475767778797a7b7c7d7e7f808182838485868788898a8b8c8d
8e8f909192939495969798999a9b9c9d9e9fa0a1a2a3a4a5a6a7a8a9aaabacadaeafb0b1b2b3b4b5b6b7b8b9babbbcbdbef
c0c1c2c3c4c5c6c7c8c9cacbcccdcecf0d1d2d3d4d5d6d7d8d9dadbdcdddedfe0e1e2e3e4e5e6e7e8e9eaebecedeeff0f1
f2f3f4f5f6f7f8f9fafbfcfdfefff
verify ok
TEE.AllocateOperation(): start
TEE.FreeOperation(): start
TEE.DigestDoFinal(): start
TEE.FreeOperation(): start
hash: 9b04c091da96b997afb8f2585d608aeb9c4a904f7d52c8f28c7e4d2dd9fba5f
TEE.AllocateTransientObject(): start
TEE.GenerateKey(): start
TEE.GenerateRandom(): start
TEE.AllocateOperation(): start
TEE.GenerateRandom(): start
TEE.CipherInit(): start
TEE.CipherUpdate(): start
TEE.FreeOperation(): start
@cipher: 7427bff21e729a824a239e25332ebd455d18fa6aeclec6618b77c252f768e0a9345608b0135727568867ce5b0fa
c872f6647787861b88220840281f3944eea456a2769081e6598079b52edc541e2201ffd2e96a6c3e485be25a0ce4f5c07544
aa0c67b3e34bd069b293843daf66db51b751b3c09f2a9c6912c22a6062c8ecbd0effd4698081660e218f6f0c1249e3691a33
e91836953953513040eb29ce709efe50f96e67f07d6a1b00f08beaebc5950f9744b0049cb76ec5ba17a49d7270b60034c47
23bb79dc61d465062b0394e8d93f98c2391ee2b02b7b537b375e0e1cc5eeb8eb2e62df839048db0f1fdbdd1b7f5c6ef2faa1
a5b305ef045936c9146f8
TEE.AllocateOperation(): start
TEE.CipherInit(): start
TEE.CipherUpdate(): start
TEE.FreeOperation(): start
TEE.FreeTransientObject(): start
decrypted to: 000102030405060708090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f202122232425262728292a
2b2c2d2e2f303132333435363738393a3b3c3d3e3f404142434445464748494a4b4c4d4e4f505152535455565758595a5b5c
5d5e5f606162636465666768696a6b6c6d6e6f707172737475767778797a7b7c7d7e7f808182838485868788898a8b8c8d8e
8f909192939495969798999a9b9c9d9e9fa0a1a2a3a4a5a6a7a8a9aaabacadaeafb0b1b2b3b4b5b6b7b8b9babbbcbdbefc0
c1c2c3c4c5c6c7c8c9cacbcccdcecf0d1d2d3d4d5d6d7d8d9dadbdcdddedfe0e1e2e3e4e5e6e7e8e9eaebecedeeff0f1f2
f3f4f5f6f7f8f9fafbfcfdfefff
verify ok
TEE.AllocateTransientObject(): start
TEE.GenerateKey(): start
TEE.GenerateRandom(): start
TEE.AllocateOperation(): start
TEE.GenerateRandom(): start
TEE.AEInit(): start
TEE.AEEncryptFinal(): start
TEE.FreeOperation(): start
@cipher: e33f34122c80b9a10002725e4e21542256da7c7cd3f6dd1b62b71cf8308f9e4a0daa50b29880a8f76707c4ed432
549c4da9e68e7930189d2127fdd7aa2379106090814b5deed9a9e161ef0886da03a2a94c3fb9e0faadfd1ce8bb09fb5388bb
23a042944fbb269d486aa4f21a91a41968184122520dfc308850059efce660a52adb17361bd52f570bfba05cccad32ffa9ea
c94914725ded073355f28eb3dc30d60f00cfd2e76c3a05df8bef32f302bb4d14b493a3a90b1dee4eba64e625695c4d58ec4
febfb8436d62e4cac82fcdb00e60c8138af7176995a742b08a572f64e539e9f9850a9f6f33907a829108ca6540332aab53f3f
6a4fd2c3de35c5556a427
@tag: 4c920ce2aef079e468ab24e25730d9d2
TEE.AllocateOperation(): start
```

```

TEE.AEInit(): start
TEE.AEDecryptFinal(): start
TEE.FreeOperation(): start
TEE.FreeTransientObject(): start
decrypted to: 000102030405060708090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f202122232425262728292a
2b2c2d2e2f303132333435363738393a3b3c3d3e3f404142434445464748494a4b4c4d4e4f505152535455565758595a5b5c
5d5e5f606162636465666768696a6b6c6d6e6f707172737475767778797a7b7c7d7e7f808182838485868788898a8b8c8d8e
8f909192939495969798999a9b9c9d9e9fa0a1a2a3a4a5a6a7a8a9aaabacadaeafb0b1b2b3b4b5b6b7b8b9babbbcbdbefc0
c1c2c3c4c5c6c7c8c9cacbcccdcecfcd0d1d2d3d4d5d6d7d8d9daddbdcdddedfe0e1e2e3e4e5e6e7e8e9eaebeceedeefeff0f1f2
f3f4f5f6f7f8f9fafbfcfdfefff
verify ok
TEE.AllocateOperation(): start
TEE.FreeOperation(): start
TEE.DigestDoFinal(): start
TEE.FreeOperation(): start
@digest: 9b04c091da96b997afb8f2585d608aeb9c4a904f7d52c8f28c7e4d2dd9fba5f
TEE.AllocateOperation(): start
TEE.AllocateTransientObject(): start
TEE.InitValueAttribute(): start
TEE.GenerateKey(): start
TEE.GenerateRandom(): start
TEE.AsymmetricSignDigest(): start
TEE.FreeOperation(): start
@signature: 100b392ce043e9b8dc703088f505dd3083ec47bfcdb8d59d968a66b54e80464d684d56dc9c44336f08fd96309
79863a2d8fb7cd672a819ef609357e9ac6a3d80e
TEE.AllocateOperation(): start
TEE.AsymmetricVerifyDigest(): start
TEE.FreeOperation(): start
@@TEE.FreeOperation:
TEE.FreeTransientObject(): start
verify ok
main end
Info: Enclave successfully returned.

```

## 6 API Compare With Full-Set of GP API

### 6.1 GP API

#### API Functions by Category

#### APIs supported by both GP and AIST-GP are in Blue

API list from TEE Internal Core API Specification documentation, GlobalPlatform Technology

Asymmetric	<a href="#">TEE_FreeOperation</a>
<a href="#">TEE_AsymmetricDecrypt</a>	<a href="#">TEE_GetOperationInfo</a>
<a href="#">TEE_AsymmetricEncrypt</a>	<a href="#">TEE_GetOperationInfoMultiple</a>
<a href="#">TEE_AsymmetricSignDigest</a>	<a href="#">TEE_IsAlgorithmSupported</a>
<a href="#">TEE_AsymmetricVerifyDigest</a>	<a href="#">TEE_ResetOperation</a>
Authenticated Encryption	<a href="#">TEE_SetOperationKey</a>
<a href="#">TEE_AEDecryptFinal</a>	<a href="#">TEE_SetOperationKey2</a>
<a href="#">TEE_AEEncryptFinal</a>	Initialization
<a href="#">TEE_AEInit</a>	<a href="#">TEE_BigIntInit</a>
<a href="#">TEE_AEUpdate</a>	<a href="#">TEE_BigIntInitFMM</a>
<a href="#">TEE_AEUpdateAAD</a>	<a href="#">TEE_BigIntInitFMMContext</a>
Basic Arithmetic	Internal Client API
<a href="#">TEE_BigIntAdd</a>	<a href="#">TEE_CloseTASession</a>
<a href="#">TEE_BigIntDiv</a>	<a href="#">TEE_InvokeTACommand</a>
<a href="#">TEE_BigIntMul</a>	<a href="#">TEE_OpenTASession</a>
<a href="#">TEE_BigIntNeg</a>	Key Derivation
<a href="#">TEE_BigIntSquare</a>	<a href="#">TEE_DeriveKey</a>
<a href="#">TEE_BigIntSub</a>	Logical Operation
Cancellation	<a href="#">TEE_BigIntCmp</a>
<a href="#">TEE_GetCancellationFlag</a>	<a href="#">TEE_BigIntCmpS32</a>
<a href="#">TEE_MaskCancellation</a>	<a href="#">TEE_BigIntGetBit</a>
<a href="#">TEE_UnmaskCancellation</a>	<a href="#">TEE_BigIntGetBitCount</a>
Converter	<a href="#">TEE_BigIntShiftRight</a>
<a href="#">TEE_BigIntConvertFromOctetString</a>	MAC
<a href="#">TEE_BigIntConvertFromS32</a>	<a href="#">TEE_MACCompareFinal</a>
<a href="#">TEE_BigIntConvertToOctetString</a>	<a href="#">TEE_MACComputeFinal</a>
<a href="#">TEE_BigIntConvertToS32</a>	<a href="#">TEE_MACInit</a>
Data Stream Access	<a href="#">TEE_MACUpdate</a>
<a href="#">TEE_ReadObjectData</a>	Memory Allocation and Size of Objects
<a href="#">TEE_SeekObjectData</a>	<a href="#">TEE_BigIntFMMContextSizeInU32</a>
<a href="#">TEE_TruncateObjectData</a>	<a href="#">TEE_BigIntFMMSizeInU32</a>
<a href="#">TEE_WriteObjectData</a>	<a href="#">TEE_BigIntSizeInU32 (macro)</a>
Deprecated	Memory Management
<a href="#">TEE_CloseAndDeletePersistentObject</a>	<a href="#">TEE_CheckMemoryAccessRights</a>
<a href="#">TEE_CopyObjectAttributes</a>	<a href="#">TEE_Free</a>
<a href="#">TEE_GetObjectInfo</a>	<a href="#">TEE_GetInstanceData</a>
<a href="#">TEE_RestrictObjectUsage</a>	<a href="#">TEE_Malloc</a>
Fast Modular Multiplication	<a href="#">TEE_MemCompare</a>
<a href="#">TEE_BigIntComputeFMM</a>	<a href="#">TEE_MemFill</a>
<a href="#">TEE_BigIntConvertFromFMM</a>	<a href="#">TEE_MemMove</a>
<a href="#">TEE_BigIntConvertToFMM</a>	<a href="#">TEE_Realloc</a>
Generic Object	<a href="#">TEE_SetInstanceData</a>
<a href="#">TEE_CloseObject</a>	Message Digest
<a href="#">TEE_GetObjectBufferAttribute</a>	<a href="#">TEE_DigestDoFinal</a>
<a href="#">TEE_GetObjectInfo (deprecated)</a>	<a href="#">TEE_DigestUpdate</a>
<a href="#">TEE_GetObjectInfo1</a>	Modular Arithmetic
<a href="#">TEE_GetObjectValueAttribute</a>	<a href="#">TEE_BigIntAddMod</a>
<a href="#">TEE_RestrictObjectUsage (deprecated)</a>	<a href="#">TEE_BigIntInvMod</a>
<a href="#">TEE_RestrictObjectUsage1</a>	<a href="#">TEE_BigIntMod</a>
Generic Operation	<a href="#">TEE_BigIntMulMod</a>
<a href="#">TEE_AllocateOperation</a>	<a href="#">TEE_BigIntSquareMod</a>
<a href="#">TEE_CopyOperation</a>	<a href="#">TEE_BigIntSubMod</a>

Other Arithmetic  
 TEE\_BigIntComputeExtendedGcd  
 TEE\_BigIntIsProbablePrime  
 TEE\_BigIntRelativePrime

Panic Function  
 TEE\_Panic

Persistent Object  
 TEE\_CloseAndDeletePersistentObject  
 (deprecated)  
 TEE\_CloseAndDeletePersistentObject1  
 TEE\_CreatePersistentObject  
 TEE\_OpenPersistentObject  
 TEE\_RenamePersistentObject

Persistent Object Enumeration \*

TEE\_AllocatePersistentObjectEnumerator  
 TEE\_FreePersistentObjectEnumerator  
 TEE\_GetNextPersistentObject  
 TEE\_ResetPersistentObjectEnumerator  
 TEE\_StartPersistentObjectEnumerator

Property Access  
 TEE\_AllocatePropertyEnumerator  
 TEE\_FreePropertyEnumerator  
 TEE\_GetNextProperty  
 TEE\_GetPropertyAsBinaryBlock  
 TEE\_GetPropertyAsBool  
 TEE\_GetPropertyAsIdentity  
 TEE\_GetPropertyAsString  
 TEE\_GetPropertyAsU32  
 TEE\_GetPropertyAsU64  
 TEE\_GetPropertyAsUUID  
 TEE\_GetPropertyName

TEE\_ResetPropertyEnumerator  
 TEE\_StartPropertyEnumerator

Random Data Generation  
 TEE\_GenerateRandom

Symmetric Cipher  
 TEE\_CipherDoFinal  
 TEE\_CipherInit  
 TEE\_CipherUpdate

TA Interface  
 TA\_CloseSessionEntryPoint  
 TA\_CreateEntryPoint  
 TA\_DestroyEntryPoint  
 TA\_InvokeCommandEntryPoint  
 TA\_OpenSessionEntryPoint

Time  
 TEE\_GetREETime  
 TEE\_GetSystemTime  
 TEE\_GetTAPersistentTime  
 TEE\_SetTAPersistentTime  
 TEE\_Wait

Transient Object  
 TEE\_AllocateTransientObject  
 TEE\_CopyObjectAttributes (deprecated)  
 TEE\_CopyObjectAttributes1  
 TEE\_FreeTransientObject  
 TEE\_GenerateKey  
 TEE\_InitRefAttribute  
 TEE\_InitValueAttribute  
 TEE\_PopulateTransientObject  
 TEE\_ResetTransientObject

## 7 Class Index

### 7.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

<a href="#">_TEE_ObjectHandle</a>	33
<a href="#">_TEE_OperationHandle</a>	35
<a href="#">addrinfo</a>	36
<a href="#">enclave_report</a>	37
<a href="#">pollfd</a>	38
<a href="#">report</a>	39
<a href="#">sm_report</a>	40
<a href="#">TEE_Attribute</a>	40
<a href="#">TEE_Identity</a>	42
<a href="#">TEE_ObjectInfo</a>	43
<a href="#">TEE_OperationInfo</a>	44
<a href="#">TEE_OperationInfoKey</a>	45
<a href="#">TEE_OperationInfoMultiple</a>	46
<a href="#">TEE_Param</a>	47
<a href="#">TEE_SEAID</a>	48
<a href="#">TEE_SEReaderProperties</a>	49
<a href="#">TEE_Time</a>	50
<a href="#">TEE_UUID</a>	50
<a href="#">TEEC_Context</a>	51
<a href="#">TEEC_Operation</a>	52
<a href="#">TEEC_Parameter</a>	53
<a href="#">TEEC_RegisteredMemoryReference</a>	54
<a href="#">TEEC_Session</a>	56
<a href="#">TEEC_SharedMemory</a>	56
<a href="#">TEEC_TempMemoryReference</a>	58
<a href="#">TEEC_UUID</a>	59
<a href="#">TEEC_Value</a>	60

## 8 File Index

### 8.1 File List

Here is a list of all files with brief descriptions:

ta-ref/api/tee-internal-api-cryptlib.c	162
ta-ref/api/include/compiler.h	61
ta-ref/api/include/report.h	64
ta-ref/api/include/tee-common.h	
Common type and definitions of RISC-V TEE	65
ta-ref/api/include/tee-ta-internal.h	
Candidate API list for Global Platform like RISC-V TEE	66
ta-ref/api/include/tee_api_defines.h	93
ta-ref/api/include/tee_api_defines_extensions.h	99
ta-ref/api/include/tee_api_types.h	101
ta-ref/api/include/tee_client_api.h	107
ta-ref/api/include/tee_internal_api.h	116
ta-ref/api/include/tee_internal_api_extensions.h	116
ta-ref/api/include/tee_ta_api.h	119
ta-ref/api/include/test_dev_key.h	123
ta-ref/api/include/trace.h	124
ta-ref/api/include/trace_levels.h	129
ta-ref/api/keystone/tee-internal-api-machine.c	130
ta-ref/api/keystone/tee-internal-api.c	132
ta-ref/api/keystone/tee_api_tee_types.h	151
ta-ref/api/keystone/teec_stub.c	157
ta-ref/api/keystone/trace.c	160
ta-ref/api/optee/tee_api_tee_types.h	154
ta-ref/api/sgx/tee-internal-api.c	142
ta-ref/api/sgx/tee_api_tee_types.h	154

## 9 Class Documentation

### 9.1 \_\_TEE\_ObjectHandle Struct Reference

```
#include <tee_api_tee_types.h>
```

## Public Attributes

- unsigned int [type](#)
- int [flags](#)
- int [desc](#)
- mbedtls\_aes\_context [persist\\_ctx](#)
- unsigned char [persist\\_iv](#) [TEE\_OBJECT\_NONCE\_SIZE]
- unsigned char [public\\_key](#) [TEE\_OBJECT\_KEY\_SIZE]
- unsigned char [private\\_key](#) [TEE\_OBJECT\_SKEY\_SIZE]

### 9.1.1 Member Data Documentation

**9.1.1.1 desc** int \_\_TEE\_ObjectHandle::desc

**9.1.1.2 flags** int \_\_TEE\_ObjectHandle::flags

**9.1.1.3 persist\_ctx** mbedtls\_aes\_context \_\_TEE\_ObjectHandle::persist\_ctx

**9.1.1.4 persist\_iv** unsigned char \_\_TEE\_ObjectHandle::persist\_iv

**9.1.1.5 private\_key** unsigned char \_\_TEE\_ObjectHandle::private\_key

**9.1.1.6 public\_key** unsigned char \_\_TEE\_ObjectHandle::public\_key

**9.1.1.7 type** unsigned int \_\_TEE\_ObjectHandle::type

The documentation for this struct was generated from the following files:

- ta-ref/api/keystone/[tee\\_api\\_tee\\_types.h](#)
- ta-ref/api/sgx/[tee\\_api\\_tee\\_types.h](#)

## 9.2 \_\_TEE\_OperationHandle Struct Reference

```
#include <tee_api_tee_types.h>
```

### Public Attributes

- int [mode](#)
- int [flags](#)
- int [alg](#)
- sha3\_ctx\_t [ctx](#)
- mbedtls\_aes\_context [aectx](#)
- mbedtls\_gcm\_context [aegcmctx](#)
- int [aegcm\\_state](#)
- unsigned char [aeiv](#) [TEE\_OBJECT\_NONCE\_SIZE]
- unsigned char [aekey](#) [32]
- unsigned char [pubkey](#) [TEE\_OBJECT\_KEY\_SIZE]
- unsigned char [prikey](#) [TEE\_OBJECT\_SKEY\_SIZE]

### 9.2.1 Member Data Documentation

**9.2.1.1 aectx** mbedtls\_aes\_context \_\_TEE\_OperationHandle::aectx

**9.2.1.2 aegcm\_state** int \_\_TEE\_OperationHandle::aegcm\_state

**9.2.1.3 aegcmctx** mbedtls\_gcm\_context \_\_TEE\_OperationHandle::aegcmctx

**9.2.1.4 aeiv** unsigned char \_\_TEE\_OperationHandle::aeiv

**9.2.1.5 aekey** unsigned char \_\_TEE\_OperationHandle::aekey

**9.2.1.6 alg** int \_\_TEE\_OperationHandle::alg



**9.2.1.7 ctx** `sha3_ctx_t __TEE_OperationHandle::ctx`

**9.2.1.8 flags** `int __TEE_OperationHandle::flags`

**9.2.1.9 mode** `int __TEE_OperationHandle::mode`

**9.2.1.10 prikey** `unsigned char __TEE_OperationHandle::prikey`

**9.2.1.11 pubkey** `unsigned char __TEE_OperationHandle::pubkey`

The documentation for this struct was generated from the following files:

- [ta-ref/api/keystone/tee\\_api\\_tee\\_types.h](#)
- [ta-ref/api/sgx/tee\\_api\\_tee\\_types.h](#)

## 9.3 addrinfo Struct Reference

```
#include <tee-api-types.h>
```

Collaboration diagram for addrinfo:



### Public Attributes

- `int` [ai\\_flags](#)
- `int` [ai\\_family](#)
- `int` [ai\\_socktype](#)
- `int` [ai\\_protocol](#)
- `socklen_t` [ai\\_addrlen](#)
- `struct sockaddr *` [ai\\_addr](#)
- `char *` [ai\\_canonname](#)
- `struct addrinfo *` [ai\\_next](#)

### 9.3.1 Member Data Documentation

**9.3.1.1 ai\_addr** `struct sockaddr* addrinfo::ai_addr`

**9.3.1.2 ai\_addrlen** `socklen_t addrinfo::ai_addrlen`

**9.3.1.3 ai\_canonname** `char* addrinfo::ai_canonname`

**9.3.1.4 ai\_family** `int addrinfo::ai_family`

**9.3.1.5 ai\_flags** `int addrinfo::ai_flags`

**9.3.1.6 ai\_next** `struct addrinfo* addrinfo::ai_next`

**9.3.1.7 ai\_protocol** `int addrinfo::ai_protocol`

**9.3.1.8 ai\_socktype** `int addrinfo::ai_socktype`

The documentation for this struct was generated from the following file:

- [ta-ref/api/include/tee\\_api\\_types.h](#)

## 9.4 enclave\_report Struct Reference

```
#include <report.h>
```

## Public Attributes

- uint8\_t [hash](#) [MDSIZE]
- uint64\_t [data\\_len](#)
- uint8\_t [data](#) [ATTEST\_DATA\_MAXLEN]
- uint8\_t [signature](#) [SIGNATURE\_SIZE]

### 9.4.1 Member Data Documentation

**9.4.1.1 data** uint8\_t enclave\_report::data[ATTEST\_DATA\_MAXLEN]

**9.4.1.2 data\_len** uint64\_t enclave\_report::data\_len

**9.4.1.3 hash** uint8\_t enclave\_report::hash[MDSIZE]

**9.4.1.4 signature** uint8\_t enclave\_report::signature[SIGNATURE\_SIZE]

The documentation for this struct was generated from the following file:

- ta-ref/api/include/[report.h](#)

## 9.5 pollfd Struct Reference

```
#include <tee_api_types.h>
```

## Public Attributes

- int [fd](#)
- short int [events](#)
- short int [revents](#)

### 9.5.1 Member Data Documentation

**9.5.1.1 events** `short int pollfd::events`

**9.5.1.2 fd** `int pollfd::fd`

**9.5.1.3 revents** `short int pollfd::revents`


The documentation for this struct was generated from the following file:

- [ta-ref/api/include/tee\\_api\\_types.h](#)

## 9.6 report Struct Reference

```
#include <report.h>
```

Collaboration diagram for report:

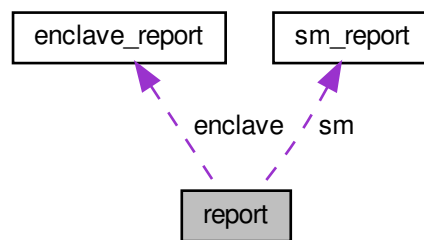

### Public Attributes

- struct [enclave\\_report](#) `enclave`
- struct [sm\\_report](#) `sm`
- `uint8_t` [dev\\_public\\_key](#) `[PUBLIC_KEY_SIZE]`

### 9.6.1 Member Data Documentation

**9.6.1.1 dev\_public\_key** `uint8_t report::dev_public_key[PUBLIC_KEY_SIZE]`

**9.6.1.2 enclave** `struct enclave\_report report::enclave`

**9.6.1.3 sm** `struct sm\_report report::sm`

The documentation for this struct was generated from the following file:

- [ta-ref/api/include/report.h](#)

## 9.7 sm\_report Struct Reference

```
#include <report.h>
```

### Public Attributes

- `uint8_t hash [MDSIZE]`
- `uint8_t public\_key [PUBLIC_KEY_SIZE]`
- `uint8_t signature [SIGNATURE_SIZE]`

### 9.7.1 Member Data Documentation

**9.7.1.1 hash** `uint8_t sm_report::hash[MDSIZE]`

**9.7.1.2 public\_key** `uint8_t sm_report::public_key[PUBLIC_KEY_SIZE]`

**9.7.1.3 signature** `uint8_t sm_report::signature[SIGNATURE_SIZE]`

The documentation for this struct was generated from the following file:

- [ta-ref/api/include/report.h](#)

## 9.8 TEE Attribute Struct Reference

```
#include <tee_api_types.h>
```

## Public Attributes

- uint32\_t attributeID
- union {
  - struct {
    - void \* buffer
    - uint32\_t length
  - } ref
  - struct {
    - uint32\_t a
    - uint32\_t b
  - } value
- } content

### 9.8.1 Member Data Documentation

**9.8.1.1 a** uint32\_t TEE\_Attribute::a

**9.8.1.2 attributeID** uint32\_t TEE\_Attribute::attributeID

**9.8.1.3 b** uint32\_t TEE\_Attribute::b

**9.8.1.4 buffer** void\* TEE\_Attribute::buffer

**9.8.1.5** union { ... } TEE\_Attribute::content

**9.8.1.6 length** uint32\_t TEE\_Attribute::length

**9.8.1.7** struct { ... } TEE\_Attribute::ref

**9.8.1.8**    `struct { ... } TEE_Attribute::value`


The documentation for this struct was generated from the following file:

- [ta-ref/api/include/tee\\_api\\_types.h](#)

## 9.9 TEE\_Identity Struct Reference

```
#include <tee_api_types.h>
```

Collaboration diagram for TEE\_Identity:



### Public Attributes

- `uint32_t login`
- `TEE_UUID uuid`

### 9.9.1 Member Data Documentation

**9.9.1.1 login**    `uint32_t TEE_Identity::login`

**9.9.1.2 uuid**    `TEE_UUID TEE_Identity::uuid`

The documentation for this struct was generated from the following file:

- [ta-ref/api/include/tee\\_api\\_types.h](#)

## 9.10 TEE\_ObjectInfo Struct Reference

```
#include <tee_api_types.h>
```

### Public Attributes

- uint32\_t [objectType](#)
- union {
  - uint32\_t [keySize](#)
  - uint32\_t [objectSize](#)
- };
- union {
  - uint32\_t [maxKeySize](#)
  - uint32\_t [maxObjectSize](#)
- };
- uint32\_t [objectUsage](#)
- uint32\_t [dataSize](#)
- uint32\_t [dataPosition](#)
- uint32\_t [handleFlags](#)

### 9.10.1 Member Data Documentation

**9.10.1.1**    `__extension__ union { ... } TEE_ObjectInfo::@3`

**9.10.1.2**    `__extension__ union { ... } TEE_ObjectInfo::@5`

**9.10.1.3**    **dataPosition**    `uint32_t TEE_ObjectInfo::dataPosition`

**9.10.1.4**    **dataSize**    `uint32_t TEE_ObjectInfo::dataSize`

**9.10.1.5**    **handleFlags**    `uint32_t TEE_ObjectInfo::handleFlags`



**9.10.1.6 keySize** `uint32_t TEE_ObjectInfo::keySize`

**9.10.1.7 maxKeySize** `uint32_t TEE_ObjectInfo::maxKeySize`

**9.10.1.8 maxObjectSize** `uint32_t TEE_ObjectInfo::maxObjectSize`

**9.10.1.9 objectSize** `uint32_t TEE_ObjectInfo::objectSize`

**9.10.1.10 objectType** `uint32_t TEE_ObjectInfo::objectType`

**9.10.1.11 objectUsage** `uint32_t TEE_ObjectInfo::objectUsage`

The documentation for this struct was generated from the following file:

- [ta-ref/api/include/tee\\_api\\_types.h](#)

## 9.11 TEE.OperationInfo Struct Reference

```
#include <tee_api_types.h>
```

### Public Attributes

- `uint32_t` [algorithm](#)
- `uint32_t` [operationClass](#)
- `uint32_t` [mode](#)
- `uint32_t` [digestLength](#)
- `uint32_t` [maxKeySize](#)
- `uint32_t` [keySize](#)
- `uint32_t` [requiredKeyUsage](#)
- `uint32_t` [handleState](#)

### 9.11.1 Member Data Documentation

**9.11.1.1 algorithm** uint32\_t TEE\_OperationInfo::algorithm

**9.11.1.2 digestLength** uint32\_t TEE\_OperationInfo::digestLength

**9.11.1.3 handleState** uint32\_t TEE\_OperationInfo::handleState

**9.11.1.4 keySize** uint32\_t TEE\_OperationInfo::keySize

**9.11.1.5 maxKeySize** uint32\_t TEE\_OperationInfo::maxKeySize

**9.11.1.6 mode** uint32\_t TEE\_OperationInfo::mode

**9.11.1.7 operationClass** uint32\_t TEE\_OperationInfo::operationClass

**9.11.1.8 requiredKeyUsage** uint32\_t TEE\_OperationInfo::requiredKeyUsage

The documentation for this struct was generated from the following file:

- ta-ref/api/include/[tee\\_api\\_types.h](#)

## 9.12 TEE\_OperationInfoKey Struct Reference

```
#include <tee_api_types.h>
```

### Public Attributes

- uint32\_t [keySize](#)
- uint32\_t [requiredKeyUsage](#)

### 9.12.1 Member Data Documentation

**9.12.1.1 keySize** `uint32_t TEE_OperationInfoKey::keySize`

**9.12.1.2 requiredKeyUsage** `uint32_t TEE_OperationInfoKey::requiredKeyUsage`


The documentation for this struct was generated from the following file:

- [ta-ref/api/include/tee\\_api\\_types.h](#)

### 9.13 TEE\_OperationInfoMultiple Struct Reference

```
#include <tee_api_types.h>
```

Collaboration diagram for TEE\_OperationInfoMultiple:

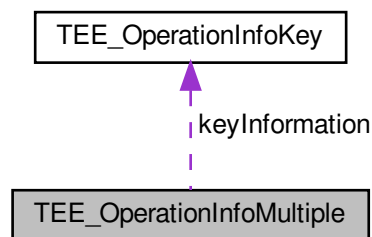

#### Public Attributes

- `uint32_t` [algorithm](#)
- `uint32_t` [operationClass](#)
- `uint32_t` [mode](#)
- `uint32_t` [digestLength](#)
- `uint32_t` [maxKeySize](#)
- `uint32_t` [handleState](#)
- `uint32_t` [operationState](#)
- `uint32_t` [numberOfKeys](#)
- [TEE\\_OperationInfoKey](#) [keyInformation](#) []

### 9.13.1 Member Data Documentation

**9.13.1.1 algorithm** uint32\_t TEE\_OperationInfoMultiple::algorithm

**9.13.1.2 digestLength** uint32\_t TEE\_OperationInfoMultiple::digestLength

**9.13.1.3 handleState** uint32\_t TEE\_OperationInfoMultiple::handleState

**9.13.1.4 keyInformation** [TEE\\_OperationInfoKey](#) TEE\_OperationInfoMultiple::keyInformation[]

**9.13.1.5 maxKeySize** uint32\_t TEE\_OperationInfoMultiple::maxKeySize

**9.13.1.6 mode** uint32\_t TEE\_OperationInfoMultiple::mode

**9.13.1.7 numberOfKeys** uint32\_t TEE\_OperationInfoMultiple::numberOfKeys

**9.13.1.8 operationClass** uint32\_t TEE\_OperationInfoMultiple::operationClass

**9.13.1.9 operationState** uint32\_t TEE\_OperationInfoMultiple::operationState

The documentation for this struct was generated from the following file:

- [ta-ref/api/include/tee\\_api\\_types.h](#)

## 9.14 TEE\_Param Union Reference

```
#include <tee_api_types.h>
```

## Public Attributes

- struct {  
    void \* [buffer](#)  
    uint32\_t [size](#)  
} [memref](#)
- struct {  
    uint32\_t [a](#)  
    uint32\_t [b](#)  
} [value](#)

### 9.14.1 Member Data Documentation

**9.14.1.1**   **a**   uint32\_t TEE\_Param::a

**9.14.1.2**   **b**   uint32\_t TEE\_Param::b

**9.14.1.3**   **buffer**   void\* TEE\_Param::buffer

**9.14.1.4**   struct { ... } TEE\_Param::memref

**9.14.1.5**   **size**   uint32\_t TEE\_Param::size

**9.14.1.6**   struct { ... } TEE\_Param::value

The documentation for this union was generated from the following file:

- [ta-ref/api/include/tee\\_api\\_types.h](#)

## 9.15 TEE\_SEAID Struct Reference

```
#include <tee_api_types.h>
```

## Public Attributes

- `uint8_t * buffer`
- `size_t bufferLen`

### 9.15.1 Member Data Documentation

**9.15.1.1 buffer** `uint8_t* TEE_SEAID::buffer`

**9.15.1.2 bufferLen** `size_t TEE_SEAID::bufferLen`

The documentation for this struct was generated from the following file:

- `ta-ref/api/include/tee_api_types.h`

## 9.16 TEE\_SERedReaderProperties Struct Reference

```
#include <tee_api_types.h>
```

## Public Attributes

- `bool sePresent`
- `bool teeOnly`
- `bool selectResponseEnable`

### 9.16.1 Member Data Documentation

**9.16.1.1 selectResponseEnable** `bool TEE_SERedReaderProperties::selectResponseEnable`

**9.16.1.2 sePresent** `bool TEE_SERedReaderProperties::sePresent`

**9.16.1.3 teeOnly** `bool TEE_SERedReaderProperties::teeOnly`

The documentation for this struct was generated from the following file:

- `ta-ref/api/include/tee_api_types.h`

## 9.17 TEE\_Time Struct Reference

```
#include <tee_api_types.h>
```

### Public Attributes

- uint32\_t [seconds](#)
- uint32\_t [millis](#)

### 9.17.1 Member Data Documentation

**9.17.1.1 millis**    uint32\_t TEE\_Time::millis

**9.17.1.2 seconds**    uint32\_t TEE\_Time::seconds

The documentation for this struct was generated from the following file:

- ta-ref/api/include/[tee\\_api\\_types.h](#)

## 9.18 TEE\_UUID Struct Reference

```
#include <tee_api_types.h>
```

### Public Attributes

- uint32\_t [timeLow](#)
- uint16\_t [timeMid](#)
- uint16\_t [timeHiAndVersion](#)
- uint8\_t [clockSeqAndNode](#) [8]

### 9.18.1 Member Data Documentation

**9.18.1.1 clockSeqAndNode**    uint8\_t TEE\_UUID::clockSeqAndNode[8]

**9.18.1.2 timeHiAndVersion** `uint16_t TEE_UUID::timeHiAndVersion`

**9.18.1.3 timeLow** `uint32_t TEE_UUID::timeLow`

**9.18.1.4 timeMid** `uint16_t TEE_UUID::timeMid`

The documentation for this struct was generated from the following file:

- [ta-ref/api/include/tee\\_api\\_types.h](#)

## 9.19 TEEC\_Context Struct Reference

```
#include <tee_client_api.h>
```

### Public Attributes

- `int` [fd](#)
- `bool` [reg\\_mem](#)

### 9.19.1 Detailed Description

struct [TEEC\\_Context](#) - Represents a connection between a client application and a TEE.

### 9.19.2 Member Data Documentation

**9.19.2.1 fd** `int TEEC_Context::fd`

**9.19.2.2 reg\_mem** `bool TEEC_Context::reg_mem`

The documentation for this struct was generated from the following file:


- [ta-ref/api/include/tee\\_client\\_api.h](#)



## 9.20 TEEC\_Operation Struct Reference

```
#include <tee_client_api.h>
```

Collaboration diagram for TEEC\_Operation:

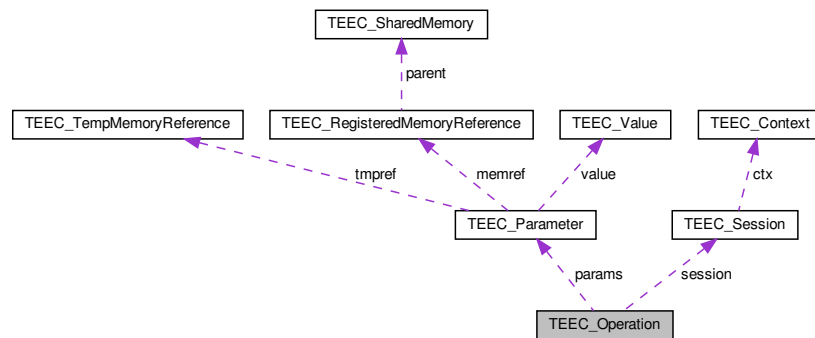

### Public Attributes

- `uint32_t started`
- `uint32_t paramTypes`
- `TEEC_Parameter params` [TEEC\_CONFIG\_PAYLOAD\_REF\_COUNT]
- `TEEC_Session * session`

### 9.20.1 Detailed Description

struct `TEEC_Operation` - Holds information and memory references used in `TEEC_InvokeCommand()`.

#### Parameters

<i>started</i>	Client must initialize to zero if it needs to cancel an operation about to be performed.
<i>paramTypes</i>	Type of data passed. Use TEEC_PARAMS_TYPE macro to create the correct flags. 0 means TEEC_NONE is passed for all params.
<i>params</i>	Array of parameters of type <code>TEEC_Parameter</code> .
<i>session</i>	Internal pointer to the last session used by TEEC_InvokeCommand with this operation.

### 9.20.2 Member Data Documentation

**9.20.2.1 params** `TEEC_Parameter` `TEEC_Operation::params` [TEEC\_CONFIG\_PAYLOAD\_REF\_COUNT]

**9.20.2.2 paramTypes** `uint32_t TEEC_Operation::paramTypes`

**9.20.2.3 session** `TEEC_Session* TEEC_Operation::session`

**9.20.2.4 started** `uint32_t TEEC_Operation::started`


The documentation for this struct was generated from the following file:

- [ta-ref/api/include/tee\\_client\\_api.h](#)

## 9.21 TEEC\_Parameter Union Reference

```
#include <tee_client_api.h>
```

Collaboration diagram for TEEC\_Parameter:

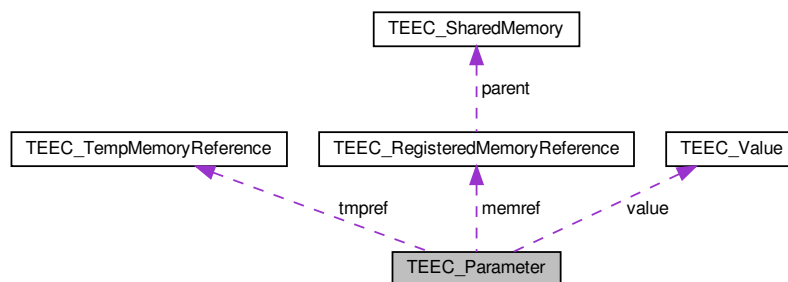

### Public Attributes

- [TEEC\\_TempMemoryReference tmpref](#)
- [TEEC\\_RegisteredMemoryReference memref](#)
- [TEEC\\_Value value](#)

### 9.21.1 Detailed Description

union [TEEC\\_Parameter](#) - Memory container to be used when passing data between client application and trusted code.

Either the client uses a shared memory reference, parts of it or a small raw data container.

## Parameters

<i>tmpref</i>	A temporary memory reference only valid for the duration of the operation.
<i>memref</i>	The entire shared memory or parts of it.
<i>value</i>	The small raw data container to use

## 9.21.2 Member Data Documentation

**9.21.2.1 memref** [TEEC.RegisteredMemoryReference](#) `TEEC.Parameter::memref`

**9.21.2.2 tmpref** [TEEC.TempMemoryReference](#) `TEEC.Parameter::tmpref`

**9.21.2.3 value** [TEEC.Value](#) `TEEC.Parameter::value`


The documentation for this union was generated from the following file:

- [ta-ref/api/include/tee\\_client\\_api.h](#)

## 9.22 TEEC\_RegisterMemoryReference Struct Reference

```
#include <tee_client_api.h>
```

Collaboration diagram for TEEC\_RegisterMemoryReference:

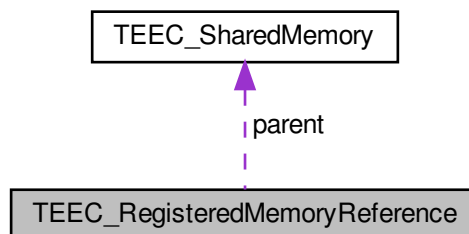

## Public Attributes

- [TEEC\\_SharedMemory](#) \* [parent](#)
- [size\\_t](#) [size](#)
- [size\\_t](#) [offset](#)

### 9.22.1 Detailed Description

struct [TEEC\\_RegisteredMemoryReference](#) - use a pre-registered or pre-allocated shared memory block of memory to transfer data between a client application and trusted code.

#### Parameters

<i>parent</i>	Points to a shared memory structure. The memory reference may utilize the whole shared memory or only a part of it. Must not be NULL
<i>size</i>	The size, in bytes, of the memory buffer.
<i>offset</i>	The offset, in bytes, of the referenced memory region from the start of the shared memory block.

### 9.22.2 Member Data Documentation

**9.22.2.1 offset** `size_t TEEC_RegisteredMemoryReference::offset`

**9.22.2.2 parent** `TEEC\_SharedMemory* TEEC_RegisteredMemoryReference::parent`

**9.22.2.3 size** `size_t TEEC_RegisteredMemoryReference::size`


The documentation for this struct was generated from the following file:

- `ta-ref/api/include/tee\_client\_api.h`

## 9.23 TEEC\_Session Struct Reference

```
#include <tee_client_api.h>
```

Collaboration diagram for TEEC\_Session:



### Public Attributes

- `TEEC_Context * ctx`
- `uint32_t session_id`

### 9.23.1 Detailed Description

struct `TEEC_Session` - Represents a connection between a client application and a trusted application.

### 9.23.2 Member Data Documentation

**9.23.2.1** `ctx` `TEEC_Context*` `TEEC_Session::ctx`

**9.23.2.2** `session_id` `uint32_t` `TEEC_Session::session_id`

The documentation for this struct was generated from the following file:

- `ta-ref/api/include/tee_client_api.h`

## 9.24 TEEC\_SharedMemory Struct Reference

```
#include <tee_client_api.h>
```

**Public Attributes**

- void \* [buffer](#)
- size\_t [size](#)
- uint32\_t [flags](#)
- int [id](#)
- size\_t [allocated\\_size](#)
- void \* [shadow\\_buffer](#)
- int [registered\\_fd](#)
- bool [buffer\\_allocated](#)

**9.24.1 Detailed Description**

struct [TEEC\\_SharedMemory](#) - Memory to transfer data between a client application and trusted code.

**Parameters**

<i>buffer</i>	The memory buffer which is to be, or has been, shared with the TEE.
<i>size</i>	The size, in bytes, of the memory buffer.
<i>flags</i>	Bit-vector which holds properties of buffer. The bit-vector can contain either or both of the TEEC_MEM_INPUT and TEEC_MEM_OUTPUT flags.

A shared memory block is a region of memory allocated in the context of the client application memory space that can be used to transfer data between that client application and a trusted application. The user of this struct is responsible to populate the buffer pointer.

**9.24.2 Member Data Documentation**

**9.24.2.1 [allocated\\_size](#)**    size\_t TEEC\_SharedMemory::allocated\_size

**9.24.2.2 [buffer](#)**    void\* TEEC\_SharedMemory::buffer

**9.24.2.3 [buffer\\_allocated](#)**    bool TEEC\_SharedMemory::buffer\_allocated

**9.24.2.4 [flags](#)**    uint32\_t TEEC\_SharedMemory::flags

**9.24.2.5 id** `int TEEC_SharedMemory::id`

**9.24.2.6 registered\_fd** `int TEEC_SharedMemory::registered_fd`

**9.24.2.7 shadow\_buffer** `void* TEEC_SharedMemory::shadow_buffer`

**9.24.2.8 size** `size_t TEEC_SharedMemory::size`

The documentation for this struct was generated from the following file:

- [ta-ref/api/include/tee\\_client\\_api.h](#)

## 9.25 TEEC\_TempMemoryReference Struct Reference

```
#include <tee_client_api.h>
```

### Public Attributes

- `void *` [buffer](#)
- `size_t` [size](#)

### 9.25.1 Detailed Description

struct [TEEC\\_TempMemoryReference](#) - Temporary memory to transfer data between a client application and trusted code, only used for the duration of the operation.

#### Parameters

<i>buffer</i>	The memory buffer which is to be, or has been shared with the TEE.
<i>size</i>	The size, in bytes, of the memory buffer.

A memory buffer that is registered temporarily for the duration of the operation to be called.

### 9.25.2 Member Data Documentation

**9.25.2.1 buffer** void\* TEEC\_TempMemoryReference::buffer

**9.25.2.2 size** size\_t TEEC\_TempMemoryReference::size

The documentation for this struct was generated from the following file:

- ta-ref/api/include/[tee\\_client\\_api.h](#)

## 9.26 TEEC\_UUID Struct Reference

```
#include <tee_client_api.h>
```

### Public Attributes

- uint32\_t [timeLow](#)
- uint16\_t [timeMid](#)
- uint16\_t [timeHiAndVersion](#)
- uint8\_t [clockSeqAndNode](#) [8]

### 9.26.1 Detailed Description

This type contains a Universally Unique Resource Identifier (UUID) type as defined in RFC4122. These UUID values are used to identify Trusted Applications.

### 9.26.2 Member Data Documentation

**9.26.2.1 clockSeqAndNode** uint8\_t TEEC\_UUID::clockSeqAndNode[8]

**9.26.2.2 timeHiAndVersion** uint16\_t TEEC\_UUID::timeHiAndVersion

**9.26.2.3 timeLow** uint32\_t TEEC\_UUID::timeLow



#### 9.26.2.4 timeMid `uint16_t TEEC_UUID::timeMid`

The documentation for this struct was generated from the following file:

- [ta-ref/api/include/tee\\_client\\_api.h](#)

### 9.27 TEEC\_Value Struct Reference

```
#include <tee_client_api.h>
```

#### Public Attributes

- `uint32_t a`
- `uint32_t b`

#### 9.27.1 Detailed Description

struct [TEEC\\_Value](#) - Small raw data container

Instead of allocating a shared memory buffer this structure can be used to pass small raw data between a client application and trusted code.

##### Parameters

<i>a</i>	The first integer value.
<i>b</i>	The second second value.

#### 9.27.2 Member Data Documentation

##### 9.27.2.1 **a** `uint32_t TEEC_Value::a`

##### 9.27.2.2 **b** `uint32_t TEEC_Value::b`


The documentation for this struct was generated from the following file:

- [ta-ref/api/include/tee\\_client\\_api.h](#)

## 10 File Documentation

### 10.1 ta-ref/api/include/compiler.h File Reference

This graph shows which files directly or indirectly include this file:

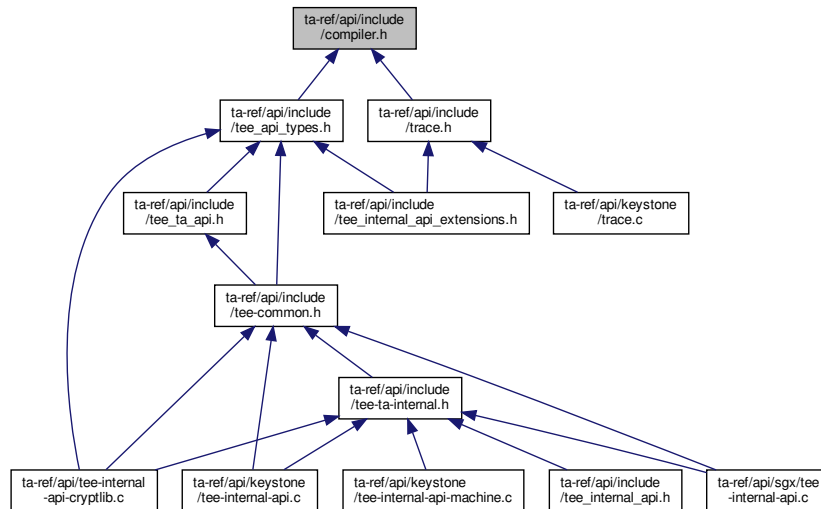

### 10.2 compiler.h

[Go to the documentation of this file.](#)

```

1 /*
2  * Copyright (c) 2014, STMicroelectronics International N.V.
3  * All rights reserved.
4  *
5  * Redistribution and use in source and binary forms, with or without
6  * modification, are permitted provided that the following conditions are met:
7  *
8  * 1. Redistributions of source code must retain the above copyright notice,
9  * this list of conditions and the following disclaimer.
10 *
11 * 2. Redistributions in binary form must reproduce the above copyright notice,
12 * this list of conditions and the following disclaimer in the documentation
13 * and/or other materials provided with the distribution.
14 *
15 * THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
16 * AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
17 * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
18 * ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE
19 * LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
20 * CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF
21 * SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS
22 * INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
23 * CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
24 * ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
25 * POSSIBILITY OF SUCH DAMAGE.
26 */
27
28 #ifndef COMPILER_H
29 #define COMPILER_H
30
31 #ifndef DOXYGEN_SHOULD_SKIP_THIS
32 /*
33  * Macros that should be used instead of using __attribute__ directly to
34  * ease portability and make the code easier to read.
35  */
36
37 #define __deprecated __attribute__((deprecated))

```

```

38 #define __packed      __attribute__((packed))
39 #define __weak         __attribute__((weak))
40 #define __noreturn     __attribute__((noreturn))
41 #define __pure         __attribute__((pure))
42 #define __aligned(x)   __attribute__((aligned(x)))
43 #define __printf(a, b) __attribute__((format(printf, a, b)))
44 #define __noinline     __attribute__((noinline))
45 #define __attr_const    __attribute__((__const__))
46 #define __unused       __attribute__((unused))
47 #define __maybe_unused __attribute__((unused))
48 #define __used         __attribute__((__used__))
49 #define __must_check    __attribute__((warn_unused_result))
50 #define __cold         __attribute__((__cold__))
51 #define __section(x)    __attribute__((section(x)))
52 #define __data          __section("__data")
53 #define __bss           __section("__bss")
54 #define __rodata        __section("__rodata")
55 #define __rodata_unpaged __section("__rodata.unpaged")
56 #define __early_ta      __section("__rodata.early_ta")
57 #define __noprof        __attribute__((no_instrument_function))
58
59 #define __compiler_bswap64(x)  __builtin_bswap64(x)
60 #define __compiler_bswap32(x)  __builtin_bswap32(x)
61 #define __compiler_bswap16(x)  __builtin_bswap16(x)
62
63 #define __GCC_VERSION (__GNUC__ * 10000 + __GNUC_MINOR__ * 100 + \
64                      __GNUC_PATCHLEVEL__)
65
66 #if __GCC_VERSION >= 50100 && !defined(__CHECKER__)
67 #define __HAVE_BUILTIN_OVERFLOW 1
68 #endif
69
70 #ifdef __HAVE_BUILTIN_OVERFLOW
71 #define __compiler_add_overflow(a, b, res) \
72     __builtin_add_overflow(a, (b), (res))
73
74 #define __compiler_sub_overflow(a, b, res) \
75     __builtin_sub_overflow(a, (b), (res))
76
77 #define __compiler_mul_overflow(a, b, res) \
78     __builtin_mul_overflow(a, (b), (res))
79 #else
80 /*
81  * Copied/inspired from https://www.fefe.de/intof.html
82  */
83 #define __INTOF_HALF_MAX_SIGNED(type) ((type)1 << (sizeof(type)*8-2))
84 #define __INTOF_MAX_SIGNED(type) (__INTOF_HALF_MAX_SIGNED(type) - 1 + \
85                                   __INTOF_HALF_MAX_SIGNED(type))
86 #define __INTOF_MIN_SIGNED(type) (-1 - __INTOF_MAX_SIGNED(type))
87
88 #define __INTOF_MIN(type) ((type)-1 < 1?__INTOF_MIN_SIGNED(type):(type)0)
89 #define __INTOF_MAX(type) ((type)~__INTOF_MIN(type))
90
91 #define __INTOF_ASSIGN(dest, src) (__extension__({ \
92     typeof(src) __intof_x = (src); \
93     typeof(dest) __intof_y = __intof_x; \
94     (((uintmax_t)__intof_x == (uintmax_t)__intof_y) && \
95      ((__intof_x < 1) == (__intof_y < 1)) ? \
96      (void)((dest) = __intof_y, 0 : 1); \
97     }))
98
99 #define __INTOF_ADD(c, a, b) (__extension__({ \
100     typeof(a) __intofa_a = (a); \
101     typeof(b) __intofa_b = (b); \
102     \
103     __intofa_b < 1 ? \
104     ((__INTOF_MIN(typeof(c)) - __intofa_b <= __intofa_a) ? \
105      __INTOF_ASSIGN((c), __intofa_a + __intofa_b) : 1) : \
106     ((__INTOF_MAX(typeof(c)) - __intofa_b >= __intofa_a) ? \
107      __INTOF_ASSIGN((c), __intofa_a + __intofa_b) : 1); \
108     }))
109
110 #define __INTOF_SUB(c, a, b) (__extension__({ \
111     typeof(a) __intofs_a = a; \
112     typeof(b) __intofs_b = b; \
113     \
114     __intofs_b < 1 ? \
115     ((__INTOF_MAX(typeof(c)) + __intofs_b >= __intofs_a) ? \
116      __INTOF_ASSIGN((c), __intofs_a - __intofs_b) : 1) : \
117     ((__INTOF_MIN(typeof(c)) + __intofs_b <= __intofs_a) ? \
118      __INTOF_ASSIGN((c), __intofs_a - __intofs_b) : 1); \
119     }))
120
121 /*
122  * Dealing with detecting overflow in multiplication of integers.
123  * First step is to remove two corner cases with the minum signed integer

```


```

126 * which can't be represented as a positive integer + sign.
127 * Multiply with 0 or 1 can't overflow, no checking needed of the operation,
128 * only if it can be assigned to the result.
129 *
130 * After the corner cases are eliminated we convert the two factors to
131 * positive unsigned values, keeping track of the original in another
132 * variable which is used at the end to determine the sign of the product.
133 *
134 * The two terms (a and b) are divided into upper and lower half (x1 upper
135 * and x0 lower), so the product is:
136 * ((a1 << hshift) + a0) * ((b1 << hshift) + b0)
137 * which also is:
138 * ((a1 * b1) << (hshift * 2)) +          (T1)
139 * ((a1 * b0 + a0 * b1) << hshift) +      (T2)
140 * (a0 * b0)                             (T3)
141 *
142 * From this we can tell and (a1 * b1) has to be 0 or we'll overflow, that
143 * is, at least one of a1 or b1 has to be 0. Once this has been checked the
144 * addition: ((a1 * b0) << hshift) + ((a0 * b1) << hshift)
145 * isn't an addition as one of the terms will be 0.
146 *
147 * Since each factor in: (a0 * b0)
148 * only uses half the capacity of the underlying type it can't overflow
149 *
150 * The addition of T2 and T3 can overflow so we use __INTOF_ADD() to
151 * perform that addition. If the addition succeeds without overflow the
152 * result is assigned the required sign and checked for overflow again.
153 */
154
155 #define __intof_mul_negate ((__intof_oa < 1) != (__intof_ob < 1))
156 #define __intof_mul_hshift (sizeof(uintmax_t) * 8 / 2)
157 #define __intof_mul_hmask (UINTMAX_MAX >> __intof_mul_hshift)
158 #define __intof_mul_a0 ((uintmax_t)(__intof_a) >> __intof_mul_hshift)
159 #define __intof_mul_b0 ((uintmax_t)(__intof_b) >> __intof_mul_hshift)
160 #define __intof_mul_a1 ((uintmax_t)(__intof_a) & __intof_mul_hmask)
161 #define __intof_mul_b1 ((uintmax_t)(__intof_b) & __intof_mul_hmask)
162 #define __intof_mul_t (__intof_mul_a1 * __intof_mul_b0 + \
163     __intof_mul_a0 * __intof_mul_b1)
164
165 #define __INTOF_MUL(c, a, b) (__extension__({ \
166     typeof(a) __intof_oa = (a); \
167     typeof(a) __intof_a = __intof_oa < 1 ? __intof_oa : __intof_oa; \
168     typeof(b) __intof_ob = (b); \
169     typeof(b) __intof_b = __intof_ob < 1 ? __intof_ob : __intof_ob; \
170     typeof(c) __intof_c; \
171     \
172     __intof_oa == 0 || __intof_ob == 0 || \
173     __intof_oa == 1 || __intof_ob == 1 ? \
174     __INTOF_ASSIGN((c), __intof_oa * __intof_ob) : \
175     (__intof_mul_a0 && __intof_mul_b0) || \
176     __intof_mul_t > __intof_mul_hmask ? 1 : \
177     __INTOF_ADD((__intof_c), __intof_mul_t << __intof_mul_hshift, \
178         __intof_mul_a1 * __intof_mul_b1) ? 1 : \
179     __intof_mul_negate ? __INTOF_ASSIGN((c), -__intof_c) : \
180     __INTOF_ASSIGN((c), __intof_c); \
181 })))
182
183 #define __compiler_add_overflow(a, b, res) __INTOF_ADD(*(res), (a), (b))
184 #define __compiler_sub_overflow(a, b, res) __INTOF_SUB(*(res), (a), (b))
185 #define __compiler_mul_overflow(a, b, res) __INTOF_MUL(*(res), (a), (b))
186
187 #endif
188 #define __compiler_compare_and_swap(p, oval, nval) \
189     __atomic_compare_exchange_n((p), (oval), (nval), true, \
190         __ATOMIC_ACQUIRE, __ATOMIC_RELAXED) \
191
192 #define __compiler_atomic_load(p) __atomic_load_n((p), __ATOMIC_RELAXED)
193 #define __compiler_atomic_store(p, val) \
194     __atomic_store_n((p), (val), __ATOMIC_RELAXED)
195
196 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
197 #endif /*COMPILER.H*/

```

### 10.3 ta-ref/api/include/report.h File Reference

This graph shows which files directly or indirectly include this file:

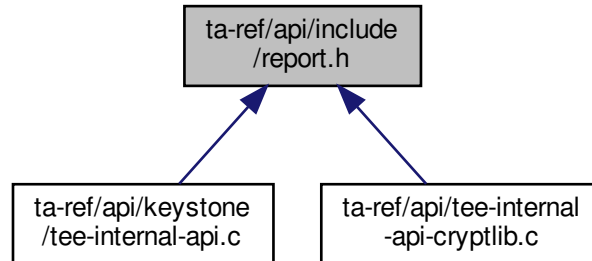

#### Classes

- struct [enclave\\_report](#)
- struct [sm\\_report](#)
- struct [report](#)

### 10.4 report.h

[Go to the documentation of this file.](#)

```


1
2 #ifndef _REPORT_H
3 #define _REPORT_H
4
5 #ifndef DOXYGEN_SHOULD_SKIP_THIS
6 #define MDSIZE 64
7 #define SIGNATURE_SIZE 64
8 #define PUBLIC_KEY_SIZE 32
9 #define ATTEST_DATA_MAXLEN 1024
10 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
11
12 /* attestation reports */
13 struct enclave_report
14 {
15     uint8_t hash[MDSIZE];
16     uint64_t data_len;
17     uint8_t data[ATTEST_DATA_MAXLEN];
18     uint8_t signature[SIGNATURE_SIZE];
19 };
20
21 struct sm_report
22 {
23     uint8_t hash[MDSIZE];
24     uint8_t public_key[PUBLIC_KEY_SIZE];
25     uint8_t signature[SIGNATURE_SIZE];
26 };
27
28 struct report
29 {
30     struct enclave_report enclave;
31     struct sm_report sm;
32     uint8_t dev_public_key[PUBLIC_KEY_SIZE];
33 };
34
35 #endif // _REPORT_H
  
```

## 10.5 ta-ref/api/include/tee-common.h File Reference


Common type and definitions of RISC-V TEE.

```
#include <stdint.h>
#include <tee_api_defines.h>
#include <tee_api_types.h>
#include <tee_ta_api.h>
```

Include dependency graph for tee-common.h:

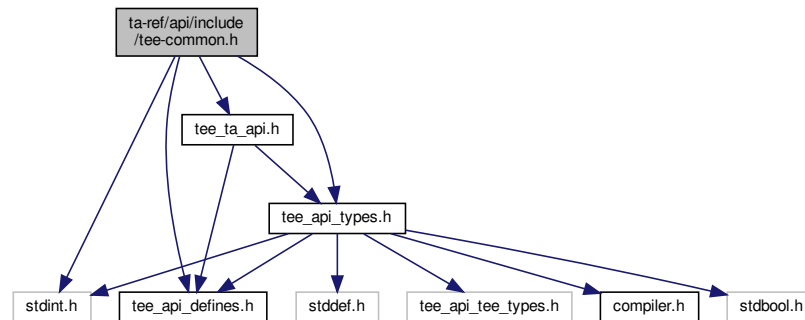

This graph shows which files directly or indirectly include this file:

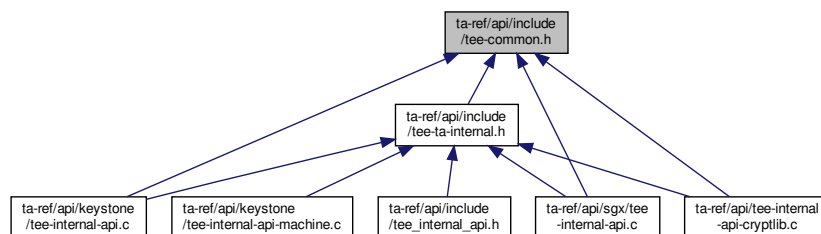

### 10.5.1 Detailed Description

Common type and definitions of RISC-V TEE.

draft RISC-V Internal TEE API

Author

Akira Tsukamoto, AIST

Date

2019/09/25

## 10.6 tee-common.h

[Go to the documentation of this file.](#)

```

1 /*
2  * SPDX-License-Identifier: BSD-2-Clause
3  *
4  * Copyright (C) 2019 National Institute of Advanced Industrial Science
5  *                               and Technology (AIST)
6  * All rights reserved.
7  *
8  * Redistribution and use in source and binary forms, with or without
9  * modification, are permitted provided that the following conditions are met:
10 *
11 * 1. Redistributions of source code must retain the above copyright notice,
12 * this list of conditions and the following disclaimer.
13 *
14 * 2. Redistributions in binary form must reproduce the above copyright notice,
15 * this list of conditions and the following disclaimer in the documentation
16 * and/or other materials provided with the distribution.
17 *
18 * THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
19 * AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
20 * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
21 * ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE
22 * LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
23 * CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF
24 * SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS
25 * INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
26 * CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
27 * ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
28 * POSSIBILITY OF SUCH DAMAGE.
29 */
30
31 #ifndef TEE_COMMON_H
32 #define TEE_COMMON_H
33
34 #include <stdint.h>
35
36 #ifdef __cplusplus
37 extern "C" {
38 #endif
39
40 #ifndef DOXYGEN_SHOULD_SKIP_THIS
41 #ifdef DEBUG
42 #define pr_deb(...) do { printf(__VA_ARGS__); } while (0)
43 #else
44 #define pr_deb(...) do { } while (0)
45 #endif /* DEBUG */
46 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
47
48 // #include <tee_api.h>
49 #include <tee_api_defines.h>
50 #include <tee_api_types.h>
51 #include <tee_ta_api.h>
52
53 // typedef uint32_t TEE_Result;
54
55 #ifdef __cplusplus
56 }
57 #endif
58 #endif /* TEE_COMMON_H */


```

## 10.7 ta-ref/api/include/tee-ta-internal.h File Reference


Candidate API list for Global Platform like RISC-V TEE.

```
#include "tee-common.h"
```

Include dependency graph for tee-ta-internal.h:

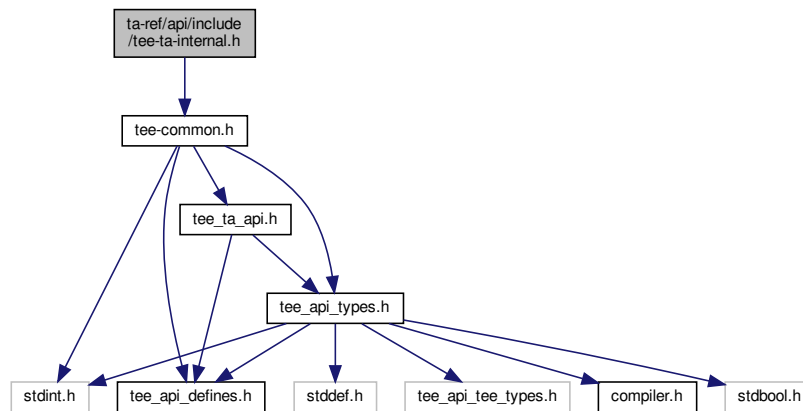

This graph shows which files directly or indirectly include this file:



## Functions

- void `__attribute__((noreturn)) TEE_Panic(unsigned long code)`  
*Core Functions, Time Functions.*
- void `TEE_GetREETime (TEE_Time *time)`  
*Core Functions, Time Functions.*
- void `TEE_GetSystemTime (TEE_Time *time)`  
*Core Functions, Time Functions.*
- `TEE_Result GetRelTimeStart (uint64_t start)`  
*Core Functions, Time Functions.*
- `TEE_Result GetRelTimeEnd (uint64_t end)`  
*Core Functions, Time Functions.*
- `TEE_Result TEE_CreatePersistentObject (uint32_t storageID, const void *objectID, uint32_t objectIDLen, uint32_t flags, TEE_ObjectHandle attributes, const void *initialData, uint32_t initialDataLen, TEE_ObjectHandle *object)`  
*Core Functions, Secure Storage Functions (data is isolated for each TA)*
- `TEE_Result TEE_OpenPersistentObject (uint32_t storageID, const void *objectID, uint32_t objectIDLen, uint32_t flags, TEE_ObjectHandle *object)`  
*Core Functions, Secure Storage Functions (data is isolated for each TA)*
- `TEE_Result TEE_GetObjectInfo1 (TEE_ObjectHandle object, TEE_ObjectInfo *objectInfo)`  
*Core Functions, Secure Storage Functions (data is isolated for each TA)*



- **TEE\_Result TEE\_WriteObjectData** (TEE\_ObjectHandle object, const void \*buffer, uint32\_t size)  
*Core Functions, Secure Storage Functions (data is isolated for each TA)*
- **TEE\_Result TEE\_ReadObjectData** (TEE\_ObjectHandle object, void \*buffer, uint32\_t size, uint32\_t \*count)  
*Core Functions, Secure Storage Functions (data is isolated for each TA)*
- void **TEE\_CloseObject** (TEE\_ObjectHandle object)  
*Core Functions, Secure Storage Functions (data is isolated for each TA)*
- void **TEE\_GenerateRandom** (void \*randomBuffer, uint32\_t randomBufferLen)  
*Crypto, common.*
- **TEE\_Result TEE\_AllocateOperation** (TEE\_OperationHandle \*operation, uint32\_t algorithm, uint32\_t mode, uint32\_t maxKeySize)  
*Crypto, for all Crypto Functions.*
- void **TEE\_FreeOperation** (TEE\_OperationHandle operation)  
*Crypto, for all Crypto Functions.*
- void **TEE\_DigestUpdate** (TEE\_OperationHandle operation, const void \*chunk, uint32\_t chunkSize)  
*Crypto, Message Digest Functions.*
- **TEE\_Result TEE\_DigestDoFinal** (TEE\_OperationHandle operation, const void \*chunk, uint32\_t chunkLen, void \*hash, uint32\_t \*hashLen)
- **TEE\_Result TEE\_SetOperationKey** (TEE\_OperationHandle operation, TEE\_ObjectHandle key)  
*Crypto, Authenticated Encryption with Symmetric key Verification Functions.*
- **TEE\_Result TEE\_AEInit** (TEE\_OperationHandle operation, const void \*nonce, uint32\_t nonceLen, uint32\_t tagLen, uint32\_t AADLen, uint32\_t payloadLen)  
*Crypto, Authenticated Encryption with Symmetric key Verification Functions.*
- **TEE\_Result TEE\_AEUpdate** (TEE\_OperationHandle operation, const void \*srcData, uint32\_t srcLen, void \*destData, uint32\_t \*destLen)  
*Crypto, Authenticated Encryption with Symmetric key Verification Functions.*
- void **TEE\_AEUpdateAAD** (TEE\_OperationHandle operation, const void \*AADdata, uint32\_t AADdataLen)  
*Crypto, Authenticated Encryption with Symmetric key Verification Functions.*
- **TEE\_Result TEE\_AEEncryptFinal** (TEE\_OperationHandle operation, const void \*srcData, uint32\_t srcLen, void \*destData, uint32\_t \*destLen, void \*tag, uint32\_t \*tagLen)  
*Crypto, Authenticated Encryption with Symmetric key Verification Functions.*
- **TEE\_Result TEE\_AEDecryptFinal** (TEE\_OperationHandle operation, const void \*srcData, uint32\_t srcLen, void \*destData, uint32\_t \*destLen, void \*tag, uint32\_t tagLen)  
*Crypto, Authenticated Encryption with Symmetric key Verification Functions.*
- void **TEE\_CipherInit** (TEE\_OperationHandle operation, const void \*nonce, uint32\_t nonceLen)  
*Crypto, Authenticated Encryption with Symmetric key Verification Functions.*
- **TEE\_Result TEE\_CipherUpdate** (TEE\_OperationHandle operation, const void \*srcData, uint32\_t srcLen, void \*destData, uint32\_t \*destLen)  
*Crypto, Authenticated Encryption with Symmetric key Verification Functions.*
- **TEE\_Result TEE\_GenerateKey** (TEE\_ObjectHandle object, uint32\_t keySize, const TEE\_Attribute \*params, uint32\_t paramCount)  
*Crypto, Asymmetric key Verification Functions.*
- **TEE\_Result TEE\_AllocateTransientObject** (TEE\_ObjectType objectType, uint32\_t maxKeySize, TEE\_ObjectHandle \*object)  
*Crypto, Asymmetric key Verification Functions.*
- void **TEE\_InitRefAttribute** (TEE\_Attribute \*attr, uint32\_t attributeID, const void \*buffer, uint32\_t length)  
*Crypto, Asymmetric key Verification Functions.*
- void **TEE\_InitValueAttribute** (TEE\_Attribute \*attr, uint32\_t attributeID, uint32\_t a, uint32\_t b)  
*Crypto, Asymmetric key Verification Functions.*
- void **TEE\_FreeTransientObject** (TEE\_ObjectHandle object)  
*Crypto, Asymmetric key Verification Functions.*
- **TEE\_Result TEE\_AsymmetricSignDigest** (TEE\_OperationHandle operation, const TEE\_Attribute \*params, uint32\_t paramCount, const void \*digest, uint32\_t digestLen, void \*signature, uint32\_t \*signatureLen)

*Crypto, Asymmetric key Verification Functions.*

- `TEE_Result TEE_AsymmetricVerifyDigest` (`TEE_OperationHandle` operation, const `TEE_Attribute` \*params, uint32\_t paramCount, const void \*digest, uint32\_t digestLen, const void \*signature, uint32\_t signatureLen)

*Crypto, Asymmetric key Verification Functions.*

### 10.7.1 Detailed Description

Candidate API list for Global Platform like RISC-V TEE.

draft RISC-V Internal TEE API

#### Author

Akira Tsukamoto, AIST

#### Date

2019/09/25

### 10.7.2 Function Documentation

**10.7.2.1** `__attribute__((noret)) void __attribute__((noret))` (

`TEE.Panic()` - Raises a panic in the Trusted Application instance.

When a Trusted Application calls the `TEE.Panic` function, the current instance shall be destroyed and all the resources opened by the instance shall be reclaimed. All sessions opened from the panicking instance on another TA shall be gracefully closed and all cryptographic objects and operations shall be closed properly.

#### Parameters

<i>code</i>	An informative panic code defined by the TA.
-------------	----------------------------------------------

#### Returns

panic code will be returned.

`TEE.Panic()` - Raises a Panic in the Trusted Application instance

When a Trusted Application calls the `TEE.Panic` function, the current instance shall be destroyed and all the resources opened by the instance shall be reclaimed.

**Parameters**

<i>ec</i>	An informative panic code defined by the TA. May be displayed in traces if traces are available.
-----------	--------------------------------------------------------------------------------------------------

**10.7.2.2 GetRelTimeEnd()** `TEE_Result GetRelTimeEnd (`  
`uint64_t end )`

Core Functions, Time Functions.

Return the elapsed.

[GetRelTimeEnd\(\)](#) - finds the real time of the end timing.

This function prints the ending time.

**Parameters**

<i>end</i>	End timing
------------	------------

**Returns**

0 If success

[GetRelTimeStart\(\)](#) - find the real time of the end timing.

This function prints the End timing.

**Parameters**

<i>end</i>	End timing
------------	------------

**Returns**

0 if success else error occurred

**10.7.2.3 GetRelTimeStart()** `TEE_Result GetRelTimeStart (`  
`uint64_t start )`

Core Functions, Time Functions.

Fast relative Time function which guarantees no hart switch or context switch between Trusted and Untrusted sides.

Most of the time ending up writing similar functions when only measuring the relative time in usec resolution which do not require the quality of the time itself but the distance of the two points.  
For the usage above, the function does not have to return wall clock time.  
Not prepared in both Keystone and GP.

[GetRelTimeStart\(\)](#) - Gets the real time of the start timing.

This function prints the starting time.

#### Parameters

<i>start</i>	Start timing
--------------	--------------

#### Returns

0 on success

[GetRelTimeStart\(\)](#) - Gets the real time of the start timing.

This function prints the start timing.

#### Parameters

<i>start</i>	start timing
--------------	--------------

#### Returns

0 if success else error occurred.

**10.7.2.4 TEE\_AEDecryptFinal()** `TEE_Result TEE_AEDecryptFinal (`  
`TEE_OperationHandle operation,`  
`const void * srcData,`  
`uint32_t srcLen,`  
`void * destData,`  
`uint32_t * destLen,`  
`void * tag,`  
`uint32_t tagLen )`

Crypto, Authenticated Encryption with Symmetric key Verification Functions.

Supports TEE\_ALG\_AES\_CCM, TEE\_ALG\_AES\_GCM.

[TEE\\_AEDecryptFinal\(\)](#) - Processes data that has not been processed by previous calls to TEE\_AEUpdate as well as data supplied in srcData.

This function completes the AE operation and compares the computed tag with the tag supplied in the parameter tag. The operation handle can be reused or newly initialized. The buffers srcData and destData shall be either completely disjoint or equal in their starting positions. The operation may be in either initial or active state and enters initial state afterwards.

**Parameters**

<i>operation</i>	Handle of a running AE operation
<i>srcData</i>	Reference to final chunk of input data to be encrypted
<i>srcLen</i>	length of the input data
<i>destData</i>	Output buffer. Can be omitted if the output is to be discarded.
<i>destLen</i>	length of the buffer.
<i>tag</i>	Output buffer filled with the computed tag
<i>tagLen</i>	length of the tag.

**Returns**

0 on success.

TEE\_ERROR\_SHORT\_BUFFER If the output buffer is not large enough to contain the output

TEE\_ERROR\_MAC\_INVALID If the computed tag does not match the supplied tag

**10.7.2.5 TEE\_AEEncryptFinal()** `TEE_Result TEE_AEEncryptFinal (`  
`TEE_OperationHandle operation,`  
`const void * srcData,`  
`uint32_t srcLen,`  
`void * destData,`  
`uint32_t * destLen,`  
`void * tag,`  
`uint32_t * tagLen )`

Crypto, Authenticated Encryption with Symmetric key Verification Functions.

Supports TEE\_ALG\_AES\_CCM, TEE\_ALG\_AES\_GCM.

[TEE\\_AEEncryptFinal\(\)](#) - processes data that has not been processed by previous calls to TEE\_AEUpdate as well as data supplied in srcData .

TEE\_AEEncryptFinal completes the AE operation and computes the tag. The operation handle can be reused or newly initialized. The buffers srcData and destData SHALL be either completely disjoint or equal in their starting positions. The operation may be in either initial or active state and enters initial state afterwards.

**Parameters**

<i>operation</i>	Handle of a running AE operation
<i>srcData</i>	Reference to final chunk of input data to be encrypted
<i>srcLen</i>	length of the input data
<i>destData</i>	Output buffer. Can be omitted if the output is to be discarded.
<i>destLen</i>	length of the buffer.
<i>tag</i>	Output buffer filled with the computed tag
<i>tagLen</i>	length of the tag.

**Returns**

0 on success.

TEE\_ERROR\_SHORT\_BUFFER If the output or tag buffer is not large enough to contain the output.

**10.7.2.6 TEE\_AEInit()** `TEE_Result TEE_AEInit (`  
`TEE_OperationHandle operation,`  
`const void * nonce,`  
`uint32_t nonceLen,`  
`uint32_t tagLen,`  
`uint32_t AADLen,`  
`uint32_t payloadLen )`

Crypto, Authenticated Encryption with Symmetric key Verification Functions.

Supports TEE\_ALG\_AES\_CCM, TEE\_ALG\_AES\_GCM.

[TEE\\_AEInit\(\)](#) - Initializes an Authentication Encryption operation.

The operation must be in initial state and remains in the initial state afterwards.

**Parameters**

<i>operation</i>	A handle on the operation.
<i>nonce</i>	The operation nonce or IV
<i>nonceLen</i>	length of nonce
<i>tagLen</i>	Size in bits of the tag
<i>AADLen</i>	Length in bytes of the AAD
<i>payloadLen</i>	Length in bytes of the payload.

**Returns**

0 on success.

TEE\_ERROR\_NOT\_SUPPORTED If the tag length is not supported by the algorithm.

**10.7.2.7 TEE\_AEUpdate()** `TEE_Result TEE_AEUpdate (`  
`TEE_OperationHandle operation,`  
`const void * srcData,`  
`uint32_t srcLen,`  
`void * destData,`  
`uint32_t * destLen )`

Crypto, Authenticated Encryption with Symmetric key Verification Functions.

Supports TEE\_ALG\_AES\_CCM, TEE\_ALG\_AES\_GCM.

[TEE\\_AEUpdate\(\)](#) - Accumulates data for an Authentication Encryption operation

This function describes Input data does not have to be a multiple of block size. Subsequent calls to this function are possible. Unless one or more calls of this function have supplied sufficient input data, no output is generated. When using this routine to decrypt the returned data may be corrupt since the integrity check is not performed until all the data has been processed. If this is a concern then only use the TEE\_AEDecryptFinal routine.

## Parameters

<i>operation</i>	Handle of a running AE operation.
<i>srcData</i>	Input data buffer to be encrypted or decrypted
<i>srcLen</i>	length of the input buffer.
<i>destData</i>	Output buffer
<i>destLen</i>	length of the out put buffer.

## Returns

0 on success.

TEE\_ERROR\_SHORT\_BUFFER if the output buffer is not large enough to contain the output.

**10.7.2.8 TEE\_AEUpdateAAD()** void TEE\_AEUpdateAAD (   
     TEE\_OperationHandle operation,   
     const void \* AADdata,   
     uint32\_t AADdataLen )

Crypto, Authenticated Encryption with Symmetric key Verification Functions.

Supports TEE\_ALG\_AES\_CCM, TEE\_ALG\_AES\_GCM.

[TEE\\_AEUpdateAAD\(\)](#) - Feeds a new chunk of Additional Authentication Data (AAD) to the AE operation. Subsequent calls to this function are possible.

The TEE\_AEUpdateAAD function feeds a new chunk of Additional Authentication Data (AAD) to the AE operation. Subsequent calls to this function are possible. The buffers srcData and destData shall be either completely disjoint or equal in their starting positions. The operation SHALL be in initial state and remains in initial state afterwards.

## Parameters

<i>operation</i>	Handle on the AE operation
<i>AADdata</i>	Input buffer containing the chunk of AAD
<i>AADdataLen</i>	length of the chunk of AAD.

**10.7.2.9 TEE\_AllocateOperation()** TEE\_Result TEE\_AllocateOperation (   
     TEE\_OperationHandle \* operation,   
     uint32\_t algorithm,   
     uint32\_t mode,   
     uint32\_t maxKeySize )

Crypto, for all Crypto Functions.

All Crypto Functions use TEE\_OperationHandle\* operation instances.   
 Create Crypto instance.



**TEE\_AllocateOperation()** - Allocates a handle for a new cryptographic operation and sets the mode and algorithm type.

If this function does not return with TEE\_SUCCESS then there is no valid handle value. Once a cryptographic operation has been created, the implementation shall guarantee that all resources necessary for the operation are allocated and that any operation with a key of at most maxKeySize bits can be performed. For algorithms that take multiple keys, for example the AES XTS algorithm, the maxKeySize parameter specifies the size of the largest key. It is up to the implementation to properly allocate space for multiple keys if the algorithm so requires.

#### Parameters

<i>operation</i>	reference to generated operation handle.
<i>algorithm</i>	One of the cipher algorithms.
<i>mode</i>	The operation mode.
<i>maxKeySize</i>	Maximum key size in bits for the operation.

#### Returns

0 in case of success

TEE\_ERROR\_OUT\_OF\_MEMORY If there are not enough resources to allocate the operation.

TEE\_ERROR\_NOT\_SUPPORTED If the mode is not compatible with the algorithm or key size or if the algorithm is not one of the listed algorithms or if maxKeySize is not appropriate for the algorithm.

**10.7.2.10 TEE\_AllocateTransientObject()** `TEE_Result TEE_AllocateTransientObject (`  
`TEE_ObjectType objectType,`  
`uint32_t maxKeySize,`  
`TEE_ObjectHandle * object )`

Crypto, Asymmetric key Verification Functions.

Create object storing asymmetric key.

**TEE\_AllocateTransientObject()** - Allocates an uninitialized transient object. Transient objects are used to hold a cryptographic object (key or key-pair).

The value TEE\_KEYSIZE\_NO\_KEY should be used for maxObjectSize for object types that do not require a key so that all the container resources can be pre-allocated. As allocated, the container is uninitialized. It can be initialized by subsequently importing the object material, generating an object, deriving an object, or loading an object from the Trusted Storage.

#### Parameters

<i>objectType</i>	Type of uninitialized object container to be created
<i>maxKeySize</i>	Key Size of the object.
<i>object</i>	Filled with a handle on the newly created key container.

## Returns

0 on success

TEE\_ERROR\_OUT\_OF\_MEMORY If not enough resources are available to allocate the object handle.

TEE\_ERROR\_NOT\_SUPPORTED If the key size is not supported or the object type is not supported.

**10.7.2.11 TEE\_AsymmetricSignDigest()** `TEE_Result TEE_AsymmetricSignDigest (`  
`TEE_OperationHandle operation,`  
`const TEE_Attribute * params,`  
`uint32_t paramCount,`  
`const void * digest,`  
`uint32_t digestLen,`  
`void * signature,`  
`uint32_t * signatureLen )`

Crypto, Asymmetric key Verification Functions.

Sign a message digest within an asymmetric key operation.

Keystone has `ed25519_sign()`.

Equivalent in openssl is `EVP_DigestSign()`.

[TEE\\_AsymmetricSignDigest\(\)](#) - Signs a message digest within an asymmetric operation.

## Parameters

<i>operation</i>	Handle on the operation, which SHALL have been suitably set up with an operation key.
<i>params</i>	Optional operation parameters
<i>paramCount</i>	size of param
<i>digest</i>	Input buffer containing the input message digest
<i>digestLen</i>	length of input buffer.
<i>signature</i>	Output buffer written with the signature of the digest
<i>signatureLen</i>	length of output buffer.

## Returns

0 on success

TEE\_ERROR\_SHORT\_BUFFER If the signature buffer is not large enough to hold the result

**10.7.2.12 TEE\_AsymmetricVerifyDigest()** `TEE_Result TEE_AsymmetricVerifyDigest (`  
`TEE_OperationHandle operation,`  
`const TEE_Attribute * params,`  
`uint32_t paramCount,`  
`const void * digest,`  
`uint32_t digestLen,`

```
const void * signature,
uint32_t signatureLen )
```

Crypto, Asymmetric key Verification Functions.

Verifies a message digest signature within an asymmetric key operation.

Keystone has `ed25519_verify()`.

Equivalent in openssl is `EVP_DigestVerify()`.

[TEE\\_AsymmetricVerifyDigest\(\)](#) - verifies a message digest signature within an asymmetric operation.

This function describes the message digest signature verify by calling `ed25519_verify()`.

#### Parameters

<i>operation</i>	Handle on the operation, which SHALL have been suitably set up with an operation key.
<i>params</i>	Optional operation parameters
<i>paramCount</i>	size of param.
<i>digest</i>	Input buffer containing the input message digest
<i>digestLen</i>	length of input buffer.
<i>signature</i>	Output buffer written with the signature of the digest
<i>signatureLen</i>	length of output buffer.

#### Returns

TEE\_SUCCESS on success

TEE\_ERROR\_SIGNATURE\_INVALID if the signature is invalid.

**10.7.2.13 TEE.CipherInit()** `void TEE_CipherInit (`  
`TEE.OperationHandle operation,`  
`const void * nonce,`  
`uint32_t nonceLen )`

Crypto, Authenticated Encryption with Symmetric key Verification Functions.

Supports TEE\_ALG\_AES\_CBC.

[TEE.CipherInit\(\)](#) - starts the symmetric cipher operation.

The operation shall have been associated with a key. If the operation is in active state, it is reset and then initialized. If the operation is in initial state, it is moved to active state.

#### Parameters

<i>operation</i>	A handle on an opened cipher operation setup with a key
<i>nonce</i>	Buffer containing the operation Initialization Vector as appropriate.
<i>nonceLen</i>	length of the buffer

**10.7.2.14 TEE\_CipherUpdate()** `TEE_Result TEE_CipherUpdate (`  
`TEE_OperationHandle operation,`  
`const void * srcData,`  
`uint32_t srcLen,`  
`void * destData,`  
`uint32_t * destLen )`

Crypto, Authenticated Encryption with Symmetric key Verification Functions.

Supports TEE\_ALG\_AES\_CBC.

[TEE\\_CipherUpdate\(\)](#) - encrypts or decrypts input data.

Input data does not have to be a multiple of block size. Subsequent calls to this function are possible. Unless one or more calls of this function have supplied sufficient input data, no output is generated. The cipher operation is finalized with a call to `TEE_CipherDoFinal`. The buffers `srcData` and `destData` SHALL be either completely disjoint or equal in their starting positions. The operation SHALL be in active state.

#### Parameters

<i>operation</i>	Handle of a running Cipher operation
<i>srcData</i>	Input data buffer to be encrypted or decrypted
<i>srcLen</i>	length of input buffer
<i>destData</i>	output buffer
<i>destLen</i>	output buffer length.

#### Returns

0 on success else

TEE\_ERROR\_SHORT\_BUFFER If the output buffer is not large enough to contain the output. In this case, the input is not fed into the algorithm.

**10.7.2.15 TEE\_CloseObject()** `void TEE_CloseObject (`  
`TEE_ObjectHandle object )`

Core Functions, Secure Storage Functions (data is isolated for each TA)

Destroy object (key, key-pair or Data).

[TEE\\_CloseObject\(\)](#) - Closes an opened object handle.

The object can be persistent or transient. For transient objects, `TEE_CloseObject` is equivalent to `TEE_FreeTransientObject`.

**Parameters**

<i>object</i>	Handle of the object.
---------------	-----------------------

**Returns**

TEE\_SUCCESS if success else error occurred.

[TEE\\_CloseObject\(\)](#) - Function closes an opened object handle.

The object can be persistent or transient. For transient objects, TEE\_CloseObject is equivalent to TEE\_Free↔ TransientObject.

**Parameters**

<i>object</i>	Handle of the object
---------------	----------------------

**Returns**

TEE\_SUCCESS if success else error occurred.

**10.7.2.16 TEE\_CreatePersistentObject()** `TEE_Result TEE_CreatePersistentObject (`  
     uint32\_t *storageID*,  
     const void \* *objectID*,  
     uint32\_t *objectIDLen*,  
     uint32\_t *flags*,  
     [TEE\\_ObjectHandle](#) *attributes*,  
     const void \* *initialData*,  
     uint32\_t *initialDataLen*,  
     [TEE\\_ObjectHandle](#) \* *object* )

Core Functions, Secure Storage Functions (data is isolated for each TA)

Create persistent object (key, key-pair or Data).

For the people who have not written code on GP then probably do not need to care the meaning of what is Persistent Object is, since the following are enough to use secure storage feature.

[TEE\\_CreatePersistentObject\(\)](#) - Creates a persistent object with initial attributes.

In this function an initial data stream content returns either a handle on the created object or TEE\_HANDLE\_NULL upon failure.

**Parameters**

<i>storageID</i>	The storage to use.
<i>objectID</i>	The object identifier
<i>objectIDLen</i>	The object identifier
Paramter list continued on next page	

<i>flags</i>	The flags which determine the settings under which the object is opened.
<i>attributes</i>	A handle on a persistent object or an initialized transient object from which to take the persistent object attributes
<i>initialData</i>	The initial data content of the persistent object
<i>initialDataLen</i>	The initial data content of the persistent object
<i>object</i>	A pointer to the handle which contains the opened handle upon successful completion

**Returns**

0 if success else error occurred.

[TEE\\_CreatePersistentObject\(\)](#) - Creates a persistent object with initial attributes.

An initial data stream content, and optionally returns either a handle on the created object, or TEE\_HANDLE\_NULL upon failure.

**Parameters**

<i>storageID</i>	The storage to use.
<i>objectID</i>	The object identifier
<i>objectIDLen</i>	The object identifier
<i>flags</i>	The flags which determine the settings under which the object is opened.
<i>attributes</i>	A handle on a persistent object or an initialized transient object from which to take the persistent object attributes
<i>initialData</i>	The initial data content of the persistent object
<i>initialDataLen</i>	The initial data content of the persistent object
<i>object</i>	A pointer to the handle, which contains the opened handle upon successful completion

**Returns**

0 if success, else error occurred.

```

10.7.2.17 TEE_DigestDoFinal() TEE\_Result TEE_DigestDoFinal (
    TEE\_OperationHandle operation,
    const void * chunk,
    uint32_t chunkLen,
    void * hash,
    uint32_t * hashLen )

```

Function accumulates message data for hashing.

[TEE\\_DigestDoFinal\(\)](#) - Finalizes the message digest operation and produces the message hash.

This function finalizes the message digest operation and produces the message hash. Afterwards the Message Digest operation is reset to initial state and can be reused.

**Parameters**

<i>operation</i>	Handle of a running Message Digest operation.
<i>chunk</i>	Chunk of data to be hashed.
<i>chunkLen</i>	size of the chunk.
<i>hash</i>	Output buffer filled with the message hash.
<i>hashLen</i>	length of the message hash.

**Returns**

0 on success

TEE\_ERROR\_SHORT\_BUFFER If the output buffer is too small. In this case, the operation is not finalized.

**10.7.2.18 TEE.DigestUpdate()** void TEE.DigestUpdate (   
     TEE.OperationHandle operation,   
     const void \* chunk,   
     uint32\_t chunkSize )

Crypto, Message Digest Functions.

Function accumulates message data for hashing.

[TEE.DigestUpdate\(\)](#)- Accumulates message data for hashing.

This function describes the message does not have to be block aligned. Subsequent calls to this function are possible. The operation may be in either initial or active state and becomes active.

**Parameters**

<i>operation</i>	Handle of a running Message Digest operation.
<i>chunk</i>	Chunk of data to be hashed
<i>chunkSize</i>	size of the chunk.

**10.7.2.19 TEE.FreeOperation()** void TEE.FreeOperation (   
     TEE.OperationHandle operation )

Crypto, for all Crypto Functions.

All Crypto Functions use TEE.OperationHandle\* operation instances.

Destroy Crypto instance.

[TEE.FreeOperation\(\)](#) - Deallocates all resources associated with an operation handle.

This function deallocates all resources associated with an operation handle. After this function is called, the operation handle is no longer valid. All cryptographic material in the operation is destroyed. The function does nothing if operation is TEE\_HANDLE\_NULL.

## Parameters

<i>operation</i>	Reference to operation handle.
------------------	--------------------------------

## Returns

nothing after the operation free.

**10.7.2.20 TEE\_FreeTransientObject()** `void TEE_FreeTransientObject ( TEE_ObjectHandle object )`

Crypto, Asymmetric key Verification Functions.

Destroy object storing asymmetric key.

[TEE\\_FreeTransientObject\(\)](#) - Deallocates a transient object previously allocated with [TEE\\_AllocateTransientObject](#) .

this function describes the object handle is no longer valid and all resources associated with the transient object shall have been reclaimed after the [TEE\\_AllocateTransientObject\(\)](#) call.

## Parameters

<i>object</i>	Handle on the object to free.
---------------	-------------------------------

**10.7.2.21 TEE\_GenerateKey()** `TEE_Result TEE_GenerateKey ( TEE_ObjectHandle object, uint32_t keySize, const TEE_Attribute * params, uint32_t paramCount )`

Crypto, Asymmetric key Verification Functions.

Generate asymmetric keypair.

[TEE\\_GenerateKey \(\)](#) - Generates a random key or a key-pair and populates a transient key object with the generated key material.

The size of the desired key is passed in the keySize parameter and shall be less than or equal to the maximum key size specified when the transient object was created.

## Parameters

<i>object</i>	Handle on an uninitialized transient key to populate with the generated key.
Paramter list continued on next page	



<i>keySize</i>	Requested key size shall be less than or equal to the maximum key size specified when the object container was created
<i>params</i>	Parameters for the key generation.
<i>paramCount</i>	The values of all parameters are copied into the object so that the params array and all the memory buffers it points to may be freed after this routine returns without affecting the object.

#### Returns

0 on success

TEE\_ERROR\_BAD\_PARAMETERS If an incorrect or inconsistent attribute is detected. The checks that are performed depend on the implementation.

**10.7.2.22 TEE\_GenerateRandom()** void TEE\_GenerateRandom (   
 void \* *randomBuffer*,   
 uint32\_t *randomBufferLen* )

Crypto, common.

Random Data Generation Function. The quality of the random is implementation dependent.

I am not sure this should be in Keystone or not, but it is very handy.

Good to have adding a way to check the quality of the random implementation.

[TEE\\_GenerateRandom\(\)](#) - Generates random data.

This function generates random data of random buffer length and is stored in to random Buffer by calling wc.RNG↔  
\_GenerateBlock(). If ret is not equal  
to 0 then TEE\_Panic is called.

#### Parameters

<i>randomBuffer</i>	Reference to generated random data
<i>randomBufferLen</i>	Byte length of requested random data

#### Returns

random data random data will be returned.

[TEE\\_GenerateRandom\(\)](#) - Generates random data.

This function generates random data of random bufferlength and is stored in to randomBuffer by calling sgx.read↔  
\_rand().

#### Parameters

<i>randomBuffer</i>	Reference to generated random data
<i>randomBufferLen</i>	Byte length of requested random data

**10.7.2.23 TEE\_GetObjectInfo1()** `TEE_Result TEE_GetObjectInfo1 (`  
`TEE_ObjectHandle object,`  
`TEE_ObjectInfo * objectInfo )`

Core Functions, Secure Storage Functions (data is isolated for each TA)

Get length of object required before reading the object.

[TEE\\_GetObjectInfo1\(\)](#) - Returns the characteristics of an object.

This function returns a handle which can be used to access the object's attributes and data stream.

#### Parameters

<i>objectInfo</i>	Pointer to a structure filled with the object information
<i>object</i>	Handle of the object

#### Returns

0 if success else error occurred.

[TEE\\_GetObjectInfo1\(\)](#) - Function returns the characteristics of an object.

It returns a handle that can be used to access the object's attributes and data stream.

#### Parameters

<i>objectInfo</i>	Pointer to a structure filled with the object information
<i>object</i>	Handle of the object

#### Returns

0 if success else error occurred.

**10.7.2.24 TEE\_GetREETime()** `void TEE_GetREETime (`  
`TEE_Time * time )`

Core Functions, Time Functions.

Wall clock time of host OS, expressed in the number of seconds since 1970-01-01 UTC.  
 This could be implemented on Keystone using ocall.

[TEE\\_GetREETime\(\)](#) - Retrieves the current REE system time.

This function retrieves the current time as seen from the point of view of the REE.

**Parameters**

<i>time</i>	Filled with the number of seconds and milliseconds
-------------	----------------------------------------------------

[TEE\\_GetREETime\(\)](#) - Function retrieves the current REE system time.

This function retrieves the current time as seen from the point of view of the REE.

**Parameters**

<i>time</i>	Filled with the number of seconds and milliseconds.
-------------	-----------------------------------------------------

**10.7.2.25 TEE\_GetSystemTime()** `void TEE_GetSystemTime (`  
`TEE_Time * time )`

Core Functions, Time Functions.

Time of TEE-controlled secure timer or Host OS time, implementation dependent.

[TEE\\_GetSystemTime\(\)](#) - Retrieves the current system time.

This function describes the system time has an arbitrary implementation defined origin that can vary across TA instances. The minimum guarantee is that the system time shall be monotonic for a given TA instance.

**Parameters**

<i>time</i>	Filled with the number of seconds and milliseconds
-------------	----------------------------------------------------

[TEE\\_GetSystemTime\(\)](#) - Retrieves the current system time.

The system time has an arbitrary implementation-defined origin that can vary across TA instances

**Parameters**

<i>time</i>	Filled with the number of seconds and milliseconds.
-------------	-----------------------------------------------------

**10.7.2.26 TEE\_InitRefAttribute()** `void TEE_InitRefAttribute (`  
`TEE_Attribute * attr,`  
`uint32_t attributeID,`

```
const void * buffer,
uint32_t length )
```

Crypto, Asymmetric key Verification Functions.

Storing asymmetric key.

[TEE\\_InitRefAttribute\(\)](#) - The helper function can be used to populate a single attribute either with a reference to a buffer or with integer values.

In `TEE_InitRefAttribute()` only the buffer pointer is copied, not the content of the buffer. This means that the attribute structure maintains a pointer back to the supplied buffer. It is the responsibility of the TA author to ensure that the contents of the buffer maintain their value until the attributes array is no longer in use.

#### Parameters

<i>attr</i>	attribute structure to initialize.
<i>attributeID</i>	Identifier of the attribute to populate.
<i>buffer</i>	input buffer that holds the content of the attribute.
<i>length</i>	buffer length.

**10.7.2.27 TEE\_InitValueAttribute()** `void TEE_InitValueAttribute (`  
`TEE\_Attribute * attr,`  
`uint32_t attributeID,`  
`uint32_t a,`  
`uint32_t b )`

Crypto, Asymmetric key Verification Functions.

Storing asymmetric key.

[TEE\\_InitValueAttribute\(\)](#) - The helper function can be used to populate a single attribute either with a reference to a buffer or with integer values.

#### Parameters

<i>attr</i>	attribute structure to initialize.
<i>attributeID</i>	Identifier of the attribute to populate.
<i>a</i>	unsigned integer value to assign to the a member of the attribute structure.
<i>b</i>	unsigned integer value to assign to the b member of the attribute structure

**10.7.2.28 TEE\_OpenPersistentObject()** `TEE_Result TEE_OpenPersistentObject (`  
`uint32_t storageID,`  
`const void * objectID,`  
`uint32_t objectIDLen,`

```
uint32_t flags,
TEE_ObjectHandle * object )
```

Core Functions, Secure Storage Functions (data is isolated for each TA)

Open persistent object.

[TEE\\_OpenPersistentObject\(\)](#) - Opens a handle on an existing persistent object.

This function returns a handle which can be used to access the object's attributes and data stream.

#### Parameters

<i>storageID</i>	The storage to use
<i>objectID</i>	The object identifier
<i>objectIDLen</i>	The object identifier
<i>flags</i>	The flags which determine the settings under which the object is opened.
<i>object</i>	A pointer to the handle, which contains the opened handle upon successful completion

#### Returns

0 if success else error occurred.

[TEE\\_OpenPersistentObject\(\)](#) - Opens a handle on an existing persistent object.

This function returns a handle that can be used to access the object's attributes and data stream.

#### Parameters

<i>storageID</i>	The storage to use.
<i>objectID</i>	The object identifier
<i>objectIDLen</i>	The object identifier
<i>flags</i>	The flags which determine the settings under which the object is opened.
<i>object</i>	A pointer to the handle, which contains the opened handle upon successful completion

#### Returns

0 if success, else error occurred.

**10.7.2.29 TEE\_ReadObjectData()** [TEE\\_Result](#) TEE\_ReadObjectData (   
[TEE\\_ObjectHandle](#) object,   
void \* buffer,   
uint32\_t size,   
uint32\_t \* count )

Core Functions, Secure Storage Functions (data is isolated for each TA)

Read object.

[TEE\\_ReadObjectData\(\)](#) - Attempts to read size bytes from the data stream associated with the object into the buffer pointed to by buffer.

The bytes are read starting at the position in the data stream currently stored in the object handle. The handle's position is incremented by the number of bytes actually read. On completion of TEE\_ReadObjectData sets the number of bytes actually read in the "uint32\_t" pointed to by count. The value written to \*count may be less than size if the number of bytes until the end-of-stream is less than size. It is set to 0 if the position at the start of the read operation is at or beyond the end-of-stream. These are the only cases where \*count may be less than size.

#### Parameters

<i>object</i>	Handle of the object
<i>buffer</i>	The buffer containing the data to be written
<i>size</i>	The number of bytes to write
<i>count</i>	size of the buffer.

#### Returns

TEE\_SUCCESS if success else error occurred.

[TEE\\_ReadObjectData\(\)](#) - Attempts to read size bytes from the data stream associated with the object object into the buffer pointed to by buffer.

The bytes are read starting at the position in the data stream currently stored in the object handle. The handle's position is incremented by the number of bytes actually read. On completion TEE\_ReadObjectData sets the number of bytes actually read in the uint32\_t pointed to by count. The value written to \*count may be less than size if the number of bytes until the end-of-stream is less than size. It is set to 0 if the position at the start of the read operation is at or beyond the end-of-stream. These are the only cases where \*count may be less than size.

#### Parameters

<i>object</i>	Handle of the object
<i>buffer</i>	The buffer containing the data to be written
<i>size</i>	The number of bytes to write
<i>count</i>	size of the buffer.

#### Returns

TEE\_SUCCESS if success, else error occurred.

**10.7.2.30 TEE\_SetOperationKey()** [TEE\\_Result](#) TEE\_SetOperationKey (   
 [TEE\\_OperationHandle](#) operation,   
 [TEE\\_ObjectHandle](#) key )

Crypto, Authenticated Encryption with Symmetric key Verification Functions.

Set symmetric key used in operation.

[TEE.SetOperationKey\(\)](#) - Programs the key of an operation; that is, it associates an operation with a key.

The key material is copied from the key object handle into the operation. After the key has been set, there is no longer any link between the operation and the key object. The object handle can be closed or reset and this will not affect the operation. This copied material exists until the operation is freed using [TEE.FreeOperation](#) or another key is set into the operation.

#### Parameters

<i>operation</i>	Operation handle.
<i>key</i>	A handle on a key object.

#### Returns

0 on success return

TEE\_ERROR\_CORRUPT\_OBJECT If the object is corrupt. The object handle is closed.

TEE\_ERROR\_STORAGE\_NOT\_AVAILABLE If the persistent object is stored in a storage area which is currently inaccessible.

**10.7.2.31 TEE.WriteObjectData()** `TEE_Result TEE.WriteObjectData (`  
     [TEE.ObjectHandle](#) *object*,  
     const void \* *buffer*,  
     uint32\_t *size* )

Core Functions, Secure Storage Functions (data is isolated for each TA)

Write object.

[TEE.WriteObjectData\(\)](#) - Writes the buffer data in to persistent objects.

In this function it checks if object is present or not, the encryption/ decryption buffer is taken by calling `mbedtls.aes↔_crypt.cbc()` then that buffer data is encrypted and mapped to object. On the base of object creation `TEE.SUCCESS` appears else `TEE.ERROR.GENERIC` appears.

#### Parameters

<i>object</i>	Handle of the object
<i>buffer</i>	The buffer containing the data to be written
<i>size</i>	The number of bytes to write

#### Returns

TEE\_SUCCESS if success else error occurred.

[TEE.WriteObjectData\(\)](#) - writes size bytes from the buffer pointed to by buffer to the data stream associated with the open object handle object.

If the current data position points before the end-of-stream, then size bytes are written to the data stream, overwriting bytes starting at the current data position. If the current data position points beyond the stream's end, then the data stream is first extended with zero bytes until the length indicated by the data position indicator is reached, and then size bytes are written to the stream.

#### Parameters

<i>object</i>	Handle of the object
<i>buffer</i>	The buffer containing the data to be written
<i>size</i>	The number of bytes to write

#### Returns

TEE\_SUCCESS if success else error occurred.

## 10.8 tee-ta-internal.h

[Go to the documentation of this file.](#)

```

1 /*
2  * SPDX-License-Identifier: BSD-2-Clause
3  *
4  * Copyright (C) 2019 National Institute of Advanced Industrial Science
5  *                               and Technology (AIST)
6  * All rights reserved.
7  *
8  * Redistribution and use in source and binary forms, with or without
9  * modification, are permitted provided that the following conditions are met:
10  *
11  * 1. Redistributions of source code must retain the above copyright notice,
12  * this list of conditions and the following disclaimer.
13  *
14  * 2. Redistributions in binary form must reproduce the above copyright notice,
15  * this list of conditions and the following disclaimer in the documentation
16  * and/or other materials provided with the distribution.
17  *
18  * THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
19  * AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
20  * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
21  * ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE
22  * LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
23  * CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF
24  * SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS
25  * INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
26  * CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
27  * ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
28  * POSSIBILITY OF SUCH DAMAGE.
29  */
30
31 #ifndef TA_INTERNAL_TEE_H
32 #define TA_INTERNAL_TEE_H
33
34 #include "tee-common.h"
35
36 #ifdef __cplusplus
37 extern "C" {
38
39 void __attribute__((noreturn)) TEE_Panic(unsigned long code);
40
41 void TEE_GetREETime(TEE_Time *time);
42
43 /* Wall clock time is important for verifying certificates. */
44 void TEE_GetSystemTime(TEE_Time *time);
45
46 /* Start timer */
47 TEE_Result GetRelTimeStart(uint64_t start);
48
49 TEE_Result GetRelTimeEnd(uint64_t end);
50
51 }
52
53 #endif

```



```

79
85 TEE_Result TEE_CreatePersistentObject(uint32_t storageID, const void *objectID,
86                                     uint32_t objectIDLen, uint32_t flags,
87                                     TEE_ObjectHandle attributes,
88                                     const void *initialData,
89                                     uint32_t initialDataLen,
90                                     TEE_ObjectHandle *object);
92
93 TEE_Result TEE_OpenPersistentObject(uint32_t storageID, const void *objectID,
94                                     uint32_t objectIDLen, uint32_t flags,
95                                     TEE_ObjectHandle *object);
97
98 TEE_Result TEE_GetObjectInfo1(TEE_ObjectHandle object, TEE_ObjectInfo *objectInfo);
100
101 TEE_Result TEE_WriteObjectData(TEE_ObjectHandle object, const void *buffer,
102                               uint32_t size);
105 TEE_Result TEE_ReadObjectData(TEE_ObjectHandle object, void *buffer,
106                               uint32_t size, uint32_t *count);
108
109 void TEE_CloseObject(TEE_ObjectHandle object);
110
111
113
119 void TEE_GenerateRandom(void *randomBuffer, uint32_t randomBufferLen);
120
122
124 TEE_Result TEE_AllocateOperation(TEE_OperationHandle *operation,
125                                  uint32_t algorithm, uint32_t mode,
126                                  uint32_t maxKeySize);
128
130 void TEE_FreeOperation(TEE_OperationHandle operation);
131
132
134
135 void TEE_DigestUpdate(TEE_OperationHandle operation,
136                      const void *chunk, uint32_t chunkSize);
138 TEE_Result TEE_DigestDoFinal(TEE_OperationHandle operation, const void *chunk,
139                              uint32_t chunkLen, void *hash, uint32_t *hashLen);
140
142
143 TEE_Result TEE_SetOperationKey(TEE_OperationHandle operation,
144                                TEE_ObjectHandle key);
146
147 TEE_Result TEE_AEInit(TEE_OperationHandle operation, const void *nonce,
148                      uint32_t nonceLen, uint32_t tagLen, uint32_t AADLen,
149                      uint32_t payloadLen);
151
152 TEE_Result TEE_AEUpdate(TEE_OperationHandle operation, const void *srcData,
153                        uint32_t srcLen, void *destData, uint32_t *destLen);
155
156 void TEE_AEUpdateAAD(TEE_OperationHandle operation, const void *AADdata,
157                   uint32_t AADdataLen);
159
160 TEE_Result TEE_AEEncryptFinal(TEE_OperationHandle operation,
161                               const void *srcData, uint32_t srcLen,
162                               void *destData, uint32_t *destLen, void *tag,
163                               uint32_t *tagLen);
165
166 TEE_Result TEE_AEDecryptFinal(TEE_OperationHandle operation,
167                               const void *srcData, uint32_t srcLen,
168                               void *destData, uint32_t *destLen, void *tag,
169                               uint32_t tagLen);
170
172
173 void TEE_CipherInit(TEE_OperationHandle operation, const void *nonce,
174                    uint32_t nonceLen);
176
177 TEE_Result TEE_CipherUpdate(TEE_OperationHandle operation, const void *srcData,
178                             uint32_t srcLen, void *destData, uint32_t *destLen);
179
181
182 TEE_Result TEE_GenerateKey(TEE_ObjectHandle object, uint32_t keySize,
183                           const TEE_Attribute *params, uint32_t paramCount);
185
186 TEE_Result TEE_AllocateTransientObject(TEE_ObjectType objectType,
187                                       uint32_t maxKeySize,
188                                       TEE_ObjectHandle *object);
190
191 void TEE_InitRefAttribute(TEE_Attribute *attr, uint32_t attributeID,
192                          const void *buffer, uint32_t length);
194
195 void TEE_InitValueAttribute(TEE_Attribute *attr, uint32_t attributeID,
196                             uint32_t a, uint32_t b);
198
199 void TEE_FreeTransientObject(TEE_ObjectHandle object);
200
202

```


```

206 TEE_Result TEE_AsymmetricSignDigest(TEE_OperationHandle operation,
207                                     const TEE_Attribute *params,
208                                     uint32_t paramCount, const void *digest,
209                                     uint32_t digestLen, void *signature,
210                                     uint32_t *signatureLen);
212
216 TEE_Result TEE_AsymmetricVerifyDigest(TEE_OperationHandle operation,
217                                       const TEE_Attribute *params,
218                                       uint32_t paramCount, const void *digest,
219                                       uint32_t digestLen, const void *signature,
220                                       uint32_t signatureLen);
221
222 #ifdef __cplusplus
223 }
224 #endif
225
226 #endif /* TA_INTERNAL_TEE_H */

```

## 10.9 ta-ref/api/include/tee\_api\_defines.h File Reference

This graph shows which files directly or indirectly include this file:

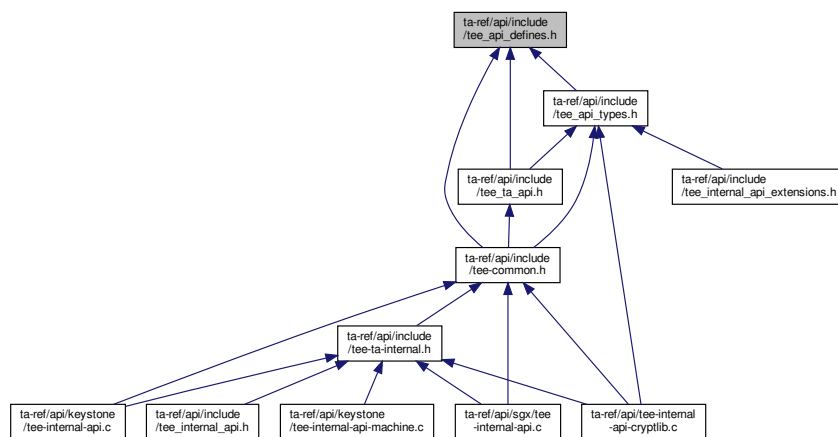

## 10.10 tee\_api\_defines.h

[Go to the documentation of this file.](#)

```

1 /*
2  * Copyright (c) 2014, STMicroelectronics International N.V.
3  * All rights reserved.
4  *
5  * Redistribution and use in source and binary forms, with or without
6  * modification, are permitted provided that the following conditions are met:
7  *
8  * 1. Redistributions of source code must retain the above copyright notice,
9  * this list of conditions and the following disclaimer.
10 *
11 * 2. Redistributions in binary form must reproduce the above copyright notice,
12 * this list of conditions and the following disclaimer in the documentation
13 * and/or other materials provided with the distribution.
14 *
15 * THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
16 * AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
17 * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
18 * ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE
19 * LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
20 * CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF
21 * SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS
22 * INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
23 * CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
24 * ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
25 * POSSIBILITY OF SUCH DAMAGE.

```

```

26 */
27
28 /* Based on GP TEE Internal Core API Specification Version 1.1 */
29
30 #ifndef TEE_API_DEFINES_H
31 #define TEE_API_DEFINES_H
32
33 #ifndef DOXYGEN_SHOULD_SKIP_THIS
34 #define TEE_INT_CORE_API_SPEC_VERSION 0x0000000A
35 #define TEE_HANDLE_NULL 0
36 #define TEE_TIMEOUT_INFINITE 0xFFFFFFFF
37
38 /* API Error Codes */
39 #define TEE_SUCCESS 0x00000000
40 #define TEE_ERROR_CORRUPT_OBJECT 0xF0100001
41 #define TEE_ERROR_CORRUPT_OBJECT_2 0xF0100002
42 #define TEE_ERROR_STORAGE_NOT_AVAILABLE 0xF0100003
43 #define TEE_ERROR_STORAGE_NOT_AVAILABLE_2 0xF0100004
44 #define TEE_ERROR_GENERIC 0xFFFF0000
45 #define TEE_ERROR_ACCESS_DENIED 0xFFFF0001
46 #define TEE_ERROR_CANCEL 0xFFFF0002
47 #define TEE_ERROR_ACCESS_CONFLICT 0xFFFF0003
48 #define TEE_ERROR_EXCESS_DATA 0xFFFF0004
49 #define TEE_ERROR_BAD_FORMAT 0xFFFF0005
50 #define TEE_ERROR_BAD_PARAMETERS 0xFFFF0006
51 #define TEE_ERROR_BAD_STATE 0xFFFF0007
52 #define TEE_ERROR_ITEM_NOT_FOUND 0xFFFF0008
53 #define TEE_ERROR_NOT_IMPLEMENTED 0xFFFF0009
54 #define TEE_ERROR_NOT_SUPPORTED 0xFFFF000A
55 #define TEE_ERROR_NO_DATA 0xFFFF000B
56 #define TEE_ERROR_OUT_OF_MEMORY 0xFFFF000C
57 #define TEE_ERROR_BUSY 0xFFFF000D
58 #define TEE_ERROR_COMMUNICATION 0xFFFF000E
59 #define TEE_ERROR_SECURITY 0xFFFF000F
60 #define TEE_ERROR_SHORT_BUFFER 0xFFFF0010
61 #define TEE_ERROR_EXTERNAL_CANCEL 0xFFFF0011
62 #define TEE_ERROR_OVERFLOW 0xFFFF300F
63 #define TEE_ERROR_TARGET_DEAD 0xFFFF3024
64 #define TEE_ERROR_STORAGE_NO_SPACE 0xFFFF3041
65 #define TEE_ERROR_MAC_INVALID 0xFFFF3071
66 #define TEE_ERROR_SIGNATURE_INVALID 0xFFFF3072
67 #define TEE_ERROR_TIME_NOT_SET 0xFFFF5000
68 #define TEE_ERROR_TIME_NEEDS_RESET 0xFFFF5001
69
70 /* Parameter Type Constants */
71 #define TEE_PARAM_TYPE_NONE 0
72 #define TEE_PARAM_TYPE_VALUE_INPUT 1
73 #define TEE_PARAM_TYPE_VALUE_OUTPUT 2
74 #define TEE_PARAM_TYPE_VALUE_INOUT 3
75 #define TEE_PARAM_TYPE_MEMREF_INPUT 5
76 #define TEE_PARAM_TYPE_MEMREF_OUTPUT 6
77 #define TEE_PARAM_TYPE_MEMREF_INOUT 7
78
79 /* Login Type Constants */
80 #define TEE_LOGIN_PUBLIC 0x00000000
81 #define TEE_LOGIN_USER 0x00000001
82 #define TEE_LOGIN_GROUP 0x00000002
83 #define TEE_LOGIN_APPLICATION 0x00000004
84 #define TEE_LOGIN_APPLICATION_USER 0x00000005
85 #define TEE_LOGIN_APPLICATION_GROUP 0x00000006
86 #define TEE_LOGIN_TRUSTED_APP 0xF0000000
87
88 /* Origin Code Constants */
89 #define TEE_ORIGIN_API 0x00000001
90 #define TEE_ORIGIN_COMMS 0x00000002
91 #define TEE_ORIGIN_TEE 0x00000003
92 #define TEE_ORIGIN_TRUSTED_APP 0x00000004
93
94 /* Property Sets pseudo handles */
95 #define TEE_PROPSET_TEE_IMPLEMENTATION (TEE_PropSetHandle) 0xFFFFFFFFD
96 #define TEE_PROPSET_CURRENT_CLIENT (TEE_PropSetHandle) 0xFFFFFFFFE
97 #define TEE_PROPSET_CURRENT_TA (TEE_PropSetHandle) 0xFFFFFFFFF
98
99 /* Memory Access Rights Constants */
100 #define TEE_MEMORY_ACCESS_READ 0x00000001
101 #define TEE_MEMORY_ACCESS_WRITE 0x00000002
102 #define TEE_MEMORY_ACCESS_ANY_OWNER 0x00000004
103
104 /* Memory Management Constant */
105 #define TEE_MALLOC_FILL_ZERO 0x00000000
106
107 /* Other constants */
108 #define TEE_STORAGE_PRIVATE 0x00000001
109
110 #define TEE_DATA_FLAG_ACCESS_READ 0x00000001
111 #define TEE_DATA_FLAG_ACCESS_WRITE 0x00000002
112 #define TEE_DATA_FLAG_ACCESS_WRITE_META 0x00000004

```

```

113 #define TEE_DATA_FLAG_SHARE_READ 0x00000010
114 #define TEE_DATA_FLAG_SHARE_WRITE 0x00000020
115 #define TEE_DATA_FLAG_OVERWRITE 0x00000400
116 #define TEE_DATA_MAX_POSITION 0xFFFFFFFF
117 #define TEE_OBJECT_ID_MAX_LEN 64
118 #define TEE_USAGE_EXTRACTABLE 0x00000001
119 #define TEE_USAGE_ENCRYPT 0x00000002
120 #define TEE_USAGE_DECRYPT 0x00000004
121 #define TEE_USAGE_MAC 0x00000008
122 #define TEE_USAGE_SIGN 0x00000010
123 #define TEE_USAGE_VERIFY 0x00000020
124 #define TEE_USAGE_DERIVE 0x00000040
125 #define TEE_HANDLE_FLAG_PERSISTENT 0x00010000
126 #define TEE_HANDLE_FLAG_INITIALIZED 0x00020000
127 #define TEE_HANDLE_FLAG_KEY_SET 0x00040000
128 #define TEE_HANDLE_FLAG_EXPECT_TWO_KEYS 0x00080000
129 #define TEE_OPERATION_CIPHER 1
130 #define TEE_OPERATION_MAC 3
131 #define TEE_OPERATION_AE 4
132 #define TEE_OPERATION_DIGEST 5
133 #define TEE_OPERATION_ASYMMETRIC_CIPHER 6
134 #define TEE_OPERATION_ASYMMETRIC_SIGNATURE 7
135 #define TEE_OPERATION_KEY_DERIVATION 8
136 #define TEE_OPERATION_STATE_INITIAL 0x00000000
137 #define TEE_OPERATION_STATE_ACTIVE 0x00000001
138
139 /* Algorithm Identifiers */
140 #define TEE_ALG_AES_ECB_NOPAD 0x10000010
141 #define TEE_ALG_AES_CBC_NOPAD 0x10000110
142 #define TEE_ALG_AES_CTR 0x10000210
143 #define TEE_ALG_AES_CTS 0x10000310
144 #define TEE_ALG_AES_XTS 0x10000410
145 #define TEE_ALG_AES_CBC_MAC_NOPAD 0x30000110
146 #define TEE_ALG_AES_CBC_MAC_PKCS5 0x30000510
147 #define TEE_ALG_AES_CMAC 0x30000610
148 #define TEE_ALG_AES_CCM 0x40000710
149 #define TEE_ALG_AES_GCM 0x40000810
150 #define TEE_ALG_DES_ECB_NOPAD 0x10000011
151 #define TEE_ALG_DES_CBC_NOPAD 0x10000111
152 #define TEE_ALG_DES_CBC_MAC_NOPAD 0x30000111
153 #define TEE_ALG_DES_CBC_MAC_PKCS5 0x30000511
154 #define TEE_ALG_DES3_ECB_NOPAD 0x10000013
155 #define TEE_ALG_DES3_CBC_NOPAD 0x10000113
156 #define TEE_ALG_DES3_CBC_MAC_NOPAD 0x30000113
157 #define TEE_ALG_DES3_CBC_MAC_PKCS5 0x30000513
158 #define TEE_ALG_RSASSA_PKCS1_V1_5_MD5 0x70001830
159 #define TEE_ALG_RSASSA_PKCS1_V1_5_SHA1 0x70002830
160 #define TEE_ALG_RSASSA_PKCS1_V1_5_SHA224 0x70003830
161 #define TEE_ALG_RSASSA_PKCS1_V1_5_SHA256 0x70004830
162 #define TEE_ALG_RSASSA_PKCS1_V1_5_SHA384 0x70005830
163 #define TEE_ALG_RSASSA_PKCS1_V1_5_SHA512 0x70006830
164 #define TEE_ALG_RSASSA_PKCS1_V1_5_MD5_SHA1 0x7000F830
165 #define TEE_ALG_RSASSA_PKCS1_PSS_MGF1_SHA1 0x70212930
166 #define TEE_ALG_RSASSA_PKCS1_PSS_MGF1_SHA224 0x70313930
167 #define TEE_ALG_RSASSA_PKCS1_PSS_MGF1_SHA256 0x70414930
168 #define TEE_ALG_RSASSA_PKCS1_PSS_MGF1_SHA384 0x70515930
169 #define TEE_ALG_RSASSA_PKCS1_PSS_MGF1_SHA512 0x70616930
170 #define TEE_ALG_RSAES_PKCS1_V1_5 0x60000130
171 #define TEE_ALG_RSAES_PKCS1_OAEP_MGF1_SHA1 0x60210230
172 #define TEE_ALG_RSAES_PKCS1_OAEP_MGF1_SHA224 0x60310230
173 #define TEE_ALG_RSAES_PKCS1_OAEP_MGF1_SHA256 0x60410230
174 #define TEE_ALG_RSAES_PKCS1_OAEP_MGF1_SHA384 0x60510230
175 #define TEE_ALG_RSAES_PKCS1_OAEP_MGF1_SHA512 0x60610230
176 #define TEE_ALG_RSA_NOPAD 0x60000030
177 #define TEE_ALG_DSA_SHA1 0x70002131
178 #define TEE_ALG_DSA_SHA224 0x70003131
179 #define TEE_ALG_DSA_SHA256 0x70004131
180 #define TEE_ALG_DH_DERIVE_SHARED_SECRET 0x80000032
181 #define TEE_ALG_MD5 0x50000001
182 #define TEE_ALG_SHA1 0x50000002
183 #define TEE_ALG_SHA224 0x50000003
184 #define TEE_ALG_SHA256 0x50000004
185 #define TEE_ALG_SHA384 0x50000005
186 #define TEE_ALG_SHA512 0x50000006
187 #define TEE_ALG_MD5_SHA1 0x5000000F
188 #define TEE_ALG_HMAC_MD5 0x30000001
189 #define TEE_ALG_HMAC_SHA1 0x30000002
190 #define TEE_ALG_HMAC_SHA224 0x30000003
191 #define TEE_ALG_HMAC_SHA256 0x30000004
192 #define TEE_ALG_HMAC_SHA384 0x30000005
193 #define TEE_ALG_HMAC_SHA512 0x30000006
194 /*
195  * Fix GP Internal Core API v1.1
196  * "Table 6-12: Structure of Algorithm Identifier"
197  * indicates ECDSA have the algorithm "0x41" and ECDH "0x42"
198  * whereas
199  * "Table 6-11: List of Algorithm Identifiers" defines

```

```

200 *      TEE.ALG.ECDSA.P192 as 0x70001042
201 *
202 * We chose to define TEE.ALG.ECDSA.P192 as 0x70001041 (conform to table 6-12)
203 */
204 #define TEE.ALG.ECDSA.P192                0x70001041
205 #define TEE.ALG.ECDSA.P224                0x70002041
206 #define TEE.ALG.ECDSA.P256                0x70003041
207 #define TEE.ALG.ECDSA.P384                0x70004041
208 #define TEE.ALG.ECDSA.P521                0x70005041
209 #define TEE.ALG.ECDH.P192                 0x80001042
210 #define TEE.ALG.ECDH.P224                 0x80002042
211 #define TEE.ALG.ECDH.P256                 0x80003042
212 #define TEE.ALG.ECDH.P384                 0x80004042
213 #define TEE.ALG.ECDH.P521                 0x80005042
214
215 /* Object Types */
216
217 #define TEE.TYPE.AES                      0xA0000010
218 #define TEE.TYPE.DES                      0xA0000011
219 #define TEE.TYPE.DES3                     0xA0000013
220 #define TEE.TYPE.HMAC.MD5                 0xA0000001
221 #define TEE.TYPE.HMAC.SHA1                0xA0000002
222 #define TEE.TYPE.HMAC.SHA224              0xA0000003
223 #define TEE.TYPE.HMAC.SHA256              0xA0000004
224 #define TEE.TYPE.HMAC.SHA384              0xA0000005
225 #define TEE.TYPE.HMAC.SHA512              0xA0000006
226 #define TEE.TYPE.RSA.PUBLIC.KEY            0xA0000030
227 #define TEE.TYPE.RSA.KEYPAIR              0xA1000030
228 #define TEE.TYPE.DSA.PUBLIC.KEY            0xA0000031
229 #define TEE.TYPE.DSA.KEYPAIR              0xA1000031
230 #define TEE.TYPE.DH.KEYPAIR               0xA1000032
231 #define TEE.TYPE.ECDSA.PUBLIC.KEY          0xA0000041
232 #define TEE.TYPE.ECDSA.KEYPAIR            0xA1000041
233 #define TEE.TYPE.ECDH.PUBLIC.KEY           0xA0000042
234 #define TEE.TYPE.ECDH.KEYPAIR             0xA1000042
235 #define TEE.TYPE.GENERIC.SECRET           0xA0000000
236 #define TEE.TYPE.CORRUPTED.OBJECT         0xA00000BE
237 #define TEE.TYPE.DATA                     0xA00000BF
238
239 /* List of Object or Operation Attributes */
240
241 #define TEE.ATTR.SECRET.VALUE              0xC0000000
242 #define TEE.ATTR.RSA.MODULUS               0xD0000130
243 #define TEE.ATTR.RSA.PUBLIC.EXPONENT        0xD0000230
244 #define TEE.ATTR.RSA.PRIVATE.EXPONENT      0xC0000330
245 #define TEE.ATTR.RSA.PRIME1                0xC0000430
246 #define TEE.ATTR.RSA.PRIME2                0xC0000530
247 #define TEE.ATTR.RSA.EXPONENT1             0xC0000630
248 #define TEE.ATTR.RSA.EXPONENT2            0xC0000730
249 #define TEE.ATTR.RSA.COEFFICIENT           0xC0000830
250 #define TEE.ATTR.DSA.PRIME                 0xD0001031
251 #define TEE.ATTR.DSA.SUBPRIME              0xD0001131
252 #define TEE.ATTR.DSA.BASE                  0xD0001231
253 #define TEE.ATTR.DSA.PUBLIC.VALUE           0xD000131
254 #define TEE.ATTR.DSA.PRIVATE.VALUE         0xC0000231
255 #define TEE.ATTR.DH.PRIME                  0xD0001032
256 #define TEE.ATTR.DH.SUBPRIME              0xD0001132
257 #define TEE.ATTR.DH.BASE                   0xD0001232
258 #define TEE.ATTR.DH.X.BITS                 0xF0001332
259 #define TEE.ATTR.DH.PUBLIC.VALUE            0xD000132
260 #define TEE.ATTR.DH.PRIVATE.VALUE          0xC0000232
261 #define TEE.ATTR.RSA.OAEP.LABEL             0xD0000930
262 #define TEE.ATTR.RSA.PSS.SALT.LENGTH       0xF0000A30
263 #define TEE.ATTR.ECC.PUBLIC.VALUE.X         0xD0000141
264 #define TEE.ATTR.ECC.PUBLIC.VALUE.Y         0xD0000241
265 #define TEE.ATTR.ECC.PRIVATE.VALUE         0xC0000341
266 #define TEE.ATTR.ECC.CURVE                 0xF0000441
267
268 #define TEE.ATTR.BIT.PROTECTED              (1 << 28)
269 #define TEE.ATTR.BIT.VALUE                 (1 << 29)
270
271 /* List of Supported ECC Curves */
272 #define TEE.ECC.CURVE.NIST.P192            0x00000001
273 #define TEE.ECC.CURVE.NIST.P224            0x00000002
274 #define TEE.ECC.CURVE.NIST.P256            0x00000003
275 #define TEE.ECC.CURVE.NIST.P384            0x00000004
276 #define TEE.ECC.CURVE.NIST.P521            0x00000005
277
278
279 /* Panicked Functions Identification */
280 /* TA Interface */
281 #define TEE.PANIC.ID.TA.CLOSESESSIONENTRYPOINT 0x00000101
282 #define TEE.PANIC.ID.TA.CREATEENTRYPOINT      0x00000102
283 #define TEE.PANIC.ID.TA.DESTROYENTRYPOINT      0x00000103
284 #define TEE.PANIC.ID.TA.INVOKECOMMANDENTRYPOINT 0x00000104
285 #define TEE.PANIC.ID.TA.OPENSESSIONENTRYPOINT 0x00000105
286 /* Property Access */

```

```

287 #define TEE.PANIC.ID.TEE.ALLOCATEPROPERTYENUMERATOR 0x00000201
288 #define TEE.PANIC.ID.TEE.FREEPROPERTYENUMERATOR 0x00000202
289 #define TEE.PANIC.ID.TEE.GETNEXTPROPERTY 0x00000203
290 #define TEE.PANIC.ID.TEE.GETPROPERTYASBINARYBLOCK 0x00000204
291 #define TEE.PANIC.ID.TEE.GETPROPERTYASBOOL 0x00000205
292 #define TEE.PANIC.ID.TEE.GETPROPERTYASIDENTITY 0x00000206
293 #define TEE.PANIC.ID.TEE.GETPROPERTYASSTRING 0x00000207
294 #define TEE.PANIC.ID.TEE.GETPROPERTYASU32 0x00000208
295 #define TEE.PANIC.ID.TEE.GETPROPERTYASUUID 0x00000209
296 #define TEE.PANIC.ID.TEE.GETPROPERTYNAME 0x0000020A
297 #define TEE.PANIC.ID.TEE.RESETPROPERTYENUMERATOR 0x0000020B
298 #define TEE.PANIC.ID.TEE.STARTPROPERTYENUMERATOR 0x0000020C
299 /* Panic Function */
300 #define TEE.PANIC.ID.TEE.PANIC 0x00000301
301 /* Internal Client API */
302 #define TEE.PANIC.ID.TEE.CLOSETASESSION 0x00000401
303 #define TEE.PANIC.ID.TEE.INVOKETACOMMAND 0x00000402
304 #define TEE.PANIC.ID.TEE.OPENTASESSION 0x00000403
305 /* Cancellation */
306 #define TEE.PANIC.ID.TEE.GETCANCELLATIONFLAG 0x00000501
307 #define TEE.PANIC.ID.TEE.MASKCANCELLATION 0x00000502
308 #define TEE.PANIC.ID.TEE.UNMASKCANCELLATION 0x00000503
309 /* Memory Management */
310 #define TEE.PANIC.ID.TEE.CHECKMEMORYACCESSRIGHTS 0x00000601
311 #define TEE.PANIC.ID.TEE.FREE 0x00000602
312 #define TEE.PANIC.ID.TEE.GETINSTANCEDATA 0x00000603
313 #define TEE.PANIC.ID.TEE.MALLOC 0x00000604
314 #define TEE.PANIC.ID.TEE.MEMCOMPARE 0x00000605
315 #define TEE.PANIC.ID.TEE.MEMFILL 0x00000606
316 #define TEE.PANIC.ID.TEE.MEMMOVE 0x00000607
317 #define TEE.PANIC.ID.TEE.REALLOC 0x00000608
318 #define TEE.PANIC.ID.TEE.SETINSTANCEDATA 0x00000609
319 /* Generic Object */
320 #define TEE.PANIC.ID.TEE.CLOSEOBJECT 0x00000701
321 #define TEE.PANIC.ID.TEE.GETOBJECTBUFFERATTRIBUTE 0x00000702
322 /* deprecated */
323 #define TEE.PANIC.ID.TEE.GETOBJECTINFO 0x00000703
324 #define TEE.PANIC.ID.TEE.GETOBJECTVALUEATTRIBUTE 0x00000704
325 /* deprecated */
326 #define TEE.PANIC.ID.TEE.RESTRICTOBJECTUSAGE 0x00000705
327 #define TEE.PANIC.ID.TEE.GETOBJECTINFO1 0x00000706
328 #define TEE.PANIC.ID.TEE.RESTRICTOBJECTUSAGE1 0x00000707
329 /* Transient Object */
330 #define TEE.PANIC.ID.TEE.ALLOCATETRANSIENTOBJECT 0x00000801
331 /* deprecated */
332 #define TEE.PANIC.ID.TEE.COPYOBJECTATTRIBUTES 0x00000802
333 #define TEE.PANIC.ID.TEE.FREETRANSIENTOBJECT 0x00000803
334 #define TEE.PANIC.ID.TEE.GENERATEKEY 0x00000804
335 #define TEE.PANIC.ID.TEE.INITREFATTRIBUTE 0x00000805
336 #define TEE.PANIC.ID.TEE.INITVALUEATTRIBUTE 0x00000806
337 #define TEE.PANIC.ID.TEE.POPULATETRANSIENTOBJECT 0x00000807
338 #define TEE.PANIC.ID.TEE.RESETTRANSIENTOBJECT 0x00000808
339 #define TEE.PANIC.ID.TEE.COPYOBJECTATTRIBUTES1 0x00000809
340 /* Persistent Object */
341 /* deprecated */
342 #define TEE.PANIC.ID.TEE.CLOSEANDDELETERPERSISTENTOBJECT 0x00000901
343 #define TEE.PANIC.ID.TEE.CREATEPERSISTENTOBJECT 0x00000902
344 #define TEE.PANIC.ID.TEE.OPENPERSISTENTOBJECT 0x00000903
345 #define TEE.PANIC.ID.TEE.RENAMEPERSISTENTOBJECT 0x00000904
346 #define TEE.PANIC.ID.TEE.CLOSEANDDELETERPERSISTENTOBJECT1 0x00000905
347 /* Persistent Object Enumeration */
348 #define TEE.PANIC.ID.TEE.ALLOCATEPERSISTENTOBJECTENUMERATOR 0x00000A01
349 #define TEE.PANIC.ID.TEE.FREEPERSISTENTOBJECTENUMERATOR 0x00000A02
350 #define TEE.PANIC.ID.TEE.GETNEXTPERSISTENTOBJECT 0x00000A03
351 #define TEE.PANIC.ID.TEE.RESETPERSISTENTOBJECTENUMERATOR 0x00000A04
352 #define TEE.PANIC.ID.TEE.STARTPERSISTENTOBJECTENUMERATOR 0x00000A05
353 /* Data Stream Access */
354 #define TEE.PANIC.ID.TEE.READOBJECTDATA 0x00000B01
355 #define TEE.PANIC.ID.TEE.SEEKOBJECTDATA 0x00000B02
356 #define TEE.PANIC.ID.TEE.TRUNCATEOBJECTDATA 0x00000B03
357 #define TEE.PANIC.ID.TEE.WRITEOBJECTDATA 0x00000B04
358 /* Generic Operation */
359 #define TEE.PANIC.ID.TEE.ALLOCATEOPERATION 0x00000C01
360 #define TEE.PANIC.ID.TEE.COPYOPERATION 0x00000C02
361 #define TEE.PANIC.ID.TEE.FREEOPERATION 0x00000C03
362 #define TEE.PANIC.ID.TEE.GETOPERATIONINFO 0x00000C04
363 #define TEE.PANIC.ID.TEE.RESETOPERATION 0x00000C05
364 #define TEE.PANIC.ID.TEE.SETOPERATIONKEY 0x00000C06
365 #define TEE.PANIC.ID.TEE.SETOPERATIONKEY2 0x00000C07
366 #define TEE.PANIC.ID.TEE.GETOPERATIONINFOMULTIPLE 0x00000C08
367 /* Message Digest */
368 #define TEE.PANIC.ID.TEE.DIGESTDOFINAL 0x00000D01
369 #define TEE.PANIC.ID.TEE.DIGESTUPDATE 0x00000D02
370 /* Symmetric Cipher */
371 #define TEE.PANIC.ID.TEE.CIPHERDOFINAL 0x00000E01
372 #define TEE.PANIC.ID.TEE.CIPHERINIT 0x00000E02
373 #define TEE.PANIC.ID.TEE.CIPHERUPDATE 0x00000E03

```

```

374 /* MAC */
375 #define TEE_PANIC_ID_TEE_MACCOMPAREFINAL 0x00000F01
376 #define TEE_PANIC_ID_TEE_MACCOMPUTEFINAL 0x00000F02
377 #define TEE_PANIC_ID_TEE_MACINIT 0x00000F03
378 #define TEE_PANIC_ID_TEE_MACUPDATE 0x00000F04
379 /* Authenticated Encryption */
380 #define TEE_PANIC_ID_TEE_AEDECRYPTFINAL 0x00001001
381 #define TEE_PANIC_ID_TEE_AEENCRYPTFINAL 0x00001002
382 #define TEE_PANIC_ID_TEE_AEINIT 0x00001003
383 #define TEE_PANIC_ID_TEE_AEUPDATE 0x00001004
384 #define TEE_PANIC_ID_TEE_AEUPDATEAAD 0x00001005
385 /* Asymmetric */
386 #define TEE_PANIC_ID_TEE_ASYMMETRICDECRYPT 0x00001101
387 #define TEE_PANIC_ID_TEE_ASYMMETRICENCRYPT 0x00001102
388 #define TEE_PANIC_ID_TEE_ASYMMETRICSIGNDIGEST 0x00001103
389 #define TEE_PANIC_ID_TEE_ASYMMETRICVERIFYDIGEST 0x00001104
390 /* Key Derivation */
391 #define TEE_PANIC_ID_TEE_DERIVEKEY 0x00001201
392 /* Random Data Generation */
393 #define TEE_PANIC_ID_TEE_GENERATERANDOM 0x00001301
394 /* Time */
395 #define TEE_PANIC_ID_TEE_GETREETIME 0x00001401
396 #define TEE_PANIC_ID_TEE_GETSYSTEMTIME 0x00001402
397 #define TEE_PANIC_ID_TEE_GETTAPERSISTENTTIME 0x00001403
398 #define TEE_PANIC_ID_TEE_SETTAPERSISTENTTIME 0x00001404
399 #define TEE_PANIC_ID_TEE_WAIT 0x00001405
400 /* Memory Allocation and Size of Objects */
401 #define TEE_PANIC_ID_TEE_BIGINTFMMCONTEXTSIZEINU32 0x00001501
402 #define TEE_PANIC_ID_TEE_BIGINTFMMSIZEINU32 0x00001502
403 /* Initialization */
404 #define TEE_PANIC_ID_TEE_BIGINTINIT 0x00001601
405 #define TEE_PANIC_ID_TEE_BIGINTINITFMM 0x00001602
406 #define TEE_PANIC_ID_TEE_BIGINTINITFMMCONTEXT 0x00001603
407 /* Converter */
408 #define TEE_PANIC_ID_TEE_BIGINTCONVERTFROMOCTETSTRING 0x00001701
409 #define TEE_PANIC_ID_TEE_BIGINTCONVERTFROMS32 0x00001702
410 #define TEE_PANIC_ID_TEE_BIGINTCONVERTTOOCTETSTRING 0x00001703
411 #define TEE_PANIC_ID_TEE_BIGINTCONVERTTOS32 0x00001704
412 /* Logical Operation */
413 #define TEE_PANIC_ID_TEE_BIGINTCMP 0x00001801
414 #define TEE_PANIC_ID_TEE_BIGINTCMPS32 0x00001802
415 #define TEE_PANIC_ID_TEE_BIGINTGETBIT 0x00001803
416 #define TEE_PANIC_ID_TEE_BIGINTGETBITCOUNT 0x00001804
417 #define TEE_PANIC_ID_TEE_BIGINTSHIFTRIGHT 0x00001805
418 /* Basic Arithmetic */
419 #define TEE_PANIC_ID_TEE_BIGINTADD 0x00001901
420 #define TEE_PANIC_ID_TEE_BIGINTDIV 0x00001902
421 #define TEE_PANIC_ID_TEE_BIGINTMUL 0x00001903
422 #define TEE_PANIC_ID_TEE_BIGINTNEG 0x00001904
423 #define TEE_PANIC_ID_TEE_BIGINTSQUARE 0x00001905
424 #define TEE_PANIC_ID_TEE_BIGINTSUB 0x00001906
425 /* Modular Arithmetic */
426 #define TEE_PANIC_ID_TEE_BIGINTADDMOD 0x00001A01
427 #define TEE_PANIC_ID_TEE_BIGINTINVMOD 0x00001A02
428 #define TEE_PANIC_ID_TEE_BIGINTMOD 0x00001A03
429 #define TEE_PANIC_ID_TEE_BIGINTMULMOD 0x00001A04
430 #define TEE_PANIC_ID_TEE_BIGINTSQUAREMOD 0x00001A05
431 #define TEE_PANIC_ID_TEE_BIGINTSUBMOD 0x00001A06
432 /* Other Arithmetic */
433 #define TEE_PANIC_ID_TEE_BIGINTCOMPUTEEXTENDEDGCD 0x00001B01
434 #define TEE_PANIC_ID_TEE_BIGINTISPROBABLEPRIME 0x00001B02
435 #define TEE_PANIC_ID_TEE_BIGINTRELATIVEPRIME 0x00001B03
436 /* Fast Modular Multiplication */
437 #define TEE_PANIC_ID_TEE_BIGINTCOMPUTEFORM 0x00001C01
438 #define TEE_PANIC_ID_TEE_BIGINTCONVERTFROMFMM 0x00001C02
439 #define TEE_PANIC_ID_TEE_BIGINTCONVERTTOFMM 0x00001C03
440
441 /*
442 * The macro TEE_PARAM_TYPES can be used to construct a value that you can
443 * compare against an incoming paramTypes to check the type of all the
444 * parameters in one comparison, like in the following example:
445 * if (paramTypes != TEE_PARAM_TYPES(TEE_PARAM_TYPE_MEMREF_INPUT,
446 *                                     TEE_PARAM_TYPE_MEMREF_OUTPUT,
447 *                                     TEE_PARAM_TYPE_NONE, TEE_PARAM_TYPE_NONE)) {
448 *     return TEE_ERROR_BAD_PARAMETERS;
449 * }
450 */
451 #define TEE_PARAM_TYPES(t0,t1,t2,t3) \
452 ((t0) | ((t1) << 4) | ((t2) << 8) | ((t3) << 12))
453
454 /*
455 * The macro TEE_PARAM_TYPE_GET can be used to extract the type of a given
456 * parameter from paramTypes if you need more fine-grained type checking.
457 */
458 #define TEE_PARAM_TYPE_GET(t, i) (((uint32_t)t) >> ((i)*4)) & 0xF
459
460 /*

```


```

461  * The macro TEE_PARAM_TYPE_SET can be used to load the type of a given
462  * parameter from paramTypes without specifying all types (TEE_PARAM_TYPES)
463  */
464 #define TEE_PARAM_TYPE_SET(t, i) (((uint32_t)(t) & 0xF) << ((i)*4))
465
466 /* Not specified in the standard */
467 #define TEE_NUM_PARAMS 4
468
469 /* TEE Arithmetical APIs */
470
471 #define TEE_BigIntSizeInU32(n) (((n)+31)/32)+2
472
473 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
474 #endif /* TEE_API_DEFINES_H */

```

## 10.11 ta-ref/api/include/tee\_api\_defines\_extensions.h File Reference

This graph shows which files directly or indirectly include this file:

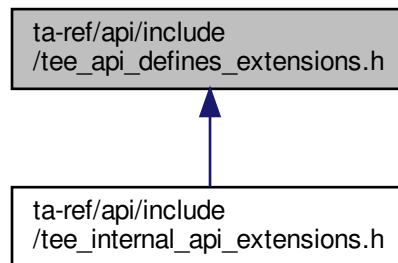

## 10.12 tee\_api\_defines\_extensions.h

[Go to the documentation of this file.](#)

```

1  /*
2  * Copyright (c) 2014, Linaro Limited
3  * All rights reserved.
4  *
5  * Redistribution and use in source and binary forms, with or without
6  * modification, are permitted provided that the following conditions are met:
7  *
8  * 1. Redistributions of source code must retain the above copyright notice,
9  * this list of conditions and the following disclaimer.
10 *
11 * 2. Redistributions in binary form must reproduce the above copyright notice,
12 * this list of conditions and the following disclaimer in the documentation
13 * and/or other materials provided with the distribution.
14 *
15 * THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
16 * AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
17 * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
18 * ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE
19 * LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
20 * CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF
21 * SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS
22 * INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
23 * CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
24 * ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
25 * POSSIBILITY OF SUCH DAMAGE.
26 */
27
28 #ifndef TEE_API_DEFINES_EXTENSIONS_H
29 #define TEE_API_DEFINES_EXTENSIONS_H
30 #ifndef DOXYGEN_SHOULD_SKIP_THIS

```




```

31
32 /*
33 * HMAC-based Extract-and-Expand Key Derivation Function (HKDF)
34 */
35
36 #define TEE_ALG_HKDF_MD5_DERIVE_KEY 0x800010C0
37 #define TEE_ALG_HKDF_SHA1_DERIVE_KEY 0x800020C0
38 #define TEE_ALG_HKDF_SHA224_DERIVE_KEY 0x800030C0
39 #define TEE_ALG_HKDF_SHA256_DERIVE_KEY 0x800040C0
40 #define TEE_ALG_HKDF_SHA384_DERIVE_KEY 0x800050C0
41 #define TEE_ALG_HKDF_SHA512_DERIVE_KEY 0x800060C0
42
43 #define TEE_TYPE_HKDF_IKM 0xA10000C0
44
45 #define TEE_ATTR_HKDF_IKM 0xC00001C0
46 #define TEE_ATTR_HKDF_SALT 0xD00002C0
47 #define TEE_ATTR_HKDF_INFO 0xD00003C0
48 #define TEE_ATTR_HKDF_OKM_LENGTH 0xF00004C0
49
50 /*
51 * Concatenation Key Derivation Function (Concat KDF)
52 * NIST SP 800-56A section 5.8.1
53 */
54
55 #define TEE_ALG_CONCAT_KDF_SHA1_DERIVE_KEY 0x800020C1
56 #define TEE_ALG_CONCAT_KDF_SHA224_DERIVE_KEY 0x800030C1
57 #define TEE_ALG_CONCAT_KDF_SHA256_DERIVE_KEY 0x800040C1
58 #define TEE_ALG_CONCAT_KDF_SHA384_DERIVE_KEY 0x800050C1
59 #define TEE_ALG_CONCAT_KDF_SHA512_DERIVE_KEY 0x800060C1
60
61 #define TEE_TYPE_CONCAT_KDF_Z 0xA10000C1
62
63 #define TEE_ATTR_CONCAT_KDF_Z 0xC00001C1
64 #define TEE_ATTR_CONCAT_KDF_OTHER_INFO 0xD00002C1
65 #define TEE_ATTR_CONCAT_KDF_DKM_LENGTH 0xF00003C1
66
67 /*
68 * PKCS #5 v2.0 Key Derivation Function 2 (PBKDF2)
69 * RFC 2898 section 5.2
70 * https://www.ietf.org/rfc/rfc2898.txt
71 */
72
73 #define TEE_ALG_PBKDF2_HMAC_SHA1_DERIVE_KEY 0x800020C2
74
75 #define TEE_TYPE_PBKDF2_PASSWORD 0xA10000C2
76
77 #define TEE_ATTR_PBKDF2_PASSWORD 0xC00001C2
78 #define TEE_ATTR_PBKDF2_SALT 0xD00002C2
79 #define TEE_ATTR_PBKDF2_ITERATION_COUNT 0xF00003C2
80 #define TEE_ATTR_PBKDF2_DKM_LENGTH 0xF00004C2
81
82 /*
83 * Implementation-specific object storage constants
84 */
85
86 /* Storage is provided by the Rich Execution Environment (REE) */
87 #define TEE_STORAGE_PRIVATE_REE 0x80000000
88 /* Storage is the Replay Protected Memory Block partition of an eMMC device */
89 #define TEE_STORAGE_PRIVATE_RPMB 0x80000100
90 /* Was TEE_STORAGE_PRIVATE_SQL, which isn't supported any longer */
91 #define TEE_STORAGE_PRIVATE_SQL_RESERVED 0x80000200
92
93 /*
94 * Extension of "Memory Access Rights Constants"
95 * #define TEE_MEMORY_ACCESS_READ 0x00000001
96 * #define TEE_MEMORY_ACCESS_WRITE 0x00000002
97 * #define TEE_MEMORY_ACCESS_ANY_OWNER 0x00000004
98 *
99 * TEE_MEMORY_ACCESS_NONSECURE : if set TEE_CheckMemoryAccessRights()
100 * successfully returns only if target vmem range is mapped non-secure.
101 *
102 * TEE_MEMORY_ACCESS_SECURE : if set TEE_CheckMemoryAccessRights()
103 * successfully returns only if target vmem range is mapped secure.
104
105 */
106 #define TEE_MEMORY_ACCESS_NONSECURE 0x10000000
107 #define TEE_MEMORY_ACCESS_SECURE 0x20000000
108
109 #endif /* DOXYGEN_SHOULD_SKIP_THIS */
110 #endif /* TEE_API_DEFINES_EXTENSIONS_H */


```

## 10.13 ta-ref/api/include/tee\_api\_types.h File Reference

```
#include <compiler.h>
#include <stdint.h>
#include <stdbool.h>
#include <stddef.h>
#include <tee_api_defines.h>
#include "tee_api_tee_types.h"
Include dependency graph for tee_api_types.h:
```



This graph shows which files directly or indirectly include this file:

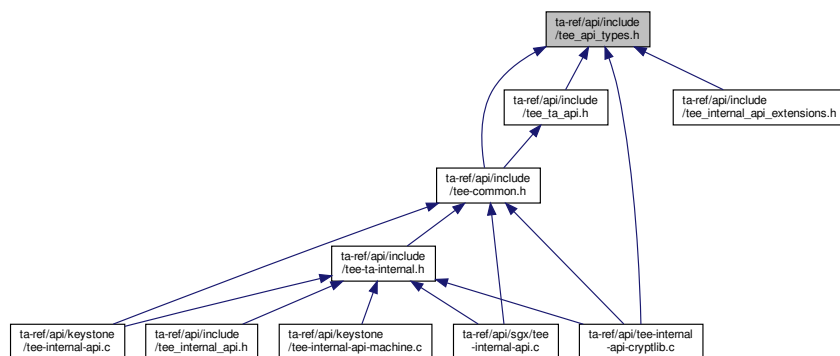

### Classes

- struct [TEE\\_UUID](#)
- struct [TEE\\_Identity](#)
- union [TEE\\_Param](#)
- struct [TEE\\_ObjectInfo](#)
- struct [TEE\\_Attribute](#)
- struct [TEE\\_OperationInfo](#)
- struct [TEE\\_OperationInfoKey](#)
- struct [TEE\\_OperationInfoMultiple](#)
- struct [TEE\\_Time](#)
- struct [TEE\\_SEReaderProperties](#)
- struct [TEE\\_SEAID](#)
- struct [pollfd](#)
- struct [addrinfo](#)

## Typedefs

- typedef uint32\_t [TEE\\_Result](#)
- typedef struct \_\_TEE\_TASessionHandle \* [TEE\\_TASessionHandle](#)
- typedef struct \_\_TEE\_PropSetHandle \* [TEE\\_PropSetHandle](#)
- typedef struct \_\_TEE\_ObjectHandle \* [TEE\\_ObjectHandle](#)
- typedef struct \_\_TEE\_ObjectEnumHandle \* [TEE\\_ObjectEnumHandle](#)
- typedef struct \_\_TEE\_OperationHandle \* [TEE\\_OperationHandle](#)
- typedef uint32\_t [TEE\\_ObjectType](#)
- typedef uint32\_t [TEE\\_BigInt](#)
- typedef uint32\_t [TEE\\_BigIntFMM](#)
- typedef uint32\_t TEE\_BigIntFMMContext [\\_\\_aligned](#)([\\_\\_alignof\\_\\_](#)(void \*))
- typedef struct \_\_TEE\_SEServiceHandle \* [TEE\\_SEServiceHandle](#)
- typedef struct \_\_TEE\_SEReaderHandle \* [TEE\\_SEReaderHandle](#)
- typedef struct \_\_TEE\_SESessionHandle \* [TEE\\_SESessionHandle](#)
- typedef struct \_\_TEE\_SEChannelHandle \* [TEE\\_SEChannelHandle](#)
- typedef uint32\_t [TEE\\_ErrorOrigin](#)
- typedef void \* [TEE\\_Session](#)
- typedef unsigned long int [nfds\\_t](#)
- typedef unsigned int [socklen\\_t](#)

## Enumerations

- enum [TEE\\_Whence](#) { [TEE\\_DATA\\_SEEK\\_SET](#) = 0 , [TEE\\_DATA\\_SEEK\\_CUR](#) = 1 , [TEE\\_DATA\\_SEEK\\_END](#) = 2 }
- enum [TEE\\_OperationMode](#) {  
    [TEE\\_MODE\\_ENCRYPT](#) = 0 , [TEE\\_MODE\\_DECRYPT](#) = 1 , [TEE\\_MODE\\_SIGN](#) = 2 , [TEE\\_MODE\\_VERIFY](#) = 3 ,  
    [TEE\\_MODE\\_MAC](#) = 4 , [TEE\\_MODE\\_DIGEST](#) = 5 , [TEE\\_MODE\\_DERIVE](#) = 6 }

### 10.13.1 Typedef Documentation

**10.13.1.1 [\\_\\_aligned](#)**    typedef uint32\_t TEE\_BigIntFMMContext [\\_\\_aligned](#)([\\_\\_alignof\\_\\_](#)(void \*))

**10.13.1.2 [nfds\\_t](#)**    typedef unsigned long int [nfds\\_t](#)

**10.13.1.3 [socklen\\_t](#)**    typedef unsigned int [socklen\\_t](#)

**10.13.1.4 [TEE\\_BigInt](#)**    typedef uint32\_t [TEE\\_BigInt](#)

**10.13.1.5 TEE\_BigIntFMM** typedef uint32\_t [TEE\\_BigIntFMM](#)

**10.13.1.6 TEE\_ErrorOrigin** typedef uint32\_t [TEE\\_ErrorOrigin](#)

**10.13.1.7 TEE\_ObjectEnumHandle** typedef struct \_\_TEE\_ObjectEnumHandle\* [TEE\\_ObjectEnumHandle](#)

**10.13.1.8 TEE\_ObjectHandle** typedef struct \_\_TEE\_ObjectHandle\* [TEE\\_ObjectHandle](#)

**10.13.1.9 TEE\_ObjectType** typedef uint32\_t [TEE\\_ObjectType](#)

**10.13.1.10 TEE\_OperationHandle** typedef struct \_\_TEE\_OperationHandle\* [TEE\\_OperationHandle](#)

**10.13.1.11 TEE\_PropSetHandle** typedef struct \_\_TEE\_PropSetHandle\* [TEE\\_PropSetHandle](#)

**10.13.1.12 TEE\_Result** typedef uint32\_t [TEE\\_Result](#)

**10.13.1.13 TEE\_SEChannelHandle** typedef struct \_\_TEE\_SEChannelHandle\* [TEE\\_SEChannelHandle](#)

**10.13.1.14 TEE\_SEReaderHandle** typedef struct \_\_TEE\_SEReaderHandle\* [TEE\\_SEReaderHandle](#)

**10.13.1.15 TEE\_SEServiceHandle** typedef struct \_\_TEE\_SEServiceHandle\* [TEE\\_SEServiceHandle](#)

**10.13.1.16 TEE\_SESessionHandle** typedef struct \_\_TEE\_SESessionHandle\* [TEE\\_SESessionHandle](#)

**10.13.1.17 TEE\_Session** typedef void\* [TEE\\_Session](#)

**10.13.1.18 TEE\_TASessionHandle** typedef struct \_\_TEE\_TASessionHandle\* [TEE\\_TASessionHandle](#)

## 10.13.2 Enumeration Type Documentation

**10.13.2.1 TEE\_OperationMode** enum [TEE\\_OperationMode](#)

Enumerator

TEE_MODE_ENCRYPT	
TEE_MODE_DECRYPT	
TEE_MODE_SIGN	
TEE_MODE_VERIFY	
TEE_MODE_MAC	
TEE_MODE_DIGEST	
TEE_MODE_DERIVE	

**10.13.2.2 TEE\_Whence** enum [TEE\\_Whence](#)

Enumerator

TEE_DATA_SEEK_SET	
TEE_DATA_SEEK_CUR	
TEE_DATA_SEEK_END	

## 10.14 tee\_api\_types.h

[Go to the documentation of this file.](#)

```
1 /*
2  * Copyright (c) 2014, STMicroelectronics International N.V.
3  * All rights reserved.
4  *
5  * Redistribution and use in source and binary forms, with or without
6  * modification, are permitted provided that the following conditions are met:
7  *
8  * 1. Redistributions of source code must retain the above copyright notice,
9  * this list of conditions and the following disclaimer.
10 *
```

```

11  * 2. Redistributions in binary form must reproduce the above copyright notice,
12  * this list of conditions and the following disclaimer in the documentation
13  * and/or other materials provided with the distribution.
14  *
15  * THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
16  * AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
17  * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
18  * ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE
19  * LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
20  * CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF
21  * SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS
22  * INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
23  * CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
24  * ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
25  * POSSIBILITY OF SUCH DAMAGE.
26  */
27
28 /* Based on GP TEE Internal API Specification Version 0.11 */
29 #ifndef TEE_API_TYPES_H
30 #define TEE_API_TYPES_H
31
32 #include <compiler.h>
33 #include <stdint.h>
34 #include <stdbool.h>
35 #include <stddef.h>
36 #include <tee_api.defines.h>
37 #include "tee_api.tee.types.h"
38
39 /*
40  * Common Definitions
41  */
42
43 typedef uint32_t TEE_Result;
44
45 typedef struct {
46     uint32_t timeLow;
47     uint16_t timeMid;
48     uint16_t timeHiAndVersion;
49     uint8_t clockSeqAndNode[8];
50 } TEE_UUID;
51
52 /*
53  * The TEE.Identity structure defines the full identity of a Client:
54  * - login is one of the TEE.LOGIN_XXX constants
55  * - uuid contains the client UUID or Nil if not applicable
56  */
57 typedef struct {
58     uint32_t login;
59     TEE_UUID uuid;
60 } TEE_Identity;
61
62 /*
63  * This union describes one parameter passed by the Trusted Core Framework
64  * to the entry points TA.OpenSessionEntryPoint or
65  * TA.InvokeCommandEntryPoint or by the TA to the functions
66  * TEE.OpenTASession or TEE.InvokeTACommand.
67  *
68  * Which of the field value or memref to select is determined by the
69  * parameter type specified in the argument paramTypes passed to the entry
70  * point.
71  */
72 typedef union {
73     struct {
74         void *buffer;
75         uint32_t size;
76     } memref;
77     struct {
78         uint32_t a;
79         uint32_t b;
80     } value;
81 } TEE_Param;
82
83 /*
84  * The type of opaque handles on TA Session. These handles are returned by
85  * the function TEE.OpenTASession.
86  */
87 typedef struct __TEE_TASessionHandle *TEE_TASessionHandle;
88
89 /*
90  * The type of opaque handles on property sets or enumerators. These
91  * handles are either one of the pseudo handles TEE_PROPSET_XXX or are
92  * returned by the function TEE.AllocatePropertyEnumerator.
93  */
94 typedef struct __TEE_PropSetHandle *TEE_PropSetHandle;
95
96 typedef struct __TEE_ObjectHandle *TEE_ObjectHandle;
97 typedef struct __TEE_ObjectEnumHandle *TEE_ObjectEnumHandle;

```

```

98 typedef struct __TEEOperationHandle *TEEOperationHandle;
99
100 /*
101  * Storage Definitions
102  */
103
104 typedef uint32_t TEEObjectType;
105
106 typedef struct {
107     uint32_t objectType;
108     __extension__ union {
109         uint32_t keySize; /* used in 1.1 spec */
110         uint32_t objectSize; /* used in 1.1.1 spec */
111     };
112     __extension__ union {
113         uint32_t maxKeySize; /* used in 1.1 spec */
114         uint32_t maxObjectSize; /* used in 1.1.1 spec */
115     };
116     uint32_t objectUsage;
117     uint32_t dataSize;
118     uint32_t dataPosition;
119     uint32_t handleFlags;
120 } TEEObjectInfo;
121
122 typedef enum {
123     TEE_DATA_SEEK_SET = 0,
124     TEE_DATA_SEEK_CUR = 1,
125     TEE_DATA_SEEK_END = 2
126 } TEEWhence;
127
128 typedef struct {
129     uint32_t attributeID;
130     union {
131         struct {
132             void *buffer;
133             uint32_t length;
134         } ref;
135         struct {
136             uint32_t a, b;
137         } value;
138     } content;
139 } TEEAttribute;
140
141 #ifndef DOXYGEN_SHOULD_SKIP_THIS
142 #define DMREQ_FINISH 0
143 #define DMREQ_WRITE 1
144 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
145
146 /* Cryptographic Operations API */
147
148 typedef enum {
149     TEE_MODE_ENCRYPT = 0,
150     TEE_MODE_DECRYPT = 1,
151     TEE_MODE_SIGN = 2,
152     TEE_MODE_VERIFY = 3,
153     TEE_MODE_MAC = 4,
154     TEE_MODE_DIGEST = 5,
155     TEE_MODE_DERIVE = 6
156 } TEEOperationMode;
157
158 typedef struct {
159     uint32_t algorithm;
160     uint32_t operationClass;
161     uint32_t mode;
162     uint32_t digestLength;
163     uint32_t maxKeySize;
164     uint32_t keySize;
165     uint32_t requiredKeyUsage;
166     uint32_t handleState;
167 } TEEOperationInfo;
168
169 typedef struct {
170     uint32_t keySize;
171     uint32_t requiredKeyUsage;
172 } TEEOperationInfoKey;
173
174 typedef struct {
175     uint32_t algorithm;
176     uint32_t operationClass;
177     uint32_t mode;
178     uint32_t digestLength;
179     uint32_t maxKeySize;
180     uint32_t handleState;
181     uint32_t operationState;
182     uint32_t numberOfKeys;
183     TEEOperationInfoKey keyInformation[];
184 } TEEOperationInfoMultiple;

```

```

185
186 /* Time & Date API */
187
188 typedef struct {
189     uint32_t seconds;
190     uint32_t millis;
191 } TEE_Time;
192
193 /* TEE Arithmetical APIs */
194
195 typedef uint32_t TEE_BigInt;
196
197 typedef uint32_t TEE_BigIntFMM;
198
199 typedef uint32_t TEE_BigIntFMMContext __aligned(__alignof__(void *));
200
201 /* Tee Secure Element APIs */
202
203 typedef struct __TEE_SEServiceHandle *TEE_SEServiceHandle;
204 typedef struct __TEE_SEReaderHandle *TEE_SEReaderHandle;
205 typedef struct __TEE_SESessionHandle *TEE_SESessionHandle;
206 typedef struct __TEE_SEChannelHandle *TEE_SEChannelHandle;
207
208 typedef struct {
209     bool sePresent;
210     bool teeOnly;
211     bool selectResponseEnable;
212 } TEE_SEReaderProperties;
213
214 typedef struct {
215     uint8_t *buffer;
216     size_t bufferLen;
217 } TEE_SEAID;
218
219 /* Other definitions */
220 typedef uint32_t TEE_ErrorOrigin;
221 typedef void *TEE_Session;
222
223 #ifndef DOXYGEN_SHOULD_SKIP_THIS
224 #define TEE_MEM_INPUT 0x00000001
225 #define TEE_MEM_OUTPUT 0x00000002
226
227 #define TEE_MEMREF_0_USED 0x00000001
228 #define TEE_MEMREF_1_USED 0x00000002
229 #define TEE_MEMREF_2_USED 0x00000004
230 #define TEE_MEMREF_3_USED 0x00000008
231
232 #define TEE_SE_READER_NAME_MAX 20
233 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
234
235 typedef unsigned long int nfds_t;
236
237 struct pollfd
238 {
239     int fd; /* File descriptor to poll. */
240     short int events; /* Types of events poller cares about. */
241     short int revents; /* Types of events that actually occurred. */
242 };
243
244 typedef unsigned int socklen_t;
245
246 struct addrinfo {
247     int ai_flags;
248     int ai_family;
249     int ai_socktype;
250     int ai_protocol;
251     socklen_t ai_addrlen;
252     struct sockaddr *ai_addr;
253     char *ai_canonname;
254     struct addrinfo *ai_next;
255 };
256
257
258
259 #endif /* TEE_API_TYPES_H */

```

## 10.15 ta-ref/api/include/tee\_client\_api.h File Reference

```


#include <stdint.h>
#include <stddef.h>
#include <stdbool.h>

```




```
#include <limits.h>
```

Include dependency graph for tee\_client\_api.h:

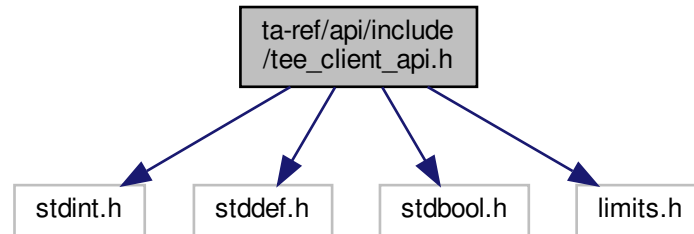

This graph shows which files directly or indirectly include this file:

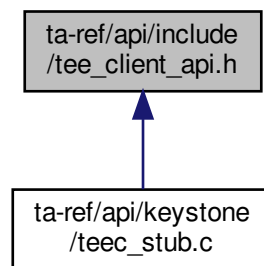

## Classes

- struct [TEEC\\_Context](#)
- struct [TEEC\\_UUID](#)
- struct [TEEC\\_SharedMemory](#)
- struct [TEEC\\_TempMemoryReference](#)
- struct [TEEC\\_RegisteredMemoryReference](#)
- struct [TEEC\\_Value](#)
- union [TEEC\\_Parameter](#)
- struct [TEEC\\_Session](#)
- struct [TEEC\\_Operation](#)

## Typedefs

- typedef uint32\_t [TEEC\\_Result](#)

## Functions

- [TEEC\\_Result](#) [TEEC\\_InitializeContext](#) (const char \*name, [TEEC\\_Context](#) \*context)
- void [TEEC\\_FinalizeContext](#) ([TEEC\\_Context](#) \*context)
- [TEEC\\_Result](#) [TEEC\\_OpenSession](#) ([TEEC\\_Context](#) \*context, [TEEC\\_Session](#) \*session, const [TEEC\\_UUID](#) \*destination, uint32\_t connectionMethod, const void \*connectionData, [TEEC\\_Operation](#) \*operation, uint32\_t \*returnOrigin)
- void [TEEC\\_CloseSession](#) ([TEEC\\_Session](#) \*session)
- [TEEC\\_Result](#) [TEEC\\_InvokeCommand](#) ([TEEC\\_Session](#) \*session, uint32\_t commandID, [TEEC\\_Operation](#) \*operation, uint32\_t \*returnOrigin)
- [TEEC\\_Result](#) [TEEC\\_RegisterSharedMemory](#) ([TEEC\\_Context](#) \*context, [TEEC\\_SharedMemory](#) \*sharedMem)
- [TEEC\\_Result](#) [TEEC\\_AllocateSharedMemory](#) ([TEEC\\_Context](#) \*context, [TEEC\\_SharedMemory](#) \*sharedMem)
- void [TEEC\\_ReleaseSharedMemory](#) ([TEEC\\_SharedMemory](#) \*sharedMemory)
- void [TEEC\\_RequestCancellation](#) ([TEEC\\_Operation](#) \*operation)

### 10.15.1 Typedef Documentation

**10.15.1.1 TEEC\_Result** typedef uint32\_t [TEEC\\_Result](#)

### 10.15.2 Function Documentation

**10.15.2.1 TEEC\_AllocateSharedMemory()** [TEEC\\_Result](#) [TEEC\\_AllocateSharedMemory](#) (  
[TEEC\\_Context](#) \* context,  
[TEEC\\_SharedMemory](#) \* sharedMem )

[TEEC\\_AllocateSharedMemory\(\)](#) - Allocate shared memory for TEE.

#### Parameters

<i>context</i>	The initialized TEE context structure in which scope to open the session.
<i>sharedMem</i>	Pointer to the allocated shared memory.

#### Returns

[TEEC\\_SUCCESS](#) The registration was successful.  
[TEEC\\_ERROR\\_OUT\\_OF\\_MEMORY](#) Memory exhaustion.  
[TEEC\\_Result](#) Something failed.

**10.15.2.2 TEEC\_CloseSession()** void [TEEC\\_CloseSession](#) (  
[TEEC\\_Session](#) \* session )

[TEEC\\_CloseSession\(\)](#) - Closes the session which has been opened with the specific trusted application.

**Parameters**

<i>session</i>	The opened session to close.
----------------	------------------------------

**10.15.2.3 TEEC.FinalizeContext()** `void TEEC.FinalizeContext (`  
`TEEC_Context * context )`

[TEEC.FinalizeContext\(\)](#) - Destroys a context holding connection information on the specific TEE.

This function destroys an initialized TEE context, closing the connection between the client application and the TEE. This function must only be called when all sessions related to this TEE context have been closed and all shared memory blocks have been released.

**Parameters**

<i>context</i>	The context to be destroyed.
----------------	------------------------------

[TEEC.FinalizeContext\(\)](#) - Destroys a context holding connection information on the specific TEE.

This function finalizes an initialized TEE context, closing the connection between the client application and the TEE. This function must only be called when all sessions related to this TEE context have been closed and all shared memory blocks have been released.

**Parameters**

<i>context</i>	The context to be finalized.
----------------	------------------------------

**10.15.2.4 TEEC.InitializeContext()** `TEEC_Result TEEC.InitializeContext (`  
`const char * name,`  
`TEEC_Context * context )`

[TEEC.InitializeContext\(\)](#) - Initializes a context holding connection information on the specific TEE, designated by the name string.

**Parameters**

<i>name</i>	A zero-terminated string identifying the TEE to connect to. If name is set to NULL, the default TEE is connected to. NULL is the only supported value in this version of the API implementation.
<i>context</i>	The context structure which is to be initialized.

## Returns

TEEC.SUCCESS The initialization was successful.

TEEC.Result Something failed.

### 10.15.2.5 TEEC\_InvokeCommand() `TEEC_Result` TEEC\_InvokeCommand (

```
TEEC_Session * session,
uint32_t commandID,
TEEC_Operation * operation,
uint32_t * returnOrigin )
```

`TEEC_InvokeCommand()` - Executes a command in the specified trusted application.

## Parameters

<i>session</i>	A handle to an open connection to the trusted application.
<i>commandID</i>	Identifier of the command in the trusted application to invoke.
<i>operation</i>	An operation structure to use in the invoke command. May be set to NULL to signify no operation structure needed.
<i>returnOrigin</i>	A parameter which will hold the error origin if this function returns any value other than TEEC.SUCCESS.

## Returns

TEEC.SUCCESS OpenSession successfully opened a new session.

TEEC.Result Something failed.

### 10.15.2.6 TEEC\_OpenSession() `TEEC_Result` TEEC\_OpenSession (

```
TEEC_Context * context,
TEEC_Session * session,
const TEEC_UUID * destination,
uint32_t connectionMethod,
const void * connectionData,
TEEC_Operation * operation,
uint32_t * returnOrigin )
```

`TEEC_OpenSession()` - Opens a new session with the specified trusted application.

## Parameters

<i>context</i>	The initialized TEE context structure in which scope to open the session.
<i>session</i>	The session to initialize.
<i>destination</i>	A structure identifying the trusted application with which to open a session.
<i>connectionMethod</i>	The connection method to use.
<i>connectionData</i>	Any data necessary to connect with the chosen connection method. Not supported, should be set to NULL.
Paramter list continued on next page	

<i>operation</i>	An operation structure to use in the session. May be set to NULL to signify no operation structure needed.
<i>returnOrigin</i>	A parameter which will hold the error origin if this function returns any value other than TEEC_SUCCESS.

#### Returns

TEEC\_SUCCESS OpenSession successfully opened a new session.

TEEC\_Result Something failed.

**10.15.2.7 TEEC\_RegisterSharedMemory()** `TEEC_Result TEEC_RegisterSharedMemory (`  
`TEEC_Context * context,`  
`TEEC_SharedMemory * sharedMem )`

**TEEC\_RegisterSharedMemory()** - Register a block of existing memory as a shared block within the scope of the specified context.

#### Parameters

<i>context</i>	The initialized TEE context structure in which scope to open the session.
<i>sharedMem</i>	pointer to the shared memory structure to register.

#### Returns

TEEC\_SUCCESS The registration was successful.

TEEC\_ERROR\_OUT\_OF\_MEMORY Memory exhaustion.

TEEC\_Result Something failed.

**10.15.2.8 TEEC\_ReleaseSharedMemory()** `void TEEC_ReleaseSharedMemory (`  
`TEEC_SharedMemory * sharedMemory )`

**TEEC\_ReleaseSharedMemory()** - Free or deregister the shared memory.

#### Parameters

<i>sharedMem</i>	Pointer to the shared memory to be freed.
------------------	-------------------------------------------

**10.15.2.9 TEEC.RequestCancellation()** void TEEC.RequestCancellation (  
     TEEC.Operation \* operation )

[TEEC.RequestCancellation\(\)](#) - Request the cancellation of a pending open session or command invocation.

#### Parameters

<i>operation</i>	Pointer to an operation previously passed to open session or invoke.
------------------	----------------------------------------------------------------------

## 10.16 tee\_client.api.h

[Go to the documentation of this file.](#)

```

1 /*
2  * Copyright (c) 2014, STMicroelectronics International N.V.
3  * All rights reserved.
4  * Copyright (c) 2015, Linaro Limited
5  * All rights reserved.
6  *
7  * Redistribution and use in source and binary forms, with or without
8  * modification, are permitted provided that the following conditions are met:
9  *
10 * 1. Redistributions of source code must retain the above copyright notice,
11 * this list of conditions and the following disclaimer.
12 *
13 * 2. Redistributions in binary form must reproduce the above copyright notice,
14 * this list of conditions and the following disclaimer in the documentation
15 * and/or other materials provided with the distribution.
16 *
17 * THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
18 * AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
19 * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
20 * ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE
21 * LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
22 * CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF
23 * SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS
24 * INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
25 * CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
26 * ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
27 * POSSIBILITY OF SUCH DAMAGE.
28 */
29 #ifndef TEE_CLIENT_API_H
30 #define TEE_CLIENT_API_H
31
32 #ifdef __cplusplus
33 extern "C" {
34 #endif
35
36 #include <stdint.h>
37 #include <stddef.h>
38 #include <stdbool.h>
39 #include <limits.h>
40
41 #ifndef DOXYGEN_SHOULD_SKIP_THIS
42 /*
43  * Defines the number of available memory references in an open session or
44  * invoke command operation payload.
45  */
46 #define TEEC_CONFIG_PAYLOAD_REF_COUNT 4
47
48 #define TEEC_CONFIG_SHARED_MEM_MAX_SIZE ULONG_MAX
49
50 #define TEEC_NONE 0x00000000
51 #define TEEC_VALUE_INPUT 0x00000001
52 #define TEEC_VALUE_OUTPUT 0x00000002
53 #define TEEC_VALUE_INOUT 0x00000003
54 #define TEEC_MEMREF_TEMP_INPUT 0x00000005
55 #define TEEC_MEMREF_TEMP_OUTPUT 0x00000006
56 #define TEEC_MEMREF_TEMP_INOUT 0x00000007
57 #define TEEC_MEMREF_WHOLE 0x0000000C
58 #define TEEC_MEMREF_PARTIAL_INPUT 0x0000000D
59 #define TEEC_MEMREF_PARTIAL_OUTPUT 0x0000000E
60 #define TEEC_MEMREF_PARTIAL_INOUT 0x0000000F
61
62 #define TEEC_MEM_INPUT 0x00000001
63 #define TEEC_MEM_OUTPUT 0x00000002
64
65 #endif
66
67 #endif

```

```

135
168 #define TEEC_SUCCESS                0x00000000
169 #define TEEC_ERROR_GENERIC            0xFFFF0000
170 #define TEEC_ERROR_ACCESS_DENIED     0xFFFF0001
171 #define TEEC_ERROR_CANCEL             0xFFFF0002
172 #define TEEC_ERROR_ACCESS_CONFLICT   0xFFFF0003
173 #define TEEC_ERROR_EXCESS_DATA       0xFFFF0004
174 #define TEEC_ERROR_BAD_FORMAT        0xFFFF0005
175 #define TEEC_ERROR_BAD_PARAMETERS    0xFFFF0006
176 #define TEEC_ERROR_BAD_STATE         0xFFFF0007
177 #define TEEC_ERROR_ITEM_NOT_FOUND    0xFFFF0008
178 #define TEEC_ERROR_NOT_IMPLEMENTED   0xFFFF0009
179 #define TEEC_ERROR_NOT_SUPPORTED     0xFFFF000A
180 #define TEEC_ERROR_NO_DATA           0xFFFF000B
181 #define TEEC_ERROR_OUT_OF_MEMORY     0xFFFF000C
182 #define TEEC_ERROR_BUSY              0xFFFF000D
183 #define TEEC_ERROR_COMMUNICATION     0xFFFF000E
184 #define TEEC_ERROR_SECURITY          0xFFFF000F
185 #define TEEC_ERROR_SHORT_BUFFER      0xFFFF0010
186 #define TEEC_ERROR_EXTERNAL_CANCEL   0xFFFF0011
187 #define TEEC_ERROR_TARGET_DEAD       0xFFFF3024
188
202 #define TEEC_ORIGIN_API              0x00000001
203 #define TEEC_ORIGIN_COMMS            0x00000002
204 #define TEEC_ORIGIN_TEE              0x00000003
205 #define TEEC_ORIGIN_TRUSTED_APP      0x00000004
206
223 #define TEEC_LOGIN_PUBLIC            0x00000000
224 #define TEEC_LOGIN_USER              0x00000001
225 #define TEEC_LOGIN_GROUP             0x00000002
226 #define TEEC_LOGIN_APPLICATION       0x00000004
227 #define TEEC_LOGIN_USER_APPLICATION  0x00000005
228 #define TEEC_LOGIN_GROUP_APPLICATION 0x00000006
229
238 #define TEEC_PARAM_TYPES(p0, p1, p2, p3) \
239     ((p0) | ((p1) << 4) | ((p2) << 8) | ((p3) << 12))
240
247 #define TEEC_PARAM_TYPE_GET(p, i) (((p) >> (i * 4)) & 0xF)
248 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
249
250 typedef uint32_t TEEC_Result;
251
256 typedef struct {
257     /* Implementation defined */
258     int fd;
259     bool reg_mem;
260 } TEEC_Context;
261
267 typedef struct {
268     uint32_t timeLow;
269     uint16_t timeMid;
270     uint16_t timeHiAndVersion;
271     uint8_t clockSeqAndNode[8];
272 } TEEC_UUID;
273
290 typedef struct {
291     void *buffer;
292     size_t size;
293     uint32_t flags;
294     /*
295      * Implementation-Defined
296      */
297     int id;
298     size_t allocated_size;
299     void *shadow_buffer;
300     int registered_fd;
301     bool buffer_allocated;
302 } TEEC_SharedMemory;
303
316 typedef struct {
317     void *buffer;
318     size_t size;
319 } TEEC_TempMemoryReference;
320
336 typedef struct {
337     TEEC_SharedMemory *parent;
338     size_t size;
339     size_t offset;
340 } TEEC_RegisteredMemoryReference;
341
352 typedef struct {
353     uint32_t a;
354     uint32_t b;
355 } TEEC_Value;
356
371 typedef union {
372     TEEC_TempMemoryReference tmpref;

```

```

373     TEEC.RegisteredMemoryReference memref;
374     TEEC.Value value;
375 } TEEC.Parameter;
376
377 typedef struct {
378     /* Implementation defined */
379     TEEC.Context *ctx;
380     uint32_t session_id;
381 } TEEC.Session;
382
383 typedef struct {
384     uint32_t started;
385     uint32_t paramTypes;
386     TEEC.Parameter params[TEEC_CONFIG.PAYLOAD_REF_COUNT];
387     /* Implementation-Defined */
388     TEEC.Session *session;
389 } TEEC.Operation;
390
391 TEEC.Result TEEC.InitializeContext(const char *name, TEEC.Context *context);
392
393 void TEEC.FinalizeContext(TEEC.Context *context);
394
395 TEEC.Result TEEC.OpenSession(TEEC.Context *context,
396                             TEEC.Session *session,
397                             const TEEC.UUID *destination,
398                             uint32_t connectionMethod,
399                             const void *connectionData,
400                             TEEC.Operation *operation,
401                             uint32_t *returnOrigin);
402
403 void TEEC.CloseSession(TEEC.Session *session);
404
405 TEEC.Result TEEC.InvokeCommand(TEEC.Session *session,
406                               uint32_t commandID,
407                               TEEC.Operation *operation,
408                               uint32_t *returnOrigin);
409
410 TEEC.Result TEEC.RegisterSharedMemory(TEEC.Context *context,
411                                       TEEC.SharedMemory *sharedMem);
412
413 TEEC.Result TEEC.AllocateSharedMemory(TEEC.Context *context,
414                                       TEEC.SharedMemory *sharedMem);
415
416 void TEEC.ReleaseSharedMemory(TEEC.SharedMemory *sharedMemory);
417
418 void TEEC.RequestCancellation(TEEC.Operation *operation);
419
420 #ifdef __cplusplus
421 }
422 #endif
423 #endif
424 #endif


```



## 10.17 ta-ref/api/include/tee\_internal\_api.h File Reference

```
#include "tee-ta-internal.h"
```

Include dependency graph for tee\_internal\_api.h:

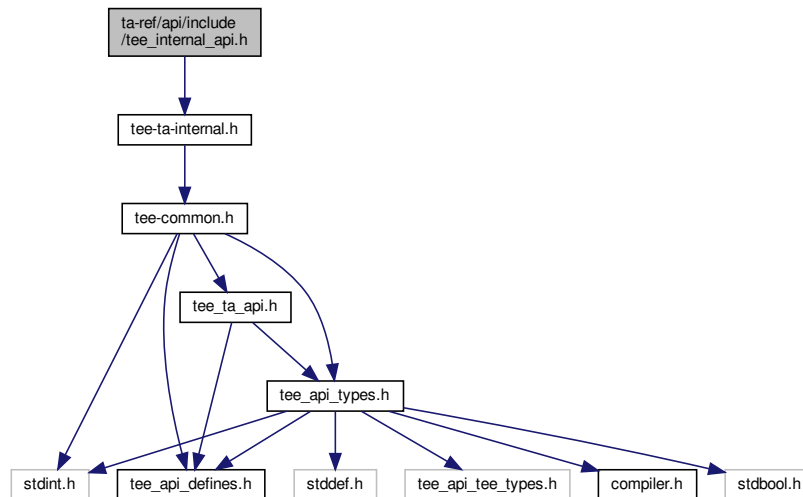

## 10.18 tee\_internal\_api.h


[Go to the documentation of this file.](#)

```
1 #include "tee-ta-internal.h"
```

## 10.19 ta-ref/api/include/tee\_internal\_api\_extensions.h File Reference

```
#include <trace.h>
#include <stdio.h>
#include <tee_api_defines_extensions.h>
#include <tee_api_types.h>
```

Include dependency graph for tee\_internal\_api\_extensions.h:

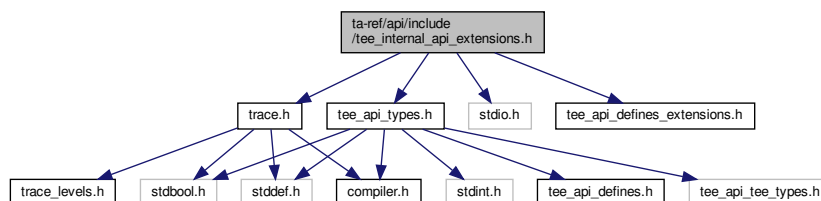

## Functions

- void [tee\\_user\\_mem\\_mark\\_heap](#) (void)
- size\_t [tee\\_user\\_mem\\_check\\_heap](#) (void)
- [TEE\\_Result TEE\\_CacheClean](#) (char \*buf, size\_t len)
- [TEE\\_Result TEE\\_CacheFlush](#) (char \*buf, size\_t len)
- [TEE\\_Result TEE\\_CacheInvalidate](#) (char \*buf, size\_t len)
- void \* [tee\\_map\\_zi](#) (size\_t len, uint32\_t flags)
- [TEE\\_Result tee\\_unmap](#) (void \*buf, size\_t len)
- [TEE\\_Result tee\\_uuid\\_from\\_str](#) (TEE\_UUID \*uuid, const char \*s)

### 10.19.1 Function Documentation

**10.19.1.1 TEE\_CacheClean()** [TEE\\_Result](#) TEE\_CacheClean (  
char \* *buf*,  
size\_t *len* )

**10.19.1.2 TEE\_CacheFlush()** [TEE\\_Result](#) TEE\_CacheFlush (  
char \* *buf*,  
size\_t *len* )

**10.19.1.3 TEE\_CacheInvalidate()** [TEE\\_Result](#) TEE\_CacheInvalidate (  
char \* *buf*,  
size\_t *len* )

**10.19.1.4 tee\_map\_zi()** void \* tee\_map\_zi (  
size\_t *len*,  
uint32\_t *flags* )

**10.19.1.5 tee\_unmap()** [TEE\\_Result](#) tee\_unmap (  
void \* *buf*,  
size\_t *len* )

**10.19.1.6 tee\_user\_mem\_check\_heap()** size\_t tee\_user\_mem\_check\_heap (  
void )

**10.19.1.7 tee\_user\_mem\_mark\_heap()** void tee\_user\_mem\_mark\_heap (

void )

**10.19.1.8 tee\_uuid\_from\_str()** TEE\_Result tee\_uuid\_from\_str (

TEE\_UUID \* uuid,

const char \* s )


## 10.20 tee\_internal\_api\_extensions.h

[Go to the documentation of this file.](#)


```
1 /* SPDX-License-Identifier: BSD-2-Clause */
2 /*
3  * Copyright (c) 2014, STMicroelectronics International N.V.
4  */
5
6 #ifndef TEE_INTERNAL_API_EXTENSIONS_H
7 #define TEE_INTERNAL_API_EXTENSIONS_H
8
9 /* trace support */
10 #include <trace.h>
11 #include <stdio.h>
12 #include <tee_api_defines_extensions.h>
13 #include <tee_api_types.h>
14
15 void tee_user_mem_mark_heap(void);
16 size_t tee_user_mem_check_heap(void);
17 /* Hint implementation defines */
18
19 #ifndef DOXYGEN_SHOULD_SKIP_THIS
20 #define TEE_USER_MEM_HINT_NO_FILL_ZERO 0x80000000
21 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
22
23 /*
24  * Cache maintenance support (TA requires the CACHE_MAINTENANCE property)
25  *
26  * TEE.CacheClean() Write back to memory any dirty data cache lines. The line
27  * is marked as not dirty. The valid bit is unchanged.
28  *
29  * TEE.CacheFlush() Purges any valid data cache lines. Any dirty cache lines
30  * are first written back to memory, then the cache line is
31  * invalidated.
32  *
33  * TEE.CacheInvalidate() Invalidate any valid data cache lines. Any dirty line
34  * are not written back to memory.
35  */
36 TEE_Result TEE.CacheClean(char *buf, size_t len);
37 TEE_Result TEE.CacheFlush(char *buf, size_t len);
38 TEE_Result TEE.CacheInvalidate(char *buf, size_t len);
39
40 /*
41  * tee_map_zi() - Map zero initialized memory
42  * @len: Number of bytes
43  * @flags: 0 or TEE_MEMORY_ACCESS_ANY_OWNER to allow sharing with other TAs
44  *
45  * Returns valid pointer on success or NULL on error.
46  */
47 void *tee_map_zi(size_t len, uint32_t flags);
48
49 /*
50  * tee_unmap() - Unmap previously mapped memory
51  * @buf: Buffer
52  * @len: Number of bytes
53  *
54  * Note that supplied @buf and @len has to match exactly what has
55  * previously been returned by tee_map_zi().
56  *
57  * Return TEE_SUCCESS on success or TEE_ERROR_* on failure.
58  */
59 TEE_Result tee_unmap(void *buf, size_t len);
60
61 /*
62  * Convert a UUID string @s into a TEE_UUID @uuid
63  * Expected format for @s is: xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxxx
64  * 'x' being any hexadecimal digit (0-9a-fA-F)
65  */
66 TEE_Result tee_uuid_from_str(TEE_UUID *uuid, const char *s);
67
68 #endif
```

## 10.21 ta-ref/api/include/tee.ta\_api.h File Reference

```
#include <tee_api_defines.h>
#include <tee_api_types.h>
Include dependency graph for tee.ta_api.h:
```

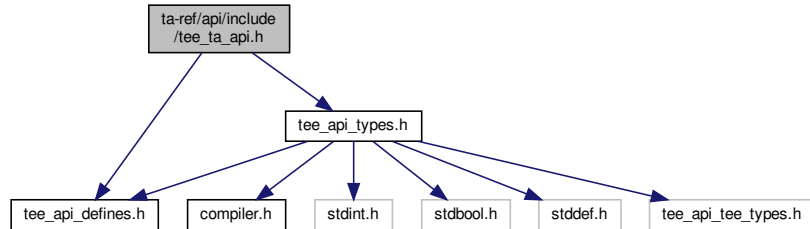

This graph shows which files directly or indirectly include this file:

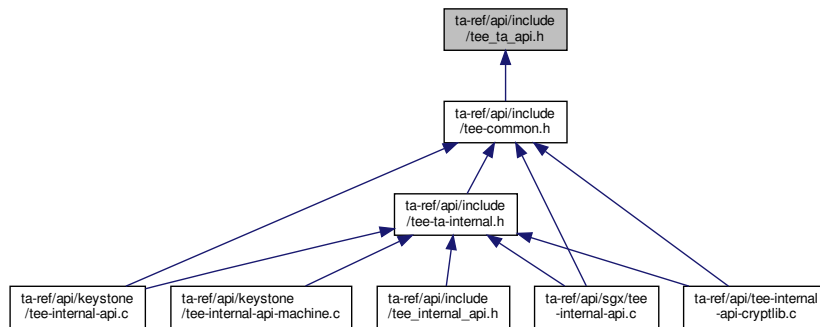

### Functions

- [TEE\\_Result](#) TA\_EXPORT [TA\\_CreateEntryPoint](#) (void)
- void TA\_EXPORT [TA\\_DestroyEntryPoint](#) (void)
- [TEE\\_Result](#) TA\_EXPORT [TA\\_OpenSessionEntryPoint](#) (uint32\_t paramTypes, [TEE\\_Param](#) params[TEE\_NUM\_PARAMS], void \*\*sessionContext)
- void TA\_EXPORT [TA\\_CloseSessionEntryPoint](#) (void \*sessionContext)
- [TEE\\_Result](#) TA\_EXPORT [TA\\_InvokeCommandEntryPoint](#) (void \*sessionContext, uint32\_t commandID, uint32\_t paramTypes, [TEE\\_Param](#) params[TEE\_NUM\_PARAMS])

#### 10.21.1 Function Documentation

**10.21.1.1 TA\_CloseSessionEntryPoint()** void TA\_EXPORT TA\_CloseSessionEntryPoint ( void \* sessionContext )

**10.21.1.2 TA\_CreateEntryPoint()** `TEE_Result TA_EXPORT TA_CreateEntryPoint (`  
`void )`

**10.21.1.3 TA\_DestroyEntryPoint()** `void TA_EXPORT TA_DestroyEntryPoint (`  
`void )`

**10.21.1.4 TA\_InvokeCommandEntryPoint()** `TEE_Result TA_EXPORT TA_InvokeCommandEntryPoint (`  
`void * sessionContext,`  
`uint32_t commandID,`  
`uint32_t paramTypes,`  
`TEE_Param params[TEE_NUM_PARAMS] )`

**10.21.1.5 TA\_OpenSessionEntryPoint()** `TEE_Result TA_EXPORT TA_OpenSessionEntryPoint (`  
`uint32_t paramTypes,`  
`TEE_Param params[TEE_NUM_PARAMS],`  
`void ** sessionContext )`

## 10.22 tee.ta\_api.h

[Go to the documentation of this file.](#)

```
1 /*
2  * Copyright (c) 2014, STMicroelectronics International N.V.
3  * All rights reserved.
4  *
5  * Redistribution and use in source and binary forms, with or without
6  * modification, are permitted provided that the following conditions are met:
7  *
8  * 1. Redistributions of source code must retain the above copyright notice,
9  * this list of conditions and the following disclaimer.
10 *
11 * 2. Redistributions in binary form must reproduce the above copyright notice,
12 * this list of conditions and the following disclaimer in the documentation
13 * and/or other materials provided with the distribution.
14 *
15 * THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
16 * AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
17 * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
18 * ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE
19 * LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
20 * CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF
21 * SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS
22 * INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
23 * CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
24 * ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
25 * POSSIBILITY OF SUCH DAMAGE.
26 */
27
28 /* Based on GP TEE Internal API Specification Version 0.22 */
29 #ifndef TEE_TA_API_H
30 #define TEE_TA_API_H
31
32 #include <tee.api.defines.h>
33 #include <tee.api.types.h>
34
35 #ifndef DOXYGEN_SHOULD_SKIP_THIS
36 /* This is a null define in STE TEE environment */
37 #define TA_EXPORT
38 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
39
40 /*
```

```

41 * TA Interface
42 *
43 * Each Trusted Application must provide the Implementation with a number
44 * of functions, collectively called the "TA interface". These functions
45 * are the entry points called by the Trusted Core Framework to create the
46 * instance, notify the instance that a new client is connecting, notify
47 * the instance when the client invokes a command, etc.
48 *
49 * Trusted Application Entry Points:
50 */
51
52 /*
53 * The function TAA.CreateEntryPoint is the Trusted Application's
54 * constructor, which the Framework calls when it creates a new instance of
55 * the Trusted Application. To register instance data, the implementation
56 * of this constructor can use either global variables or the function
57 * TEE.InstanceSetData.
58 *
59 * Return Value:
60 * - TEE.SUCCESS: if the instance is successfully created, the function
61 *   must return TEE.SUCCESS.
62 * - Any other value: if any other code is returned the instance is not
63 *   created, and no other entry points of this instance will be called.
64 *   The Framework MUST reclaim all resources and dereference all objects
65 *   related to the creation of the instance.
66 *
67 *   If this entry point was called as a result of a client opening a
68 *   session, the error code is returned to the client and the session is
69 *   not opened.
70 */
71 TEE_Result TA_EXPORT TAA.CreateEntryPoint(void);
72
73 /*
74 * The function TAA.DestroyEntryPoint is the Trusted Applications
75 * destructor, which the Framework calls when the instance is being
76 * destroyed.
77 *
78 * When the function TAA.DestroyEntryPoint is called, the Framework
79 * guarantees that no client session is currently open. Once the call to
80 * TAA.DestroyEntryPoint has been completed, no other entry point of this
81 * instance will ever be called.
82 *
83 * Note that when this function is called, all resources opened by the
84 * instance are still available. It is only after the function returns that
85 * the Implementation MUST start automatically reclaiming resources left
86 * opened.
87 *
88 * Return Value:
89 * This function can return no success or error code. After this function
90 * returns the Implementation MUST consider the instance destroyed and
91 * reclaims all resources left open by the instance.
92 */
93 void TA_EXPORT TAA.DestroyEntryPoint(void);
94
95 /*
96 * The Framework calls the function TAA.OpenSessionEntryPoint when a client
97 * requests to open a session with the Trusted Application. The open
98 * session request may result in a new Trusted Application instance being
99 * created as defined in section 4.5.
100 *
101 * The client can specify parameters in an open operation which are passed
102 * to the Trusted Application instance in the arguments paramTypes and
103 * params. These arguments can also be used by the Trusted Application
104 * instance to transfer response data back to the client. See section 4.3.6
105 * for a specification of how to handle the operation parameters.
106 *
107 * If this function returns TEE.SUCCESS, the client is connected to a
108 * Trusted Application instance and can invoke Trusted Application
109 * commands. When the client disconnects, the Framework will eventually
110 * call the TAA.CloseSessionEntryPoint entry point.
111 *
112 * If the function returns any error, the Framework rejects the connection
113 * and returns the error code and the current content of the parameters the
114 * client. The return origin is then set to TEE.ORIGIN.TRUSTED.APP.
115 *
116 * The Trusted Application instance can register a session data pointer by
117 * setting *pSessionContext. The value of this pointer is not interpreted
118 * by the Framework, and is simply passed back to other TA functions
119 * within this session. Note that *sessionContext may be set with a pointer
120 * to a memory allocated by the Trusted Application instance or with
121 * anything else, like an integer, a handle etc. The Framework will not
122 * automatically free *sessionContext when the session is closed; the
123 * Trusted Application instance is responsible for freeing memory if
124 * required.
125 *
126 * During the call to TAA.OpenSessionEntryPoint the client may request to
127 * cancel the operation. See section 4.10 for more details on

```

```

128 * cancellations. If the call to TA.OpenSessionEntryPoint returns
129 * TEE_SUCCESS, the client must consider the session as successfully opened
130 * and explicitly close it if necessary.
131 *
132 * Parameters:
133 * - paramTypes: the types of the four parameters.
134 * - params: a pointer to an array of four parameters.
135 * - sessionContext: A pointer to a variable that can be filled by the
136 *   Trusted Application instance with an opaque void* data pointer
137 *
138 * Return Value:
139 * - TEE_SUCCESS if the session is successfully opened.
140 * - Any other value if the session could not be open.
141 *   o The error code may be one of the pre-defined codes, or may be a new
142 *     error code defined by the Trusted Application implementation itself.
143 */
144 TEE_Result TA_EXPORT TA_OpenSessionEntryPoint(uint32_t paramTypes,
145                                             TEE_Param params[TEE_NUM_PARAMS],
146                                             void **sessionContext);
147
148 /*
149 * The Framework calls this function to close a client session. During the
150 * call to this function the implementation can use any session functions.
151 *
152 * The Trusted Application implementation is responsible for freeing any
153 * resources consumed by the session being closed. Note that the Trusted
154 * Application cannot refuse to close a session, but can hold the closing
155 * until it returns from TA.CloseSessionEntryPoint. This is why this
156 * function cannot return an error code.
157 *
158 * Parameters:
159 * - sessionContext: The value of the void* opaque data pointer set by the
160 *   Trusted Application in the function TA.OpenSessionEntryPoint for this
161 *   session.
162 */
163 void TA_EXPORT TA_CloseSessionEntryPoint(void *sessionContext);
164
165 /*
166 * The Framework calls this function when the client invokes a command
167 * within the given session.
168 *
169 * The Trusted Application can access the parameters sent by the client
170 * through the paramTypes and params arguments. It can also use these
171 * arguments to transfer response data back to the client.
172 *
173 * During the call to TA.InvokeCommandEntryPoint the client may request to
174 * cancel the operation.
175 *
176 * A command is always invoked within the context of a client session.
177 * Thus, any session function can be called by the command implementation.
178 *
179 * Parameter:
180 * - sessionContext: The value of the void* opaque data pointer set by the
181 *   Trusted Application in the function TA.OpenSessionEntryPoint.
182 * - commandID: A Trusted Application-specific code that identifies the
183 *   command to be invoked.
184 * - paramTypes: the types of the four parameters.
185 * - params: a pointer to an array of four parameters.
186 *
187 * Return Value:
188 * - TEE_SUCCESS: if the command is successfully executed, the function
189 *   must return this value.
190 * - Any other value: if the invocation of the command fails for any
191 *   reason.
192 *   o The error code may be one of the pre-defined codes, or may be a new
193 *     error code defined by the Trusted Application implementation itself.
194 */
195
196 TEE_Result TA_EXPORT TA_InvokeCommandEntryPoint(void *sessionContext,
197                                                uint32_t commandID,
198                                                uint32_t paramTypes,
199                                                TEE_Param params[TEE_NUM_PARAMS]);
200
201 /*
202 * Correspondance Client Functions <--> TA Functions
203 *
204 * TEE.OpenSession or TEE.OpenTASession:
205 * If a new Trusted Application instance is needed to handle the session,
206 * TA.CreateEntryPoint is called.
207 * Then, TA.OpenSessionEntryPoint is called.
208 *
209 *
210 * TEE.InvokeCommand or TEE.InvokeTACommand:
211 * TA.InvokeCommandEntryPoint is called.
212 *
213 *
214 * TEE.CloseSession or TEE.CloseTASession:

```

```

215 * TA_CloseSessionEntryPoint is called.
216 * For a multi-instance TA or for a single-instance, non keep-alive TA, if
217 * the session closed was the last session on the instance, then
218 * TADestroyEntryPoint is called. Otherwise, the instance is kept until
219 * the TEE shuts down.
220 *
221 */
222
223 #endif

```

## 10.23 ta-ref/api/include/test\_dev\_key.h File Reference

### Variables

- static const unsigned char [\\_sanctum\\_dev\\_secret\\_key](#) []
- static const size\_t [\\_sanctum\\_dev\\_secret\\_key\\_len](#) = 64
- static const unsigned char [\\_sanctum\\_dev\\_public\\_key](#) []
- static const size\_t [\\_sanctum\\_dev\\_public\\_key\\_len](#) = 32

### 10.23.1 Variable Documentation

**10.23.1.1 [\\_sanctum\\_dev\\_public\\_key](#)** const unsigned char [\\_sanctum\\_dev\\_public\\_key](#)[] [static]

#### Initial value:

```

= {
    0x0f, 0xaa, 0xd4, 0xff, 0x01, 0x17, 0x85, 0x83, 0xba, 0xa5, 0x88, 0x96,
    0x6f, 0x7c, 0x1f, 0xf3, 0x25, 0x64, 0xdd, 0x17, 0xd7, 0xdc, 0x2b, 0x46,
    0xcb, 0x50, 0xa8, 0x4a, 0x69, 0x27, 0x0b, 0x4c
}

```

**10.23.1.2 [\\_sanctum\\_dev\\_public\\_key\\_len](#)** const size\_t [\\_sanctum\\_dev\\_public\\_key\\_len](#) = 32 [static]

**10.23.1.3 [\\_sanctum\\_dev\\_secret\\_key](#)** const unsigned char [\\_sanctum\\_dev\\_secret\\_key](#)[] [static]

#### Initial value:

```

= {
    0x40, 0xa0, 0x99, 0x47, 0x8c, 0xce, 0xfa, 0x3a, 0x06, 0x63, 0xab, 0xc9,
    0x5e, 0x7a, 0x1e, 0xc9, 0x54, 0xb4, 0xf5, 0xf6, 0x45, 0xba, 0xd8, 0x04,
    0xdb, 0x13, 0xe7, 0xd7, 0x82, 0x6c, 0x70, 0x73, 0x57, 0x6a, 0x9a, 0xb6,
    0x21, 0x60, 0xd9, 0xd1, 0xc6, 0xae, 0xdc, 0x29, 0x85, 0x2f, 0xb9, 0x60,
    0xee, 0x51, 0x32, 0x83, 0x5a, 0x16, 0x89, 0xec, 0x06, 0xa8, 0x72, 0x34,
    0x51, 0xaa, 0x0e, 0x4a
}

```

**10.23.1.4 [\\_sanctum\\_dev\\_secret\\_key\\_len](#)** const size\_t [\\_sanctum\\_dev\\_secret\\_key\\_len](#) = 64 [static]




## 10.24 test\_dev\_key.h

[Go to the documentation of this file.](#)


```
1 /* These are known device TESTING keys, use them for testing on platforms/qemu */
2
3 #warning Using TEST device root key. No integrity guarantee.
4 static const unsigned char _sanctum_dev_secret_key[] = {
5     0x40, 0xa0, 0x99, 0x47, 0x8c, 0xce, 0xfa, 0x3a, 0x06, 0x63, 0xab, 0xc9,
6     0x5e, 0x7a, 0x1e, 0xc9, 0x54, 0xb4, 0xf5, 0xf6, 0x45, 0xba, 0xd8, 0x04,
7     0xdb, 0x13, 0xe7, 0xd7, 0x82, 0x6c, 0x70, 0x73, 0x57, 0x6a, 0x9a, 0xb6,
8     0x21, 0x60, 0xd9, 0xd1, 0xc6, 0xae, 0xdc, 0x29, 0x85, 0x2f, 0xb9, 0x60,
9     0xee, 0x51, 0x32, 0x83, 0x5a, 0x16, 0x89, 0xec, 0x06, 0xa8, 0x72, 0x34,
10    0x51, 0xaa, 0x0e, 0x4a
11 };
12 static const size_t _sanctum_dev_secret_key_len = 64;
13
14 static const unsigned char _sanctum_dev_public_key[] = {
15     0x0f, 0xaa, 0xd4, 0xff, 0x01, 0x17, 0x85, 0x83, 0xba, 0xa5, 0x88, 0x96,
16     0x6f, 0x7c, 0x1f, 0xf3, 0x25, 0x64, 0xdd, 0x17, 0xd7, 0xdc, 0x2b, 0x46,
17     0xcb, 0x50, 0xa8, 0x4a, 0x69, 0x27, 0x0b, 0x4c
18 };
19 static const size_t _sanctum_dev_public_key_len = 32;
```

## 10.25 ta-ref/api/include/trace.h File Reference

```
#include <stdbool.h>
#include <stddef.h>
#include <compiler.h>
#include <trace_levels.h>
Include dependency graph for trace.h:
```

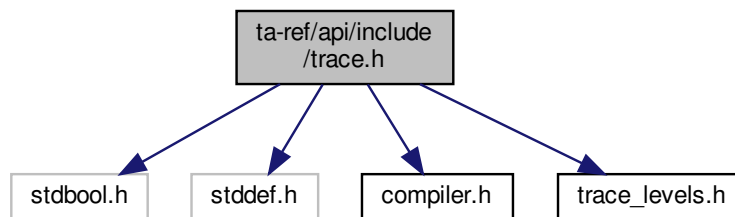

This graph shows which files directly or indirectly include this file:

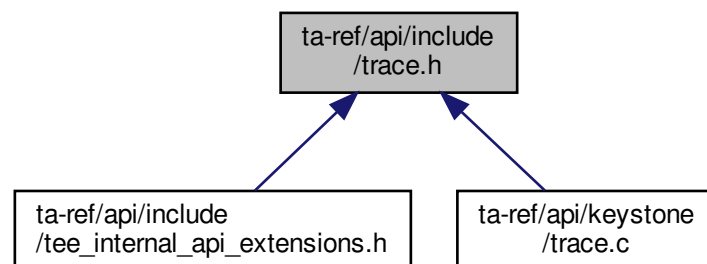

## Functions

- void [trace\\_ext\\_puts](#) (const char \*str)
- int [trace\\_ext\\_get\\_thread\\_id](#) (void)
- void [trace\\_set\\_level](#) (int level)
- int [trace\\_get\\_level](#) (void)
- void [trace\\_printf](#) (const char \*func, int line, int level, bool level\_ok, const char \*fmt,...) \_\_printf(5
- void [dhex\\_dump](#) (const char \*function, int line, int level, const void \*buf, int len)

## Variables

- int [trace\\_level](#)
- const char [trace\\_ext\\_prefix](#) []

### 10.25.1 Function Documentation

**10.25.1.1 [dhex\\_dump\(\)](#)** void [dhex\\_dump](#) (  
     const char \* *function*,  
     int *line*,  
     int *level*,  
     const void \* *buf*,  
     int *len* )

**10.25.1.2 [trace\\_ext\\_get\\_thread\\_id\(\)](#)** int [trace\\_ext\\_get\\_thread\\_id](#) (  
     void )

**10.25.1.3 [trace\\_ext\\_puts\(\)](#)** void [trace\\_ext\\_puts](#) (  
     const char \* *str* )

**10.25.1.4 [trace\\_get\\_level\(\)](#)** int [trace\\_get\\_level](#) (  
     void )

**10.25.1.5 [trace\\_printf\(\)](#)** void [trace\\_printf](#) (  
     const char \* *func*,  
     int *line*,  
     int *level*,  
     bool *level\_ok*,  
     const char \* *fmt*,  
     ... )

**10.25.1.6 trace\_set\_level()** void trace\_set\_level (  
int level )

## 10.25.2 Variable Documentation

**10.25.2.1 trace\_ext\_prefix** const char trace\_ext\_prefix[] [extern]

**10.25.2.2 trace\_level** int trace\_level [extern]

## 10.26 trace.h

[Go to the documentation of this file.](#)

```

1 /*
2  * Copyright (c) 2014, STMicroelectronics International N.V.
3  * All rights reserved.
4  *
5  * Redistribution and use in source and binary forms, with or without
6  * modification, are permitted provided that the following conditions are met:
7  *
8  * 1. Redistributions of source code must retain the above copyright notice,
9  * this list of conditions and the following disclaimer.
10 *
11 * 2. Redistributions in binary form must reproduce the above copyright notice,
12 * this list of conditions and the following disclaimer in the documentation
13 * and/or other materials provided with the distribution.
14 *
15 * THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
16 * AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
17 * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
18 * ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE
19 * LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
20 * CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF
21 * SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS
22 * INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
23 * CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
24 * ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
25 * POSSIBILITY OF SUCH DAMAGE.
26 */
27 #ifndef TRACE_H
28 #define TRACE_H
29
30 #include <stdbool.h>
31 #include <stddef.h>
32 #include <compiler.h>
33 #include <trace_levels.h>
34
35 #ifndef DOXYGEN_SHOULD_SKIP_THIS
36 #define MAX_PRINT_SIZE 256
37 #define MAX_FUNC_PRINT_SIZE 32
38
39 #ifndef TRACE_LEVEL
40 #define TRACE_LEVEL TRACE_MAX
41 #endif
42 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
43
44 /*
45  * Symbols provided by the entity that uses this API.
46  */
47 extern int trace_level;
48 extern const char trace_ext_prefix[];
49 void trace_ext_puts(const char *str);
50 int trace_ext_get_thread_id(void);
51 void trace_set_level(int level);
52 int trace_get_level(void);
53
54 /* Internal functions used by the macros below */
55 void trace_printf(const char *func, int line, int level, bool level_ok,
```

```

56         const char *fmt, ...) __printf(5, 6);
57
58 #ifndef DOXYGEN_SHOULD_SKIP_THIS
59 #define trace_printf_helper(level, level_ok, ...) \
60     trace_printf(__func__, __LINE__, (level), (level_ok), \
61         __VA_ARGS__)
62
63 /* Formatted trace tagged with level independent */
64 #if (TRACE_LEVEL <= 0)
65 #define MSG(...)    (void)0
66 #else
67 #define MSG(...)    trace_printf_helper(0, false, __VA_ARGS__)
68 #endif
69
70 /* Formatted trace tagged with TRACE_ERROR level */
71 #if (TRACE_LEVEL < TRACE_ERROR)
72 #define EMSG(...)    (void)0
73 #else
74 #define EMSG(...)    trace_printf_helper(TRACE_ERROR, true, __VA_ARGS__)
75 #endif
76
77 /* Formatted trace tagged with TRACE_INFO level */
78 #if (TRACE_LEVEL < TRACE_INFO)
79 #define MSG(...)    (void)0
80 #else
81 #define MSG(...)    trace_printf_helper(TRACE_INFO, true, __VA_ARGS__)
82 #endif
83
84 /* Formatted trace tagged with TRACE_DEBUG level */
85 #if (TRACE_LEVEL < TRACE_DEBUG)
86 #define DMSG(...)    (void)0
87 #else
88 #define DMSG(...)    trace_printf_helper(TRACE_DEBUG, true, __VA_ARGS__)
89 #endif
90
91 /* Formatted trace tagged with TRACE_FLOW level */
92 #if (TRACE_LEVEL < TRACE_FLOW)
93 #define FMSG(...)    (void)0
94 #else
95 #define FMSG(...)    trace_printf_helper(TRACE_FLOW, true, __VA_ARGS__)
96 #endif
97
98 /* Formatted trace tagged with TRACE_FLOW level and prefix with '>' */
99 #define INMSG(...)    FMSG("> " __VA_ARGS__)
100 /* Formatted trace tagged with TRACE_FLOW level and prefix with '<' */
101 #define OUTMSG(...)    FMSG("< " __VA_ARGS__)
102 /* Formatted trace tagged with TRACE_FLOW level and prefix with '<' and print
103  * an error message if r != 0 */
104 #define OUTRMSG(r) \
105     do { \
106         OUTMSG("r=[%x]", r); \
107         return r; \
108     } while (0)
109
110 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
111
112 void dhex_dump(const char *function, int line, int level,
113     const void *buf, int len);
114
115
116 #ifndef DOXYGEN_SHOULD_SKIP_THIS
117 #if (TRACE_LEVEL < TRACE_DEBUG)
118 #define DHEXDUMP(buf, len) (void)0
119 #else
120 #define DHEXDUMP(buf, len) dhex_dump(__func__, __LINE__, TRACE_DEBUG, \
121     buf, len)
122 #endif
123
124
125 /* Trace api without trace formatting */
126
127 #define trace_printf_helper_raw(level, level_ok, ...) \
128     trace_printf(NULL, 0, (level), (level_ok), __VA_ARGS__)
129
130 /* No formatted trace tagged with level independent */
131 #if (TRACE_LEVEL <= 0)
132 #define MSG_RAW(...)    (void)0
133 #else
134 #define MSG_RAW(...)    trace_printf_helper_raw(0, false, __VA_ARGS__)
135 #endif
136
137 /* No formatted trace tagged with TRACE_ERROR level */
138 #if (TRACE_LEVEL < TRACE_ERROR)
139 #define EMSG_RAW(...)    (void)0
140 #else
141 #define EMSG_RAW(...)    trace_printf_helper_raw(TRACE_ERROR, true, __VA_ARGS__)
142 #endif

```


```

143
144 /* No formatted trace tagged with TRACE.INFO level */
145 #if (TRACE_LEVEL < TRACE.INFO)
146 #define MSG_RAW(...) (void)0
147 #else
148 #define MSG_RAW(...) trace_printf_helper_raw(TRACE.INFO, true, __VA_ARGS__)
149 #endif
150
151 /* No formatted trace tagged with TRACE.DEBUG level */
152 #if (TRACE_LEVEL < TRACE.DEBUG)
153 #define MSG_RAW(...) (void)0
154 #else
155 #define MSG_RAW(...) trace_printf_helper_raw(TRACE.DEBUG, true, __VA_ARGS__)
156 #endif
157
158 /* No formatted trace tagged with TRACE.FLOW level */
159 #if (TRACE_LEVEL < TRACE.FLOW)
160 #define MSG_RAW(...) (void)0
161 #else
162 #define MSG_RAW(...) trace_printf_helper_raw(TRACE.FLOW, true, __VA_ARGS__)
163 #endif
164
165 #if (TRACE_LEVEL <= 0)
166 #define MSG(...) (void)0
167 #else
168 /*
169  * Synchronised flushed trace, an Always message straight to HW trace IP.
170  * Current only supported inside OP-TEE kernel, will be just like an MSG()
171  * in another context.
172  */
173 #define MSG(...) \
174     trace_printf(__func__, __LINE__, TRACE.ERROR, true, __VA_ARGS__)
175
176 #endif /* TRACE_LEVEL */
177
178 #if defined(__KERNEL__) && defined(CFG_UNWIND)
179 #include <kernel/unwind.h>
180 #define _PRINT_STACK
181 #endif
182
183 #if defined(_PRINT_STACK) && (TRACE_LEVEL >= TRACE.ERROR)
184 #define EPRINT_STACK() print_kernel_stack(TRACE.ERROR)
185 #else
186 #define EPRINT_STACK() (void)0
187 #endif
188
189 #if defined(_PRINT_STACK) && (TRACE_LEVEL >= TRACE.INFO)
190 #define IPPRINT_STACK() print_kernel_stack(TRACE.INFO)
191 #else
192 #define IPPRINT_STACK() (void)0
193 #endif
194
195 #if defined(_PRINT_STACK) && (TRACE_LEVEL >= TRACE.DEBUG)
196 #define DPRINT_STACK() print_kernel_stack(TRACE.DEBUG)
197 #else
198 #define DPRINT_STACK() (void)0
199 #endif
200
201 #if defined(_PRINT_STACK) && (TRACE_LEVEL >= TRACE.FLOW)
202 #define FPRINT_STACK() print_kernel_stack(TRACE.FLOW)
203 #else
204 #define FPRINT_STACK() (void)0
205 #endif
206
207 #if defined(__KERNEL__) && defined(CFG_UNWIND)
208 #undef _PRINT_STACK
209 #endif
210
211 #endif /* DOXYGEN_SHOULD_SKIP_THIS */
212 #endif /* TRACE_H */

```

## 10.27 ta-ref/api/include/trace\_levels.h File Reference

This graph shows which files directly or indirectly include this file:

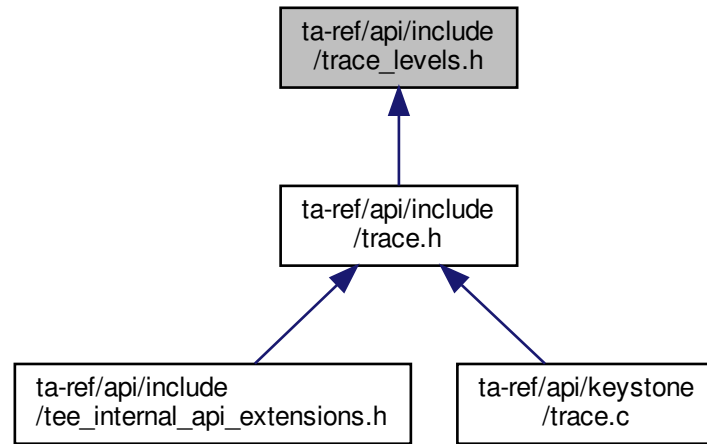

## 10.28 trace\_levels.h

[Go to the documentation of this file.](#)

```

1 /*
2  * Copyright (c) 2014, STMicroelectronics International N.V.
3  * All rights reserved.
4  *
5  * Redistribution and use in source and binary forms, with or without
6  * modification, are permitted provided that the following conditions are met:
7  *
8  * 1. Redistributions of source code must retain the above copyright notice,
9  * this list of conditions and the following disclaimer.
10 *
11 * 2. Redistributions in binary form must reproduce the above copyright notice,
12 * this list of conditions and the following disclaimer in the documentation
13 * and/or other materials provided with the distribution.
14 *
15 * THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
16 * AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
17 * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
18 * ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE
19 * LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
20 * CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF
21 * SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS
22 * INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
23 * CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
24 * ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
25 * POSSIBILITY OF SUCH DAMAGE.
26 */
27 #ifndef TRACE_LEVELS_H
28 #define TRACE_LEVELS_H
29
30 /*
31  * Trace levels.
32  *
33  * ALWAYS is used when you always want a print to be seen, but it is not always
34  * an error.
35  *
36  * ERROR is used when some kind of error has happened, this is most likely the
37  * print you will use most of the time when you report some kind of error.
38  *
39  * INFO is used when you want to print some 'normal' text to the user.
40  * This is the default level.

```

```

41 *
42 * DEBUG is used to print extra information to enter deeply in the module.
43 *
44 * FLOW is used to print the execution flow, typically the in/out of functions.
45 *
46 */
47
48 #ifndef DOXYGEN_SHOULD_SKIP_THIS
49 #define TRACE_MIN 1
50 #define TRACE_ERROR TRACE_MIN
51 #define TRACE_INFO 2
52 #define TRACE_DEBUG 3
53 #define TRACE_FLOW 4
54 #define TRACE_MAX TRACE_FLOW
55
56 /* Trace level of the casual printf */
57 #define TRACE_PRINTF_LEVEL TRACE_ERROR
58
59 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
60 #endif /*TRACE_LEVELS_H*/
61


```

## 10.29 ta-ref/api/keystone/tee-internal-api-machine.c File Reference

```
#include "eapp_utils.h"
```

```
#include "tee-ta-internal.h"
```

Include dependency graph for tee-internal-api-machine.c:

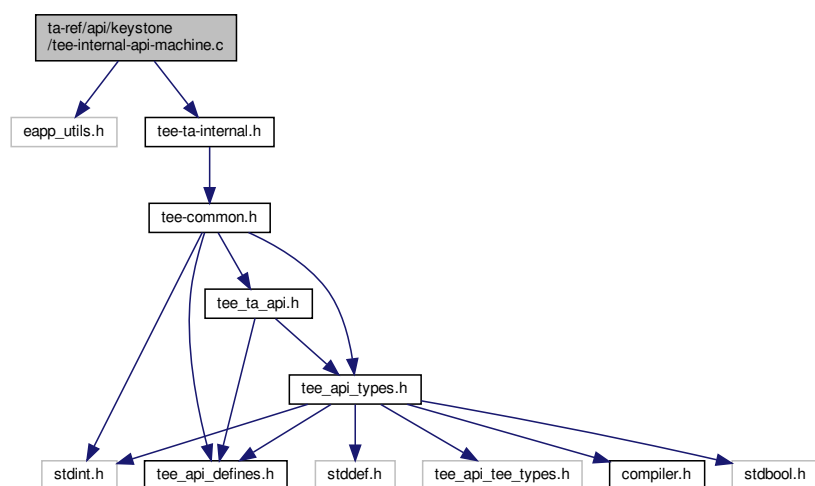

### Functions

- void `__attribute__((noreturn))`

#### 10.29.1 Function Documentation

**10.29.1.1** `__attribute__((noreturn)) void __attribute__((noreturn))`

TEE.Panic() - Raises a panic in the Trusted Application instance.

When a Trusted Application calls the TEE.Panic function, the current instance shall be destroyed and all the resources opened by the instance shall be reclaimed. All sessions opened from the panicking instance on another TA shall be gracefully closed and all cryptographic objects and operations shall be closed properly.



## Parameters

<i>code</i>	An informative panic code defined by the TA.
-------------	----------------------------------------------


## Returns

panic code will be returned.

## 10.30 ta-ref/api/keystone/tee-internal-api.c File Reference

```
#include "tee_api_tee_types.h"
#include "tee-common.h"
#include "tee-ta-internal.h"
#include "edger/Enclave_t.h"
#include "syscall.h"
#include "report.h"
#include <string.h>
#include <stdlib.h>
```

Include dependency graph for tee-internal-api.c:

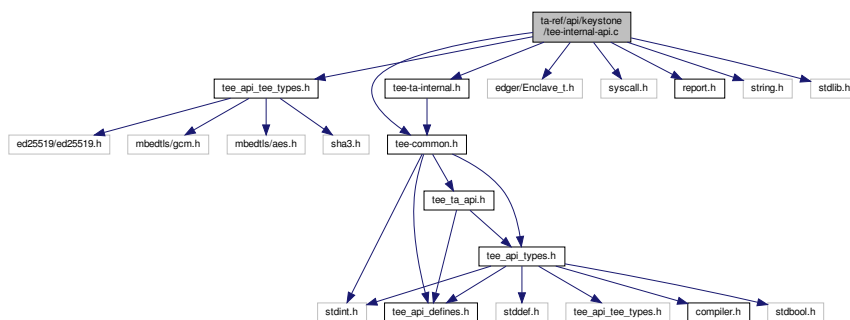

## Functions

- void \* [TEE\\_Malloc](#) (uint32\_t size, uint32\_t hint)
- void \* [TEE\\_Realloc](#) (void \*buffer, uint32\_t newSize)
- void [TEE\\_Free](#) (void \*buffer)
- void [TEE\\_GetREETime](#) (TEE\_Time \*time)  
Core Functions, Time Functions.
- void [TEE\\_GetSystemTime](#) (TEE\_Time \*time)  
Core Functions, Time Functions.
- [TEE\\_Result GetRelTimeStart](#) (uint64\_t start)  
Core Functions, Time Functions.
- [TEE\\_Result GetRelTimeEnd](#) (uint64\_t end)  
Core Functions, Time Functions.
- static int [flags2flags](#) (int flags)
- static int [set\\_object\\_key](#) (void \*id, unsigned int idlen, [TEE\\_ObjectHandle](#) object)
- static [TEE\\_Result](#) [OpenPersistentObject](#) (uint32\_t storageID, const void \*objectID, uint32\_t objectIDLen, uint32\_t flags, [TEE\\_ObjectHandle](#) \*object, int ocreat)

- [TEE\\_Result TEE\\_CreatePersistentObject](#) (uint32\_t storagelD, const void \*objectID, uint32\_t objectIDLen, uint32\_t flags, [TEE\\_ObjectHandle](#) attributes, const void \*initialData, uint32\_t initialDataLen, [TEE\\_ObjectHandle](#) \*object)  
*Core Functions, Secure Storage Functions (data is isolated for each TA)*
- [TEE\\_Result TEE\\_OpenPersistentObject](#) (uint32\_t storagelD, const void \*objectID, uint32\_t objectIDLen, uint32\_t flags, [TEE\\_ObjectHandle](#) \*object)  
*Core Functions, Secure Storage Functions (data is isolated for each TA)*
- [TEE\\_Result TEE\\_GetObjectInfo1](#) ([TEE\\_ObjectHandle](#) object, [TEE\\_ObjectInfo](#) \*objectInfo)  
*Core Functions, Secure Storage Functions (data is isolated for each TA)*
- [TEE\\_Result TEE\\_WriteObjectData](#) ([TEE\\_ObjectHandle](#) object, const void \*buffer, uint32\_t size)  
*Core Functions, Secure Storage Functions (data is isolated for each TA)*
- [TEE\\_Result TEE\\_ReadObjectData](#) ([TEE\\_ObjectHandle](#) object, void \*buffer, uint32\_t size, uint32\_t \*count)  
*Core Functions, Secure Storage Functions (data is isolated for each TA)*
- void [TEE\\_CloseObject](#) ([TEE\\_ObjectHandle](#) object)  
*Core Functions, Secure Storage Functions (data is isolated for each TA)*
- WC\_RNG \* [get\\_wc\\_rng](#) (void)
- int [wc\\_ocall\\_genseed](#) (void \*nonce, uint32\_t len)
- void [TEE\\_GenerateRandom](#) (void \*randomBuffer, uint32\_t randomBufferLen)  
*Crypto, common.*

## Variables

- static int [wc\\_rng\\_init](#) = 0
- static WC\_RNG [rngstr](#)

## 10.30.1 Function Documentation

**10.30.1.1 flags2flags()** static int flags2flags (  
int flags ) [inline], [static]

[flags2flags\(\)](#) - Checks the status for reading or writing of the file operational.

This function is used to check the status for reading or writing of the file operational.

### Parameters

<i>flags</i>	Flags of the referencing node.
--------------	--------------------------------

### Returns

ret if success.

**10.30.1.2 get\_wc\_rng()** WC\_RNG \* get\_wc\_rng (  
void )

[get\\_wc\\_rng\(\)](#) - Gets the seed (from OS) and key cipher for rng (random number genertor).

This function returns the random number or unique number of "rngstr".

#### Returns

random number if success else error occured.

**10.30.1.3 GetRelTimeEnd()** TEE\_Result GetRelTimeEnd (  
uint64\_t end )

Core Functions, Time Functions.

[GetRelTimeEnd\(\)](#) - finds the real time of the end timing.

This function prints the ending time.

#### Parameters

<i>end</i>	End timing
------------	------------

#### Returns

0 If success

**10.30.1.4 GetRelTimeStart()** TEE\_Result GetRelTimeStart (  
uint64\_t start )

Core Functions, Time Functions.

[GetRelTimeStart\(\)](#) - Gets the real time of the start timing.

This function prints the starting time.

#### Parameters

<i>start</i>	Start timing
--------------	--------------

## Returns

0 on success

**10.30.1.5 OpenPersistentObject()** static `TEE.Result` OpenPersistentObject (   
     uint32\_t *storageID*,   
     const void \* *objectID*,   
     uint32\_t *objectIDLen*,   
     uint32\_t *flags*,   
     TEE.ObjectHandle \* *object*,   
     int *ocreat* ) [static]

[OpenPersistentObject\(\)](#) - Opens a handle on an existing persistent object.

The flags parameter is a set of flags that controls the access rights and sharing permissions with which the object handle is opened. The value of the flags parameter is constructed by a bitwise-inclusive OR of flags TEE\_DATA\_↔ FLAG\_ACCESS\_READ, the object is opened with the read access right. This allows the Trusted Application to call the function TEE.ReadObjectData. TEE\_DATA.FLAG\_ACCESS\_WRITE, the object is opened with the write access right. TEE\_DATA.FLAG\_ACCESS\_WRITE\_META, the object is opened with the write-meta access right.

## Parameters

<i>storageID</i>	The storage to use.
<i>objectID</i>	The object identifier
<i>objectIDLen</i>	length of the identifier
<i>flags</i>	The flags which determine the settings under which the object is opened.
<i>object</i>	A pointer to the handle, which contains the opened handle upon successful completion.

## Returns

0 if success else error occurred.

**10.30.1.6 set\_object\_key()** static int set\_object\_key (   
     void \* *id*,   
     unsigned int *idlen*,   
     TEE.ObjectHandle *object* ) [static]

[set\\_object\\_key\(\)](#) - Initialize report and then attest enclave with file.

This function describes the initialization of report, attest the enclave with file id and its length then assigned to ret. Based on "mbedtls" key encryption and decryption position of the object will be copied. Finally ret value returns on success else signature too short error will appear on failure.

**Parameters**

<i>id</i>	id of the object.
<i>idlen</i>	length of the id.
<i>object</i>	TEE_ObjectHandle type handle.

**Returns**

ret if success.

**10.30.1.7 TEE\_CloseObject()** `void TEE_CloseObject (`  
`TEE_ObjectHandle object )`

Core Functions, Secure Storage Functions (data is isolated for each TA)

[TEE\\_CloseObject\(\)](#) - Closes an opened object handle.

The object can be persistent or transient. For transient objects, TEE\_CloseObject is equivalent to TEE\_Free↔TransientObject.

**Parameters**

<i>object</i>	Handle of the object.
---------------	-----------------------

**Returns**

TEE\_SUCCESS if success else error occurred.

**10.30.1.8 TEE\_CreatePersistentObject()** `TEE_Result TEE_CreatePersistentObject (`  
`uint32_t storageID,`  
`const void * objectID,`  
`uint32_t objectIDLen,`  
`uint32_t flags,`  
`TEE_ObjectHandle attributes,`  
`const void * initialData,`  
`uint32_t initialDataLen,`  
`TEE_ObjectHandle * object )`

Core Functions, Secure Storage Functions (data is isolated for each TA)

[TEE\\_CreatePersistentObject\(\)](#) - Creates a persistent object with initial attributes.

In this function an initial data stream content returns either a handle on the created object or TEE\_HANDLE\_NULL upon failure.

## Parameters

<i>storageID</i>	The storage to use.
<i>objectID</i>	The object identifier
<i>objectIDLen</i>	The object identifier
<i>flags</i>	The flags which determine the settings under which the object is opened.
<i>attributes</i>	A handle on a persistent object or an initialized transient object from which to take the persistent object attributes
<i>initialData</i>	The initial data content of the persistent object
<i>initialDataLen</i>	The initial data content of the persistent object
<i>object</i>	A pointer to the handle which contains the opened handle upon successful completion

## Returns

0 if success else error occurred.

**10.30.1.9 TEE.Free()** `void TEEFree (`  
`void * buffer )`

[TEE.Free\(\)](#) - causes the space pointed to by buffer to be deallocated;that is made available for further allocation.

This function describes if buffer is a NULL pointer, TEE.Free does nothing. Otherwise, it is a Programmer Error if the argument does not match a pointer previously returned by the TEE.Malloc or TEE.Realloc if the space has been deallocated by a call to TEE.Free or TEE.Realloc.

## Parameters

<i>buffer</i>	The pointer to the memory block to be freed.
---------------	----------------------------------------------

**10.30.1.10 TEE.GenerateRandom()** `void TEEGenerateRandom (`  
`void * randomBuffer,`  
`uint32_t randomBufferLen )`

Crypto, common.

[TEE.GenerateRandom\(\)](#) - Generates random data.

This function generates random data of random buffer length and is stored in to random Buffer by calling wc\_RNG↵\_GenerateBlock().If ret is not equal to 0 then TEE.Panic is called.

**Parameters**

<i>randomBuffer</i>	Reference to generated random data
<i>randomBufferLen</i>	Byte length of requested random data

**Returns**

random data random data will be returned.

**10.30.1.11 TEE\_GetObjectInfo1()** `TEE_Result TEE_GetObjectInfo1 (`  
`TEE_ObjectHandle object,`  
`TEE_ObjectInfo * objectInfo )`

Core Functions, Secure Storage Functions (data is isolated for each TA)

[TEE\\_GetObjectInfo1\(\)](#) - Returns the characteristics of an object.

This function returns a handle which can be used to access the object's attributes and data stream.

**Parameters**

<i>objectInfo</i>	Pointer to a structure filled with the object information
<i>object</i>	Handle of the object

**Returns**

0 if success else error occurred.

**10.30.1.12 TEE\_GetREETime()** `void TEE_GetREETime (`  
`TEE_Time * time )`

Core Functions, Time Functions.

[TEE\\_GetREETime\(\)](#) - Retrieves the current REE system time.

This function retrieves the current time as seen from the point of view of the REE.

**Parameters**

<i>time</i>	Filled with the number of seconds and milliseconds
-------------	----------------------------------------------------

**10.30.1.13 TEE\_GetSystemTime()** `void TEE_GetSystemTime (`  
`TEE_Time * time )`

Core Functions, Time Functions.

[TEE\\_GetSystemTime\(\)](#) - Retrieves the current system time.

This function describes the system time has an arbitrary implementation defined origin that can vary across TA instances. The minimum guarantee is that the system time shall be monotonic for a given TA instance.

#### Parameters

<i>time</i>	Filled with the number of seconds and milliseconds
-------------	----------------------------------------------------

**10.30.1.14 TEE\_Malloc()** `void * TEE_Malloc (`  
`uint32_t size,`  
`uint32_t hint )`

[TEE\\_Malloc\(\)](#) - Allocates space for an object whose size in bytes is specified in the parameter size.

This function describes the pointer returned is guaranteed to be aligned such that it may be assigned as a pointer to any basic C type. The valid hint values are a bitmask and can be independently set. This parameter allows Trusted Applications to refer to various pools of memory or to request special characteristics for the allocated memory by using an implementation-defined hint. Future versions of this specification may introduce additional standard hints.

#### Parameters

<i>size</i>	The size of the buffer to be allocated.
<i>hint</i>	A hint to the allocator.

#### Returns

Upon successful completion, with size not equal to zero, the function returns a pointer to the allocated space.

**10.30.1.15 TEE\_OpenPersistentObject()** `TEE_Result TEE_OpenPersistentObject (`  
`uint32_t storageID,`  
`const void * objectID,`  
`uint32_t objectIDLen,`  
`uint32_t flags,`  
`TEE_ObjectHandle * object )`



Core Functions, Secure Storage Functions (data is isolated for each TA)

[TEE\\_OpenPersistentObject\(\)](#) - Opens a handle on an existing persistent object.

This function returns a handle which can be used to access the object's attributes and data stream.

#### Parameters

<i>storageID</i>	The storage to use
<i>objectID</i>	The object identifier
<i>objectIDLen</i>	The object identifier
<i>flags</i>	The flags which determine the settings under which the object is opened.
<i>object</i>	A pointer to the handle, which contains the opened handle upon successful completion

#### Returns

0 if success else error occurred.

**10.30.1.16 TEE\_ReadObjectData()** `TEE_Result TEE_ReadObjectData (`  
`TEE\_ObjectHandle object,`  
`void * buffer,`  
`uint32_t size,`  
`uint32_t * count )`

Core Functions, Secure Storage Functions (data is isolated for each TA)

[TEE\\_ReadObjectData\(\)](#) - Attempts to read size bytes from the data stream associated with the object into the buffer pointed to by buffer.

The bytes are read starting at the position in the data stream currently stored in the object handle. The handle's position is incremented by the number of bytes actually read. On completion of TEE\_ReadObjectData sets the number of bytes actually read in the "uint32\_t" pointed to by count. The value written to \*count may be less than size if the number of bytes until the end-of-stream is less than size. It is set to 0 if the position at the start of the read operation is at or beyond the end-of-stream. These are the only cases where \*count may be less than size.

#### Parameters

<i>object</i>	Handle of the object
<i>buffer</i>	The buffer containing the data to be written
<i>size</i>	The number of bytes to write
<i>count</i>	size of the buffer.

#### Returns

TEE\_SUCCESS if success else error occurred.

**10.30.1.17 TEE\_Realloc()** `void * TEE_Realloc (`  
`void * buffer,`  
`uint32_t newSize )`

[TEE\\_Realloc\(\)](#) - Changes the size of the memory object pointed to by *buffer* to the size specified by *new size*.

This function describes the content of the object remains unchanged up to the lesser of the new and old sizes. Space in excess of the old size contains unspecified content. If the new size of the memory object requires movement of the object, the space for the previous instantiation of the object is deallocated. If the space cannot be allocated, the original object remains allocated, and this function returns a NULL pointer.

#### Parameters

<i>buffer</i>	The pointer to the object to be reallocated.
<i>newSize</i>	The new size required for the object

#### Returns

Upon successful completion, TEE\_Realloc returns a pointer to the (possibly moved) allocated space. If there is not enough available memory, TEE\_Realloc returns a NULL pointer and the original buffer is still allocated and unchanged.

**10.30.1.18 TEE\_WriteObjectData()** `TEE_Result TEE_WriteObjectData (`  
`TEE_ObjectHandle object,`  
`const void * buffer,`  
`uint32_t size )`

Core Functions, Secure Storage Functions (data is isolated for each TA)

[TEE\\_WriteObjectData\(\)](#) - Writes the buffer data in to persistent objects.

In this function it checks if object is present or not, the encryption/ decryption buffer is taken by calling `mbedtls.aes->.crypt_cbc()` then that buffer data is encrypted and mapped to object. On the base of object creation TEE\_SUCCESS appears else TEE\_ERROR.GENERIC appears.

#### Parameters

<i>object</i>	Handle of the object
<i>buffer</i>	The buffer containing the data to be written
<i>size</i>	The number of bytes to write

#### Returns

TEE\_SUCCESS if success else error occurred.

**10.30.1.19 wc\_ocall\_genseed()** `int wc_ocall_genseed (`  
`void * nonce,`  
`uint32_t len )`

[wc\\_ocall\\_genseed\(\)](#) To generate random data.

This function describes the return value of random generated data. if generated random value is not equal to length of buffer then panic reason occurs.

#### Parameters

<i>nonce</i>	pointer of buffer
<i>len</i>	length of the buffer.

#### Returns

0 on success else error will occur based on panic raised inside trusted application.

### 10.30.2 Variable Documentation

**10.30.2.1 rngstr** `WC_RNG rngstr [static]`

**10.30.2.2 wc\_rng\_init** `int wc_rng_init = 0 [static]`

`ocall_getrandom()` - For getting random data.

This function describes that the retval is returned based on the size of buffer by calling the functions `ocall_getrandom196` and `ocall_getrandom16`

#### Parameters

<i>buf</i>	character type buffer
<i>len</i>	size of the buffer
<i>flags</i>	unassigned integer flag

#### Returns


retval value will be returned based on length of buffer.

### 10.31 ta-ref/api/sgx/tee-internal-api.c File Reference

```
#include "tee_api/tee-types.h"
#include "tee-common.h"
```

```
#include "tee-ta-internal.h"
#include "sgx_trts.h"
#include "sgx_utils.h"
#include "edger/Enclave_t.h"
#include <string.h>
```

Include dependency graph for tee-internal-api.c:

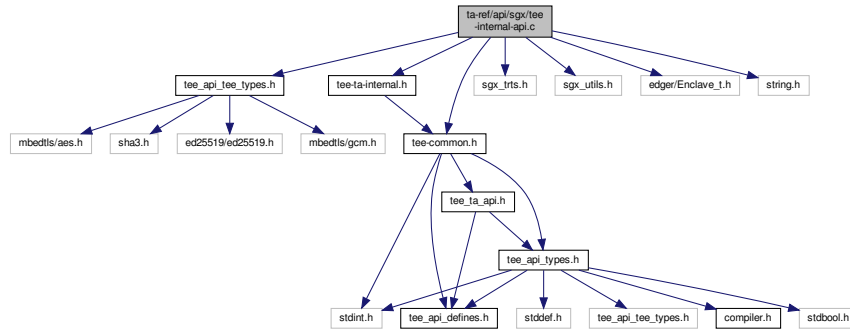

## Functions

- void `__attribute__((noreturn))`
- void `TEE_GetREETime (TEE_Time *time)`  
*Core Functions, Time Functions.*
- void `TEE_GetSystemTime (TEE_Time *time)`  
*Core Functions, Time Functions.*
- `TEE_Result GetRelTimeStart (uint64_t start)`  
*Core Functions, Time Functions.*
- `TEE_Result GetRelTimeEnd (uint64_t end)`  
*Core Functions, Time Functions.*
- static int `flags2flags (int flags)`
- static int `set_object_key (const void *id, unsigned int idlen, TEE_ObjectHandle object)`
- static `TEE_Result OpenPersistentObject (uint32_t storageID, const void *objectID, uint32_t objectIDLen, uint32_t flags, TEE_ObjectHandle *object, int ocreat)`
- `TEE_Result TEE_CreatePersistentObject (uint32_t storageID, const void *objectID, uint32_t objectIDLen, uint32_t flags, TEE_ObjectHandle attributes, const void *initialData, uint32_t initialDataLen, TEE_ObjectHandle *object)`  
*Core Functions, Secure Storage Functions (data is isolated for each TA)*
- `TEE_Result TEE_OpenPersistentObject (uint32_t storageID, const void *objectID, uint32_t objectIDLen, uint32_t flags, TEE_ObjectHandle *object)`  
*Core Functions, Secure Storage Functions (data is isolated for each TA)*
- `TEE_Result TEE_GetObjectInfo1 (TEE_ObjectHandle object, TEE_ObjectInfo *objectInfo)`  
*Core Functions, Secure Storage Functions (data is isolated for each TA)*
- `TEE_Result TEE_WriteObjectData (TEE_ObjectHandle object, const void *buffer, uint32_t size)`  
*Core Functions, Secure Storage Functions (data is isolated for each TA)*
- `TEE_Result TEE_ReadObjectData (TEE_ObjectHandle object, void *buffer, uint32_t size, uint32_t *count)`  
*Core Functions, Secure Storage Functions (data is isolated for each TA)*
- void `TEE_CloseObject (TEE_ObjectHandle object)`  
*Core Functions, Secure Storage Functions (data is isolated for each TA)*
- void `TEE_GenerateRandom (void *randomBuffer, uint32_t randomBufferLen)`  
*Crypto, common.*
- static `WC_RNG * get_wc_rng (void)`

## Variables

- static int `wc_rng_init` = 0
- static WC\_RNG `rngstr`

### 10.31.1 Function Documentation

**10.31.1.1 `__attribute__()`** `void __attribute__ (`  
`(noreturn) )`

`TEE_Panic()` - Raises a Panic in the Trusted Application instance

When a Trusted Application calls the `TEE_Panic` function, the current instance shall be destroyed and all the resources opened by the instance shall be reclaimed.

#### Parameters

<code>ec</code>	An informative panic code defined by the TA. May be displayed in traces if traces are available.
-----------------	--------------------------------------------------------------------------------------------------

**10.31.1.2 `flags2flags()`** `static int flags2flags (`  
`int flags ) [inline], [static]`

`flags2flags()` - Checks the status for reading or writing of the file operational.

This function is to check the status for reading or writing of the file operational.

#### Parameters

<code>flags</code>	Flags of the referencing node.
--------------------	--------------------------------

#### Returns

0 if success else error occurred.

**10.31.1.3 `get_wc_rng()`** `static WC_RNG * get_wc_rng (`  
`void ) [static]`

`get_wc_rng()` - Gets the seed (from OS) and key cipher for rng(random number genertor).

This function returns the random number or unique number of "rngstr".

**Returns**

random number if success else error occurred.

**10.31.1.4 GetRelTimeEnd()** `TEE_Result GetRelTimeEnd (`  
`uint64_t end )`

Core Functions, Time Functions.

[GetRelTimeStart\(\)](#) - find the real time of the end timing.

This function prints the End timing.

**Parameters**

<i>end</i>	End timing
------------	------------

**Returns**

0 if success else error occurred

**10.31.1.5 GetRelTimeStart()** `TEE_Result GetRelTimeStart (`  
`uint64_t start )`

Core Functions, Time Functions.

[GetRelTimeStart\(\)](#) - Gets the real time of the start timing.

This function prints the start timing.

**Parameters**

<i>start</i>	start timing
--------------	--------------

**Returns**

0 if success else error occurred.

**10.31.1.6 OpenPersistentObject()** `static TEE_Result OpenPersistentObject (`  
`uint32_t storageID,`  
`const void * objectID,`

```

uint32_t objectIDLen,
uint32_t flags,
TEE_ObjectHandle * object,
int ocreat ) [static]

```

**OpenPersistentObject()** - Opens a handle on an existing persistent object.

The flags parameter is a set of flags that controls the access rights and sharing permissions with which the object handle is opened. The value of the flags parameter is constructed by a bitwise-inclusive OR of flags TEE\_DATA\_FLAG\_ACCESS\_READ, the object is opened with the read access right. This allows the Trusted Application to call the function TEE\_ReadObjectData. TEE\_DATA\_FLAG\_ACCESS\_WRITE, the object is opened with the write access right. TEE\_DATA\_FLAG\_ACCESS\_WRITE\_META, the object is opened with the write-meta access right.

#### Parameters

<i>storageID</i>	The storage to use.
<i>objectID</i>	The object identifier
<i>objectIDLen</i>	length of the identifier
<i>flags</i>	The flags which determine the settings under which the object is opened.
<i>object</i>	A pointer to the handle, which contains the opened handle upon successful completion.

#### Returns

0 if success else error occurred.

**10.31.1.7 set\_object\_key()** static int set\_object\_key (   
const void \* id,   
unsigned int idlen,   
TEE\_ObjectHandle object ) [static]

set\_object\_key - To initialize report and then attest enclave with file.

This function describes objectID as key\_id to make the key dependent on it sgx report key is 128-bit. Fill another 128-bit with seal key. seal key doesn't change with enclave. Better than nothing, though. random nonce can not use for AES here because of persistency. the digest of attestation report and objectID as the last resort has been used.

#### Parameters

<i>id</i>	id of the object.
<i>idlen</i>	length of the id.
<i>object</i>	TEE_ObjectHandle type handle.

#### Returns

0 if success else error occurred.

**10.31.1.8 TEE\_CloseObject()** `void TEE_CloseObject (`  
`TEE_ObjectHandle object )`

Core Functions, Secure Storage Functions (data is isolated for each TA)

[TEE\\_CloseObject\(\)](#) - Function closes an opened object handle.

The object can be persistent or transient. For transient objects, TEE\_CloseObject is equivalent to TEE\_Free↔TransientObject.

#### Parameters

<i>object</i>	Handle of the object
---------------	----------------------

#### Returns

TEE\_SUCCESS if success else error occurred.

**10.31.1.9 TEE\_CreatePersistentObject()** `TEE_Result TEE_CreatePersistentObject (`  
`uint32_t storageID,`  
`const void * objectID,`  
`uint32_t objectIDLen,`  
`uint32_t flags,`  
`TEE_ObjectHandle attributes,`  
`const void * initialData,`  
`uint32_t initialDataLen,`  
`TEE_ObjectHandle * object )`

Core Functions, Secure Storage Functions (data is isolated for each TA)

[TEE\\_CreatePersistentObject\(\)](#) - Creates a persistent object with initial attributes.

An initial data stream content, and optionally returns either a handle on the created object, or TEE\_HANDLE\_NULL upon failure.

#### Parameters

<i>storageID</i>	The storage to use.
<i>objectID</i>	The object identifier
<i>objectIDLen</i>	The object identifier
<i>flags</i>	The flags which determine the settings under which the object is opened.
<i>attributes</i>	A handle on a persistent object or an initialized transient object from which to take the persistent object attributes
<i>initialData</i>	The initial data content of the persistent object
<i>initialDataLen</i>	The initial data content of the persistent object
<i>object</i>	A pointer to the handle, which contains the opened handle upon successful completion



**Returns**

0 if success, else error occurred.

**10.31.1.10 TEE\_GenerateRandom()** `void TEE_GenerateRandom (`  
    `void * randomBuffer,`  
    `uint32_t randomBufferLen )`

Crypto, common.

[TEE\\_GenerateRandom\(\)](#) - Generates random data.

This function generates random data of random bufferlength and is stored in to randomBuffer by calling `sgx_read_rand()`.

**Parameters**

<i>randomBuffer</i>	Reference to generated random data
<i>randomBufferLen</i>	Byte length of requested random data

**10.31.1.11 TEE\_GetObjectInfo1()** `TEE_Result TEE_GetObjectInfo1 (`  
    `TEE_ObjectHandle object,`  
    `TEE_ObjectInfo * objectInfo )`

Core Functions, Secure Storage Functions (data is isolated for each TA)

[TEE\\_GetObjectInfo1\(\)](#) - Function returns the characteristics of an object.

It returns a handle that can be used to access the object's attributes and data stream.

**Parameters**

<i>objectInfo</i>	Pointer to a structure filled with the object information
<i>object</i>	Handle of the object

**Returns**

0 if success else error occurred.

**10.31.1.12 TEE\_GetREETime()** `void TEE_GetREETime (`  
    `TEE_Time * time )`

Core Functions, Time Functions.

[TEE\\_GetREETime\(\)](#) - Function retrieves the current REE system time.

This function retrieves the current time as seen from the point of view of the REE.

#### Parameters

<i>time</i>	Filled with the number of seconds and milliseconds.
-------------	-----------------------------------------------------

**10.31.1.13 TEE\_GetSystemTime()** `void TEE_GetSystemTime ( TEE_Time * time )`

Core Functions, Time Functions.

[TEE\\_GetSystemTime\(\)](#) - Retrieves the current system time.

The system time has an arbitrary implementation-defined origin that can vary across TA instances

#### Parameters

<i>time</i>	Filled with the number of seconds and milliseconds.
-------------	-----------------------------------------------------

**10.31.1.14 TEE\_OpenPersistentObject()** `TEE_Result TEE_OpenPersistentObject ( uint32_t storageID, const void * objectID, uint32_t objectIDLen, uint32_t flags, TEE_ObjectHandle * object )`

Core Functions, Secure Storage Functions (data is isolated for each TA)

[TEE\\_OpenPersistentObject\(\)](#) - Opens a handle on an existing persistent object.

This function returns a handle that can be used to access the object's attributes and data stream.

#### Parameters

<i>storageID</i>	The storage to use.
<i>objectID</i>	The object identifier
<i>objectIDLen</i>	The object identifier
<i>flags</i>	The flags which determine the settings under which the object is opened.
<i>object</i>	A pointer to the handle, which contains the opened handle upon successful completion

**Returns**

0 if success, else error occurred.

**10.31.1.15 TEE\_ReadObjectData()** `TEE_Result` TEE\_ReadObjectData (   
     `TEE_ObjectHandle` *object*,   
     `void *` *buffer*,   
     `uint32_t` *size*,   
     `uint32_t *` *count* )

Core Functions, Secure Storage Functions (data is isolated for each TA)

[`TEE\_ReadObjectData\(\)`](#) - Attempts to read *size* bytes from the data stream associated with the object *object* into the buffer pointed to by *buffer*.

The bytes are read starting at the position in the data stream currently stored in the object handle. The handle's position is incremented by the number of bytes actually read. On completion `TEE_ReadObjectData` sets the number of bytes actually read in the `uint32_t` pointed to by *count*. The value written to *\*count* may be less than *size* if the number of bytes until the end-of-stream is less than *size*. It is set to 0 if the position at the start of the read operation is at or beyond the end-of-stream. These are the only cases where *\*count* may be less than *size*.

**Parameters**

<i>object</i>	Handle of the object
<i>buffer</i>	The buffer containing the data to be written
<i>size</i>	The number of bytes to write
<i>count</i>	size of the buffer.

**Returns**

`TEE_SUCCESS` if success, else error occurred.

**10.31.1.16 TEE\_WriteObjectData()** `TEE_Result` TEE\_WriteObjectData (   
     `TEE_ObjectHandle` *object*,   
     `const void *` *buffer*,   
     `uint32_t` *size* )

Core Functions, Secure Storage Functions (data is isolated for each TA)

[`TEE\_WriteObjectData\(\)`](#) - writes *size* bytes from the buffer pointed to by *buffer* to the data stream associated with the open object handle *object*.

If the current data position points before the end-of-stream, then *size* bytes are written to the data stream, overwriting bytes starting at the current data position. If the current data position points beyond the stream's end, then the data stream is first extended with zero bytes until the length indicated by the data position indicator is reached, and then *size* bytes are written to the stream.

## Parameters

<i>object</i>	Handle of the object
<i>buffer</i>	The buffer containing the data to be written
<i>size</i>	The number of bytes to write

## Returns

TEE\_SUCCESS if success else error occurred.


## 10.31.2 Variable Documentation

**10.31.2.1 rngstr** WC\_RNG rngstr [static]


**10.31.2.2 wc\_rng\_init** int wc\_rng\_init = 0 [static]

## 10.32 ta-ref/api/keystone/tee\_api.tee\_types.h File Reference

```
#include "mbedtls/gcm.h"
#include "mbedtls/aes.h"
#include "sha3.h"
#include "ed25519/ed25519.h"
Include dependency graph for tee_api.tee_types.h:
```

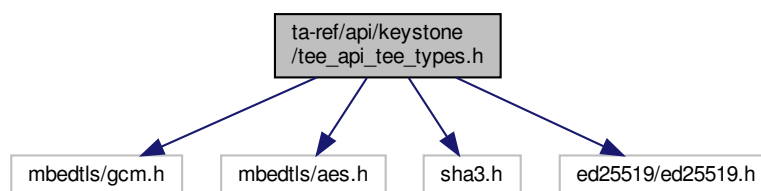

This graph shows which files directly or indirectly include this file:

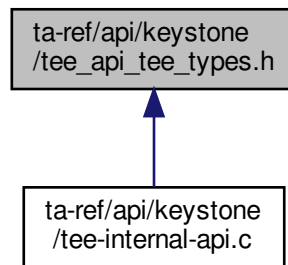

## Classes

- struct `__TEE_OperationHandle`
- struct `__TEE_ObjectHandle`

## 10.33 tee\_api\_tee\_types.h

[Go to the documentation of this file.](#)

```

1 /*
2  * SPDX-License-Identifier: BSD-2-Clause
3  *
4  * Copyright (C) 2019 National Institute of Advanced Industrial Science
5  *                               and Technology (AIST)
6  * All rights reserved.
7  *
8  * Redistribution and use in source and binary forms, with or without
9  * modification, are permitted provided that the following conditions are met:
10 *
11 * 1. Redistributions of source code must retain the above copyright notice,
12 * this list of conditions and the following disclaimer.
13 *
14 * 2. Redistributions in binary form must reproduce the above copyright notice,
15 * this list of conditions and the following disclaimer in the documentation
16 * and/or other materials provided with the distribution.
17 *
18 * THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
19 * AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
20 * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
21 * ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE
22 * LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
23 * CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF
24 * SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS
25 * INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
26 * CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
27 * ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
28 * POSSIBILITY OF SUCH DAMAGE.
29 */
30
31 #ifndef TEE_API_TYPES_KESTONE_H
32 #define TEE_API_TYPES_KESTONE_H
33
34 #ifndef DOXYGEN_SHOULD_SKIP_THIS
35 #define MBEDCRYPT 1
36 #define WOLFCRYPT 2
37 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
38
39 #if CRYPTLIB==MBEDCRYPT
40 #ifndef DOXYGEN_SHOULD_SKIP_THIS
41 #define MBEDTLS_CONFIG_FILE "mbed-crypto-config.h"
42 #define AES256 1
43 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/

```

```

44 # include "mbedtls/gcm.h"
45 # include "mbedtls/aes.h"
46 # include "sha3.h"
47 # include "ed25519/ed25519.h"
48 #elif CRYPTLIB==WOLFCRYPT
49 #ifndef DOXYGEN_SHOULD_SKIP_THIS
50 # define HAVE_AESGCM 1
51 # define HAVE_AES_CBC 1
52 # define HAVE_AES_DECRYPT 1
53 # define HAVE_FIPS 1
54 # define HAVE_FIPS_VERSION 2
55 # define HAVE_ED25519 1
56 # define HAVE_ED25519_SIGN 1
57 # define HAVE_ED25519_VERIFY 1
58 # define WOLFSSL_SHA512 1
59 # define WOLFSSL_SHA3 1
60 # define WOLFSSL_SHA3_SMALL 1
61 # define WOLFCRYPT_ONLY 1
62 # define WOLF_CRYPT_PORT_H
63 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
64 # include "wolfssl/wolfcrypt/sha3.h"
65 # include "wolfssl/wolfcrypt/aes.h"
66 # include "wolfssl/wolfcrypt/sha512.h"
67 # include "wolfssl/wolfcrypt/ed25519.h"
68 #else
69 # include "sha3.h"
70 # include "ed25519/ed25519.h"
71 # include "tiny_AES.c/aes.h"
72 #ifndef DOXYGEN_SHOULD_SKIP_THIS
73 # define AES256 1
74 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
75 #endif
76
77 #ifndef DOXYGEN_SHOULD_SKIP_THIS
78 #define SHA_LENGTH (256/8)
79 #define TEE_OBJECT_NONCE_SIZE 16
80 #define TEE_OBJECT_KEY_SIZE 32
81 #define TEE_OBJECT_SKEY_SIZE 64
82 #define TEE_OBJECT_AAD_SIZE 16
83 #define TEE_OBJECT_TAG_SIZE 16
84 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
85
86 struct __TEEOperationHandle
87 {
88     int mode;
89     int flags;
90     int alg;
91     #if CRYPTLIB==MBEDCRYPT
92     sha3_ctx_t ctx;
93     mbedtls_aes_context aectx;
94     mbedtls_gcm_context aegcmctx;
95     #elif CRYPTLIB==WOLFCRYPT
96     wc_Sha3 ctx;
97     Aes aectx;
98     Aes aegcmctx;
99     unsigned int aegcm_aadsz;
100     unsigned char aegcm_aad[TEE_OBJECT_AAD_SIZE];
101     ed25519_key key;
102     #else
103     sha3_ctx_t ctx;
104     struct AES_ctx aectx;
105     #endif
106     int aegcm_state;
107     unsigned char aeiv[TEE_OBJECT_NONCE_SIZE];
108     unsigned char aekey[32];
109     unsigned char pubkey[TEE_OBJECT_KEY_SIZE];
110     unsigned char prikey[TEE_OBJECT_SKEY_SIZE];
111 };
112
113 struct __TEEObjectHandle
114 {
115     unsigned int type;
116     int flags;
117     int desc;
118     #if CRYPTLIB==MBEDCRYPT
119     mbedtls_aes_context persist_ctx;
120     unsigned char persist_iv[TEE_OBJECT_NONCE_SIZE];
121     #elif CRYPTLIB==WOLFCRYPT
122     Aes persist_ctx;
123     unsigned char persist_iv[TEE_OBJECT_NONCE_SIZE];
124     ed25519_key key;
125     #else
126     struct AES_ctx persist_ctx;
127     #endif
128     unsigned char public_key[TEE_OBJECT_KEY_SIZE];
129     unsigned char private_key[TEE_OBJECT_SKEY_SIZE];
130 };

```

```

131
132 // defined in tee_api_defines.h
133 // enum Data.Flag.Constants {
134 //     TEE_DATA_FLAG_ACCESS_READ = 0x00000001,
135 //     TEE_DATA_FLAG_ACCESS_WRITE = 0x00000002,
136 //     //TEE_DATA_FLAG_ACCESS_WRITE_META = 0x00000004,
137 //     //TEE_DATA_FLAG_SHARE_READ = 0x00000010,
138 //     //TEE_DATA_FLAG_SHARE_WRITE = 0x00000020,
139 //     TEE_DATA_FLAG_OVERWRITE = 0x00000400
140 // };
141 // enum Data.Flag.Constants {
142 //     TEE_DATA_FLAG_ACCESS_READ = 0x00000001,
143 //     TEE_DATA_FLAG_ACCESS_WRITE = 0x00000002,
144 //     //TEE_DATA_FLAG_ACCESS_WRITE_META = 0x00000004,
145 //     //TEE_DATA_FLAG_SHARE_READ = 0x00000010,
146 //     //TEE_DATA_FLAG_SHARE_WRITE = 0x00000020,
147 //     TEE_DATA_FLAG_OVERWRITE = 0x00000400
148 // };
149 #endif

```

### 10.34 ta-ref/api/optee/tee\_api\_tee\_types.h File Reference

### 10.35 tee\_api\_tee\_types.h

[Go to the documentation of this file.](#)

```
1 // empty
```


### 10.36 ta-ref/api/sgx/tee\_api\_tee\_types.h File Reference

```


#include "sha3.h"
#include "ed25519/ed25519.h"
#include "mbedtls/gcm.h"
#include "mbedtls/aes.h"

```

Include dependency graph for tee\_api\_tee\_types.h:

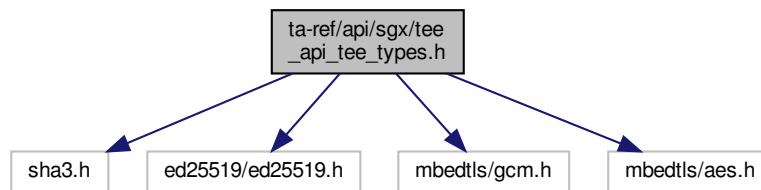

This graph shows which files directly or indirectly include this file:



## Classes

- struct [\\_\\_TEE\\_OperationHandle](#)
- struct [\\_\\_TEE\\_ObjectHandle](#)

## 10.37 tee\_api\_tee\_types.h

[Go to the documentation of this file.](#)

```

1 /*
2  * SPDX-License-Identifier: BSD-2-Clause
3  *
4  * Copyright (C) 2019 National Institute of Advanced Industrial Science
5  *                               and Technology (AIST)
6  * All rights reserved.
7  *
8  * Redistribution and use in source and binary forms, with or without
9  * modification, are permitted provided that the following conditions are met:
10 *
11 * 1. Redistributions of source code must retain the above copyright notice,
12 * this list of conditions and the following disclaimer.
13 *
14 * 2. Redistributions in binary form must reproduce the above copyright notice,
15 * this list of conditions and the following disclaimer in the documentation
16 * and/or other materials provided with the distribution.
17 *
18 * THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
19 * AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
20 * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
21 * ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE
22 * LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
23 * CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF
24 * SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS
25 * INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
26 * CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
27 * ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
28 * POSSIBILITY OF SUCH DAMAGE.
29 */
30
31 #ifndef TEE_API_TYPES_KEystone_H
32 #define TEE_API_TYPES_KEystone_H
33
34 #ifndef DOXYGEN_SHOULD_SKIP_THIS
35 #define MBEDCRYPT 1
36 #define WOLFCRYPT 2
37 #define SHA_LENGTH (256/8)
38 #define AES256 1
39 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
40
41 #include "sha3.h"
42 #include "ed25519/ed25519.h"
43

```



```


44 #if CRYPTLIB==MBEDCRYPT
45 #ifndef DOXYGEN_SHOULD_SKIP_THIS
46 # define MBEDTLS_CONFIG_FILE "mbed-crypto-config.h"
47 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
48 # include "mbedtls/gcm.h"
49 # include "mbedtls/aes.h"
50 #elif CRYPTLIB==WOLFCRYPT
51 #ifndef DOXYGEN_SHOULD_SKIP_THIS
52 # define HAVE_AESGCM 1
53 # define HAVE_AES_CBC 1
54 # define HAVE_AES_DECRYPT 1
55 # define HAVE_FIPS 1
56 # define HAVE_FIPS_VERSION 2
57 # define HAVE_ED25519 1
58 # define HAVE_ED25519_SIGN 1
59 # define HAVE_ED25519_VERIFY 1
60 # define WOLFSSL_SHA3 1
61 # define WOLF_CRYPT_PORT_H
62 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
63 # include "wolfssl/wolfcrypt/sha3.h"
64 # include "wolfssl/wolfcrypt/aes.h"
65 # include "wolfssl/wolfcrypt/sha512.h"
66 # include "wolfssl/wolfcrypt/ed25519.h"
67 #else
68 # include "tiny-AES.c/aes.h"
69 #endif
70
71 #ifndef DOXYGEN_SHOULD_SKIP_THIS
72 #define TEE_OBJECT_NONCE_SIZE 16
73 #define TEE_OBJECT_KEY_SIZE 32
74 #define TEE_OBJECT_SKEY_SIZE 64
75 #define TEE_OBJECT_AAD_SIZE 16
76 #define TEE_OBJECT_TAG_SIZE 16
77 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
78
79 struct __TEEOperationHandle
80 {
81     int mode;
82     int flags;
83     int alg;
84     #if CRYPTLIB==MBEDCRYPT
85     sha3_ctx_t ctx;
86     mbedtls_aes_context aectx;
87     mbedtls_gcm_context aegcmctx;
88     #elif CRYPTLIB==WOLFCRYPT
89     wc_Sha3 ctx;
90     Aes aectx;
91     Aes aegcmctx;
92     unsigned int aegcm_aadsz;
93     unsigned char aegcm_aad[TEE_OBJECT_AAD_SIZE];
94     ed25519_key key;
95     #else
96     sha3_ctx_t ctx;
97     struct AES_ctx aectx;
98     #endif
99     int aegcm_state;
100     unsigned char aeiv[TEE_OBJECT_NONCE_SIZE];
101     unsigned char aekey[32];
102     unsigned char pubkey[TEE_OBJECT_KEY_SIZE];
103     unsigned char prikey[TEE_OBJECT_SKEY_SIZE];
104 };
105
106 struct __TEEObjectHandle
107 {
108     unsigned int type;
109     int flags;
110     int desc;
111     #if CRYPTLIB==MBEDCRYPT
112     mbedtls_aes_context persist_ctx;
113     unsigned char persist_iv[TEE_OBJECT_NONCE_SIZE];
114     #elif CRYPTLIB==WOLFCRYPT
115     Aes persist_ctx;
116     unsigned char persist_iv[TEE_OBJECT_NONCE_SIZE];
117     ed25519_key key;
118     #else
119     struct AES_ctx persist_ctx;
120     #endif
121     unsigned char public_key[TEE_OBJECT_KEY_SIZE];
122     unsigned char private_key[TEE_OBJECT_SKEY_SIZE];
123 };
124
125 // Minimal constant definitions
126 #ifndef DOXYGEN_SHOULD_SKIP_THIS
127 #define TEE_HANDLE_NULL 0
128 #endif /*DOXYGEN_SHOULD_SKIP_THIS*/
129
130 #endif

```

## 10.38 ta-ref/api/keystone/teec\_stub.c File Reference

```
#include <tee_client_api.h>
```

Include dependency graph for teec\_stub.c:

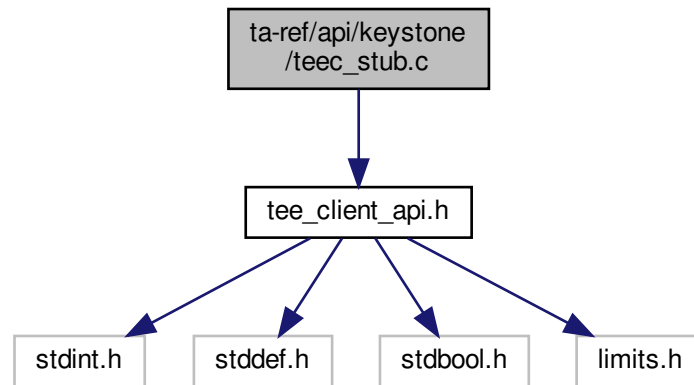

### Functions

- [TEEC\\_Result TEEC\\_InitializeContext](#) (const char \*name, [TEEC\\_Context](#) \*context)
- void [TEEC\\_FinalizeContext](#) ([TEEC\\_Context](#) \*context)
- [TEEC\\_Result TEEC\\_OpenSession](#) ([TEEC\\_Context](#) \*context, [TEEC\\_Session](#) \*session, const [TEEC\\_UUID](#) \*destination, uint32\_t connectionMethod, const void \*connectionData, [TEEC\\_Operation](#) \*operation, uint32\_t \*returnOrigin)
- void [TEEC\\_CloseSession](#) ([TEEC\\_Session](#) \*session)
- [TEEC\\_Result TEEC\\_RegisterSharedMemory](#) ([TEEC\\_Context](#) \*context, [TEEC\\_SharedMemory](#) \*sharedMem)
- [TEEC\\_Result TEEC\\_AllocateSharedMemory](#) ([TEEC\\_Context](#) \*context, [TEEC\\_SharedMemory](#) \*sharedMem)
- void [TEEC\\_ReleaseSharedMemory](#) ([TEEC\\_SharedMemory](#) \*sharedMemory)
- void [TEEC\\_RequestCancellation](#) ([TEEC\\_Operation](#) \*operation)

### 10.38.1 Function Documentation

**10.38.1.1 TEEC\_AllocateSharedMemory()** [TEEC\\_Result](#) TEEC\_AllocateSharedMemory (   
[TEEC\\_Context](#) \* context,   
[TEEC\\_SharedMemory](#) \* sharedMem )

[TEEC\\_AllocateSharedMemory\(\)](#) - Allocate shared memory for TEE.

#### Parameters

<i>context</i>	The initialized TEE context structure in which scope to open the session.
<i>sharedMem</i>	Pointer to the allocated shared memory.

**Returns**

TEEC\_SUCCESS The registration was successful.  
TEEC\_ERROR\_OUT\_OF\_MEMORY Memory exhaustion.  
TEEC\_Result Something failed.

**10.38.1.2 TEEC.CloseSession()** `void TEEC_CloseSession (`  
`TEEC_Session * session )`

[TEEC.CloseSession\(\)](#) - Closes the session which has been opened with the specific trusted application.

**Parameters**

<i>session</i>	The opened session to close.
----------------	------------------------------

**10.38.1.3 TEEC.FinalizeContext()** `void TEEC_FinalizeContext (`  
`TEEC_Context * context )`

[TEEC.FinalizeContext\(\)](#) - Destroys a context holding connection information on the specific TEE.

This function finalizes an initialized TEE context, closing the connection between the client application and the TEE. This function must only be called when all sessions related to this TEE context have been closed and all shared memory blocks have been released.

**Parameters**

<i>context</i>	The context to be finalized.
----------------	------------------------------

**10.38.1.4 TEEC.InitializeContext()** `TEEC_Result TEEC_InitializeContext (`  
`const char * name,`  
`TEEC_Context * context )`

[TEEC.InitializeContext\(\)](#) - Initializes a context holding connection information on the specific TEE, designated by the name string.

**Parameters**

<i>name</i>	A zero-terminated string identifying the TEE to connect to. If name is set to NULL, the default TEE is connected to. NULL is the only supported value in this version of the API implementation.
<i>context</i>	The context structure which is to be initialized.

**Returns**

TEEC\_SUCCESS The initialization was successful.

TEEC\_Result Something failed.

**10.38.1.5 TEEC\_OpenSession()** `TEEC_Result TEEC_OpenSession (`

```
TEEC_Context * context,
TEEC_Session * session,
const TEEC_UUID * destination,
uint32_t connectionMethod,
const void * connectionData,
TEEC_Operation * operation,
uint32_t * returnOrigin )
```

`TEEC_OpenSession()` - Opens a new session with the specified trusted application.

**Parameters**

<i>context</i>	The initialized TEE context structure in which scope to open the session.
<i>session</i>	The session to initialize.
<i>destination</i>	A structure identifying the trusted application with which to open a session.
<i>connectionMethod</i>	The connection method to use.
<i>connectionData</i>	Any data necessary to connect with the chosen connection method. Not supported, should be set to NULL.
<i>operation</i>	An operation structure to use in the session. May be set to NULL to signify no operation structure needed.
<i>returnOrigin</i>	A parameter which will hold the error origin if this function returns any value other than TEEC_SUCCESS.

**Returns**

TEEC\_SUCCESS OpenSession successfully opened a new session.

TEEC\_Result Something failed.

**10.38.1.6 TEEC\_RegisterSharedMemory()** `TEEC_Result TEEC_RegisterSharedMemory (`

```
TEEC_Context * context,
TEEC_SharedMemory * sharedMem )
```

`TEEC_RegisterSharedMemory()` - Register a block of existing memory as a shared block within the scope of the specified context.

**Parameters**

<i>context</i>	The initialized TEE context structure in which scope to open the session.
<i>sharedMem</i>	pointer to the shared memory structure to register.

**Returns**

TEEC\_SUCCESS The registration was successful.  
TEEC\_ERROR\_OUT\_OF\_MEMORY Memory exhaustion.  
TEEC\_Result Something failed.

**10.38.1.7 TEEC.ReleaseSharedMemory()** `void TEEC.ReleaseSharedMemory (`  
`TEEC_SharedMemory * sharedMemory )`

[TEEC.ReleaseSharedMemory\(\)](#) - Free or deregister the shared memory.

**Parameters**

<i>sharedMem</i>	Pointer to the shared memory to be freed.
------------------	-------------------------------------------

**10.38.1.8 TEEC.RequestCancellation()** `void TEEC.RequestCancellation (`  
`TEEC_Operation * operation )`

[TEEC.RequestCancellation\(\)](#) - Request the cancellation of a pending open session or command invocation.


**Parameters**

<i>operation</i>	Pointer to an operation previously passed to open session or invoke.
------------------	----------------------------------------------------------------------

## 10.39 ta-ref/api/keystone/trace.c File Reference

```
#include <stdarg.h>
#include "trace.h"
#include "edger/Enclave_t.h"
```

Include dependency graph for trace.c:

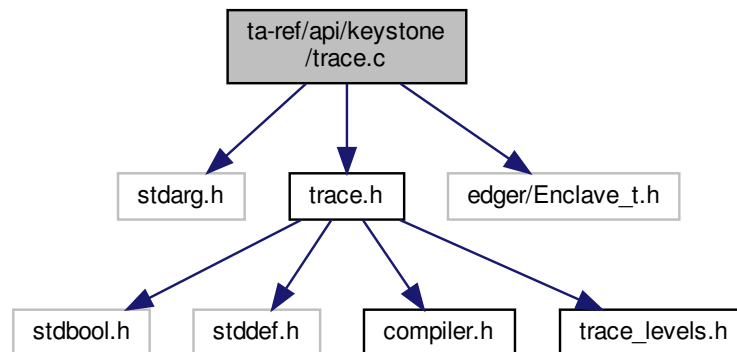

## Functions

- void [trace\\_vprintf](#) (const char \*func, int line, int level, bool level\_ok, const char \*fmt, va\_list ap)
- void [trace\\_printf](#) (const char \*func, int line, int level, bool level\_ok, const char \*fmt,...)

### 10.39.1 Function Documentation

**10.39.1.1 trace\_printf()** void trace\_printf (

```

    const char * func,
    int line,
    int level,
    bool level_ok,
    const char * fmt,
    ... )

```

[trace\\_printf\(\)](#) - Prints the formatted data to stdout.

This function returns the value of ap by calling va\_end().

#### Parameters

<i>func</i>	Pointer to a buffer where the resulting C-string is stored.
<i>line</i>	integer type of line
<i>level_ok</i>	boolean value
<i>fmt</i>	C string that contains a format string
<i>ap</i>	A value identifying a variable arguments list

**Returns**

Total number of characters is returned.

```
10.39.1.2 trace_vprintf() void trace_vprintf (
    const char * func,
    int line,
    int level,
    bool level_ok,
    const char * fmt,
    va_list ap )
```

[trace\\_vprintf\(\)](#) - Writes the formatted data from variable argument list to sized buffer.

This function returns the buffer character by calling ocall\_print\_string()

**Parameters**

<i>func</i>	Pointer to a buffer where the resulting C-string is stored.
<i>line</i>	integer type of line
<i>level_ok</i>	boolean value
<i>fmt</i>	C string that contains a format string
<i>ap</i>	A value identifying a variable arguments list


**Returns**

buf The total number of characters written is returned.

**10.40 ta-ref/api/tee-internal-api-cryptlib.c File Reference**

```
#include "tee_api_types.h"
#include "tee-common.h"
#include "tee-ta-internal.h"
#include "edger/Enclave_t.h"
#include "syscall.h"
#include "report.h"
#include <string.h>
#include <stdlib.h>
```

Include dependency graph for tee-internal-api-cryptlib.c:

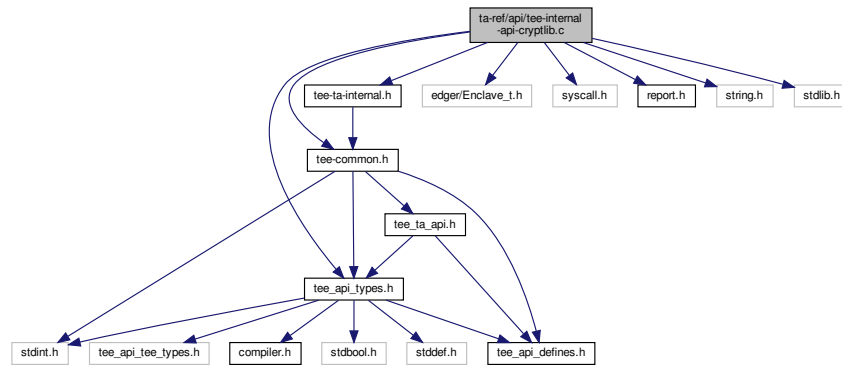

## Functions

- void [wolfSSL\\_Free](#) (void \*p)
- void \* [wolfSSL\\_Malloc](#) (size\_t n)
- [TEE\\_Result TEE\\_AllocateOperation](#) ([TEE.OperationHandle](#) \*operation, uint32\_t algorithm, uint32\_t mode, uint32\_t maxKeySize)  
*Crypto, for all Crypto Functions.*
- void [TEE\\_FreeOperation](#) ([TEE.OperationHandle](#) operation)  
*Crypto, for all Crypto Functions.*
- void [TEE\\_DigestUpdate](#) ([TEE.OperationHandle](#) operation, const void \*chunk, uint32\_t chunkSize)  
*Crypto, Message Digest Functions.*
- [TEE\\_Result TEE\\_DigestDoFinal](#) ([TEE.OperationHandle](#) operation, const void \*chunk, uint32\_t chunkLen, void \*hash, uint32\_t \*hashLen)
- [TEE\\_Result TEE\\_SetOperationKey](#) ([TEE.OperationHandle](#) operation, [TEE.ObjectHandle](#) key)  
*Crypto, Authenticated Encryption with Symmetric key Verification Functions.*
- [TEE\\_Result TEE\\_AEInit](#) ([TEE.OperationHandle](#) operation, const void \*nonce, uint32\_t nonceLen, uint32\_t tagLen, uint32\_t AADLen, uint32\_t payloadLen)  
*Crypto, Authenticated Encryption with Symmetric key Verification Functions.*
- void [TEE\\_AEUpdateAAD](#) ([TEE.OperationHandle](#) operation, const void \*AADdata, uint32\_t AADdataLen)  
*Crypto, Authenticated Encryption with Symmetric key Verification Functions.*
- [TEE\\_Result TEE\\_AEUpdate](#) ([TEE.OperationHandle](#) operation, const void \*srcData, uint32\_t srcLen, void \*destData, uint32\_t \*destLen)  
*Crypto, Authenticated Encryption with Symmetric key Verification Functions.*
- [TEE\\_Result TEE\\_AEEncryptFinal](#) ([TEE.OperationHandle](#) operation, const void \*srcData, uint32\_t srcLen, void \*destData, uint32\_t \*destLen, void \*tag, uint32\_t \*tagLen)  
*Crypto, Authenticated Encryption with Symmetric key Verification Functions.*
- [TEE\\_Result TEE\\_AEDecryptFinal](#) ([TEE.OperationHandle](#) operation, const void \*srcData, uint32\_t srcLen, void \*destData, uint32\_t \*destLen, void \*tag, uint32\_t tagLen)  
*Crypto, Authenticated Encryption with Symmetric key Verification Functions.*
- void [TEE\\_CipherInit](#) ([TEE.OperationHandle](#) operation, const void \*nonce, uint32\_t nonceLen)  
*Crypto, Authenticated Encryption with Symmetric key Verification Functions.*
- [TEE\\_Result TEE\\_CipherUpdate](#) ([TEE.OperationHandle](#) operation, const void \*srcData, uint32\_t srcLen, void \*destData, uint32\_t \*destLen)  
*Crypto, Authenticated Encryption with Symmetric key Verification Functions.*
- [TEE\\_Result TEE\\_CipherDoFinal](#) ([TEE.OperationHandle](#) operation, const void \*srcData, uint32\_t srcLen, void \*destData, uint32\_t \*destLen)



- **TEE\_Result TEE\_GenerateKey** (**TEE\_ObjectHandle** object, **uint32\_t** keySize, **const TEE\_Attribute** \*params, **uint32\_t** paramCount)  
*Crypto, Asymmetric key Verification Functions.*
- **TEE\_Result TEE\_AllocateTransientObject** (**TEE\_ObjectType** objectType, **uint32\_t** maxKeySize, **TEE\_ObjectHandle** \*object)  
*Crypto, Asymmetric key Verification Functions.*
- **void TEE\_InitRefAttribute** (**TEE\_Attribute** \*attr, **uint32\_t** attributeID, **const void** \*buffer, **uint32\_t** length)  
*Crypto, Asymmetric key Verification Functions.*
- **void TEE\_InitValueAttribute** (**TEE\_Attribute** \*attr, **uint32\_t** attributeID, **uint32\_t** a, **uint32\_t** b)  
*Crypto, Asymmetric key Verification Functions.*
- **void TEE\_FreeTransientObject** (**TEE\_ObjectHandle** object)  
*Crypto, Asymmetric key Verification Functions.*
- **TEE\_Result TEE\_AsymmetricSignDigest** (**TEE\_OperationHandle** operation, **const TEE\_Attribute** \*params, **uint32\_t** paramCount, **const void** \*digest, **uint32\_t** digestLen, **void** \*signature, **uint32\_t** \*signatureLen)  
*Crypto, Asymmetric key Verification Functions.*
- **TEE\_Result TEE\_AsymmetricVerifyDigest** (**TEE\_OperationHandle** operation, **const TEE\_Attribute** \*params, **uint32\_t** paramCount, **const void** \*digest, **uint32\_t** digestLen, **const void** \*signature, **uint32\_t** signatureLen)  
*Crypto, Asymmetric key Verification Functions.*

## 10.40.1 Function Documentation

**10.40.1.1 TEE\_AEDecryptFinal()** **TEE\_Result** TEE\_AEDecryptFinal (   
**TEE\_OperationHandle** operation,   
**const void** \* srcData,   
**uint32\_t** srcLen,   
**void** \* destData,   
**uint32\_t** \* destLen,   
**void** \* tag,   
**uint32\_t** tagLen )

Crypto, Authenticated Encryption with Symmetric key Verification Functions.

**TEE\_AEDecryptFinal()** - Processes data that has not been processed by previous calls to **TEE\_AEUpdate** as well as data supplied in **srcData**.

This function completes the AE operation and compares the computed tag with the tag supplied in the parameter **tag**. The operation handle can be reused or newly initialized. The buffers **srcData** and **destData** shall be either completely disjoint or equal in their starting positions. The operation may be in either initial or active state and enters initial state afterwards.

### Parameters

<i>operation</i>	Handle of a running AE operation
<i>srcData</i>	Reference to final chunk of input data to be encrypted
<i>srcLen</i>	length of the input data
<i>destData</i>	Output buffer. Can be omitted if the output is to be discarded.
<i>destLen</i>	length of the buffer.
<i>tag</i>	Output buffer filled with the computed tag
<i>tagLen</i>	length of the tag.

**Returns**

0 on success.

TEE\_ERROR\_SHORT\_BUFFER If the output buffer is not large enough to contain the output

TEE\_ERROR\_MAC\_INVALID If the computed tag does not match the supplied tag

**10.40.1.2 TEE\_AEEncryptFinal()** `TEE_Result TEE_AEEncryptFinal (`  
`TEE_OperationHandle operation,`  
`const void * srcData,`  
`uint32_t srcLen,`  
`void * destData,`  
`uint32_t * destLen,`  
`void * tag,`  
`uint32_t * tagLen )`

Crypto, Authenticated Encryption with Symmetric key Verification Functions.

[TEE\\_AEEncryptFinal\(\)](#) - processes data that has not been processed by previous calls to [TEE\\_AEUpdate](#) as well as data supplied in `srcData` .

[TEE\\_AEEncryptFinal](#) completes the AE operation and computes the tag. The operation handle can be reused or newly initialized. The buffers `srcData` and `destData` SHALL be either completely disjoint or equal in their starting positions. The operation may be in either initial or active state and enters initial state afterwards.

**Parameters**

<i>operation</i>	Handle of a running AE operation
<i>srcData</i>	Reference to final chunk of input data to be encrypted
<i>srcLen</i>	length of the input data
<i>destData</i>	Output buffer. Can be omitted if the output is to be discarded.
<i>destLen</i>	length of the buffer.
<i>tag</i>	Output buffer filled with the computed tag
<i>tagLen</i>	length of the tag.

**Returns**

0 on success.

TEE\_ERROR\_SHORT\_BUFFER If the output or tag buffer is not large enough to contain the output.

**10.40.1.3 TEE\_AEInit()** `TEE_Result TEE_AEInit (`  
`TEE_OperationHandle operation,`  
`const void * nonce,`  
`uint32_t nonceLen,`  
`uint32_t tagLen,`  
`uint32_t AADLen,`  
`uint32_t payloadLen )`

Crypto, Authenticated Encryption with Symmetric key Verification Functions.

[TEE.AEInit\(\)](#) - Initializes an Authentication Encryption operation.

The operation must be in initial state and remains in the initial state afterwards.

#### Parameters

<i>operation</i>	A handle on the operation.
<i>nonce</i>	The operation nonce or IV
<i>nonceLen</i>	length of nonce
<i>tagLen</i>	Size in bits of the tag
<i>AADLen</i>	Length in bytes of the AAD
<i>payloadLen</i>	Length in bytes of the payload.

#### Returns

0 on success.

TEE\_ERROR\_NOT\_SUPPORTED If the tag length is not supported by the algorithm.

**10.40.1.4 TEE.AEUpdate()** `TEE_Result TEE.AEUpdate (`  
`TEE.OperationHandle operation,`  
`const void * srcData,`  
`uint32_t srcLen,`  
`void * destData,`  
`uint32_t * destLen )`

Crypto, Authenticated Encryption with Symmetric key Verification Functions.

[TEE.AEUpdate\(\)](#) - Accumulates data for an Authentication Encryption operation

This function describes Input data does not have to be a multiple of block size. Subsequent calls to this function are possible. Unless one or more calls of this function have supplied sufficient input data, no output is generated. when using this routine to decrypt the returned data may be corrupt since the integrity check is not performed until all the data has been processed. If this is a concern then only use the TEE.AEDecryptFinal routine.

#### Parameters

<i>operation</i>	Handle of a running AE operation.
<i>srcData</i>	Input data buffer to be encrypted or decrypted
<i>srcLen</i>	length of the input buffer.
<i>destData</i>	Output buffer
<i>destLen</i>	length of the out put buffer.

## Returns

0 on success.

TEE\_ERROR\_SHORT\_BUFFER if the output buffer is not large enough to contain the output.

**10.40.1.5 TEE.AEUpdateAAD()** void TEE\_AEUpdateAAD (   
     TEE\_OperationHandle operation,   
     const void \* AADdata,   
     uint32\_t AADdataLen )

Crypto, Authenticated Encryption with Symmetric key Verification Functions.

[TEE.AEUpdateAAD\(\)](#) - Feeds a new chunk of Additional Authentication Data (AAD) to the AE operation. Subsequent calls to this function are possible.

The TEE\_AEUpdateAAD function feeds a new chunk of Additional Authentication Data (AAD) to the AE operation. Subsequent calls to this function are possible. The buffers srcData and destData shall be either completely disjoint or equal in their starting positions. The operation SHALL be in initial state and remains in initial state afterwards.

## Parameters

<i>operation</i>	Handle on the AE operation
<i>AADdata</i>	Input buffer containing the chunk of AAD
<i>AADdataLen</i>	length of the chunk of AAD.

**10.40.1.6 TEE.AllocateOperation()** TEE\_Result TEE\_AllocateOperation (   
     TEE\_OperationHandle \* operation,   
     uint32\_t algorithm,   
     uint32\_t mode,   
     uint32\_t maxKeySize )

Crypto, for all Crypto Functions.

[TEE.AllocateOperation\(\)](#) - Allocates a handle for a new cryptographic operation and sets the mode and algorithm type.

If this function does not return with TEE\_SUCCESS then there is no valid handle value. Once a cryptographic operation has been created, the implementation shall guarantee that all resources necessary for the operation are allocated and that any operation with a key of at most maxKeySize bits can be performed. For algorithms that take multiple keys, for example the AES XTS algorithm, the maxKeySize parameter specifies the size of the largest key. It is up to the implementation to properly allocate space for multiple keys if the algorithm so requires.

## Parameters

<i>operation</i>	reference to generated operation handle.
<i>algorithm</i>	One of the cipher algorithms.
<i>mode</i>	The operation mode.
<i>maxKeySize</i>	Maximum key size in bits for the operation.

**Returns**

0 in case of success

TEE\_ERROR\_OUT\_OF\_MEMORY If there are not enough resources to allocate the operation.

TEE\_ERROR\_NOT\_SUPPORTED If the mode is not compatible with the algorithm or key size or if the algorithm is not one of the listed algorithms or if maxKeySize is not appropriate for the algorithm.

**10.40.1.7 TEE\_AllocateTransientObject()** `TEE_Result TEE_AllocateTransientObject (`  
`TEE_ObjectType objectType,`  
`uint32_t maxKeySize,`  
`TEE_ObjectHandle * object )`

Crypto, Asymmetric key Verification Functions.

[TEE\\_AllocateTransientObject\(\)](#) - Allocates an uninitialized transient object. Transient objects are used to hold a cryptographic object (key or key-pair).

The value TEE\_KEYSZIE.NO\_KEY should be used for maxObjectSize for object types that do not require a key so that all the container resources can be pre-allocated. As allocated, the container is uninitialized. It can be initialized by subsequently importing the object material, generating an object, deriving an object, or loading an object from the Trusted Storage.

**Parameters**

<i>objectType</i>	Type of uninitialized object container to be created
<i>maxKeySize</i>	Key Size of the object.
<i>object</i>	Filled with a handle on the newly created key container.

**Returns**

0 on success

TEE\_ERROR\_OUT\_OF\_MEMORY If not enough resources are available to allocate the object handle.

TEE\_ERROR\_NOT\_SUPPORTED If the key size is not supported or the object type is not supported.

**10.40.1.8 TEE\_AsymmetricSignDigest()** `TEE_Result TEE_AsymmetricSignDigest (`  
`TEE_OperationHandle operation,`  
`const TEE_Attribute * params,`  
`uint32_t paramCount,`  
`const void * digest,`  
`uint32_t digestLen,`  
`void * signature,`  
`uint32_t * signatureLen )`

Crypto, Asymmetric key Verification Functions.

[TEE\\_AsymmetricSignDigest\(\)](#) - Signs a message digest within an asymmetric operation.

## Parameters

<i>operation</i>	Handle on the operation, which SHALL have been suitably set up with an operation key.
<i>params</i>	Optional operation parameters
<i>paramCount</i>	size of param
<i>digest</i>	Input buffer containing the input message digest
<i>digestLen</i>	length of input buffer.
<i>signature</i>	Output buffer written with the signature of the digest
<i>signatureLen</i>	length of output buffer.

## Returns

0 on success

TEE\_ERROR\_SHORT\_BUFFER If the signature buffer is not large enough to hold the result

**10.40.1.9 TEE\_AsymmetricVerifyDigest()** `TEE_Result TEE_AsymmetricVerifyDigest (`  
`TEE_OperationHandle operation,`  
`const TEE_Attribute * params,`  
`uint32_t paramCount,`  
`const void * digest,`  
`uint32_t digestLen,`  
`const void * signature,`  
`uint32_t signatureLen )`

Crypto, Asymmetric key Verification Functions.

[TEE\\_AsymmetricVerifyDigest\(\)](#) - verifies a message digest signature within an asymmetric operation.

This function describes the message digest signature verify by calling `ed25519_verify()`.

## Parameters

<i>operation</i>	Handle on the operation, which SHALL have been suitably set up with an operation key.
<i>params</i>	Optional operation parameters
<i>paramCount</i>	size of param.
<i>digest</i>	Input buffer containing the input message digest
<i>digestLen</i>	length of input buffer.
<i>signature</i>	Output buffer written with the signature of the digest
<i>signatureLen</i>	length of output buffer.

## Returns

TEE\_SUCCESS on success

TEE\_ERROR\_SIGNATURE\_INVALID if the signature is invalid.

**10.40.1.10 TEE\_CipherDoFinal()** `TEE_Result` TEE\_CipherDoFinal (   
     `TEE.OperationHandle` operation,   
     const void \* srcData,   
     uint32\_t srcLen,   
     void \* destData,   
     uint32\_t \* destLen )

[TEE\\_CipherDoFinal\(\)](#) - Finalizes the cipher operation, processing data that has not been processed by previous calls to TEE\_CipherUpdate as well as data supplied in srcData .

This function describes The operation handle can be reused or re-initialized. The buffers srcData and destData shall be either completely disjoint or equal in their starting positions. The operation SHALL be in active state and is set to initial state afterwards.

#### Parameters

<i>operation</i>	Handle of a running Cipher operation
<i>srcData</i>	Input data buffer to be encrypted or decrypted
<i>srcLen</i>	length of input buffer
<i>destData</i>	output buffer
<i>destLen</i>	ouput buffer length.

#### Returns

0 on success

TEE\_ERROR\_SHORT\_BUFFER If the output buffer is not large enough to contain the output

**10.40.1.11 TEE\_CipherInit()** void TEE\_CipherInit (   
     `TEE.OperationHandle` operation,   
     const void \* nonce,   
     uint32\_t nonceLen )

Crypto, Authenticated Encryption with Symmetric key Verification Functions.

[TEE\\_CipherInit\(\)](#) - starts the symmetric cipher operation.

The operation shall have been associated with a key. If the operation is in active state, it is reset and then initialized. If the operation is in initial state, it is moved to active state.

#### Parameters

<i>operation</i>	A handle on an opened cipher operation setup with a key
<i>nonce</i>	Buffer containing the operation Initialization Vector as appropriate.
<i>nonceLen</i>	length of the buffer

**10.40.1.12 TEE\_CipherUpdate()** `TEE_Result TEE_CipherUpdate (`  
`TEE.OperationHandle operation,`  
`const void * srcData,`  
`uint32_t srcLen,`  
`void * destData,`  
`uint32_t * destLen )`

Crypto, Authenticated Encryption with Symmetric key Verification Functions.

[TEE\\_CipherUpdate\(\)](#) - encrypts or decrypts input data.

Input data does not have to be a multiple of block size. Subsequent calls to this function are possible. Unless one or more calls of this function have supplied sufficient input data, no output is generated. The cipher operation is finalized with a call to `TEE_CipherDoFinal`. The buffers `srcData` and `destData` SHALL be either completely disjoint or equal in their starting positions. The operation SHALL be in active state.

#### Parameters

<i>operation</i>	Handle of a running Cipher operation
<i>srcData</i>	Input data buffer to be encrypted or decrypted
<i>srcLen</i>	length of input buffer
<i>destData</i>	output buffer
<i>destLen</i>	ouput buffer length.

#### Returns

0 on success else

`TEE_ERROR_SHORT_BUFFER` If the output buffer is not large enough to contain the output. In this case, the input is not fed into the algorithm.

**10.40.1.13 TEE\_DigestDoFinal()** `TEE_Result TEE_DigestDoFinal (`  
`TEE.OperationHandle operation,`  
`const void * chunk,`  
`uint32_t chunkLen,`  
`void * hash,`  
`uint32_t * hashLen )`

[TEE\\_DigestDoFinal\(\)](#) - Finalizes the message digest operation and produces the message hash.

This function finalizes the message digest operation and produces the message hash. Afterwards the Message Digest operation is reset to initial state and can be reused.

#### Parameters

<i>operation</i>	Handle of a running Message Digest operation.
<i>chunk</i>	Chunk of data to be hashed.
<i>chunkLen</i>	size of the chunk.
<i>hash</i>	Output buffer filled with the message hash.
<i>hashLen</i>	lenth of the mesaage hash.



**Returns**

0 on success

TEE\_ERROR\_SHORT\_BUFFER If the output buffer is too small. In this case, the operation is not finalized.

**10.40.1.14 TEE\_DigestUpdate()** `void TEE_DigestUpdate (`  
    `TEE_OperationHandle operation,`  
    `const void * chunk,`  
    `uint32_t chunkSize )`

Crypto, Message Digest Functions.

[TEE\\_DigestUpdate\(\)](#) - Accumulates message data for hashing.

This function describes the message does not have to be block aligned. Subsequent calls to this function are possible. The operation may be in either initial or active state and becomes active.

**Parameters**

<i>operation</i>	Handle of a running Message Digest operation.
<i>chunk</i>	Chunk of data to be hashed
<i>chunkSize</i>	size of the chunk.

**10.40.1.15 TEE\_FreeOperation()** `void TEE_FreeOperation (`  
    `TEE_OperationHandle operation )`

Crypto, for all Crypto Functions.

[TEE\\_FreeOperation\(\)](#) - Deallocates all resources associated with an operation handle.

This function deallocates all resources associated with an operation handle. After this function is called, the operation handle is no longer valid. All cryptographic material in the operation is destroyed. The function does nothing if operation is TEE\_HANDLE\_NULL.

**Parameters**

<i>operation</i>	Reference to operation handle.
------------------	--------------------------------

**Returns**

nothing after the operation free.

**10.40.1.16 TEE\_FreeTransientObject()** `void TEE_FreeTransientObject (`  
`TEE_ObjectHandle object )`

Crypto, Asymmetric key Verification Functions.

[TEE\\_FreeTransientObject\(\)](#) - Deallocates a transient object previously allocated with [TEE\\_AllocateTransientObject](#) .

this function describes the object handle is no longer valid and all resources associated with the transient object shall have been reclaimed after the [TEE\\_AllocateTransientObject\(\)](#) call.

#### Parameters

<i>object</i>	Handle on the object to free.
---------------	-------------------------------

**10.40.1.17 TEE\_GenerateKey()** `TEE_Result TEE_GenerateKey (`  
`TEE_ObjectHandle object,`  
`uint32_t keySize,`  
`const TEE_Attribute * params,`  
`uint32_t paramCount )`

Crypto, Asymmetric key Verification Functions.

[TEE\\_GenerateKey \(\)](#) - Generates a random key or a key-pair and populates a transient key object with the generated key material.

The size of the desired key is passed in the `keySize` parameter and shall be less than or equal to the maximum key size specified when the transient object was created.

#### Parameters

<i>object</i>	Handle on an uninitialized transient key to populate with the generated key.
<i>keySize</i>	Requested key size shall be less than or equal to the maximum key size specified when the object container was created
<i>params</i>	Parameters for the key generation.
<i>paramCount</i>	The values of all parameters are copied into the object so that the params array and all the memory buffers it points to may be freed after this routine returns without affecting the object.

#### Returns

0 on succes

`TEE_ERROR_BAD_PARAMETERS` If an incorrect or inconsistent attribute is detected. The checks that are performed depend on the implementation.

**10.40.1.18 TEE\_InitRefAttribute()** `void TEE_InitRefAttribute (`  
`TEE_Attribute * attr,`

```
uint32_t attributeID,
const void * buffer,
uint32_t length )
```

Crypto, Asymmetric key Verification Functions.

[TEE\\_InitRefAttribute\(\)](#) - The helper function can be used to populate a single attribute either with a reference to a buffer or with integer values.

In `TEE_InitRefAttribute()` only the buffer pointer is copied, not the content of the buffer. This means that the attribute structure maintains a pointer back to the supplied buffer. It is the responsibility of the TA author to ensure that the contents of the buffer maintain their value until the attributes array is no longer in use.

#### Parameters

<i>attr</i>	attribute structure to initialize.
<i>attributeID</i>	Identifier of the attribute to populate.
<i>buffer</i>	input buffer that holds the content of the attribute.
<i>length</i>	buffer length.

**10.40.1.19 TEE\_InitValueAttribute()** `void TEE_InitValueAttribute (`  
`TEE\_Attribute * attr,`  
`uint32_t attributeID,`  
`uint32_t a,`  
`uint32_t b )`

Crypto, Asymmetric key Verification Functions.

[TEE\\_InitValueAttribute\(\)](#) - The helper function can be used to populate a single attribute either with a reference to a buffer or with integer values.

#### Parameters

<i>attr</i>	attribute structure to initialize.
<i>attributeID</i>	Identifier of the attribute to populate.
<i>a</i>	unsigned integer value to assign to the a member of the attribute structure.
<i>b</i>	unsigned integer value to assign to the b member of the attribute structure

**10.40.1.20 TEE\_SetOperationKey()** `TEE\_Result TEE_SetOperationKey (`  
`TEE\_OperationHandle operation,`  
`TEE\_ObjectHandle key )`

Crypto, Authenticated Encryption with Symmetric key Verification Functions.

[TEE\\_SetOperationKey\(\)](#) - Programs the key of an operation; that is, it associates an operation with a key.

The key material is copied from the key object handle into the operation. After the key has been set, there is no longer any link between the operation and the key object. The object handle can be closed or reset and this will not affect the operation. This copied material exists until the operation is freed using `TEE_FreeOperation` or another key is set into the operation.

**Parameters**

<i>operation</i>	Operation handle.
<i>key</i>	A handle on a key object.

**Returns**

0 on success return

`TEE_ERROR_CORRUPT_OBJECT` If the object is corrupt. The object handle is closed.

`TEE_ERROR_STORAGE_NOT_AVAILABLE` If the persistent object is stored in a storage area which is currently inaccessible.

**10.40.1.21 wolfSSL\_Free()** `void wolfSSLFree (`  
`void * p )`

[wolfSSL\\_Free\(\)](#) - Deallocates the memory which allocated previously.

**Parameters**

<i>p</i>	This is the pointer to a memory block.
----------	----------------------------------------

**10.40.1.22 wolfSSL\_Malloc()** `void * wolfSSLMalloc (`  
`size_t n )`

[wolfSSL\\_Malloc\(\)](#) - Allocates the requested memory and returns a pointer to it.

**Parameters**

<i>n</i>	size of the memory block.
----------	---------------------------

- 10.41   ta-ref/docs/building.md File Reference**
- 10.42   ta-ref/docs/gp\_api.md File Reference**
- 10.43   ta-ref/docs/how\_to\_program\_on\_ta-ref.md File Reference**
- 10.44   ta-ref/docs/overview\_of\_ta-ref.md File Reference**
- 10.45   ta-ref/docs/preparation.md File Reference**
- 10.46   ta-ref/docs/running\_on\_dev\_boards.md File Reference**

## Index

- `--TEE_ObjectHandle`, 33
  - `desc`, 34
  - `flags`, 34
  - `persist_ctx`, 34
  - `persist_iv`, 34
  - `private_key`, 34
  - `public_key`, 34
  - `type`, 34
- `--TEE_OperationHandle`, 35
  - `aectx`, 35
  - `aegcm_state`, 35
  - `aegcmctx`, 35
  - `aeiv`, 35
  - `aekey`, 35
  - `alg`, 35
  - `ctx`, 35
  - `flags`, 36
  - `mode`, 36
  - `prikey`, 36
  - `pubkey`, 36
- `--aligned`
  - `tee_api_types.h`, 102
- `--attribute--`
  - `tee-internal-api-machine.c`, 130
  - `tee-internal-api.c`, 144
  - `tee-ta-internal.h`, 69
- `_sanctum_dev_public_key`
  - `test_dev_key.h`, 123
- `_sanctum_dev_public_key_len`
  - `test_dev_key.h`, 123
- `_sanctum_dev_secret_key`
  - `test_dev_key.h`, 123
- `_sanctum_dev_secret_key_len`
  - `test_dev_key.h`, 123
- a
  - `TEE_Attribute`, 41
  - `TEE_Param`, 48
  - `TEEC_Value`, 60
- `addrinfo`, 36
  - `ai_addr`, 37
  - `ai_addrlen`, 37
  - `ai_canonname`, 37
  - `ai_family`, 37
  - `ai_flags`, 37
  - `ai_next`, 37
  - `ai_protocol`, 37
  - `ai_socktype`, 37
- `aectx`
  - `--TEE_OperationHandle`, 35
- `aegcm_state`
  - `--TEE_OperationHandle`, 35
- `aegcmctx`
  - `--TEE_OperationHandle`, 35
- `aeiv`
  - `--TEE_OperationHandle`, 35
- `aekey`
  - `--TEE_OperationHandle`, 35
- `ai_addr`
  - `addrinfo`, 37
- `ai_addrlen`
  - `addrinfo`, 37
- `ai_canonname`
  - `addrinfo`, 37
- `ai_family`
  - `addrinfo`, 37
- `ai_flags`
  - `addrinfo`, 37
- `ai_next`
  - `addrinfo`, 37
- `ai_protocol`
  - `addrinfo`, 37
- `ai_socktype`
  - `addrinfo`, 37
- `alg`
  - `--TEE_OperationHandle`, 35
- `algorithm`
  - `TEE_OperationInfo`, 44
  - `TEE_OperationInfoMultiple`, 46
- `allocated_size`
  - `TEEC_SharedMemory`, 57
- `attributeID`
  - `TEE_Attribute`, 41
- b
  - `TEE_Attribute`, 41
  - `TEE_Param`, 48
  - `TEEC_Value`, 60
- `buffer`
  - `TEE_Attribute`, 41
  - `TEE_Param`, 48
  - `TEE_SEAID`, 49
  - `TEEC_SharedMemory`, 57
  - `TEEC_TempMemoryReference`, 58
- `buffer_allocated`
  - `TEEC_SharedMemory`, 57
- `bufferLen`
  - `TEE_SEAID`, 49
- `clockSeqAndNode`
  - `TEE_UUID`, 50
  - `TEEC_UUID`, 59
- `content`
  - `TEE_Attribute`, 41
- `ctx`
  - `--TEE_OperationHandle`, 35
  - `TEEC_Session`, 56
- `data`
  - `enclave_report`, 38
- `data_len`

- enclave\_report, 38
- dataPosition
  - TEE\_ObjectInfo, 43
- dataSize
  - TEE\_ObjectInfo, 43
- desc
  - \_\_TEE\_ObjectHandle, 34
- dev\_public\_key
  - report, 39
- dhex\_dump
  - trace.h, 125
- digestLength
  - TEE\_OperationInfo, 45
  - TEE\_OperationInfoMultiple, 47
- enclave
  - report, 39
- enclave\_report, 37
  - data, 38
  - data\_len, 38
  - hash, 38
  - signature, 38
- events
  - pollfd, 38
- fd
  - pollfd, 39
  - TEEC\_Context, 51
- flags
  - \_\_TEE\_ObjectHandle, 34
  - \_\_TEE\_OperationHandle, 36
  - TEEC\_SharedMemory, 57
- flags2flags
  - tee-internal-api.c, 133, 144
- get\_wc\_rng
  - tee-internal-api.c, 133, 144
- GetRelTimeEnd
  - tee-internal-api.c, 134, 145
  - tee-ta-internal.h, 70
- GetRelTimeStart
  - tee-internal-api.c, 134, 145
  - tee-ta-internal.h, 70
- handleFlags
  - TEE\_ObjectInfo, 43
- handleState
  - TEE\_OperationInfo, 45
  - TEE\_OperationInfoMultiple, 47
- hash
  - enclave\_report, 38
  - sm\_report, 40
- id
  - TEEC\_SharedMemory, 57
- keyInformation
  - TEE\_OperationInfoMultiple, 47
- keySize
  - TEE\_ObjectInfo, 43
- TEE\_OperationInfo, 45
  - TEE\_OperationInfoKey, 46
- length
  - TEE\_Attribute, 41
- login
  - TEE.Identity, 42
- maxKeySize
  - TEE\_ObjectInfo, 44
  - TEE\_OperationInfo, 45
  - TEE\_OperationInfoMultiple, 47
- maxObjectSize
  - TEE\_ObjectInfo, 44
- memref
  - TEE\_Param, 48
  - TEEC\_Parameter, 54
- millis
  - TEE\_Time, 50
- mode
  - \_\_TEE\_OperationHandle, 36
  - TEE\_OperationInfo, 45
  - TEE\_OperationInfoMultiple, 47
- nfds\_t
  - tee\_api\_types.h, 102
- numberOfKeys
  - TEE\_OperationInfoMultiple, 47
- objectSize
  - TEE\_ObjectInfo, 44
- objectType
  - TEE\_ObjectInfo, 44
- objectUsage
  - TEE\_ObjectInfo, 44
- offset
  - TEEC\_RegisteredMemoryReference, 55
- OpenPersistentObject
  - tee-internal-api.c, 135, 145
- operationClass
  - TEE\_OperationInfo, 45
  - TEE\_OperationInfoMultiple, 47
- operationState
  - TEE\_OperationInfoMultiple, 47
- params
  - TEEC\_Operation, 52
- paramTypes
  - TEEC\_Operation, 52
- parent
  - TEEC\_RegisteredMemoryReference, 55
- persist\_ctx
  - \_\_TEE\_ObjectHandle, 34
- persist\_iv
  - \_\_TEE\_ObjectHandle, 34
- pollfd, 38
  - events, 38
  - fd, 39
  - revents, 39

- prikey
  - \_\_TEE\_OperationHandle, 36
- private\_key
  - \_\_TEE\_ObjectHandle, 34
- pubkey
  - \_\_TEE\_OperationHandle, 36
- public\_key
  - \_\_TEE\_ObjectHandle, 34
  - sm\_report, 40
- ref
  - TEE\_Attribute, 41
- reg\_mem
  - TEEC\_Context, 51
- registered\_fd
  - TEEC\_SharedMemory, 58
- report, 39
  - dev\_public\_key, 39
  - enclave, 39
  - sm, 40
- requiredKeyUsage
  - TEE\_OperationInfo, 45
  - TEE\_OperationInfoKey, 46
- revents
  - pollfd, 39
- rngstr
  - tee-internal-api.c, 142, 151
- seconds
  - TEE\_Time, 50
- selectResponseEnable
  - TEE\_SEReaderProperties, 49
- sePresent
  - TEE\_SEReaderProperties, 49
- session
  - TEEC\_Operation, 53
- session\_id
  - TEEC\_Session, 56
- set\_object\_key
  - tee-internal-api.c, 135, 146
- shadow\_buffer
  - TEEC\_SharedMemory, 58
- signature
  - enclave\_report, 38
  - sm\_report, 40
- size
  - TEE\_Param, 48
  - TEEC\_RegisteredMemoryReference, 55
  - TEEC\_SharedMemory, 58
  - TEEC\_TempMemoryReference, 59
- sm
  - report, 40
- sm\_report, 40
  - hash, 40
  - public\_key, 40
  - signature, 40
- socklen\_t
  - tee\_api\_types.h, 102
- started
  - TEEC\_Operation, 53
- ta-ref/api/include/compiler.h, 61
- ta-ref/api/include/report.h, 64
- ta-ref/api/include/tee-common.h, 65, 66
- ta-ref/api/include/tee-ta-internal.h, 66, 91
- ta-ref/api/include/tee\_api\_defines.h, 93
- ta-ref/api/include/tee\_api\_defines\_extensions.h, 99
- ta-ref/api/include/tee\_api\_types.h, 101, 104
- ta-ref/api/include/tee\_client\_api.h, 107, 113
- ta-ref/api/include/tee\_internal\_api.h, 116
- ta-ref/api/include/tee\_internal\_api\_extensions.h, 116, 118
- ta-ref/api/include/tee\_ta\_api.h, 119, 120
- ta-ref/api/include/test\_dev\_key.h, 123, 124
- ta-ref/api/include/trace.h, 124, 126
- ta-ref/api/include/trace\_levels.h, 129
- ta-ref/api/keystone/tee-internal-api-machine.c, 130
- ta-ref/api/keystone/tee-internal-api.c, 132
- ta-ref/api/keystone/tee\_api\_tee\_types.h, 151, 152
- ta-ref/api/keystone/teec\_stub.c, 157
- ta-ref/api/keystone/trace.c, 160
- ta-ref/api/optee/tee\_api\_tee\_types.h, 154
- ta-ref/api/sgx/tee-internal-api.c, 142
- ta-ref/api/sgx/tee\_api\_tee\_types.h, 154, 155
- ta-ref/api/tee-internal-api-cryptlib.c, 162
- ta-ref/docs/building.md, 176
- ta-ref/docs/gp\_api.md, 176
- ta-ref/docs/how\_to\_program\_on\_ta-ref.md, 176
- ta-ref/docs/overview\_of\_ta-ref.md, 176
- ta-ref/docs/preparation.md, 176
- ta-ref/docs/running\_on\_dev\_boards.md, 176
- TA\_CloseSessionEntryPoint
  - tee\_ta\_api.h, 119
- TA\_CreateEntryPoint
  - tee\_ta\_api.h, 119
- TA\_DestroyEntryPoint
  - tee\_ta\_api.h, 120
- TA\_InvokeCommandEntryPoint
  - tee\_ta\_api.h, 120
- TA\_OpenSessionEntryPoint
  - tee\_ta\_api.h, 120
- tee-internal-api-cryptlib.c
  - TEE\_AEDecryptFinal, 164
  - TEE\_AEEncryptFinal, 165
  - TEE\_AEInit, 165
  - TEE\_AEUpdate, 166
  - TEE\_AEUpdateAAD, 167
  - TEE\_AllocateOperation, 167
  - TEE\_AllocateTransientObject, 168
  - TEE\_AsymmetricSignDigest, 168
  - TEE\_AsymmetricVerifyDigest, 169
  - TEE\_CipherDoFinal, 169
  - TEE\_CipherInit, 170
  - TEE\_CipherUpdate, 170
  - TEE\_DigestDoFinal, 171
  - TEE\_DigestUpdate, 172
  - TEE\_FreeOperation, 172
  - TEE\_FreeTransientObject, 172
  - TEE\_GenerateKey, 173



- TEE\_InitRefAttribute, 173
- TEE\_InitValueAttribute, 174
- TEE\_SetOperationKey, 174
- wolfSSL\_Free, 175
- wolfSSL\_Malloc, 175
- tee-internal-api-machine.c
  - \_\_attribute\_\_, 130
- tee-internal-api.c
  - \_\_attribute\_\_, 144
  - flags2flags, 133, 144
  - get\_wc\_rng, 133, 144
  - GetRelTimeEnd, 134, 145
  - GetRelTimeStart, 134, 145
  - OpenPersistentObject, 135, 145
  - rngstr, 142, 151
  - set\_object\_key, 135, 146
  - TEE\_CloseObject, 136, 146
  - TEE\_CreatePersistentObject, 136, 147
  - TEE\_Free, 137
  - TEE\_GenerateRandom, 137, 148
  - TEE\_GetObjectInfo1, 138, 148
  - TEE\_GetREETime, 138, 148
  - TEE\_GetSystemTime, 139, 149
  - TEE\_Malloc, 139
  - TEE\_OpenPersistentObject, 139, 149
  - TEE\_ReadObjectData, 140, 150
  - TEE\_Realloc, 140
  - TEE\_WriteObjectData, 141, 150
  - wc\_ocall\_genseed, 141
  - wc\_rng\_init, 142, 151
- tee-ta-internal.h
  - \_\_attribute\_\_, 69
  - GetRelTimeEnd, 70
  - GetRelTimeStart, 70
  - TEE\_AEDecryptFinal, 71
  - TEE\_AEEncryptFinal, 72
  - TEE\_AEInit, 73
  - TEE\_AEUpdate, 73
  - TEE\_AEUpdateAAD, 75
  - TEE\_AllocateOperation, 75
  - TEE\_AllocateTransientObject, 76
  - TEE\_AsymmetricSignDigest, 77
  - TEE\_AsymmetricVerifyDigest, 77
  - TEE\_CipherInit, 78
  - TEE\_CipherUpdate, 79
  - TEE\_CloseObject, 79
  - TEE\_CreatePersistentObject, 80
  - TEE\_DigestDoFinal, 81
  - TEE\_DigestUpdate, 82
  - TEE\_FreeOperation, 82
  - TEE\_FreeTransientObject, 83
  - TEE\_GenerateKey, 83
  - TEE\_GenerateRandom, 84
  - TEE\_GetObjectInfo1, 85
  - TEE\_GetREETime, 85
  - TEE\_GetSystemTime, 86
  - TEE\_InitRefAttribute, 86
  - TEE\_InitValueAttribute, 87
  - TEE\_OpenPersistentObject, 87
  - TEE\_ReadObjectData, 88
  - TEE\_SetOperationKey, 89
  - TEE\_WriteObjectData, 90
- TEE\_AEDecryptFinal
  - tee-internal-api-cryptlib.c, 164
  - tee-ta-internal.h, 71
- TEE\_AEEncryptFinal
  - tee-internal-api-cryptlib.c, 165
  - tee-ta-internal.h, 72
- TEE\_AEInit
  - tee-internal-api-cryptlib.c, 165
  - tee-ta-internal.h, 73
- TEE\_AEUpdate
  - tee-internal-api-cryptlib.c, 166
  - tee-ta-internal.h, 73
- TEE\_AEUpdateAAD
  - tee-internal-api-cryptlib.c, 167
  - tee-ta-internal.h, 75
- TEE\_AllocateOperation
  - tee-internal-api-cryptlib.c, 167
  - tee-ta-internal.h, 75
- TEE\_AllocateTransientObject
  - tee-internal-api-cryptlib.c, 168
  - tee-ta-internal.h, 76
- tee.api.types.h
  - \_\_aligned, 102
  - nfds\_t, 102
  - socklen\_t, 102
  - TEE\_BigInt, 102
  - TEE\_BigIntFMM, 102
  - TEE\_DATA\_SEEK\_CUR, 104
  - TEE\_DATA\_SEEK\_END, 104
  - TEE\_DATA\_SEEK\_SET, 104
  - TEE\_ErrorOrigin, 103
  - TEE\_MODE\_DECRYPT, 104
  - TEE\_MODE\_DERIVE, 104
  - TEE\_MODE\_DIGEST, 104
  - TEE\_MODE\_ENCRYPT, 104
  - TEE\_MODE\_MAC, 104
  - TEE\_MODE\_SIGN, 104
  - TEE\_MODE\_VERIFY, 104
  - TEE\_ObjectEnumHandle, 103
  - TEE\_ObjectHandle, 103
  - TEE\_ObjectType, 103
  - TEE\_OperationHandle, 103
  - TEE\_OperationMode, 104
  - TEE\_PropSetHandle, 103
  - TEE\_Result, 103
  - TEE\_SEChannelHandle, 103
  - TEE\_SEReaderHandle, 103
  - TEE\_SEServiceHandle, 103
  - TEE\_SESessionHandle, 103
  - TEE\_Session, 104
  - TEE\_TASessionHandle, 104
  - TEE\_Whence, 104
- TEE\_AsymmetricSignDigest
  - tee-internal-api-cryptlib.c, 168

- tee-ta-internal.h, 77
- TEE.AsymmetricVerifyDigest
  - tee-internal-api-cryptlib.c, 169
  - tee-ta-internal.h, 77
- TEE.Attribute, 40
  - a, 41
  - attributeID, 41
  - b, 41
  - buffer, 41
  - content, 41
  - length, 41
  - ref, 41
  - value, 41
- TEE.BigInt
  - tee\_api\_types.h, 102
- TEE.BigIntFMM
  - tee\_api\_types.h, 102
- TEE.CacheClean
  - tee\_internal\_api\_extensions.h, 117
- TEE.CacheFlush
  - tee\_internal\_api\_extensions.h, 117
- TEE.CacheInvalidate
  - tee\_internal\_api\_extensions.h, 117
- TEE.CipherDoFinal
  - tee-internal-api-cryptlib.c, 169
- TEE.CipherInit
  - tee-internal-api-cryptlib.c, 170
  - tee-ta-internal.h, 78
- TEE.CipherUpdate
  - tee-internal-api-cryptlib.c, 170
  - tee-ta-internal.h, 79
- tee\_client\_api.h
  - TEEC.AllocateSharedMemory, 109
  - TEEC.CloseSession, 109
  - TEEC.FinalizeContext, 110
  - TEEC.InitializeContext, 110
  - TEEC.InvokeCommand, 111
  - TEEC.OpenSession, 111
  - TEEC.RegisterSharedMemory, 112
  - TEEC.ReleaseSharedMemory, 112
  - TEEC.RequestCancellation, 112
  - TEEC.Result, 109
- TEE.CloseObject
  - tee-internal-api.c, 136, 146
  - tee-ta-internal.h, 79
- TEE.CreatePersistentObject
  - tee-internal-api.c, 136, 147
  - tee-ta-internal.h, 80
- TEE.DATA\_SEEK\_CUR
  - tee\_api\_types.h, 104
- TEE.DATA\_SEEK\_END
  - tee\_api\_types.h, 104
- TEE.DATA\_SEEK\_SET
  - tee\_api\_types.h, 104
- TEE.DigestDoFinal
  - tee-internal-api-cryptlib.c, 171
  - tee-ta-internal.h, 81
- TEE.DigestUpdate
  - tee-internal-api-cryptlib.c, 172
  - tee-ta-internal.h, 82
- TEE.ErrorOrigin
  - tee\_api\_types.h, 103
- TEE.Free
  - tee-internal-api.c, 137
- TEE.FreeOperation
  - tee-internal-api-cryptlib.c, 172
  - tee-ta-internal.h, 82
- TEE.FreeTransientObject
  - tee-internal-api-cryptlib.c, 172
  - tee-ta-internal.h, 83
- TEE.GenerateKey
  - tee-internal-api-cryptlib.c, 173
  - tee-ta-internal.h, 83
- TEE.GenerateRandom
  - tee-internal-api.c, 137, 148
  - tee-ta-internal.h, 84
- TEE.GetObjectInfo1
  - tee-internal-api.c, 138, 148
  - tee-ta-internal.h, 85
- TEE.GetREETime
  - tee-internal-api.c, 138, 148
  - tee-ta-internal.h, 85
- TEE.GetSystemTime
  - tee-internal-api.c, 139, 149
  - tee-ta-internal.h, 86
- TEE.Identity, 42
  - login, 42
  - uuid, 42
- TEE.InitRefAttribute
  - tee-internal-api-cryptlib.c, 173
  - tee-ta-internal.h, 86
- TEE.InitValueAttribute
  - tee-internal-api-cryptlib.c, 174
  - tee-ta-internal.h, 87
- tee\_internal\_api\_extensions.h
  - TEE.CacheClean, 117
  - TEE.CacheFlush, 117
  - TEE.CacheInvalidate, 117
  - tee\_map\_zi, 117
  - tee\_unmap, 117
  - tee\_user\_mem\_check\_heap, 117
  - tee\_user\_mem\_mark\_heap, 117
  - tee\_uuid\_from\_str, 118
- TEE.Malloc
  - tee-internal-api.c, 139
- tee\_map\_zi
  - tee\_internal\_api\_extensions.h, 117
- TEE.MODE\_DECRYPT
  - tee\_api\_types.h, 104
- TEE.MODE\_DERIVE
  - tee\_api\_types.h, 104
- TEE.MODE\_DIGEST
  - tee\_api\_types.h, 104
- TEE.MODE\_ENCRYPT
  - tee\_api\_types.h, 104
- TEE.MODE\_MAC

- tee\_api.types.h, 104
- TEE.MODE.SIGN
  - tee\_api.types.h, 104
- TEE.MODE.VERIFY
  - tee\_api.types.h, 104
- TEE.ObjectEnumHandle
  - tee\_api.types.h, 103
- TEE.ObjectHandle
  - tee\_api.types.h, 103
- TEE.ObjectInfo, 43
  - dataPosition, 43
  - dataSize, 43
  - handleFlags, 43
  - keySize, 43
  - maxKeySize, 44
  - maxObjectSize, 44
  - objectSize, 44
  - objectType, 44
  - objectUsage, 44
- TEE.ObjectType
  - tee\_api.types.h, 103
- TEE.OpenPersistentObject
  - tee-internal-api.c, 139, 149
  - tee-ta-internal.h, 87
- TEE.OperationHandle
  - tee\_api.types.h, 103
- TEE.OperationInfo, 44
  - algorithm, 44
  - digestLength, 45
  - handleState, 45
  - keySize, 45
  - maxKeySize, 45
  - mode, 45
  - operationClass, 45
  - requiredKeyUsage, 45
- TEE.OperationInfoKey, 45
  - keySize, 46
  - requiredKeyUsage, 46
- TEE.OperationInfoMultiple, 46
  - algorithm, 46
  - digestLength, 47
  - handleState, 47
  - keyInformation, 47
  - maxKeySize, 47
  - mode, 47
  - numberOfKeys, 47
  - operationClass, 47
  - operationState, 47
- TEE.OperationMode
  - tee\_api.types.h, 104
- TEE.Param, 47
  - a, 48
  - b, 48
  - buffer, 48
  - memref, 48
  - size, 48
  - value, 48
- TEE.PropSetHandle
  - tee\_api.types.h, 103
- TEE.ReadObjectData
  - tee-internal-api.c, 140, 150
  - tee-ta-internal.h, 88
- TEE.Realloc
  - tee-internal-api.c, 140
- TEE.Result
  - tee\_api.types.h, 103
- TEE.SEAID, 48
  - buffer, 49
  - bufferLen, 49
- TEE.SEChannelHandle
  - tee\_api.types.h, 103
- TEE.SEReaderHandle
  - tee\_api.types.h, 103
- TEE.SEReaderProperties, 49
  - selectResponseEnable, 49
  - sePresent, 49
  - teeOnly, 49
- TEE.SEServiceHandle
  - tee\_api.types.h, 103
- TEE.SESessionHandle
  - tee\_api.types.h, 103
- TEE.Session
  - tee\_api.types.h, 104
- TEE.SetOperationKey
  - tee-internal-api-cryptlib.c, 174
  - tee-ta-internal.h, 89
- tee.ta.api.h
  - TA.CloseSessionEntryPoint, 119
  - TA.CreateEntryPoint, 119
  - TA.DestroyEntryPoint, 120
  - TA.InvokeCommandEntryPoint, 120
  - TA.OpenSessionEntryPoint, 120
- TEE.TASessionHandle
  - tee\_api.types.h, 104
- TEE.Time, 50
  - millis, 50
  - seconds, 50
- tee\_unmap
  - tee\_internal.api\_extensions.h, 117
- tee\_user\_mem\_check\_heap
  - tee\_internal.api\_extensions.h, 117
- tee\_user\_mem\_mark\_heap
  - tee\_internal.api\_extensions.h, 117
- TEE.UUID, 50
  - clockSeqAndNode, 50
  - timeHiAndVersion, 50
  - timeLow, 51
  - timeMid, 51
- tee\_uuid\_from\_str
  - tee\_internal.api\_extensions.h, 118
- TEE.Whence
  - tee\_api.types.h, 104
- TEE.WriteObjectData
  - tee-internal-api.c, 141, 150
  - tee-ta-internal.h, 90
- TEEC.AllocateSharedMemory

- tee\_client\_api.h, 109
- teec\_stub.c, 157
- TEEC\_CloseSession
  - tee\_client\_api.h, 109
  - teec\_stub.c, 158
- TEEC\_Context, 51
  - fd, 51
  - reg\_mem, 51
- TEEC\_FinalizeContext
  - tee\_client\_api.h, 110
  - teec\_stub.c, 158
- TEEC\_InitializeContext
  - tee\_client\_api.h, 110
  - teec\_stub.c, 158
- TEEC\_InvokeCommand
  - tee\_client\_api.h, 111
- TEEC\_OpenSession
  - tee\_client\_api.h, 111
  - teec\_stub.c, 159
- TEEC\_Operation, 52
  - params, 52
  - paramTypes, 52
  - session, 53
  - started, 53
- TEEC\_Parameter, 53
  - memref, 54
  - tmpref, 54
  - value, 54
- TEEC\_RegisteredMemoryReference, 54
  - offset, 55
  - parent, 55
  - size, 55
- TEEC\_RegisterSharedMemory
  - tee\_client\_api.h, 112
  - teec\_stub.c, 159
- TEEC\_ReleaseSharedMemory
  - tee\_client\_api.h, 112
  - teec\_stub.c, 160
- TEEC\_RequestCancellation
  - tee\_client\_api.h, 112
  - teec\_stub.c, 160
- TEEC\_Result
  - tee\_client\_api.h, 109
- TEEC\_Session, 56
  - ctx, 56
  - session\_id, 56
- TEEC\_SharedMemory, 56
  - allocated\_size, 57
  - buffer, 57
  - buffer\_allocated, 57
  - flags, 57
  - id, 57
  - registered\_fd, 58
  - shadow\_buffer, 58
  - size, 58
- teec\_stub.c
  - TEEC\_AllocateSharedMemory, 157
  - TEEC\_CloseSession, 158
  - TEEC\_FinalizeContext, 158
  - TEEC\_InitializeContext, 158
  - TEEC\_OpenSession, 159
  - TEEC\_RegisterSharedMemory, 159
  - TEEC\_ReleaseSharedMemory, 160
  - TEEC\_RequestCancellation, 160
  - TEEC\_TempMemoryReference, 58
    - buffer, 58
    - size, 59
  - TEEC\_UUID, 59
    - clockSeqAndNode, 59
    - timeHiAndVersion, 59
    - timeLow, 59
    - timeMid, 59
  - TEEC\_Value, 60
    - a, 60
    - b, 60
  - teeOnly
    - TEE\_SEReaderProperties, 49
  - test\_dev\_key.h
    - \_sanctum\_dev\_public\_key, 123
    - \_sanctum\_dev\_public\_key\_len, 123
    - \_sanctum\_dev\_secret\_key, 123
    - \_sanctum\_dev\_secret\_key\_len, 123
  - timeHiAndVersion
    - TEE\_UUID, 50
    - TEEC\_UUID, 59
  - timeLow
    - TEE\_UUID, 51
    - TEEC\_UUID, 59
  - timeMid
    - TEE\_UUID, 51
    - TEEC\_UUID, 59
  - tmpref
    - TEEC\_Parameter, 54
  - trace.c
    - trace\_printf, 161
    - trace\_vprintf, 162
  - trace.h
    - dhex\_dump, 125
    - trace\_ext\_get\_thread\_id, 125
    - trace\_ext\_prefix, 126
    - trace\_ext\_puts, 125
    - trace\_get\_level, 125
    - trace\_level, 126
    - trace\_printf, 125
    - trace\_set\_level, 125
  - trace\_ext\_get\_thread\_id
    - trace.h, 125
  - trace\_ext\_prefix
    - trace.h, 126
  - trace\_ext\_puts
    - trace.h, 125
  - trace\_get\_level
    - trace.h, 125
  - trace\_level
    - trace.h, 126
  - trace\_printf

- trace.c, [161](#)
  - trace.h, [125](#)
- trace\_set\_level
  - trace.h, [125](#)
- trace\_vprintf
  - trace.c, [162](#)
- type
  - \_\_TEE\_ObjectHandle, [34](#)
- uuid
  - TEE\_Identity, [42](#)
- value
  - TEE\_Attribute, [41](#)
  - TEE\_Param, [48](#)
  - TEEC\_Parameter, [54](#)
- wc\_ocall\_genseed
  - tee-internal-api.c, [141](#)
- wc\_rng\_init
  - tee-internal-api.c, [142](#), [151](#)
- wolfSSL\_Free
  - tee-internal-api-cryptlib.c, [175](#)
- wolfSSL\_Malloc
  - tee-internal-api-cryptlib.c, [175](#)