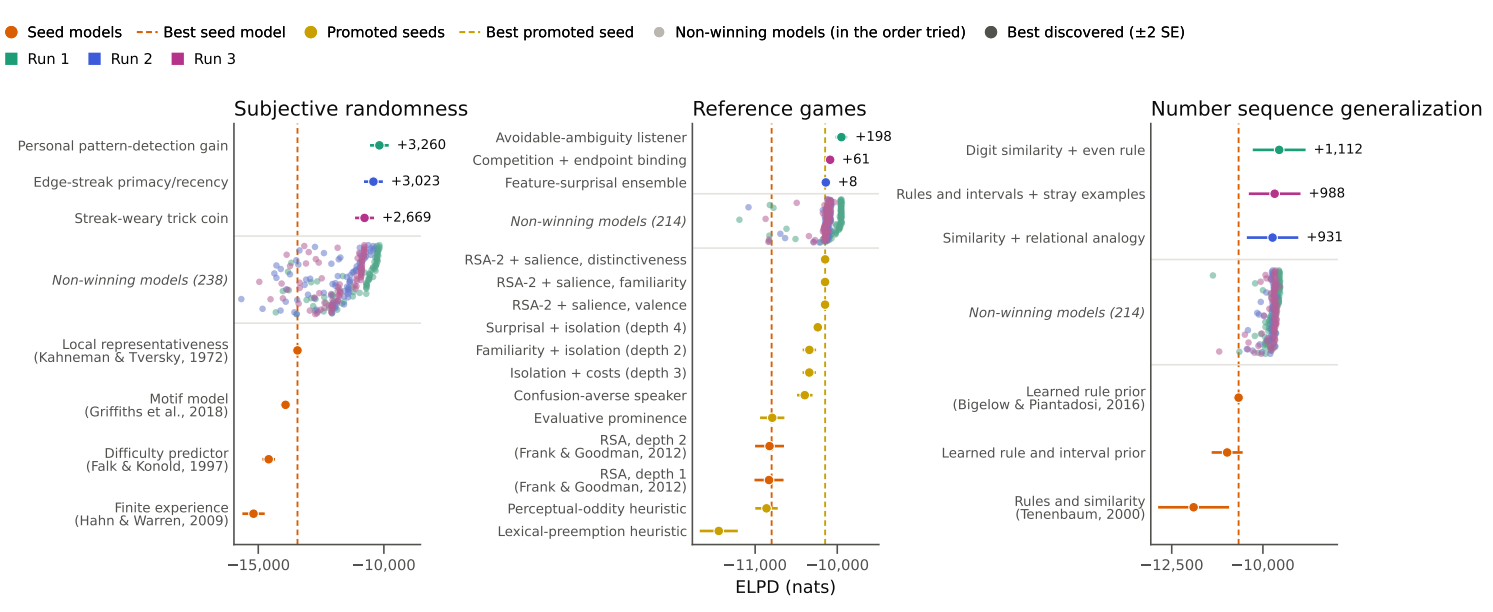
Seed models
Best seed model
Promoted seeds
Best promoted seed
Non-winning models (in the order tried)
Best discovered (±2 SE)
Run 1
Run 2
Run 3
Subjective randomness
Personal pattern-detection gain
Edge-streak primacy/recency
Streak-weary trick coin
Non-winning models (238)
Local representativeness (Kahneman & Tversky, 1972)
Motif model (Griffiths et al., 2018)
Difficulty predictor (Falk & Konold, 1997)
Finite experience (Hahn & Warren, 2009)
+3,260
+3,023
+2,669
−15,000
−10,000
Reference games
Avoidable-ambiguity listener
Competition + endpoint binding
Feature-surprisal ensemble
Non-winning models (214)
RSA-2 + salience, distinctiveness
RSA-2 + salience, familiarity
RSA-2 + salience, valence
Surprisal + isolation (depth 4)
Familiarity + isolation (depth 2)
Isolation + costs (depth 3)
Confusion-averse speaker
Evaluative prominence
RSA, depth 2 (Frank & Goodman, 2012)
RSA, depth 1 (Frank & Goodman, 2012)
Perceptual-oddity heuristic
Lexical-preemption heuristic
+198
+61
+8
−11,000
−10,000
ELPD (nats)
Number sequence generalization
Digit similarity + even rule
Rules and intervals + stray examples
Similarity + relational analogy
Non-winning models (214)
Learned rule prior (Bigelow & Piantadosi, 2016)
Learned rule and interval prior
Rules and similarity (Tenenbaum, 2000)
+1,112
+988
+931
−12,500
−10,000