RUMBLE v1.0.0-beta

OPERATION MANUAL

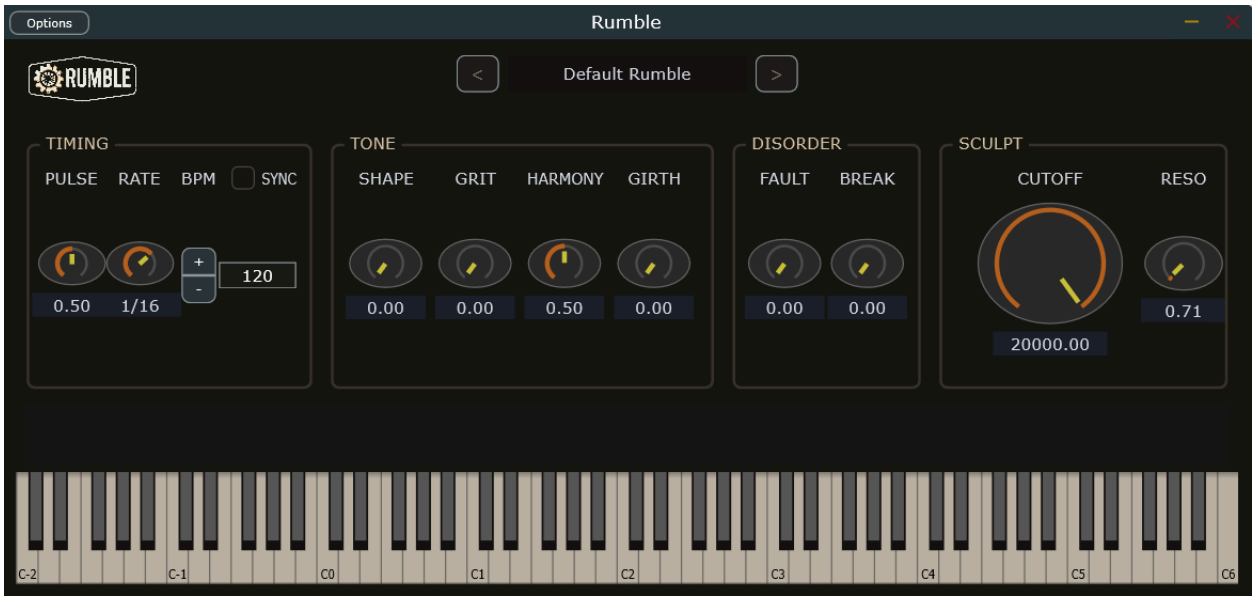

1. PRESET MANAGEMENT: THE FOLDER PROTOCOL

Rumble utilizes a lean, file-based preset system. Unlike commercial synths with complex browsers, Rumble looks directly at your operating system's data folder.

- **Navigation:** Use the **<** and **>** buttons to scroll linearly through all .xml presets located in your Presets folder.
- **Quick Save (The Handshake):** To save your current sound, **SHIFT + RIGHT-CLICK** anywhere on the Preset Label. This launches a system dialogue to name and save your patch.
- **The Directory:**
    - **Windows:** %AppData%\Roaming\Rumble\Presets
    - **macOS:** ~/Library/Application Support/Rumble/Presets

2. THE CONTROL SURFACE

The synth is divided into four distinct modules: **TIMING, TONE, DISORDER,** and **SCULPT**.

SECTION A: TIMING (THE HEARTBEAT)

This section controls the rhythmic gating of the engine. Rumble is always locked to rhythmic divisions.

- **PULSE:** Controls the "Gate Duty Cycle." At 0%, you get short, staccato blips (15% width). At 100%, you get wide, sustaining pulses (95% width).
- **RATE:** Selects the rhythmic subdivision. Options range from **1/1** (whole note) to **1/64** (hyper-speed).
- **SYNC:**
    - **Engaged:** Rumble locks to your DAW's transport and tempo.
    - **Disengaged:** Rumble runs on its internal clock. Use the **BPM box** to manually set the tempo (40–250 BPM).

SECTION B: TONE (THE VOICE)

The core sound generation module.

- **SHAPE:** A morphing oscillator that sweeps smoothly through four fundamental states: **Sine** → **Square** → **Triangle** → **Pulse**.
- **GRIT:** A non-linear "Kinked" drive stage. It adds saturation and clipping before the filter, perfect for "tearing" the sound apart.
- **HARMONY:** Manages the two secondary oscillators. Increasing this control introduces detuning and re-tuning to create thick, chorused, or harmonically complex textures.
- **GIRTH:** A spatial processor. Unlike a sub-synth, Girth applies a crossover and widens the mid-high information, giving the sound physical "width" and presence in the stereo field.

SECTION C: DISORDER (THE MECHANICS)

Where the "Rumble" happens. This section introduces rhythmic and structural failure.

- **FAULT:** (Probability Engine) Controls the likelihood of a "Skip."
    - *The Logic:* Rhythms are generated via a seed based on the MIDI note and the knob position. This means every note has its own unique "Fault Identity," but it is **deterministic**—returning to the same note and same setting will always produce the same "broken" rhythm.
- **BREAK:** (Fractal Shredder) This replaced the old tape-stop. It applies a "Fractal Thresher" to the gate, creating high-speed stutters (16 to 128 chops per pulse) and "hiccups." At 100%, the sound "shreds" into rhythmic fragments.

SECTION D: SCULPT (THE TONALITY)

A high-fidelity Zero-Delay Feedback (ZDF) filter for final shaping.

- **CUTOFF:** A 12dB/octave State Variable TPT (Topology Preserving Transform) Low-Pass Filter.
- **RESO:** Controls the resonance peak. Because it is a TPT/ZDF model, it remains stable even at high settings, allowing for "squelchy" peaks without digital artifacts.

3. INSTALLATION SECURITY (macOS)

Because Rumble is a "Boutique" (unsigned) binary, macOS will attempt to block it.

1. Run the **Rumble_Installer.pkg**.
2. If you receive a "Damaged" or "Unverified" warning:
    - Go to /Library/Audio/Plug-Ins/VST3/.
    - **Right-Click** Rumble.vst3 and select **Open**.
    - Click **Open** in the security dialogue.
    - Repeat for the .component (AU) version if necessary.