

Untitled

```
library(tidyverse)
```

```
-- Attaching core tidyverse packages ----- tidyverse 2.0.0 --  
v dplyr      1.1.4      v readr      2.1.5  
v forcats    1.0.0      v stringr    1.5.1  
v ggplot2    3.5.1      v tibble     3.2.1  
v lubridate  1.9.3      v tidyr      1.3.1  
v purrr      1.0.2
```

```
-- Conflicts ----- tidyverse_conflicts() --
```

```
x dplyr::filter() masks stats::filter()
```

```
x dplyr::lag()     masks stats::lag()
```


```
i Use the conflicted package (<http://conflicted.r-lib.org/>) to force all conflicts to become
```

```
library(gt)
```

```
library(datavolley)
```

```
ggplot() +  
  ggcourt(show_zones = FALSE, show_zone_lines = FALSE, labels = NULL) +  
  coord_flip()
```

Coordinate system already present. Adding new coordinate system, which will replace the existing one.

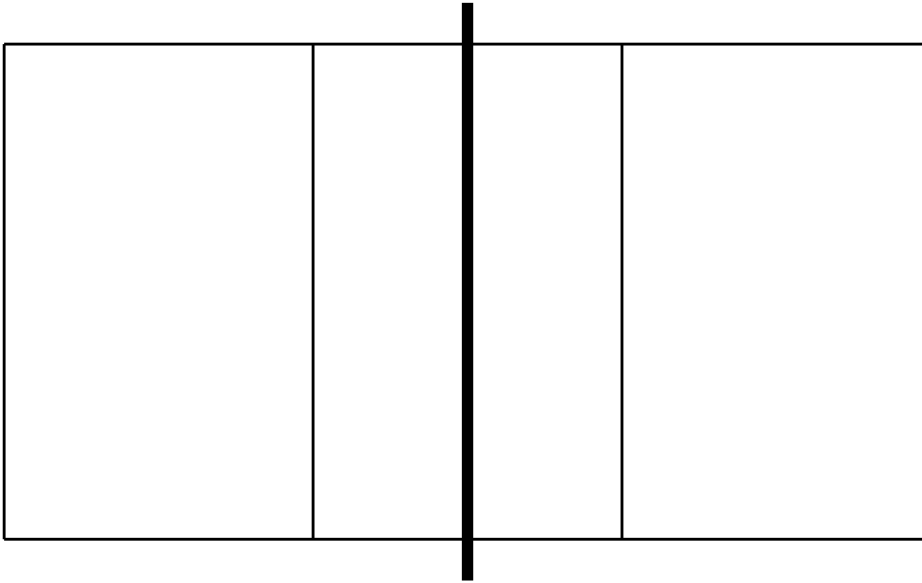

```
<div id="bloc1">  
jksdjf sdjf ;s  
</div>  
<div id="bloc2">  
fksdjf. fsdjf;  
</div>
```