

Packet Analysis Using Wireshark

Ming Chow (ming@wallofsheep.com)


Wall of Sheep and the Packet Hacking Village

Twitter: @wallofsheep, @0xmchow

About the Wall of Sheep and the Packet Hacking Village

- Our mission: security awareness
- How we accomplish our mission: interactive demonstrations, unconventional methods
- Our team: all volunteers

Picture of the Wall of Sheep

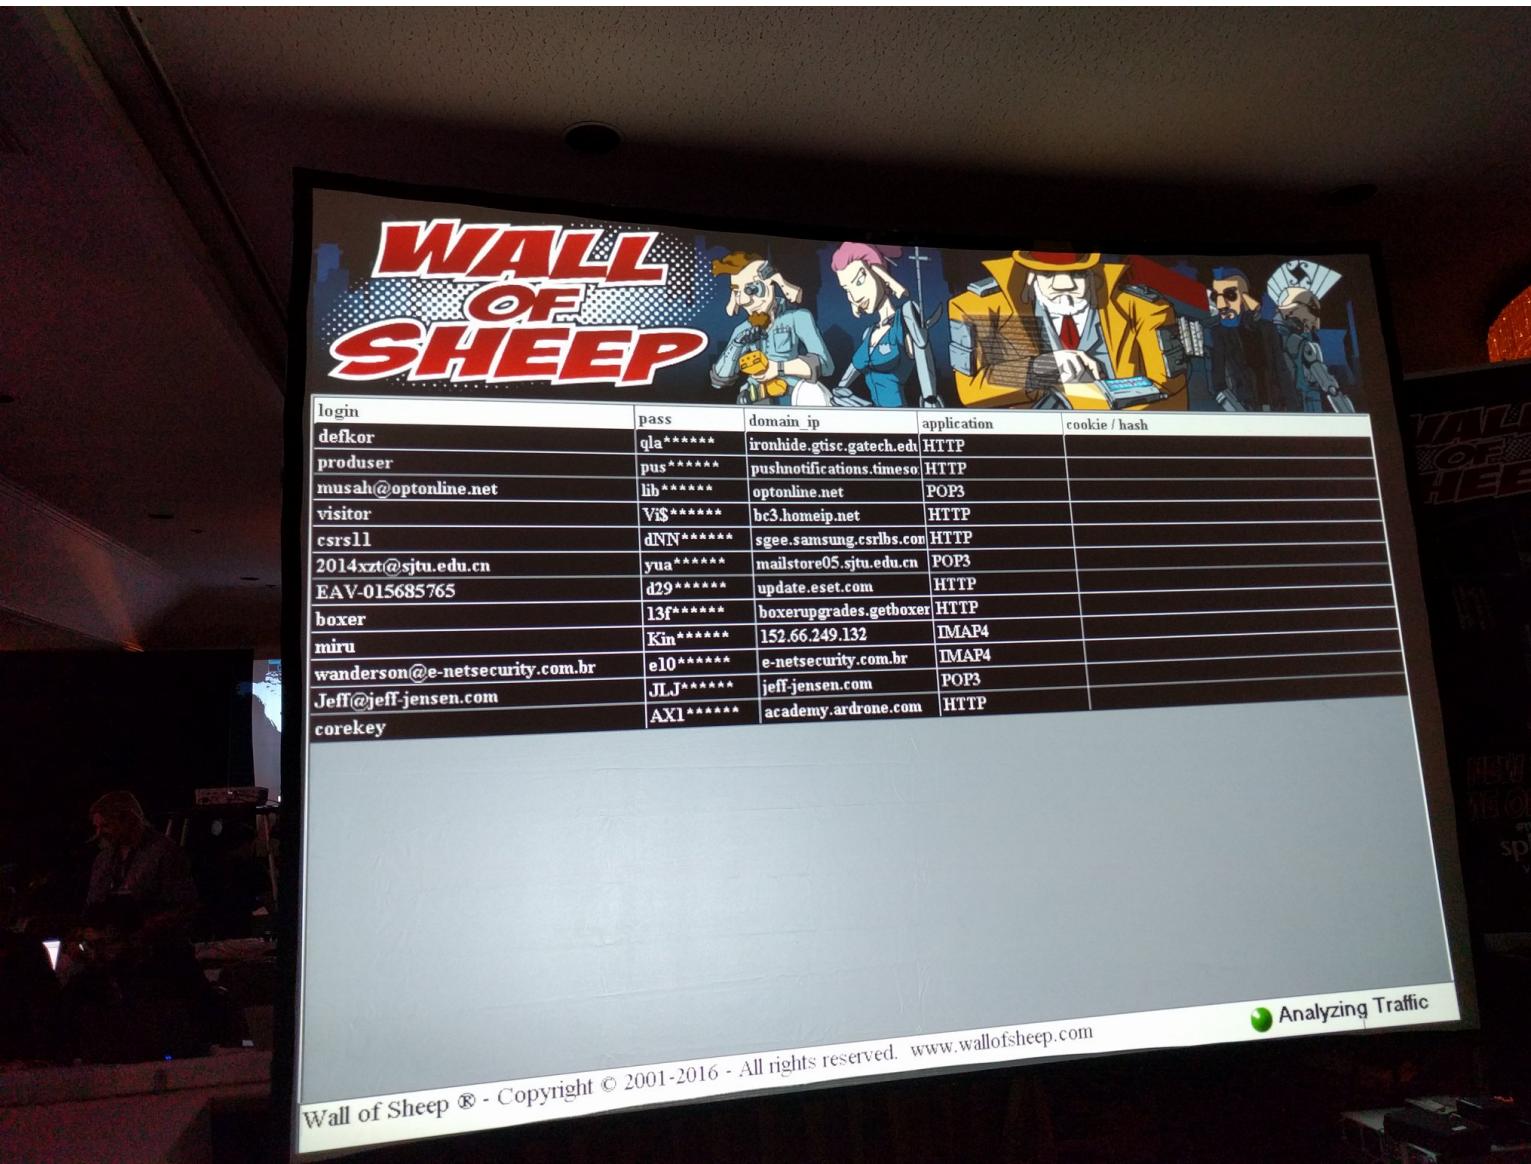

What is *Packet* Analysis?

- Look at and understand network traffic
- Also known as analyzing packets, also known as network traffic analysis, also known as packet sniffing, also known as protocol analysis, also known as packet tracing

Why Packet Analysis?

- Troubleshoot networking issues
- Record communications (e.g., email, voice, chat)
- Record and analyze web traffic
- Reconstruct images and other data transmitted on network
- Catch usernames and passwords, personal information, and other sensitive information that were sent insecurely, in plaintext

Wording

- Source:
<https://www.wired.com/story/mirai-botnet-minecraft-scam-brought-down-the-internet/>
- The day we almost started World War III on Twitter:
<https://twitter.com/0xmchow/status/941145910213562369>



Adding to the complexity, DDoS itself is a notoriously difficult crime to prove—even simply proving the crime ever happened can be extraordinarily challenging after the fact. “DDoS can happen in a vacuum, unless a company captures logs in the right way,” Peterson says. Klein, a former UNIX administrator who grew up playing with Linux, spent weeks piecing together evidence and reassembling data to show how the DDoS attacks unfolded.

On the compromised devices, they had to carefully reconstruct the network traffic data, and study how the Mirai code launched so-called “packets” against its targets—a little-understood forensic process, known as analyzing PCAP (packet capture) data. Think of it as the digital equivalent of testing for fingerprints or gunshot residue. “It was the most complex DDoS software I’ve run across,” Klein says.

The FBI zeroed in on the suspects by the end of the year: Photos of the three hung for months on the wall in the Anchorage field office, where agents dubbed them the “Cub Scout Pack,” a nod to their youthfulness. (Another older female suspect in an unrelated case, whose photo also hung on the board, was nicknamed the “Den Mother.”)

What is a Packet?

- A unit of data
- A data stream (e.g., video, a web page) is comprised of many packets
- In general, a single packet contains the following information:
 - Source and destination IP addresses and ports
 - MAC address
 - Time To Live (TTL)
 - Protocol (e.g., TCP, UDP, IMCP)
 - Payload
- A packet encapsulates all layers of the *Open Systems Interconnection (OSI) model*

What is the OSI Model?

- “A conceptual framework that describes the functions of a networking or telecommunication system.”
- 7 layers
- Each layer is abstracted from the other
- Sources:
 - <https://www.networkworld.com/article/3239677/lan-wan/the-osi-model-explained-how-to-understand-and-remember-the-7-layer-network-model.html>
 - <https://buildingautomationmonthly.com/what-is-the-osi-model/>

OSI (Open Source Interconnection) 7 Layer Model				
Layer	Application/Example	Central Device/Protocols	DOD4 Model	
Application (7) Serves as the window for users and application processes to access the network services.	End User layer Program that opens what was sent or creates what is to be sent Resource sharing • Remote file access • Remote printer access • Directory services • Network management	User Applications SMTP		Process
Presentation (6) Formats the data to be presented to the Application layer. It can be viewed as the “Translator” for the network.	Syntax layer encrypt & decrypt (if needed) Character code translation • Data conversion • Data compression • Data encryption • Character Set Translation	JPEG/ASCII EBDIC/TIFF/GIF PICT		
Session (5) Allows session establishment between processes running on different stations.	Synch & send to ports (logical ports) Session establishment, maintenance and termination • Session support - perform security, name recognition, logging, etc.	Logical Ports RPC/SQL/NFS NetBIOS names		
Transport (4) Ensures that messages are delivered error-free, in sequence, and with no losses or duplications.	TCP Host to Host, Flow Control Message segmentation • Message acknowledgement • Message traffic control • Session multiplexing	FILTERING TCP/SPX/UDP	Host to Host	
Network (3) Controls the operations of the subnet, deciding which physical path the data takes.	Packets (“letter”, contains IP address) Routing • Subnet traffic control • Frame fragmentation • Logical-physical address mapping • Subnet usage accounting	Routers IP/IPX/ICMP	Internet	Can be used on all layers
Data Link (2) Provides error-free transfer of data frames from one node to another over the Physical layer.	Frames (“envelopes”, contains MAC address) [NIC card —> Switch —> NIC card] (end to end) Establishes & terminates the logical link between nodes • Frame traffic control • Frame sequencing • Frame acknowledgment • Frame delimiting • Frame error checking • Media access control	Switch Bridge WAP PPP/SLIP	Land Based Layers	Network
Physical (1) Concerned with the transmission and reception of the unstructured raw bit stream over the physical medium.	Physical structure Cables, hubs, etc. Data Encoding • Physical medium attachment • Transmission technique - Baseband or Broadband • Physical medium transmission Bits & Volts	Hub		

What is a PCAP File?

- PCAP stands for “packet capture”
- .pcap: The common file extension for packet captures and is commonly used in many applications such as *Wireshark*
- A 100 MB PCAP file contains tens of thousands of packets

What is Wireshark?

- Graphical and extensive packet analyzer
- Open source and free
- Platform independent (Windows, macOS, and Linux versions available)
- Features include filtering, reconstructing conversations, reconstructing files based on packets
- Website: <https://www.wireshark.org/>

The Wireshark User Interface

The screenshot shows the Wireshark application window with the following components:

- Main Toolbar**: Located at the top, featuring various icons for file operations (Open, Save, Print, Copy, Paste, Find, etc.) and search functions.
- Packet List Pane**: The central pane displays a list of network packets. Each row contains information such as the packet number, timestamp, source IP, destination IP, protocol, length, and a detailed info column. A blue arrow points from the label "2. Packet List Pane" to this area.
- Packet Details Pane (all layers of the OSI model)**: Below the packet list, this pane shows the detailed structure of selected packets across different layers. It includes columns for hex, ASCII, and various protocol-specific details. A blue arrow points from the label "3. Packet Details Pane (all layers of the OSI model)" to this area.
- Packet Bytes Pane (binary data)**: At the bottom, this pane displays the raw binary data of the selected packets in a hex dump format. A blue arrow points from the label "4. Packet Bytes Pane (binary data)" to this area.

The status bar at the bottom indicates the total number of packets (76409), the displayed range (76409), and the profile (Default).

Exercises


- All PCAPs available at <https://github.com/mchow01/Packets>
- Run `git clone https://github.com/mchow01/Packets`

Exercise 1: Opening a Simple PCAP File in Wireshark

- Open set1.pcap in Wireshark
- Question 1: How many packets are there?
- Question 2: What networking protocol is used?
- Question 3: What is the source IP address?
- Question 4: What is the destination IP address?
- Question 5: What port number is the source using to communicate with the destination (or what port number is the destination listening on)?
- BONUS: Do you notice the “three-way handshake”?

Reconstructing a Conversation in Wireshark

1. Click on a packet (it will be highlighted in blue)
2. Right-click on packet
3. Go to “Follow”
4. Follow one of the following streams depending on protocol (TCP Stream is most common)

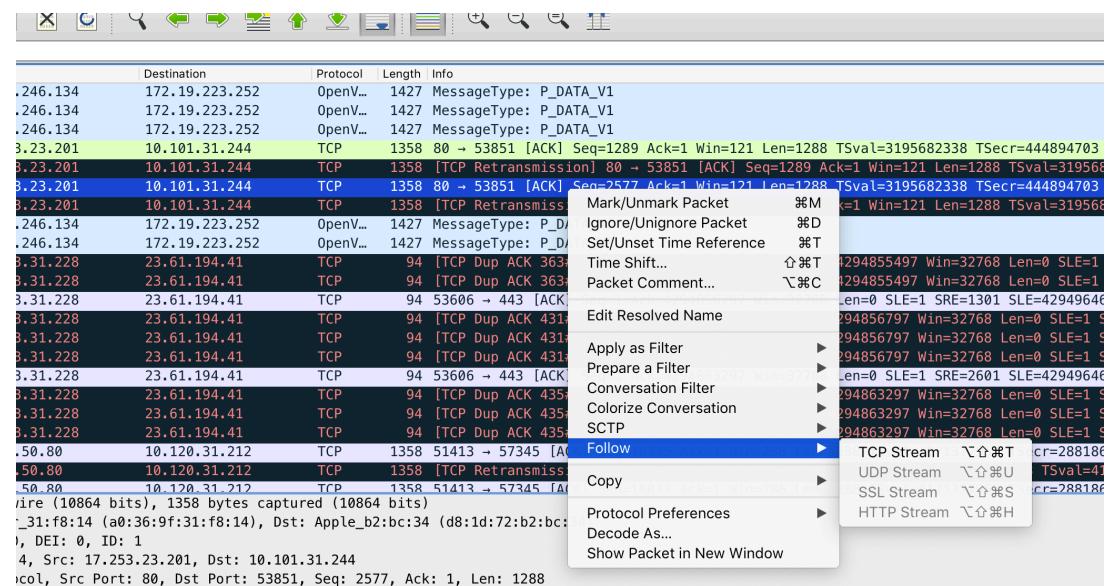

```
36 9f 31 f8 14 81 00 00 01 ..r..4..6..1...
94 00 00 3f 06 6d 09 11 fd ..E..<...?m...
50 d2 5b c4 f9 cb 7d 7a d8 ..e..P ..[...}z
75 00 00 01 01 08 0a be 7a .....y.u.....z
14 c3 aa 0d 62 32 71 17 44 >".....b2q.D
07 95 d4 a4 0d 43 10 f5 21 ....D.....C.!
30 27 9f e5 49 ac c5 4b 11 ..R/0 ! ..I.K
```

Exercise 2: Reconstructing a Media File

- Open set2.pcap in Wireshark
- Question 1: What protocol was used to transfer a media file?
- Question 2: What is the IP address of the client?
- Question 3: What is the IP address of the server?
- Question 4: What port number on the server did the client send the media file to?
- Question 5: Reconstruct and play the media file. What kind of media file?
- BONUS: How do you think the media file was transferred from client to server? (i.e., what tool was used?)

Exercise 3: Extracting Pictures

- Open set3.pcap in Wireshark
- Question 1: What insecure protocol was used to transmit pictures on network?
- Question 2: How many pictures were transmitted?
- Question 3: Extract one of the pictures that was transmitted. HINT: show and save the picture as “Raw” format.

Base64

- Base64 is an *encoding* scheme
- Used to represent binary data in ASCII text format
- Base64 is not encryption.
<https://sempf.net/post/base64-is-not-encryption>
- Why is this important? “In basic HTTP authentication, a request contains a header field of the form Authorization: Basic <credentials>, where credentials is the Base64 encoding of id and password joined by a colon.” (source:
https://en.wikipedia.org/wiki/Basic_access_authentication)

Exercise 4: Extracting Username:Password Pairs

- Open set4.pcap in Wireshark
- Question 1: What protocol was used to transmit the username:password pair (credentials)?
- Question 2: What is one username:password pair in this PCAP set?
HINT: use Edit > Find Packet
- Question 3: Is the username:password pair valid? Why / why not?

Where Do You Go From Here?

- Sniff and validate passwords
- Reconstruct files (e.g., images, MP3s)
- Volunteer at the Wall of Sheep and the Packet Hacking Village
- Learn more at our Packet Inspector event
- Further develop your skills at our Packet Detective event
<https://www.wallofsheep.com/pages/packet-detective>
- Enter Capture The Packet, a DEF CON Black Badge contest

(If time allows) Exercise 5: Extracting Username:Password Pairs

- Open set5.pcap in Wireshark
- This PCAP set is from the DEF CON conference. I am not responsible for the contents in this PCAP set.
- Question 1: How many packets are there in this PCAP set?
- Question 2: Find all the credentials in this PCAP set
- Question 3: Are the credentials valid?
- BONUS: Provide a list of all the domains and IP addresses in this PCAP set

Appendix: What is tshark?

- Command-line-based Wireshark
- Installed with Wireshark
- Dumps and analyzes network traffic
- Example, list the hosts (IP addresses and domains) in the PCAP file
 - `tshark -r file.pcap -q -z hosts,ipv4`