



core\_user\_roles

ser\_id ₽ ₽

Frole\_id 🛭 🔗 int NN

core\_password\_resets

uniqueidentifier

nvarchar(128) NN

bigint NN

datetime2 NN

datetime2 NN

bit NN

reset\_id  $\mathcal O$ 


€ user\_id 🔗

expires\_at

created\_at

token

used

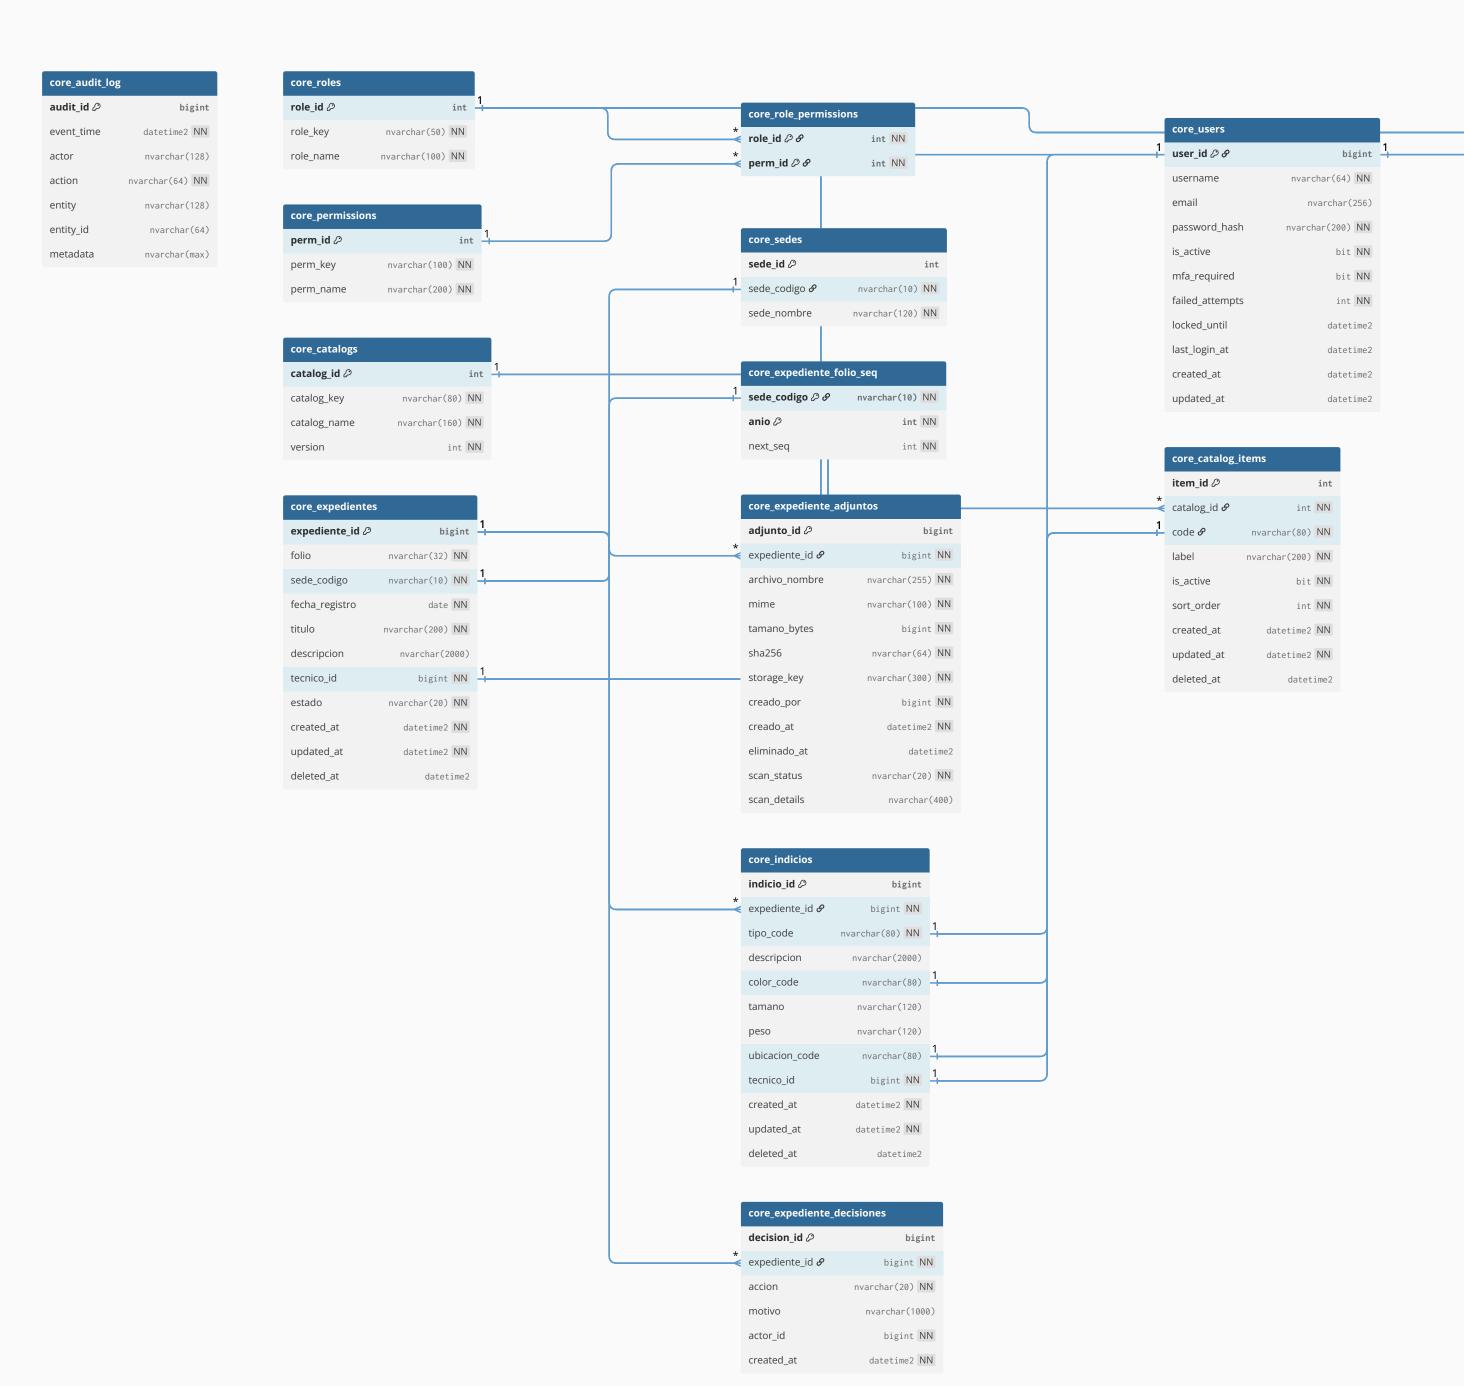



core\_user\_roles

✓ user\_id Ø Ø bigint NN

role\_id  $\mathcal{O}$   $\mathcal{O}$  int NN

core\_password\_resets

uniqueidentifier

nvarchar(128) NN

datetime2 NN

datetime2 NN

bit NN

bigint NN

reset\_id 🖉

\* user\_id  $\mathscr O$ 

token

used

expires\_at

created at