

1. IaC: Flow as Code	2
1.1 FaC: What is Flow-as-Code (FaC)	3
1.2 FaC: Scope & Limitations	5
1.3 How to create and remove flows	7
1.4 FaC: Supported Configuration and Use Cases	9
1.4.1 FaC: Sample Code	10
1.4.2 Managing Flows Using Flow-as-Code (FaC)	11
1.5 FaC: Setting up Flow Management and Pipeline Chain	13
1.5.1 FaC: Flow pipeline chain	14
1.5.2 FaC: Setting up Flow Management	15
1.6 FaC: Flow Management	16
1.6.1 FaC: Management of flow between your application and DIGIT Services	17
1.6.2 FaC: Management of inbound flow between application to on another application	27
1.6.3 FaC: Management of outbound flow between application to another application	39
1.7 FaC: Security Groups	49
1.7.1 FaC Security groups	50
1.7.2 FaC: DIGIT Services Security Groups Catalogue	51
1.7.3 FaC: DGs applications Security Groups Catalogue	57
1.7.4 FaC: How to request Security Group Creation	61

IaC: Flow as Code

- [FAC: What is Flow-as-Code \(FaC\)](#)
- [FaC: Scope & Limitations](#)
- [How to create and remove flows](#)
- [FaC: Supported Configuration and Use Cases](#)
- [FaC: Setting up Flow Management and Pipeline Chain](#)
- [FaC: Flow Management](#)
- [FaC: Security Groups](#)

FAC: What is Flow-as-Code (FaC)

What is Flow-as-Code (FaC)?

Flow-as-Code (FaC) is an [Infrastructure as Code \(IaC\)](#) tool that automates the **opening and closing of firewalls**, by defining communication rules between applications and services.

A flow defines the permitted connections between **applications**, or **services** hosted in DIGIT's Cloud On-Premises (COP) environments, whenever a [security group](#) exists and enables communication between them.

Refer to [Scope and limitations](#) for the enabled connection types.

Why do you need to use Flow-as-Code?

Flow-as-Code (FaC) **automates** and **standardizes** firewall rule management within a single Infrastructure as Code (IaC) [blueprint file](#) (**flow.yaml**), making it **faster**, **safer**, and **fully traceable** — solving the problems of slow, error-prone, and difficult-to-audit manual processes.

Flow-as-Code Process and Benefits



Step	Benefit
(1) Edit flow.yaml	Teams define or update flows directly in Git without needing manual ticket creation through JASSPR or ServiceNow.
(2) Commit & Push	Changes are tracked in Git with full version history and reviewed collaboratively.
(3) Trigger Pipeline	Flows are automatically deployed across environments for speed and consistency.
(4) Validate & Deploy	Flows are validated against policies and deployed without manual ticket creation.
(5) Monitor Feedback	Deployment results are visible in real-time, providing full transparency and auditability via automatic notifications (Success/Errors)

FaC: Scope & Limitations

 Flow as Code (FaC) is only operational within DIGIT Managed Services.

This page defines the setups that can support Flow-as-Code.

GitLab and Bitbucket are both available, enabling teams to collaborate, track changes, and automate workflows; using a web-based Git repository.

Limitations

Supported Setups

Cloud on Premises (COP)

Scenario	Description	Flow Management
COP to COP	Two COP-hosted components need to communicate on Cloud On-Premises (COP).	Flow is opened between COP-managed security groups using Flow-as-Code.
Legacy to COP	A legacy Information System (IS) connects to a system hosted in COP.	Connectivity is established between legacy and COP security groups; additional legacy firewall adjustments may be required
COP to Legacy	A COP-hosted Information System (IS) connects to a legacy system.	Flow starts from COP; legacy security group settings may require adjustment to allow the incoming connection



Refer to [Security Groups](#) for more information.

Not -Supported

Scenario	Description	Why Flow-as-Code Is Not Supported
No Assigned Security Group	The Information System (IS) or component is not associated with a security group.	Flow-as-Code requires a security group to manage firewall rules. Without it, flows cannot be automated.
Unsupported Environment	The Information System (IS) or component is hosted outside a DIGIT-managed environment.	Flow-as-Code is only available for managed environments under DIGIT security policies.
Legacy to Legacy (without security group mapping)	Two legacy systems attempt to connect without security group mapping.	Legacy flows not mapped to security groups must be handled manually outside of Flow-as-Code.



Flows to **COP DB** services are managed directly via JASSPR forms for opening inbound connections.

Refer to the following User Guide pages for more info:

- [Oracle COP User Guide](#)
- [Postgres COP User Guide](#)

Conditions for Information Systems to Implement FaC (Flow-as-Code)

1. Subscribe to the DIGIT B4 cloud service of your choice.
 2. Provision a Hosting Environment namespace for the B4 cloud service.
 3. Consult the [DIGIT Security Group Catalogue](#) to identify existing, approved security groups.
Reusing available groups ensures compliance, avoids duplication, and speeds up approval by using predefined, secure configurations.
 4. If no suitable group exists, request the creation of a new [Security Group](#).
This allows you to define specific access needs for your application while following naming standards and avoiding manual firewall misconfigurations.
 5. Create or update the flow.yaml blueprint in your Git branch (You can use the [flow.yaml blueprint](#) as the source file).
-

How to create and remove flows

What is flow.yaml?

The **flow.yaml** file is a **configuration blueprint** used in the **Flow-as-Code (FaC)** framework to define **network flows** between applications and services.

It acts as an Infrastructure as Code (IaC) file that specifies the required security rules, ensuring that applications can securely communicate across environments.

Developer Responsibilities

As a developer, you must:

1. Create and maintain the flow.yaml file in your Git repository.
2. Ensure correct configurations and follow [validation rules](#).
3. Update, commit, and push changes to trigger the Flow-as-Code (FaC) pipeline.
4. Monitor pipeline feedback and resolve issues.

 The **flow.yaml** file should be located at the root level of the branch associated with the Hosting Environment. There is one **flow.yaml** file per environment.

How to Construct a flow.yaml File

 Go to the following [page](#) to view a sample flow.yaml file.

A typical **flow.yaml** file is used to define and automate network flows between your application and external services. It enables controlled, auditable, and secure connectivity in a cloud environment.

It typically includes the following:

Section	Purpose	Best Practice
Outbound Services (Outbound-ec-services)	Lists DIGIT-managed services your Information System (IS) may need to connect to. Each entry is set to true to enable the connection or false to disable it.	Only enable required endpoints. Use descriptive comments to clarify usage.
Custom Outbound Rules (Outbound-customer-k8s-namespace)	Defines flows from your Kubernetes namespace to customer-specific security groups.	Use clear, consistent names for custom security groups.
Inbound Rules (Inbound-customer-k8s-services)	Maps external security groups to internal Kubernetes services that should be accessible.	Use only when external access is necessary. Restrict scope tightly.

Metadata (templateVersion)  When a new template version is released, the previous version may remain temporarily supported to allow customers time to transition. Older versions will eventually be phased out, and customers will be informed of the migration process.	Specifies the version of the file format to ensure compatibility with the automation pipeline.	Always use the latest supported version.
---	---	---



Clients should only request what they genuinely need, and approvals or validations can be added to detect excessive enabling during review.

Enabling all connections increases security risks, may lead to unnecessary firewall rules and costs, and violates least-privilege best practices.

Validation & Deployment

1. Commit to Git:

The `flow.yaml` file is created or updated in the environment-specific Git branch.

2. Automated Validation:

A pipeline is triggered to check:

- File structure and syntax
- Compliance with approved schema and version
- Validity of requested network rules

3. Deployment:

If validation passes, the approved network rules are automatically applied to the cloud infrastructure.

4. Feedback to User:

Validation results are shared via email notification to the customer and via the branch in your Git repository.

5. Traceability & Control:

All changes are tracked in Git, ensuring transparency, auditability, and controlled deployments.

FaC: Supported Configuration and Use Cases

- [FaC: Sample Code](#)
- [Managing Flows Using Flow-as-Code \(FaC\)](#)

FaC: Sample Code



Below is a sample flow.yaml blueprint file.

flow.yaml blueprint

```
templateVersion: 1 # version of the template file
# DIGIT Services Outbound
Outbound-ec-services:
  ec_apigwt-acc: false # possible values false or true
  ec_apigwt-prod: false # possible values false or true
  ec_bitbucket-prod: false # possible values false or true
  ec_bitbucket-ssh-prod: false # possible values false or true
  ec_eulogin-test: false # possible values false or true
  ec_eulogin-acc: false # possible values false or true
  ec_eulogin-prod: false # possible values false or true
  ec_ldap-test: false # possible values false or true
  ec_ldap-acc: false # possible values false or true
  ec_ldap-prod: false # possible values false or true
  ec_oracle-db-Legacy-nonprod: false # possible values false or true
  ec_oracle-db-Legacy-prod: false # possible values false or true
  ec_oracle-oid-Legacy-prod: false # possible values false or true
  ec_proxy-prod: false # possible values false or true
  ec_kafka-nonprod: false # possible values false or true
  ec_kafka-prod: false # possible values false or true
  ec_intragate-dev: false # possible values false or true
  ec_intragate-test: false # possible values false or true
  ec_intragate-stress: false # possible values false or true
  ec_intragate-maint: false # possible values false or true
  ec_intragate-train: false # possible values false or true
  ec_intragate-acc: false # possible values false or true
  ec_intragate-prod: false # possible values false or true
  ec_webgate-stress: false # possible values false or true
  ec_webgate-test: false # possible values false or true
  ec_webgate-train: false # possible values false or true
  ec_webgate-acc: false # possible values false or true
  ec_webgate-prod: false # possible values false or true
  ec_webgate-testa-train: false # possible values false or true
  ec_webgate-testa-acc: false # possible values false or true
  ec_webgate-testa-prod: false # possible values false or true
  ec_tech-dev: false # possible values false or true
  ec_tech-acc: false # possible values false or true
  ec_tech-prod: false # possible values false or true
  ec_devops-tech-prod: false # possible values false or true
# Customer Outbound
Outbound-customer-k8s-namespace:
  cnect-sitcen-cus-in-mongodb-acc: false # possible values false or true
  cnect-sitcen-cus-in-elasticsearch-acc: false # possible values false or true
  comp-cus-in-ldap-adlds-acc: false # possible values false or true
  rtd-cus-in-secunda-dev-endpoint: false # possible values false or true
# Customer Inbound
# List of Inbound rules to the customer kubernetes service#####
# Usage: [rule name]: [service name]
Inbound-customer-k8s-services:
  scic-cus-eg-speech-to-text-transcriber:
```

Managing Flows Using Flow-as-Code (FaC)



Homepage

Page Topics

- [Types of flows](#)
 - [Flow Types and Descriptions](#)

Related Links

- [What is Flow-as-Code \(FaC\)?](#)
- [Scope & Limitations](#)



Types of flows

You can manage two types of flows using the Flow-as-Code (FaC) pipeline:

Flow Types and Descriptions

Flow Type	Details	Requirements
Application → DIGIT Services	Enables communication between your application (inside or outside your Information System) and DIGIT services.	• DIGIT services must be published in the DIGIT Services security groups catalogue • Define the allowed security groups. If a DIGIT service is not part of the above catalogue, you must request the creation of a security group. Refer to the following page on how to request this.

Information System → Information System	Facilitates communication between two Information Systems (IS) through their defined security groups.	• Security groups must be published in the DG Security Groups Catalogue. • Request the creation your Information System security group and define the security groups identifier in the flow.yaml file. • Request authorization to use another DG Information System's security group and define the security group identifier in the flow.yaml file.  If a security group is not part of the above catalogue, you must request it. Refer to the following page on how to request this.
--	---	---

FaC: Setting up Flow Management and Pipeline Chain



Homepage

- [FaC: Flow pipeline chain](#)
- [FaC: Setting up Flow Management](#)

FaC: Flow pipeline chain




Homepage

Diagram Explanation

1. Update the `flow.yaml` file with the code required to open a flow.
2. Commit the updated `flow.yaml` file to the Git repository.
3. A Webhook automatically triggers validation and deployment of the committed code.
4. The new flow configuration, as defined in the `flow.yaml` file, is applied to the firewall rules.
5. If errors are detected, notifications are sent by email and in the Git repository.
6. On successful deployment, the flow is opened through the firewall, and confirmation is sent by email and in the Git repository.

Related Links

[Setting up Flow Management](#)

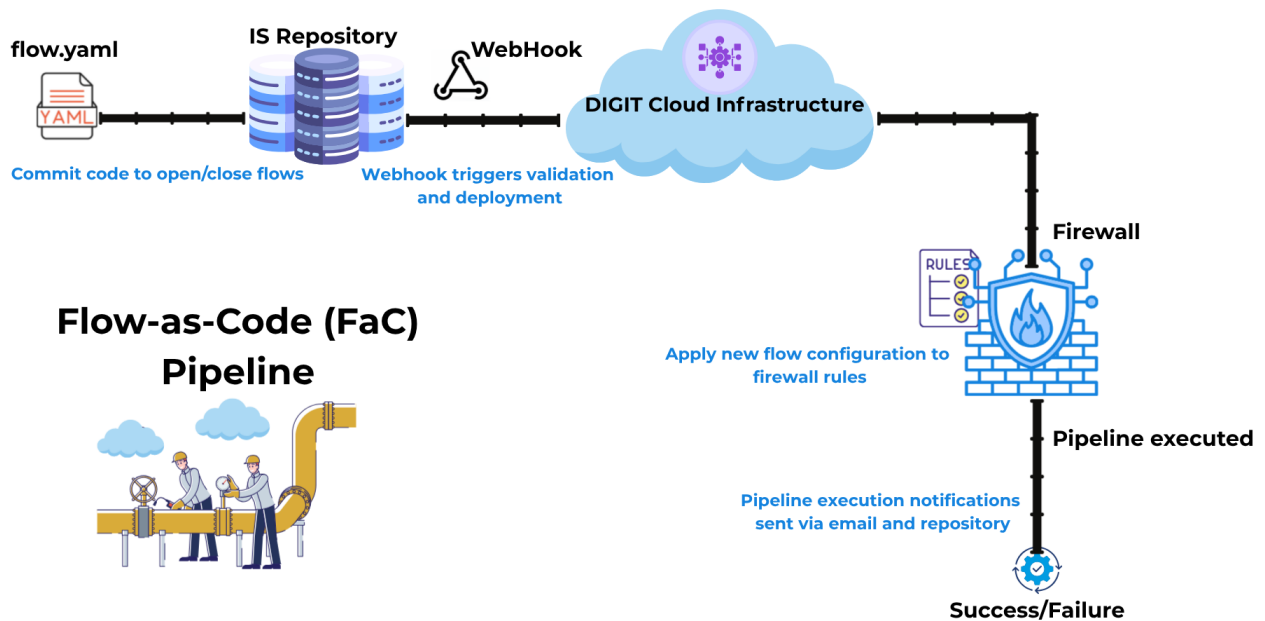

FaC: Setting up Flow Management



Homepage

The following video describes how to manage the **flow-disabled.yaml** configuration yaml file containing the list of security groups used by your Hosting Environment for the Information System already onboarded in DIGIT B4 Hosting Services in cloud and where flows have been opened previously to the opening of the flow pipeline.

The **flow-disabled.yaml** file is used to deactivate existing network flows that were opened before the Flow-as-Code pipeline. It ensures those legacy flows are properly managed, tracked, and closed through the new automated process.

For more information, please contact your DIGIT managed related services.

Your browser does not support the HTML5 video element

Related Links

[Flow pipeline chain](#)

FaC: Flow Management



Homepage

- [FaC: Management of flow between your application and DIGIT Services](#)
- [FaC: Management of inbound flow between application to on another application](#)
- [FaC: Management of outbound flow between application to another application](#)

FaC: Management of flow between your application and DIGIT Services



Homepage

Page Topics

- [How to open the flow between your application Hosted in DIGIT Hosting Services in cloud and DIGIT Services](#)
 - [Open an Outbound Flow Between Your Application in DIGIT B4 Hosting Services in the Cloud and a DIGIT Service in the EC Datacenter](#)
 - [Request the opening of an outbound flow between your application Hosted in DIGIT Hosting Services in cloud and DIGIT Services](#)
- [How to close the flow between your application Hosted in DIGIT Hosting Services in cloud and DIGIT Services](#)
 - [Request the closure of an outbound flow between your application Hosted in DIGIT Hosting Service in cloud and DIGIT Services](#)
- [Receiving email notifications](#)
- [Examples of Email Notification Messages](#)
 - [Request was processed successfully](#)
 - [An error occurred during the processing of the request](#)
 - [Email notification fields description](#)
- [CaaS feedback](#)
- [CaaS feedback fields description](#)

Related Links

- [inbound flow between application to on another application](#)
- [outbound flow between application to another application](#)


How to open the flow between your application Hosted in DIGIT Hosting Services in cloud and DIGIT Services

Watch the following video to learn more.

Your browser does not support the HTML5 video element



The following diagram provides examples involving EULogin, Web Proxy, and Oracle Legacy DB.

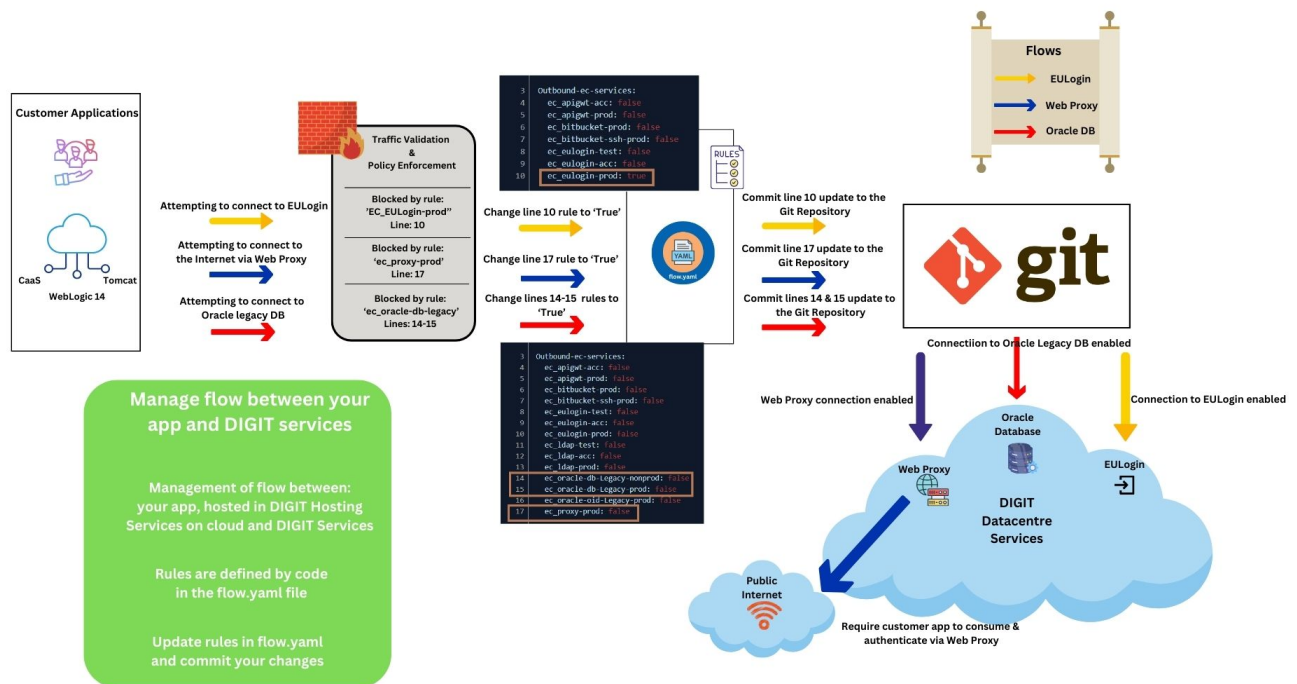

Open an Outbound Flow Between Your Application in DIGIT B4 Hosting Services in the Cloud and a DIGIT Service in the EC Datacenter

1. Please verify that a [DIGIT Service security group](#) is published for the service to which you wish to open an outbound flow in the DIGIT Services Security Groups Catalogue.
2. If a DIGIT Service security group is listed in the catalogue, proceed to open the flow between your application hosted in the DIGIT Hosting Service in the cloud and the targeted DIGIT service.

i If you cannot find the DIGIT Service you wish to open an outbound flow to in the DIGIT Services Security Groups Catalogue, please submit a Request for Information (RFI) using the following link: [RFI Submission](#).

Request the opening of an outbound flow between your application Hosted in DIGIT Hosting Services in cloud and DIGIT Services

1. Create or update the `flow.yaml` file in your Git repository branch. [You can use the flow.yaml blueprint as the source file](#).
2. Edit the `flow.yaml` file. In the section **Outbound-ec-services**, add the targeted DIGIT Service security group rule if it does not already exist in the `flow.yaml` blueprint and the DIGIT Services security groups catalogue. If the rule exists, update the DIGIT Service security group rule flag from false to true.

Example:

```

templateVersion: 1 # version of the template file
# DIGIT Services Outbound
Outbound-ec-services:
  ec_eulogin-prod: true

```

3. Commit and push the file modification to your Git repository, for the Hosting Environment branch. This will trigger the configured webhook, starting the Flow-as-Code (FaC) pipeline.
4. Wait for notifications and feedback from the Flow-as-Code (FaC) pipeline execution to check the result.

5. Go to the **Email Notification** section.
6. Go to the **CaaS Feedback** section.

How to close the flow between your application Hosted in DIGIT Hosting Services in cloud and DIGIT Services

 To request the closure of an outbound flow that has been established between your application hosted in DIGIT Hosting Service in the cloud and DIGIT Services:

- This implies that an outbound flow is already open between your application and DIGIT Services.
- This also means that a DIGIT Service security group rule with the flag set to "true" exists in the `flow.yaml` blueprint within your Git repository branch.
- The outbound flow you wish to close was previously opened using the Flow-as-Code (FaC) pipeline with the `flow.yaml` blueprint.

If this is not the case, please submit a Request for Information (RFI) for assistance via the following [link](#).

Request the closure of an outbound flow between your application Hosted in DIGIT Hosting Service in cloud and DIGIT Services

1. Navigate to the Git repository branch containing the `flow.yaml` blueprint file.
2. Edit the `flow.yaml` file.
3. In the **Outbound-ec-services** section, locate the targeted DIGIT Service security group rule that you wish to close, and change the flag from **true** to **false**.

Example:

```
templateVersion: 1 # version of the template file
# DIGIT Services Outbound
Outbound-ec-services:
  ec_eulogin-prod: false
```

4. Commit and push the changes to your Git repository in the appropriate Hosting Environment branch. This action will trigger the configured webhook and initiate the Flow-as-Code (FaC) pipeline.
5. Monitor notifications and feedback from the FaC pipeline execution to check the result.
6. Refer to the **Email Notification** section and **CaaS Feedback** section for further updates.

Receiving email notifications

This section provides examples of email notification texts, illustrating the various confirmation messages you may receive.

1. Confirmation that the request will be processed (example for a request to open a flow)

```
Subject: Flow management
To: DIGIT-ISHS-CONTAINER@ec.europa.eu
-----
DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: https://citnet.tech.ec.europa.eu/CITnet/stash/projects/DC2CLOSERV/repos/caas-tool.git
Branch: PROD
Commit: c83c4399a61624ffca26f9dfef422919b53bb279

Flows requested: ec_eulogin-prod
Flows to open: ec_eulogin-prod
Flows to close: <none>

Rule creation and deletion will happen asynchronously and report will be sent soon.
Please wait for completion feedback before proceeding with a new request.
In case no feedback is generated within an hour, please contact DIGIT ISHS CONTAINER team.
```

2. Confirmation that the request will be processed (example for a request to close a flow)

```
Subject: Flow management
To: DIGIT-ISHS-CONTAINER@ec.europa.eu
-----
DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: https://citnet.tech.ec.europa.eu/CITnet/stash/projects/DC2CLOSERV/repos/caas-tool.git
Branch: PROD
Commit: c83c4399a61624ffca26f9dfef422919b53bb279

Flows requested: <none>
Flows to open: <none>
Flows to close: ec_eulogin-prod

Rule creation and deletion will happen asynchronously and report will be sent soon.
Please wait for completion feedback before proceeding with a new request.
In case no feedback is generated within an hour, please contact DIGIT ISHS CONTAINER team.
```

2. The request has been successfully processed (example for a request to open a flow)

```
Subject: Flow management
To: DIGIT-ISHS-CONTAINER@ec.europa.eu
-----
DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: https://citnet.tech.ec.europa.eu/CITnet/stash/projects/DC2CLOSERV/repos/caas-tool.git
Branch: PROD

Flows opened: ec_eulogin-prod
Flows closed: <none>

The processing of firewall rules configuration has been completed.
Please contact DIGIT ISHS CONTAINER team if you notice any issue.
```

The request has been successfully processed (example for a request to close a flow)

```
Subject: Flow management
To: DIGIT-ISHS-CONTAINER@ec.europa.eu
-----
DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: https://citnet.tech.ec.europa.eu/CITnet/stash/projects/DC2CLOSERV/repos/caas-tool.git
Branch: PROD

Flows opened: <none>
Flows closed: ec_eulogin-prod

The processing of firewall rules configuration has been completed.
Please contact DIGIT ISHS CONTAINER team if you notice any issue.
```

Examples of Email Notification Messages

The request will be processed with no issues or warnings.

In this example, the customer has requested to open **ec_eulogin-prod**.

- Flows marked as **"true"** will appear in the **"Flows Requested"** section.
- Flows that are **requested to open** (for example, those currently closed and being changed from false to true) will be listed under the **"Flows to Open"** section.
- Flows that are **requested to close** (for example, those currently open and being changed from true to false) will appear in the **"Flows to Close"** section.

```
DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: https://citnet.tech.ec.europa.eu/CITnet/stash/scm/dc2closerv/caas-tool.git
Branch: PROD
Commit: 6963afdb61ab587d88376b93f99369623f678a59
```

```
Flows requested: ec_eulogin-prod
Flows to open: ec_eulogin-prod
Flows to close: <none>
```

Rule creation and deletion will occur asynchronously, and a report will be sent shortly.

Please wait for the completion feedback before submitting a new request.

If no feedback is generated within an hour, please contact the [DIGIT ISHS CONTAINER](#) team.

The request will be processed, but there are warnings.

In this example, a customer has requested three DIGIT flows: **ec_eulogin-prod**, **ec_my-flow**, and **ec_ldap-proddd**. The second flow does not exist, and the last one contains a typo.

DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: <https://citnet.tech.ec.europa.eu/CITnet/stash/scm/dc2closerv/caas-tool.git>
Branch: PROD
Commit: 6963afdb61ab587d88376b93f99369623f678a59

Flows requested: **ec_eulogin-prod**
Flows to open: **ec_eulogin-prod**
Flows to close: <none>

Rule creation and deletion will occur asynchronously, and a report will be sent shortly.

Please wait for the completion feedback before submitting a new request.

If no feedback is generated within an hour, please contact the [DIGIT ISHS CONTAINER](#) team.

The following errors have been detected while processing flow.yaml.

Errors Detected While Processing flow.yaml:

- **Flow name: ec_my-flow**
This is not a recognized DIGIT service flow, or there may be a typo in the label.
Please contact the [DIGIT ISHS CONTAINER](#) team for further information.
- **Flow name: ec_ldap-proddd**
This is not a recognized DIGIT service flow, or there may be a typo in the label.
Please contact the [DIGIT ISHS CONTAINER](#) team for further information.

Request was processed successfully

In this example, the request to open **ec_eulogin-prod** has been successfully processed. The flow that has been opened is listed in the "Flows opened" section.

DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: <https://citnet.tech.ec.europa.eu/CITnet/stash/scm/dc2closerv/caas-tool.git>
Branch: PROD

Flows Opened:

- ec_eulogin-prod

Flows Closed:

- None

The processing of the firewall rules configuration has been completed.
If you notice any issues, please contact the [DIGIT ISHS CONTAINER](#) team.

An error occurred during the processing of the request

In this example, the request to open or close flows has failed. An incident has been created, and the details are included in the error message.

DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: <https://citnet.tech.ec.europa.eu/CITnet/stash/scm/dc2closerv/caas-tool.git>
Branch: PROD

An error was detected during the processing of the firewall rules configuration.

An incident has been created for the **DIGIT ISHS CONTAINER** team to investigate.

The incident number for follow-up is: INC012345678.

Email notification fields description

Path	Description
Subject	The subject will always contain "Flow management".
Recipient	The email is sent to your functional mailbox registered during the subscription of the DIGIT B4 hosting service (WebLogic 14, CaaS, Tomcat, etc.).
Message	The message will contain the result of the processing of your request.

CaaS feedback

 For CaaS end-users, flow feedback will be provided in the **CaaS-feedback** branch of your Git repository, in addition to being sent via email.

1. Confirmation that the request will be processed (example for a request to open a flow)

```
feedback:
  status: success
  commit: c83c4399a61624ffca26f9dfef422919b53bb279
  info:
    - detail: |-
        Flows requested: ec_eulogin-prod
        Flows to open: ec_eulogin-prod
        Flows to close: <none>

        Rule creation and deletion will happen asynchronously and report will be sent soon.
        Please wait for completion feedback before proceeding with a new request.
        In case no feedback is generated within an hour, please contact DIGIT ISHS CONTAINER
team.
    - flow: ec_eulogin-prod
      detail: Flow will be opened
```

Confirmation that the request will be processed (example for a request to close a flow)

```

feedback:
  status: success
  commit: c83c4399a61624ffca26f9dfef422919b53bb279
  info:
    - detail: |-
        Flows requested: <none>
        Flows to open: <none>
        Flows to close: ec_eulogin-prod

        Rule creation and deletion will happen asynchronously and report will be sent soon.
        Please wait for completion feedback before proceeding with a new request.
        In case no feedback is generated within an hour, please contact DIGIT ISHS CONTAINER
team.
  - flow: ec_eulogin-prod
    detail: Flow will be opened

```

2. The request has been successfully processed (example for a request to open a flow)

```

feedback:
  status: success
  info:
    - detail: |-
        The processing of firewall rules configuration has been completed.
        Please contact DIGIT ISHS CONTAINER team if you notice any issue.
flows-status:
  EC Outbound flows:
    ec_eulogin-prod: open

```

The request has been successfully processed (example for a request to close a flow)

```

feedback:
  status: success
  info:
    - detail: |-
        The processing of firewall rules configuration has been completed.
        Please contact DIGIT ISHS CONTAINER team if you notice any issue.
flows-status:
  EC Outbound flows:
    ec_eulogin-prod: closed

```

CaaS feedback fields description

Path	Description
status	1. For the first notification (confirmation that the request will be processed), the status may be: • success: No errors were encountered; the request will be processed. • warn: Non-blocking errors were encountered; the request will still be processed. Warning details will be provided in the feedback. • error: A blocking error was encountered; the request will not be processed. Error details will be provided in the feedback. 1. For the second notification (confirmation that the request has been processed), the status may be: • success: No errors were encountered. • error: An error was encountered.

commit	The commit hash of the request.  It is only visible in the first notification (email notification and CaaS feedback file).
info	Information Messages Information messages generated during the processing of the request are included under this field. Each message contains a detail field (the actual message) along with additional context fields. For example, a message related to a specific flow will include the flow name in the flow field, as shown below: <pre>feedback: status: info info: - flow: ec_eulogin-prod detail: Flow will be opened</pre>
warn	Warnings Warnings generated during the processing of the request are included under this field. Each warning message contains a detail field (the actual message) along with additional context fields. If any warning is generated, the status of the request will be set to warn. For example, a message related to a specific flow will include the flow name in the flow field, as shown below: <pre>feedback: status: warn warn: - flow: b4-cdm-in-test-internal detail: - You have not been identified as an authorized consumer of the flow. Please contact DIGIT ISHS CONTAINER. - flow: b4-cdm-in-test-does-not-exist detail: - There is no flow label matching your request. Please contact DIGIT ISHS CONTAINER for support.</pre>
error	If an error occurs during the processing of the firewall rules, an incident will be created for the front office, and the incident number will be included along with the error message in this field. The status of the request will be set to error. <pre>feedback: status: error error: - detail: - An error was detected during the processing of firewall rules configuration. An incident has been created to DIGIT ISHS CONTAINER team for investigation. Incident number for follow-up: INC01234567</pre>

flows-status	When the request is successfully processed, the list of opened and closed flows will be included in the feedback under this section. DIGIT services will be listed under "EC Outbound flows", while customer flows will be categorized under "Customer Outbound and Inbound flows". <pre> feedback: status: success info: - detail: - The processing of firewall rules configuration has been completed. Please contact DIGIT ISHS CONTAINER team if you notice any issue. flows-status: EC Outbound flows: ec_eulogin-prod: open </pre>  This field is included only when the request has been successfully processed.
---------------------	--

FaC: Management of inbound flow between application to on another application



Hom
epage


Page Topics	Related Links
• Homepage • How to open the inbound flow between application to a K8s service of another application • Manage inbound flow rules to enable an application in the DIGIT Data Centre to connect to the K8S Namespace. ◦ To Open an Inbound Flow Between Your Application in DIGIT B4 Hosting Service in the Cloud and Another application in the EC Datacenter ◦ Request the opening of an inbound flow between your application Hosted in DIGIT Hosting Service in cloud and a k8s service of another application • How to close the inbound flow between your application Hosted in DIGIT Hosting Service in cloud and k8s service of another application ◦ Request the closure of an inbound flow between your application Hosted in DIGIT Hosting Service in cloud and a k8s service of another application • Email notifications • Email Notification Example: ◦ Email notification fields description • CaaS feedback • CaaS feedback fields description	flow between your application and DIGIT Services outbound flow between application to another application

How to open the inbound flow between application to a K8s service of another application

Watch the following video to learn how to create the **rpm.yaml** file, which is the first step.

Your browser does not support the HTML5 video element


 The following diagram illustrates how to create an RPM blueprint file in order to manage inbound flow rules.

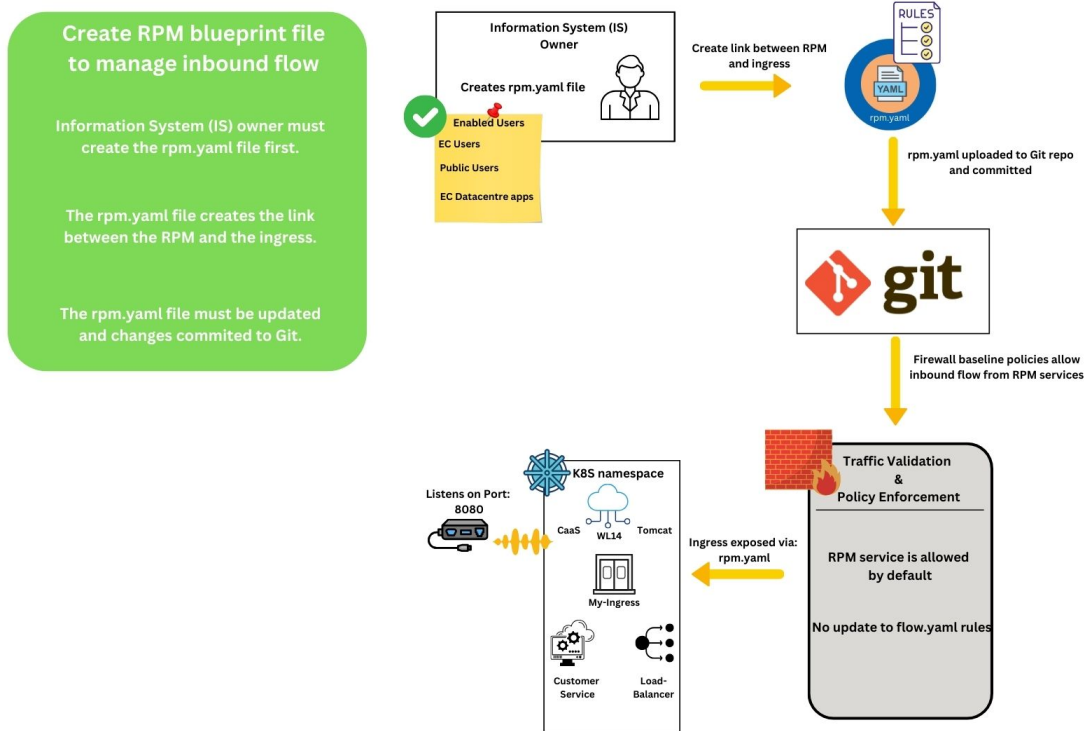

Manage inbound flow rules to enable an application in the DIGIT Data Centre to connect to the K8S Namespace.

Watch the following video to learn how to manage inbound flow rules to enable an application in the DIGIT Data Centre to connect to the K8S namespace.

Your browser does not support the HTML5 video element

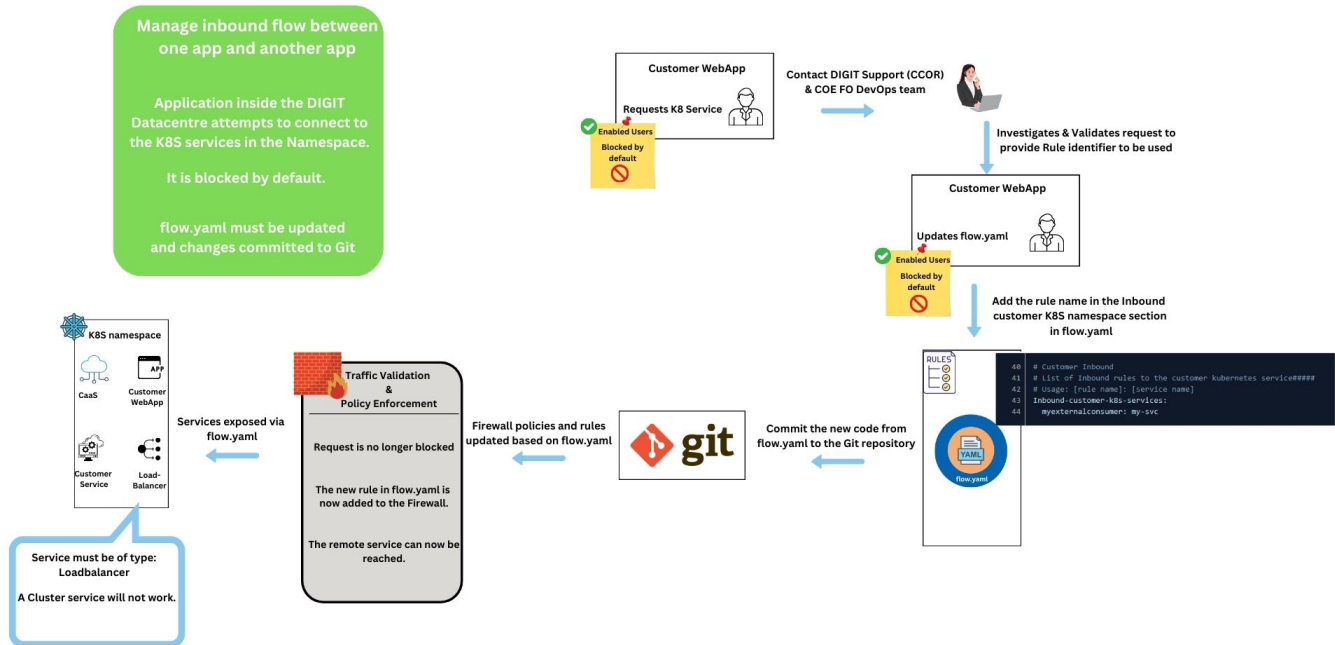

DG Security Groups

You can request to open or close inbound flows for your application hosted in DIGIT Hosting Services cloud (WebLogic 14, CaaS, Tomcat) using DG security groups listed in the [DGs Services security groups catalogue](#).

To Open an Inbound Flow Between Your Application in DIGIT B4 Hosting Service in the Cloud and Another application in the EC Datacenter

1. Verify that a DG security group is published for the service you wish to open an inbound flow to in the [DGs Services security groups catalogue](#).
2. If a DG security group is available in the [DGs Services security groups catalogue](#), proceed with opening the inbound flow between your application hosted in DIGIT Hosting Service in the cloud and an application in the EC Datacenter.

If you cannot find the DG security group you need to open an inbound flow in the [DGs Services security groups catalogue](#), please open a [Request for Information \(RFI\)](#).

Request the opening of an inbound flow between your application Hosted in DIGIT Hosting Service in cloud and a k8s service of another application

1. Create or update the `flow.yaml` file in your Git repository branch. [You can use the flow.yaml blueprint as source file](#).
2. Edit `flow.yaml`.
3. Using the security group rule provided by DIGIT CCOR / Operations, go to the section **(Inbound-customer-k8s-services)**.
4. If the targeted DG security group rule does not exist in the `flow.yaml` blueprint, and it is available in the DG Security Groups Catalogue, add the relevant DG security group rule.

5. Modify the DG security group rule flag and the name of the K8s service in DIGIT B4 Hosting Service in the cloud (WL14, CaaS, etc.) as needed.

Example:

Below is an example where the DG security group rule (digit-c-caas-tool-cus-eg-my-service-prod) is added under **Inbound-customer-k8s-services**. The target K8s service (running in DIGIT B4 Hosting Service in the cloud, such as WL14 or CaaS) is named my-service.

```
templateVersion: 1 # version of the template file
# Customer Inbound
# List of Inbound rules to the customer kubernetes service#####
# Usage: [rule name]: [service name]
Inbound-customer-k8s-services:
  digit-c-caas-tool-cus-eg-my-service-prod: my-service
```

6. Commit and push the modifications to your flow.yaml file in your Git repository branch for the Hosting Environment.
 - This action will trigger the configured webhook to start the Flow-as-Code (FaC) pipeline.
7. Wait for notifications and feedback from the Flow-as-Code (FaC) pipeline execution to check the result.
8. Check the following sections for updates:
 - a. **Email Notifications**
 - b. **CaaS Feedback Section**

How to close the inbound flow between your application Hosted in DIGIT Hosting Service in cloud and k8s service of another application



To request the closure of an existing inbound flow

If there is already an inbound flow open between your application hosted in DIGIT Hosting Service in the cloud and another application, this indicates the presence of a DG security group rule with the true flag in the flow.yaml blueprint within your Git repository branch.

This flow was previously opened using the Flow-as-Code (FaC) pipeline with the flow.yaml blueprint.

If you cannot find the relevant flow rule or need assistance, please open a [Request for Information \(RFI\)](#).

Request the closure of an inbound flow between your application Hosted in DIGIT Hosting Service in cloud and a k8s service of another application

1. Navigate to the Git repository branch containing the flow.yaml blueprint.
2. Edit flow.yaml.
3. Using the security group rule provided by DIGIT CCOR / Operations:
 - a. In the **Inbound-customer-k8s-services** section, locate the targeted DG security group rule that you want to close.
 - b. Set the flag for the Kubernetes service to a blank value.
4. **Example:**

In the **Inbound-customer-k8s-services** section, for the DG security group rule digit-c-caas-tool-cus-eg-my-service-prod, remove the Kubernetes service my-service (running in DIGIT B4 Hosting Service in cloud) and leave the flag for the DG security group rule blank.

This action will effectively close the inbound flow associated with that service.

```
templateVersion: 1 # version of the template file
# Customer Inbound
# List of Inbound rules to the customer kubernetes service#####
# Usage: [rule name]: [service name]
Inbound-customer-k8s-services:
  digit-c-caas-tool-cus-eg-my-service-prod:
```

5. Commit and push the modifications to your Git repository for the corresponding Hosting Environment branch.
 - This action will trigger the configured webhook, starting the Flow-as-Code (FaC) pipeline.
6. Wait for notifications and feedback from the FaC pipeline execution to check the result.
 - a. Go to the **Email Notification** section.
 - b. Go to the **CaaS Feedback** section for updates on the process.

Email notifications

1. Confirmation that the request will be processed (example for a request to open a flow)

```
Subject: Flow management
To: DIGIT-ISHS-CONTAINER@ec.europa.eu
-----
DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: https://citnet.tech.ec.europa.eu/CITnet/stash/projects/DC2CLOSERV/repos/caas-tool.git
Branch: PROD
Commit: c83c4399a61624ffca26f9dfef422919b53bb279

Flows requested: digit-c-caas-tool-cus-eg-my-service-prod
Flows to open: digit-c-caas-tool-cus-eg-my-service-prod
Flows to close: <none>

Rule creation and deletion will happen asynchronously and report will be sent soon.
Please wait for completion feedback before proceeding with a new request.
In case no feedback is generated within an hour, please contact DIGIT ISHS CONTAINER team.
```

2. Confirmation that the request will be processed (example for a request to close a flow)

```
Subject: Flow management
To: DIGIT-ISHS-CONTAINER@ec.europa.eu
-----
DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: https://citnet.tech.ec.europa.eu/CITnet/stash/projects/DC2CLOSERV/repos/caas-tool.git
Branch: PROD
Commit: c83c4399a61624ffca26f9dfef422919b53bb279

Flows requested: <none>
Flows to open: <none>
Flows to close: digit-c-caas-tool-cus-eg-my-service-prod

Rule creation and deletion will happen asynchronously and report will be sent soon.
Please wait for completion feedback before proceeding with a new request.
In case no feedback is generated within an hour, please contact DIGIT ISHS CONTAINER team.
```

2. The request has been successfully processed (example for a request to open a flow)

```
Subject: Flow management
To: DIGIT-ISHS-CONTAINER@ec.europa.eu
-----
DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: https://citnet.tech.ec.europa.eu/CITnet/stash/projects/DC2CLOSERV/repos/caas-tool.git
Branch: PROD

Flows opened: digit-c-caas-tool-cus-eg-my-service-prod
Flows closed: <none>

The processing of firewall rules configuration has been completed.
Please contact DIGIT ISHS CONTAINER team if you notice any issue.
```

The request has been successfully processed (example for a request to close a flow)

```
Subject: Flow management
To: DIGIT-ISHS-CONTAINER@ec.europa.eu
-----
DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: https://citnet.tech.ec.europa.eu/CITnet/stash/projects/DC2CLOSERV/repos/caas-tool.git
Branch: PROD

Flows opened: <none>
Flows closed: digit-c-caas-tool-cus-eg-my-service-prod

The processing of firewall rules configuration has been completed.
Please contact DIGIT ISHS CONTAINER team if you notice any issue.
```

Email Notification Example:

The request will be processed with no warnings.

In this example, a customer has requested to open **digit-c-caas-tool-cus-eg-my-service-prod**.

Flows Requested:

All flows set to "true" will be included in the "**Flows Requested**" section.

Flows to Open:

Flows that will be opened (requested and still closed, **false → true**) are listed in the "**Flows to Open**" section.

Flows to Close:

Flows that will be closed (not requested and still opened, **true → false**) are listed in the "**Flows to Close**" section.

DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: <https://citnet.tech.ec.europa.eu/CITnet/stash/scm/dc2closerv/caas-tool.git>
Branch: PROD
Commit: 6963afdb61ab587d88376b93f99369623f678a59

Flows requested: digit-c-caas-tool-cus-eg-my-service-prod
Flows to open: digit-c-caas-tool-cus-eg-my-service-prod
Flows to close: <none>

Rule creation and deletion will happen asynchronously and report will be sent soon.
Please wait for completion feedback before proceeding with a new request.
In case no feedback is generated within an hour, please contact DIGIT ISHS CONTAINER team.

The request will be processed, but there are warnings.

In this example, a customer has requested two inbound flows: **digit-c-caas-tool-cus-eg-my-service-prod** and **mydg-myis-cus-in-techno-server-prod**. However, the second flow does not exist.

DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: <https://citnet.tech.ec.europa.eu/CITnet/stash/scm/dc2closerv/caas-tool.git>
Branch: PROD
Commit: 6963afdb61ab587d88376b93f99369623f678a59

Flows requested: digit-c-caas-tool-cus-eg-my-service-prod
Flows to open: digit-c-caas-tool-cus-eg-my-service-prod
Flows to close: <none>

Rule creation and deletion will happen asynchronously and report will be sent soon.
Please wait for completion feedback before proceeding with a new request.
In case no feedback is generated within an hour, please contact DIGIT ISHS CONTAINER team.

The following errors have been detected while processing flow.yaml.

Flow name: **mydg-myis-cus-in-techno-server-prod**
There is no flow label matching your request.
Please contact DIGIT ISHS CONTAINER for support.

The request was processed successfully.

In this example, the request to open **digit-c-caas-tool-cus-eg-my-service-prod** has been successfully processed. The flow that has been opened is reported in the "**Flows opened**" section.

DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: <https://citnet.tech.ec.europa.eu/CITnet/stash/scm/dc2closerv/caas-tool.git>
Branch: PROD

Flows opened: **digit-c-caas-tool-cus-eg-my-service-prod**
Flows closed: <none>

The processing of firewall rules configuration has been completed.
Please contact DIGIT ISHS CONTAINER team if you notice any issue.

An error occurred during the processing of the request.

In this example, the request to open or close flows has failed. An incident has been created, and the incident number is included in the error message.

DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: <https://citnet.tech.ec.europa.eu/CITnet/stash/scm/dc2closerv/caas-tool.git>
Branch: PROD

An error was detected during the processing of firewall rules configuration.
An incident has been created to DIGIT ISHS CONTAINER team for investigation.
Incident number for follow-up: INC012345678

Email notification fields description

Path	Description
Subject	The subject will always contain "Flow management".
Recipient	The email is sent to your functional mailbox registered during the subscription of the DIGIT B4 hosting service (WebLogic 14, CaaS, Tomcat, etc.).
Message	The message will contain the result of the processing of your request.

CaaS feedback



For CaaS end-users, flow feedback will be sent to the **CaaS-feedback** branch of your Git repository, in addition to the email notifications.

1. Confirmation that the request will be processed (example for a request to open a flow)

```

feedback:
  status: success
  commit: c83c4399a61624ffca26f9dfef422919b53bb279
  info:
    - detail: |-
      Flows requested: digit-c-caas-tool-cus-eg-my-service-prod
      Flows to open: digit-c-caas-tool-cus-eg-my-service-prod
      Flows to close: <none>

      Rule creation and deletion will happen asynchronously and report will be sent soon.
      Please wait for completion feedback before proceeding with a new request.
      In case no feedback is generated within an hour, please contact DIGIT ISHS CONTAINER
team.
  - flow: digit-c-caas-tool-cus-eg-my-service-prod
    detail: Flow will be opened

```

Confirmation that the request will be processed (example for a request to close a flow)

```

feedback:
  status: success
  commit: c83c4399a61624ffca26f9dfef422919b53bb279
  info:
    - detail: |-
      Flows requested: <none>
      Flows to open: <none>
      Flows to close: digit-c-caas-tool-cus-eg-my-service-prod

      Rule creation and deletion will happen asynchronously and report will be sent soon.
      Please wait for completion feedback before proceeding with a new request.
      In case no feedback is generated within an hour, please contact DIGIT ISHS CONTAINER
team.
  - flow: digit-c-caas-tool-cus-eg-my-service-prod
    detail: Flow will be opened

```

2. The request has been successfully processed (example for a request to open a flow)

```

feedback:
  status: success
  info:
    - detail: |-
      The processing of firewall rules configuration has been completed.
      Please contact DIGIT ISHS CONTAINER team if you notice any issue.
flows-status:
  Customer Outbound and Inbound flows:
    digit-c-caas-tool-cus-eg-my-service-prod: open

```

The request has been successfully processed (example for a request to close a flow)

```

feedback:
  status: success
  info:
    - detail: |-
      The processing of firewall rules configuration has been completed.
      Please contact DIGIT ISHS CONTAINER team if you notice any issue.
flows-status:
  Customer Outbound and Inbound flows:
    digit-c-caas-tool-cus-eg-my-service-prod: closed

```

CaaS feedback fields description

Path	Description
status	The status of the request. 1. For the first notification (confirmation that the request will be processed), the status can be: • success: No error was encountered, and the request will be processed. • warn: Some non-blocking errors were encountered, but the request will be processed. Warning details will be provided in the feedback. • error: A blocking error was encountered, and the request will not be processed. Error details will be provided in the feedback. 2. For the second notification (when the request has been processed), the status can be: • success: No error was encountered. • error: An error was encountered.
commit	The commit hash of the request.  The status is only visible in the first notification (both the email notification and the CaaS feedback file).
info	Information messages generated during the processing of the request are placed under this field. Each information message includes a detail field (the actual message) along with additional context fields. For example, a message generated for a specific flow will include the flow name in the "flow" field, as shown below: <pre> feedback: status: info info: - flow: digit-c-caas-tool-cus-eg-my-service-prod detail: Flow will be opened </pre>

warn	Warnings generated during the processing of the request are placed under this field. Each warning message includes a detail field (the actual message) and additional context fields. If any warnings are generated, the status of the request will be set to "warn." For example, if you are trying to use a nonexistent DG security group rule. <pre> feedback: status: warn warn: - flow: mydg-mysis-cus-in-techno-server-prod detail: - There is no flow label matching your request. Please contact DIGIT ISHS CONTAINER for support. </pre> ⚠ If you are trying to use a DIGIT Service security group rule inside the "Inbound-customer-k8s-services" section. <pre> feedback: status: warn warn: - flow: ec_eulogin-prod detail: - This is a DIGIT service flow. Please contact DIGIT ISHS CONTAINER for more information. </pre> ⚠ If you are trying to use a DG security group rule that you are not authorized to use by the owner of the security group <pre> feedback: status: warn warn: - flow: budg-summa-cus-in-sap-server-prod detail: - You have not been identified as an authorized consumer of the flow. Please contact DIGIT ISHS CONTAINER. </pre> If you are trying to use a DG security group rule that you are not authorized to use by the owner of the security group, and the owner is known, the message will additionally include: "This flow belongs to DG \ IS." ⚠ If you are trying to use a DG security group rule for an outbound flow inside the "Inbound-customer-k8s-services" section, this will result in a warning. The request cannot be processed as it violates the flow direction rules. <pre> feedback: status: warn warn: - flow: digit-c-caas-tool-cus-eg-my-service-prod detail: - The flow should be declared in the inbound/outbound section. </pre> If the owner of the security group is known, the message will also include: "This flow belongs to DG \ IS."
------	--

error	If an error occurs during the processing of the firewall rules, an incident will be created for the front office, and its number will be included along with the error message in this field. The status of the request will be set to "error." <pre> feedback: status: error error: - detail: - An error was detected during the processing of firewall rules configuration. An incident has been created to DIGIT ISHS CONTAINER team for investigation. Incident number for follow-up: INC01234567 </pre>
flows-status	When the request is processed successfully, the list of opened and closed flows will be included in the feedback under this section. DIGIT services are grouped under "EC Outbound Flows," while customer flows are grouped under "Customer Outbound and Inbound Flows." <pre> feedback: status: success info: - detail: - The processing of firewall rules configuration has been completed. Please contact DIGIT ISHS CONTAINER team if you notice any issue. flows-status: Customer Outbound and Inbound flows: digit-c-caas-tool-cus-eg-my-service-prod: closed </pre>  This field is present only when the request has been successfully processed.

FaC: Management of outbound flow between application to another application



Homepage

Page Topics

- [Homepage](#)
- [How to open the flow between application to another application](#)
 - [Request the opening of an outbound flow between your application Hosted in DIGIT Hosting Service in cloud and another application](#)
- [How to close the flow between your application Hosted in DIGIT Hosting Service in cloud and another application ?](#)
 - [Request the closure of an outbound flow between your application Hosted in DIGIT Hosting Service in cloud and another application](#)
- [Email notifications](#)
 - [Email notification fields description](#)
- [CaaS feedback](#)
 - [CaaS feedback fields description](#)

Related Links

[flow between your application and DIGIT Services](#)

[inbound flow between application to on another application](#)


How to open the flow between application to another application

Watch the following video to learn more.

Your browser does not support the HTML5 video element



The following diagram illustrates how a third-party customer can open a flow between a service running in the DIGIT Cloud Hosting Service and the DIGIT Data Centre.

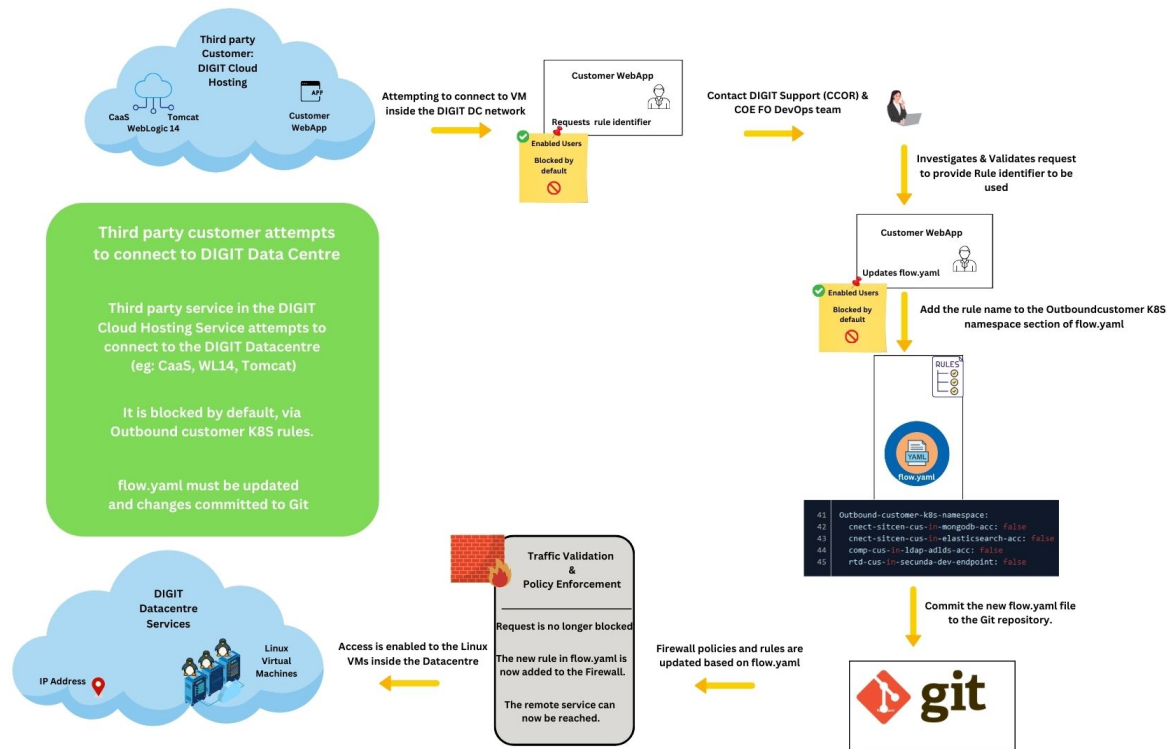

📌 DGs security groups

The DG security groups that you would be able to request to open or close outbound flow with your application Hosted in DIGIT Hosting Service in cloud (Weblogic 14, CaaS, Tomcat) are in listed in the [DGs Services security groups catalogue](#)

To Open an outbound flow between your Application in DIGIT B4 Hosting Service in cloud and another in the EC Datacenter

1. Please verify that there a DG security group published for the service you would like to open an outbound flow to in the [DGs Services security groups catalogue](#)
2. If there is a DG security group published in the [DGs Services security groups catalogue](#), please go to open the flow between your application Hosted in DIGIT Hosting Service in cloud and an application in the EC Datacenter

📌 If you cannot find the DG security group you would like to open an outbound flow published into the [DGs Services security groups catalogue](#), please open a [Request for Information \(RFI\)](#).

Request the opening of an outbound flow between your application Hosted in DIGIT Hosting Service in cloud and another application

1. Create or update the file flow.yaml in your git repository branch. [You can use the flow.yaml blueprint as source file.](#)
2. Edit flow.yaml.
3. Using the security group rule provided to you by DIGIT CCOR / Operation
4. In the Section (Outbound-customer-k8s-namespace) add (if not exist in the flow.yaml blueprint and exist [DGs Services security groups catalogue](#)), the targeted DG security group rule and/or change the DG security group rule flag from **false** to **true**
5. example here with below with DG security group rule (**digit-c-caas-tool-cus-in-mongodb-prod**), which targets a MongoDB in the EC Datacenter in the **Outbound-customer-k8s-namespace** section change from **false** to **true**


```
templateVersion: 1 # version of the template file
# Customer Outbound
Outbound-customer-k8s-namespace:
  digit-c-caas-tool-cus-in-mongodb-prod: true
```

6. Commit and push the file modification to your git repository, for the branch of the Hosting Environment.
 - This will trigger the configured webhook that will start the Flow-as-Code(FaC) pipeline.
7. Wait for notifications and feedback from the Flow-as-Code(FaC) pipeline execution to check for the result.
 - a. Go to Email notification section
 - b. Go to CaaS Feedback section

How to close the flow between your application Hosted in DIGIT Hosting Service in cloud and another application ?



To request the closure of an outbound flow open between your application Hosted in DIGIT Hosting Service in cloud and another application.

This mean that there is already an outbound flow open between your application Hosted in DIGIT Hosting Service in cloud and another application.

This mean that there is already a DG security group rule with the flag **true in the flow.yaml blueprint present in your Git repository branch**

This mean that the outbound flow open between your application Hosted in DIGIT Hosting Service in cloud and DIGIT Services that you would like to close has previously been open using the Flow-as-Code(FaC) pipeline using the flow.yaml blueprint

If you not, please a [Request for Information \(RFI\)](#).

Request the closure of an outbound flow between your application Hosted in DIGIT Hosting Service in cloud and another application

1. Go to your git repository branch containing the file flow.yaml blueprint
2. Edit flow.yaml.
3. Using the security group rule provided to you by DIGIT CCOR / Operation
4. In the Section (Outbound-customer-k8s-namespace) select the targeted DG security group rule that you would like to close and change the flag from **true to false**
5. example here below with DG security group rule (**digit-c-caas-tool-cus-in-mongodb-prod**) in the **Outbound-customer-k8s-namespace** section change the flag from **true to false**

```
templateVersion: 1 # version of the template file
# Customer Outbound
Outbound-customer-k8s-namespace:
  digit-c-caas-tool-cus-in-mongodb-prod: false
```

6. Commit and push the file modification to your git repository, for the branch of the Hosting Environment.
 - This will trigger the configured webhook that will start the Flow-as-Code(FaC) pipeline.
7. Wait for notifications and feedback from the Flow-as-Code(FaC) pipeline execution to check for the result.

- a. Go to Email notification section
 - b. Go to CaaS Feedback section
-

Email notifications

1. Confirmation that the request will be processed (example for a request to open a flow)

```
Subject: Flow management
To: DIGIT-ISHS-CONTAINER@ec.europa.eu
-----
DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: https://citnet.tech.ec.europa.eu/CITnet/stash/projects/DC2CLOSERV/repos/caas-tool.git
Branch: PROD
Commit: c83c4399a61624ffca26f9dfef422919b53bb279

Flows requested: digit-c-caas-tool-cus-in-mongodb-prod
Flows to open: digit-c-caas-tool-cus-in-mongodb-prod
Flows to close: <none>

Rule creation and deletion will happen asynchronously and report will be sent soon.
Please wait for completion feedback before proceeding with a new request.
In case no feedback is generated within an hour, please contact DIGIT ISHS CONTAINER team.
```

2. Confirmation that the request will be processed (example for a request to close a flow)

```
Subject: Flow management
To: DIGIT-ISHS-CONTAINER@ec.europa.eu
-----
DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: https://citnet.tech.ec.europa.eu/CITnet/stash/projects/DC2CLOSERV/repos/caas-tool.git
Branch: PROD
Commit: c83c4399a61624ffca26f9dfef422919b53bb279

Flows requested: <none>
Flows to open: <none>
Flows to close: digit-c-caas-tool-cus-in-mongodb-prod

Rule creation and deletion will happen asynchronously and report will be sent soon.
Please wait for completion feedback before proceeding with a new request.
In case no feedback is generated within an hour, please contact DIGIT ISHS CONTAINER team.
```

2. The request has been successfully processed (example for a request to open a flow)

```
Subject: Flow management
To: DIGIT-ISHS-CONTAINER@ec.europa.eu
-----
DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: https://citnet.tech.ec.europa.eu/CITnet/stash/projects/DC2CLOSERV/repos/caas-tool.git
Branch: PROD

Flows opened: digit-c-caas-tool-cus-in-mongodb-prod
Flows closed: <none>

The processing of firewall rules configuration has been completed.
Please contact DIGIT ISHS CONTAINER team if you notice any issue.
```

The request has been successfully processed (example for a request to close a flow)

```
Subject: Flow management
To: DIGIT-ISHS-CONTAINER@ec.europa.eu
-----
DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: https://citnet.tech.ec.europa.eu/CITnet/stash/projects/DC2CLOSERV/repos/caas-tool.git
Branch: PROD

Flows opened: <none>
Flows closed: digit-c-caas-tool-cus-in-mongodb-prod

The processing of firewall rules configuration has been completed.
Please contact DIGIT ISHS CONTAINER team if you notice any issue.
```

Examples of email notification messages

The request will be processed, with no warnings

In this example, a customer has requested to open digit-c-caas-tool-cus-in-mongodb-prod.

All flows set to "true" will be included in the "Flows requested" section.

Flows that will be opened (requested and still closed, false → true) are in the "Flows to open" section.

Flows that will be closed (not requested and still opened, true → false) are in the "Flows to close" section.

```
DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: https://citnet.tech.ec.europa.eu/CITnet/stash/scm/dc2closerv/caas-tool.git
Branch: PROD
Commit: 6963afdb61ab587d88376b93f99369623f678a59
```

Flows requested: digit-c-caas-tool-cus-in-mongodb-prod

Flows to open: digit-c-caas-tool-cus-in-mongodb-prod

Flows to close: <none>

Rule creation and deletion will happen asynchronously and report will be sent soon.

Please wait for completion feedback before proceeding with a new request.

In case no feedback is generated within an hour, please contact DIGIT ISHS CONTAINER team.

The request will be processed, but there are warnings

In this example, a customer has requested two customer outbound flows: **digit-c-caas-tool-cus-in-mongodb-prod** and **mydg-myis-cus-in-techno-server-prod**. The second one does not exist.

DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: <https://citnet.tech.ec.europa.eu/CITnet/stash/scm/dc2closerv/caas-tool.git>
Branch: PROD
Commit: 6963afdb61ab587d88376b93f99369623f678a59

Flows requested: digit-c-caas-tool-cus-in-mongodb-prod
Flows to open: digit-c-caas-tool-cus-in-mongodb-prod
Flows to close: <none>

Rule creation and deletion will happen asynchronously and report will be sent soon.
Please wait for completion feedback before proceeding with a new request.
In case no feedback is generated within an hour, please contact DIGIT ISHS CONTAINER team.

The following errors have been detected while processing flow.yaml.

Flow name: **mydg-myis-cus-in-techno-server-prod**
There is no flow label matching your request.
Please contact DIGIT ISHS CONTAINER for support.

The request was processed successfully

In this example, a request to open **digit-c-caas-tool-cus-in-mongodb-prod** has been successfully processed. The flow that has been opened is reported in the "Flows opened" section.

DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: <https://citnet.tech.ec.europa.eu/CITnet/stash/scm/dc2closerv/caas-tool.git>
Branch: PROD

Flows opened: **digit-c-caas-tool-cus-in-mongodb-prod**
Flows closed: <none>

The processing of firewall rules configuration has been completed.
Please contact DIGIT ISHS CONTAINER team if you notice any issue.

An error occurred during the processing of the request

In this example, a request to open or close flows has failed. An incident has been created and included in the error message.

DG: DIGIT C
IS: CAAS TOOL
Environment: PROD
Repository: <https://citnet.tech.ec.europa.eu/CITnet/stash/scm/dc2closerv/caas-tool.git>
Branch: PROD

An error was detected during the processing of firewall rules configuration.
An incident has been created to DIGIT ISHS CONTAINER team for investigation.
Incident number for follow-up: INC012345678

Email notification fields description

Path	Description
Subject	The subject will always contain "Flow management".
Recipient	The email is sent to your functional mailbox registered during the subscription of the DIGIT B4 hosting service (WebLogic 14, CaaS, Tomcat, etc.).
Message	The message will contain the result of the processing of your request.

CaaS feedback



For CaaS end-users, the flow feedback will be sent in the CaaS-feedback branch of your git repository in addition to the emails.

1. Confirmation that the request will be processed (example for a request to open a flow)

```
feedback:
  status: success
  commit: c83c4399a61624ffca26f9dfef422919b53bb279
  info:
    - detail: |-
      Flows requested: digit-c-caas-tool-cus-in-mongodb-prod
      Flows to open: digit-c-caas-tool-cus-in-mongodb-prod
      Flows to close: <none>

      Rule creation and deletion will happen asynchronously and report will be sent soon.
      Please wait for completion feedback before proceeding with a new request.
      In case no feedback is generated within an hour, please contact DIGIT ISHS CONTAINER
team.
  - flow: digit-c-caas-tool-cus-in-mongodb-prod
    detail: Flow will be opened
```

- Confirmation that the request will be processed (example for a request to close a flow)

```
feedback:
  status: success
  commit: c83c4399a61624ffca26f9dfef422919b53bb279
  info:
    - detail: |-
      Flows requested: <none>
      Flows to open: <none>
      Flows to close: digit-c-caas-tool-cus-in-mongodb-prod

      Rule creation and deletion will happen asynchronously and report will be sent soon.
      Please wait for completion feedback before proceeding with a new request.
      In case no feedback is generated within an hour, please contact DIGIT ISHS CONTAINER
team.
  - flow: digit-c-caas-tool-cus-in-mongodb-prod
    detail: Flow will be opened
```

2. The request has been successfully processed (example for a request to open a flow)

```

feedback:
  status: success
  info:
    - detail: |-
      The processing of firewall rules configuration has been completed.
      Please contact DIGIT ISHS CONTAINER team if you notice any issue.
flows-status:
  Customer Outbound and Inbound flows:
    digit-c-caas-tool-cus-in-mongodb-prod: open

```

The request has been successfully processed (example for a request to close a flow)

```

feedback:
  status: success
  info:
    - detail: |-
      The processing of firewall rules configuration has been completed.
      Please contact DIGIT ISHS CONTAINER team if you notice any issue.
flows-status:
  Customer Outbound and Inbound flows:
    digit-c-caas-tool-cus-in-mongodb-prod: closed

```

CaaS feedback fields description

Path	Description
status	The status of the request. 1. For the first notification (confirmation that the request will be processed), the status can be: ■ success: no error was encountered, the request will be processed. ■ warn: some non blocking errors were encountered, the request will be processed. Warning details will be provided in the feedback. ■ error: a blocking error was encountered, the request will not be processed. Error details will be provided in the feedback. 2. For the second notification (the request has been processed), the status can be: ■ success: no error was encountered. ■ error: an error was encountered.
commit	The commit hash of the request.  It is only visible in the first notification (email notification and CaaS feedback file).
info	Information messages generated during the processing of the request are put under this field. Each information message has a detail field (the actual message) and additional context fields. For example, a message generated for a specific flow has the flow name included in the flow field as follows: <pre> feedback: status: info info: - flow: digit-c-caas-tool-cus-in-mongodb-prod detail: Flow will be opened </pre>

warn	Warnings generated during the processing of the request are put under this field. Each warning message has a detail field (the actual message) and additional context fields. If any warning is generated, then the status of the request is set to warn. ⚠ If you are trying to use a nonexistent DG security group rule <pre>feedback: status: warn warn: - flow: mydg-mysis-cus-in-techno-server-prod detail: - There is no flow label matching your request. Please contact DIGIT ISHS CONTAINER for support.</pre> ⚠ If you are trying to use a DIGIT Service security group rule inside the customer outbound flows section (Outbound-customer-k8s-namespace) <pre>feedback: status: warn warn: - flow: ec_eu-login-prod detail: - This is a DIGIT service flow. Please contact DIGIT ISHS CONTAINER for more information.</pre> ⚠ If you are trying to use a DG security group rule where you are not allowed by the owner of this security group <pre>feedback: status: warn warn: - flow: budg-summa-cus-in-sap-server-prod detail: - You have not been identified as an authorized consumer of the flow. Please contact DIGIT ISHS CONTAINER.</pre> If the owner of the security group is known, then the message will contain additionally: "This flow belongs to DG \ IS." ⚠ If you are trying to use a DG security group rule for an inbound flow inside the outbound flows section <pre>feedback: status: warn warn: - flow: digit-c-caas-tool-cus-eg-mongodb-prod detail: - The flow should be declared in the inbound/outbound section.</pre> If the owner of the security group is known, then the message will contain additionally: "This flow belongs to DG \ IS."
-------------	--

error	In case an error occurs during the processing of the firewall rules, an incident will be created to front office and its number will be included along an error message in this field. The status of the request will be set to error. <pre> feedback: status: error error: - detail: - An error was detected during the processing of firewall rules configuration. An incident has been created to DIGIT ISHS CONTAINER team for investigation. Incident number for follow-up: INC01234567 </pre>
flows-status	When the request is processed successfully, the list of opened and closed flows will be included in the feedback under this section. DIGIT services are grouped under "EC Outbound flows", while customer flows are grouped under "Customer Outbound and Inbound flows". <pre> feedback: status: success info: - detail: - The processing of firewall rules configuration has been completed. Please contact DIGIT ISHS CONTAINER team if you notice any issue. flows-status: Customer Outbound and Inbound flows: digit-c-caas-tool-cus-in-mongodb-prod: closed </pre>  This field exists only when the request was successfully processed.

FaC: Security Groups



Homepage

- [FaC Security groups](#)
- [FaC: DIGIT Services Security Groups Catalogue](#)
- [FaC: DGs applications Security Groups Catalogue](#)
- [FaC: How to request Security Group Creation](#)

FaC Security groups



Homepage

Page Topics

- [What is a security group?](#)
- [Type of security group](#)

Related Links

[DIGIT Services Security Groups Catalogue](#)

[Applications Security Groups Catalogue](#)

[How to request Security Group Creation](#)



What is a security group?

A security group is a **set of rules** that defines which **types of network traffic are allowed to reach or leave an application**. In Flow-as-Code, security groups are used to control and manage firewall access consistently and securely.

Type of security group

- DIGIT Services
- DGs Information Systems

See the table below.

Security group type	Description
DIGIT Services	DIGIT maintains a catalogue of security groups per service. Example: WebLogic 14, CaaS, and Tomcat and other DIGIT services. Refer to the published DIGIT security group catalogue
DGs Information Systems	DGs request and maintain a catalogue of security groups for their Information Systems. Refer to the published DGs security groups catalogue

FaC: DIGIT Services Security Groups Catalogue



Homepage

Related Links

- [List of Rules Published in the DIGIT Services Security Group Catalogue](#)
- [Outbound Flow](#)
- [Inbound Flow](#)
 - [CaaS](#)
 - [How to use DIGIT security group for inbound connection](#)
 - [PaaS](#)
- [flow.yaml use case](#)
- [No rules defined?](#)

Related Links

- [Applications Security Groups Catalogue](#)
- [How to request Security Group Creation](#)

List of Rules Published in the DIGIT Services Security Group Catalogue



Default Security Group Rules

Some flows are preconfigured and opened by default for DIGIT-managed hosting services. These default flows cannot be modified via the flow blueprint file (flow.yaml):

- LDAP (ec_ldap-prod)
- Intragate (ec_intragate-prod)
- Proxy (ec_proxy-prod)
- EU Login (ec_eulogin-prod, ec_eulogin-acc)
- Vault and Nexus (ec_devops-tech-prod)
- Oracle Legacy (ec_oracle-db-Legacy-prod, ec_oracle-oid-Legacy-prod)
- SMTP (ec_smtp-prod)

In addition, the flow with **S3 Cloudian** (s3-lux.obj.cec.eu.int) is opened by default for B4 Hosting Services in Cloud On-Premises (COP).

The rules in the DIGIT Services Security Group Catalogue are exclusively available for use with the Flow-as-Code pipeline and the flow blueprint file.

The DIGIT Services **security group rules** are available only through the **Flow-as-Code (FaC) pipeline** using the `flow.yaml` blueprint.

For details, see the following [page](#).

If the required rule is not listed, submit a [Request for Information \(RFI\)](#).



MANAGE YOUR
INFORMATION SYSTEMS



HOSTING/HOUSING
INFORMATION REQUEST



REPORT INCIDENT

Outbound Flow

The table below lists the DIGIT security groups for **outbound flow** connection with their descriptions and endpoints. DIGIT security group rules can be used to open outbound flows between DIGIT Services and PaaS and CaaS services.

DIGIT Services Security group rule identifier (Outbound)	Description
apigwt	
ec_apigwt-acc	flow coverage / EC APIGATEWAY Acceptance External / api.acceptance.tech.ec.europa.eu / apim.acceptance.europa.eu
ec_apigwt-prod	flow coverage / EC APIGATEWAY Production Internal and External / api.tech.ec.europa.eu / api-gateway.tech.ec.europa.eu / intrapro.tech.ec.europa.eu
APIM CAPI Consul	
ec_consul-apim-capi-prod	flow coverage / APIM.CAPI Consul Production / IP 10.66.134.78,10.66.134.185 Port 443
apigwtmanager	
ec_apigwtmanager-acc	flow coverage / EC APIGATEWAY Manager Acceptance External / apigw-fp-exacc.slb.ec.europa.eu :8425
ec_apigwtmanager-prod	flow coverage / EC APIGATEWAY Manager Production Internal and External / apigw-fp-extra.slb.ec.europa.eu :1054, apigw-fp-intra.slb.ec.europa.eu :45963
Bitbucket	
ec_bitbucket-prod	flow coverage / CITNet Production / https://citnet.tech.ec.europa.eu/CITnet / B4 CITnet ingress for BitBucket PROD
ec_bitbucket-ssh-prod	flow coverage / CITNet Production / citnet.tech.ec.europa.eu/CITnet Production ssh / B4 CITnet ingress for BitBucket ssh PROD
Cat	
ec_cat-acc	flow coverage / EC CORPORATE AUDIT TRAILS Acceptance / https://intragate.acceptance.ec.europa.eu/cat
ec_cat-prod	flow coverage / EC CORPORATE AUDIT TRAIL Production / https://intragate.ec.europa.eu/audittrail
EU Login	
ec_eulogin-load	flow coverage / EU Login Load / ECAS Load / ecas.cc.cec.eu.int / B3 IAM ingress for eulogin LOAD - ecas load
ec_eulogin-test	flow coverage / EU Login Test / ECAS Test / ecast.cc.cec.eu.int / B3 IAM ingress for eulogin TEST. - ecas test - ecast.cc.cec.eu.int

ec_eulogin-acc	flow coverage / Eulogin Acceptance / ECAS Acceptance / ecasa.cc.cec.eu.int / B3 IAM ingress for eulogin ACC, ecas acc - ecasa.cc.cec.eu.int
ec_eulogin-prod	flow coverage / EU Login Production / ECAS Production / ecas.cc.cec.eu.int / B3 IAM ingress for eulogin PROD. ecas prod - ecas.cc.cec.eu.int
LDAP	
ec_ldap-test	flow coverage / CED Ldap Test non secure and secure / CED LDAP Test / ldap://cedtest.cec.eu.int:11389 / ldap://cedtest.cec.eu.int:11636
ec_ldap-acc	flow coverage / CED Ldap Acceptance non secure and secure / CED LDAP Acceptance / ldap://cedacc.cec.eu.int:11389 / ldap://cedacc.cec.eu.int:11636
ec_ldap-prod	flow coverage / CED Ldap Production non secure and secure / CED LDAP Production / ldap://cedprod.cec.eu.int:11389
ec_ldap-euds-test	flow coverage / EUDS Ldap Test non secure and secure / EUDS LDAP Test / ldap://euds.test.ec.europa.eu:11389 / ldap://euds.test.ec.europa.eu:11636
ec_ldap-euds-acc	flow coverage / EUDS Ldap Acceptance non secure and secure / EUDS LDAP Acceptance / ldap://euds.acceptance.ec.europa.eu:11389 / ldap://euds.acceptance.ec.europa.eu:11636
ec_ldap-euds-prod	flow coverage / EUDS Ldap Production non secure and secure / EUDS LDAP Production / ldap://euds.ec.europa.eu:11389 / ldap://euds.ec.europa.eu:11636
Oracle	
ec_oracle-db-Legacy-nonprod	flow coverage / Oracle DB non-production - Legacy Port 1521 / Oracle non-production - Legacy Port 1597 / B4 Oracle DB ingress for Oracle DBNONPROD
ec_oracle-db-Legacy-prod	flow coverage / Oracle Production - Legacy / Oracle Production - Legacy Port 1521 / Oracle Production - Legacy Port 1597 / B4 OracleDB ingress for OracleDB PROD
ec_oracle-oid-Legacy-prod	flow coverage / Oracle OIB Production - Legacy / B4 Oracle OID ingress for Oracle OID PROD
Proxy	
ec_proxy-prod	flow coverage / EC Proxy Production / Proxy ps-bxl-usr.cec.eu.int / Proxy pslux.ec.europa.eu / C4 RPM ingress for Proxy Out PROD
Kafka	
ec_kafka-nonprod	flow coverage / KAFKA Non-Production
ec_kafka-prod	flow coverage / KAFKA Production
SMTP	
ec_smtp-prod	flow coverage / SMTP Production / smtpmail.cec.eu.int:25 / smtpmail.cec.eu.int:587 / C5 MS Exchange ingress for SMTP PROD #
Intragate	
ec_intragate-dev	flow coverage / INTRAGATE Development Reverse Proxy / intragate.development.ec.europa.eu / C4 SNET ingress for intragate.development.ec.europa.eu
ec_intragate-test	flow coverage / INTRAGATE Test Reverse Proxy / intragate.test.ec.europa.eu / C4 SNET ingress for intragate.test.ec.europa.eu
ec_intragate-stress	Flow coverage / INTRAGATE STRESS Reverse proxy / intragate.stress.ec.europa.eu / C4 SNET ingress for intragate.stress.ec.europa.eu
ec_intragate-maint	flow coverage / INTRAGATE Maintenance Reverse Proxy / intragate.maintenance.ec.europa.eu / C4 SNET ingress for intragate.maintenance.ec.europa.eu

ec_intragate-train	flow coverage / INTRAGATE Training Reverse proxy / intragate.training.ec.europa.eu / C4 SNET ingress for intragate.training.ec.europa.eu
ec_intragate-acc	flow coverage / INTRAGATE ACCEPTANCE Reverse Proxy / intragate.acceptance.ec.europa.eu / C4 SNET ingress for intragate.acceptance.ec.europa.eu
ec_intragate-prod	flow coverage / INTRAGATE Production Reverse Proxy / intragate.ec.europa.eu / C4 SNET ingress for intragate.ec.europa.eu
Webgate	
ec_webgate-dev	flow coverage / Webgate Development Reverse Proxy / webgate.development.ec.europa.eu / C4 SNET ingress for webgate.development.ec.europa.eu
ec_webgate-stress	flow coverage / Webgate STRESS Reverse proxy / https://webgate.stress.ec.europa.eu / C4 SNET ingress for webgate.stress.ec.europa.eu
ec_webgate-test	flow coverage / Webgate Test Reverse Proxy / https://webgate.test.ec.europa.eu / C4 SNET ingress for webgate.test.ec.europa.eu
ec_webgate-train	flow coverage / Webgate Training Reverse proxy / https://webgate.training.ec.europa.eu / C4 SNET ingress for webgate.training.ec.europa.eu
ec_webgate-acc	flow coverage / Webgate Acceptance Reverse proxy / https://webgate.acceptance.ec.europa.eu / C4 SNET ingress for webgate.acceptance.ec.europa.eu
ec_webgate-prod	flow coverage / Webgate Acceptance Reverse proxy / https://webgate.acceptance.ec.europa.eu / C4 SNET ingress for webgate.acceptance.ec.europa.eu
ec_webgate-testa-train	flow coverage / Webgate Testa Training Reverse proxy / https://webgate.training.ec.testa.eu / C4 SNET ingress for webgate.training.ec.testa.eu
ec_webgate-testa-acc	flow coverage / Webgate Testa Acceptance Reverse proxy / https://webgate.acceptance.ec.testa.eu / C4 SNET ingress for webgate.acceptance.ec.testa.eu
ec_webgate-testa-prod	flow coverage / Webgate Testa Production Reverse proxy / https://webgate.ec.testa.eu / C4 SNET ingress for webgate.ec.testa.eu
ec-europa	
ec_ec-europa-eu-prod	flow coverage / *.ec.europa.eu / Port 443 / C4 SNET ingress for *.ec.europa.eu
ec_tech	
ec_tech-dev	flow coverage / Reverse Proxy tech Development / development.tech.ec.europa.eu
ec_tech-test	flow coverage / Reverse Proxy tech Test/ test.tech.ec.europa.eu
ec_tech-acc	flow coverage / Reverse Proxy tech Acceptance / acceptance.tech.ec.europa.eu
ec_tech-prod	flow coverage / TECH Production reverse proxy / tech.ec.europa.eu
ec_devops	
ec_devops-tech-prod	flow coverage / Reverse Proxy DEVOPS tech Production / devops.tech.ec.europa.eu / HCP VAULT devops tech RPM / NEXUS devops tech RPM
ec_copbeta	
ec_copbeta-tech-nonprod	flow coverage / Reverse Proxy COP BETA for acceptance,test,development / copbeta.tech.ec.europa.eu /
ec_copprd	
ec_copprd-tech-prod	flow coverage / Reverse Proxy COPPRD Production / copprd.tech.ec.europa.eu /

CC.CEC	
ec_www-cc-cec-dev	flow coverage / CC CEC Development Reverse Proxy / www.development.cc.cec / C4 SNET ingress for www.development.cc.cec
ec_www-cc-cec-test	flow coverage / CC CEC Test Reverse Proxy / www.test.cc.cec / C4 SNET ingress for www.test.cc.cec
ec_www-cc-cec-acc	flow coverage / CC CEC Acceptance Reverse Proxy / www.acceptance.cc.cec / C4 SNET ingress for www.acceptance.cc.cec
ec_www-cc-cec-prod	flow coverage / CC CEC Official Reverse Proxy / www.cc.cec / C4 SNET ingress for www.cc.cec

Inbound Flow

CaaS

The following table lists the security groups for **inbound connection**. DIGIT security group rules to be used to open inbound flows between DIGIT Services and CaaS services.

DIGIT Services Security Group Rule Identifier (Inbound)	Description
ec_apigw-in-accint	flow coverage / EC APIGATEWAY Acceptance Internal / api.acceptance.tech.ec.europa.eu / apim.acceptance.europa.eu
ec_apigw-in-prodint	flow coverage / EC APIGATEWAY Production Internal
ec_apigw-in-accext	flow coverage / EC APIGATEWAY Acceptance External / api.acceptance.tech.ec.europa.eu / apim.acceptance.europa.eu
ec_apigw-in-prodext	flow coverage / EC APIGATEWAY Production External
CAPI	
ec_capi-in-apigw-int-acc	flow coverage / EC CAPI Acceptance Internal / capi.acceptance.tech.ec.europa.eu
ec_capi-in-apigw-ext-acc	flow coverage / EC CAPI Acceptance External / sse.np.myworkplace.services.ec.europa.eu

How to use DIGIT security group for inbound connection

Refer to the following [section](#) for more information.

Example:

```
# Customer Inbound
# List of Inbound rules to the customer Kubernetes services
# Usage: [rule name]: [service name]
Inbound-customer-k8s-services:
  ec_apigw-in-accint: name_of_your_K8s_service_in_CaaS...
```

PaaS

While EC APIGATEWAY service inbound flows are allowed by default, please be aware that any other inbound flow requirement on a PaaS environment need to be requested via non-standard RFC.

Reminder: Applications must be exposed and accessed through Reverse Proxy Mapping(s).

flow.yaml use case

I would like my application to reach the Webgate testa production.

flow.yaml blueprint sample

```
templateVersion: 1 # version of the template file
# DIGIT Services Outbound
Outbound-ec-services:
  ec_webgate-testa-prod: true
# Customer Outbound
Outbound-customer-k8s-namespace: {}
# Customer Inbound
# List of Inbound rules to the customer kubernetes service#####
# Usage: [rule name]: [service name]
Inbound-customer-k8s-services: {}
```



ec_proxy-prod does not cover ps-lux-usr.cec.eu.int.

If you want to use it, create a ticket in ServiceNow.

No rules defined?

If no rules are defined, you can either declare empty maps (`{}`) or omit the root keys; both are valid and behave the same by default.

Use `{}` if you want to signal intent or satisfy schema/linters that expect the keys; otherwise remove the keys for cleanliness.

FaC: DGs applications Security Groups Catalogue



Homepage

Page Topics

- [DGs security group catalogue \(Outbound Flows\)](#)
 - [DGs Security Groups Sample](#)
- [DGs security catalogue \(Inbound Flows\)](#)
 - [DGs Security Groups Sample](#)

Related Links

[DIGIT Services Security Groups Catalogue](#)

[How to request Security Group Creation](#)

DGs security group catalogue (Outbound Flows)

The DGs Service Catalogue (see table below), enables DGs to open outbound flows between their cloud-based Information Systems in Cloud on Premises (CoP) and those in the legacy environment.

DGs Security Groups Sample

Here is a sample of DGs security groups.

If you cannot find the desired DG security group for opening an outbound flow in the **DGs Services security groups catalogue sample** below, please submit a [Request for Information \(RFI\)](#) in JASSPR.



MANAGE YOUR
INFORMATION SYSTEMS



HOSTING/HOUSING
INFORMATION REQUEST



REPORT INCIDENT



You can also consult the page [How to request Security Group Creation](#).

In the table below, items marked **nodes redacted** indicate where the node IP address(es) would normally appear.

DGs Security Group	Description	Security Group Name	Authorized Consumers
cnect-sitcen-cus-in-mongodb-acc	Flow coverage: MongoDB / server flou / node redacted — port: 27017 / CNECT SITCEN ACCEPTANCE	CNECT \ SITCEN	CNECT \ SITCEN
cnect-sitcen-cus-in-elasticsearch-acc	Flow coverage: ELASTICSEARCH Cluster / server flou / nodes redacted — port: 8200 / single node redacted — port: 8601 / CNECT SITCEN ACCEPTANCE	CNECT \ SITCEN	CNECT \ SITCEN
rtd-egrants-cus-in-secunda-production	Flow coverage: Connection to RTD EGRANTS Production / Connection to Secunda Production / nodes redacted — port: 44300	RTD \ EGRANTS	- ENEST \ IPAPP - DIGIT \ SEDIA.IOP

rtd-egrants-cus-in-secunda-acceptance	Flow coverage: RTD EGRANTS Acceptance / Connection to Secunda Acceptance / nodes redacted — port: 44300	RTD \ EGRANTS	- DIGIT \ SEDIA.IOP - DIGIT \ MAP - DIGIT \ SEDIA.CAP - DIGIT \ SEDIA.DSF - DIGIT \ SEDIA.PAAW - DIGIT \ SEDIA.PDM - DIGIT \ EPROCUREMENT. - DIGIT \ EPROCUREMENT. - DIGIT \ EREQUEST - DIGIT \ EPROCUREMENT.CTER - DIGIT \ EPROCUREMENT. - DIGIT \ ESUBMISSION - DIGIT \ EPROCUREMENT. - DIGIT \ EXT_GATEWAY
rtd-egrants-cus-in-secunda-training	Flow coverage: RTD EGRANTS Training / Connection to Secunda Training / nodes redacted — port: 44300	RTD \ EGRANTS	- DIGIT \ SEDIA.IOP - DIGIT \ MAP - DIGIT \ SEDIA.CAP - DIGIT \ SEDIA.DSF - DIGIT \ SEDIA.PAAW - DIGIT \ SEDIA.PDM - DIGIT \ EPROCUREMENT. - DIGIT \ EPROCUREMENT. - DIGIT \ EREQUEST - DIGIT \ EPROCUREMENT.CTER - DIGIT \ EPROCUREMENT. - DIGIT \ ESUBMISSION - DIGIT \ EPROCUREMENT. - DIGIT \ EXT_GATEWAY
rtd-egrants-cus-in-secunda-development	Flow coverage: RTD EGRANTS Development / Connection to Secunda Development / nodes redacted — port: 44300	RTD \ EGRANTS	- DIGIT \ SEDIA.CAP - DIGIT \ SEDIA.DSF - DIGIT \ SEDIA.IOP - DIGIT \ SEDIA.PAAW - DIGIT \ SEDIA.PDM - DIGIT \ MAP - DIGIT \ EPROCUREMENT. - DIGIT \ EPROCUREMENT. - DIGIT \ EREQUEST - DIGIT \ EPROCUREMENT.CTER - DIGIT \ EPROCUREMENT. - DIGIT \ ESUBMISSION - DIGIT \ EPROCUREMENT. - DIGIT \ EXT_GATEWAY

rtd-egrants-cus-in-secunda-integration	Flow coverage: RTD EGRANTS Integration / Connection to Secunda Integration / nodes redacted — port: 44300	RTD \ EGRANTS	- DIGIT \ SEDIA.CAP - DIGIT \ SEDIA.DSF - DIGIT \ SEDIA.IOP - DIGIT \ SEDIA.PAAW - DIGIT \ SEDIA.PDM - DIGIT \ MAP - DIGIT \ EPROCUREMENT. - ECONTRACTING - DIGIT \ EPROCUREMENT. - EREQUEST - DIGIT \ EPROCUREMENT.CTER - DIGIT \ EPROCUREMENT. - ESUBMISSION - DIGIT \ EPROCUREMENT. - EXT_GATEWAY
rtd-egrants-cus-in-secunda-test	Flow coverage: RTD EGRANTS Test / Connection to Secunda Test / nodes redacted — port: 44300	RTD \ EGRANTS	- NEAR \ IPAPP - DIGIT \ EPROCUREMENT. - ECONTRACTING - DIGIT \ SEDIA.IOP - NEAR \ MIS J - DIGIT \ SEDIA.CAP - DIGIT \ SEDIA.DSF - DIGIT \ SEDIA.IOP - DIGIT \ SEDIA.PAAW - DIGIT \ SEDIA.PDM - DIGIT \ SEDIA. - PORTAL - DIGIT \ MAP - RTD \ EFP7.CAP - DIGIT \ EPROCUREMENT. - ECONTRACTING - DIGIT \ EPROCUREMENT. - ESUBMISSION - DIGIT \ EPROCUREMENT. - EREQUEST - DIGIT \ EPROCUREMENT.CTER - DIGIT \ EPROCUREMENT. - EXT_GATEWAY - CNECT \ DSA. - PORTAL - EAC \ EACPDM

rtd-egrants-cus-in-secunda-load	Flow coverage: RTD EGRANTS Stress / Connection to Secunda Stress / nodes redacted — port: 44300	RTD \ EGRANTS	- DIGIT \ SEDIA.IOP - DIGIT \ MAP - DIGIT \ SEDIA.CAP - DIGIT \ SEDIA.DSF - DIGIT \ SEDIA.PAAW - DIGIT \ SEDIA.PDM - DIGIT \ EPROCUREMENT. ECONTRACTING - DIGIT \ EPROCUREMENT. EREQUEST - DIGIT \ EPROCUREMENT.CTER - DIGIT \ EPROCUREMENT. ESUBMISSION - DIGIT \ EPROCUREMENT. EXT_GATEWAY
comp-cus-in-ldap-adlds-acc	Flow coverage: LDAP ADLS Acceptance / node redacted — port: 1091	COMP \ CASE@EC.BAW	COMP \ CASE@EC.BAW

DGs security catalogue (Inbound Flows)

The DGs Service Catalogue published, allow DGs to open inbound flows between their cloud-based Information Systems in Cloud on Premises (CoP) and those in the legacy environment.



DGs Security Groups Sample

Here is a sample of DGs security groups.

If you cannot find the desired DG security group for opening an inbound flow in the **DGs Services security groups catalogue sample**, please submit a [Request for Information \(RFI\)](#).

You can also consult the page [FaC: How to request Security Group Creation](#)

Security group	Description	Security Group Owner	Authorized Consumers
scic-cus-eg-speech-to-text-transcriber	Flow coverage: Speech-to-Text Transcriber / node redacted — ports: 8889-8893	SCIC \ SPEECH.SERVICE	SCIC \ SPEECH.SERVICES

FaC: How to request Security Group Creation



Homepage

Table of Contents

- [Complete the Security Group request form](#)
- [Security Group Template](#)
 - [Example](#)
- [Request the creation of a Security Group template](#)
- [Description of the fields](#)

Related Links

[DIGIT Services Security Groups Catalogue](#)

[Applications Security Groups Catalogue](#)

Complete the Security Group request form

1. Make sure you know the correct DG, Information System (IS) and environment of the request.
2. Complete a **Security Group** request form. DIGIT provides a template (See section below) to guide you on how to complete the form.
3. Submit a [Request for Information \(RFI\)](#) in JASSPR to the CCOR team with [Request the creation of a Security Group Template](#). This will be validated and approved by DIGIT.
4. Once approved, you will receive the Rule Identifier information, required to update the rules in the flow blueprint file.
5. Commit your changes to the Git repository to initiate the pipeline,
6. Refer to the following [tutorial video](#), which uses [CaaS as an example](#)

Security Group Template

This is the template to request the creation of a security group for an Information System (IS) and Environment, hosted in the DC Network. You can complete the template and copy the information to a Word file.

Attach the Word file to the ServiceNow form as evidence. See a brief [tutorial video](#) for details (Uses CaaS as an example).

i **How to request the creation of a Security Group**

DG: < DG Name>

IS: < Information System >

Environment: < Environment name >

FMAOwner: DG \ IS \ Environment

FMAOwner: (ec official - userid):

FMAOwnerContact: (Functional email of service):

FMAConsumer: # Allow other DGs: Yes/No -> if Yes # DG \ IS

DG \ IS \

From Direction: only one direction can be selected per request

from-K8s-namespace

or

To-K8s-service

Description: # Description of the purpose of the flow (For example: mongoDB, redis server, subnets for application xxxxx)

IP: <IP address of resources or subnets>

PORT: <port of the resource>

Protocol: <TCP/UDP>


Example

i **Scenario:**

DG CNECT wants to publish a security group for the SITCEN Information System to secure the MongoDB resource.

Details:

- **Business Information:** Includes IS name (SITCEN), environment (e.g., Test/Production), and resource (MongoDB).
- **Diagram in JASSPR:** Shows business information, flow direction, and authorized consumers.

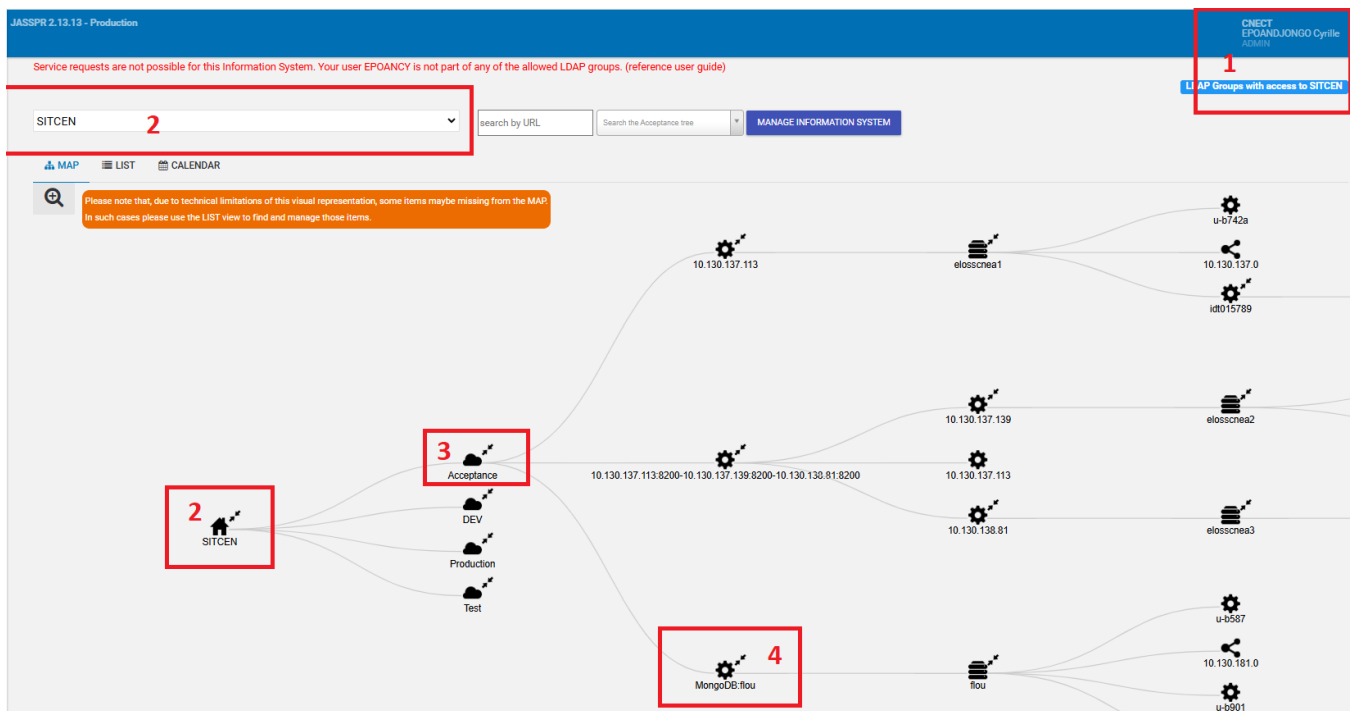

DG security group sample

- (1) DG: CNECT
- (2) IS: SITCEN
- (3) Environment: Acceptance
- (4) Resource: MongoDB:flou
 - use in resource description

Request the creation of a Security Group template



How to request a Security Group creation template

#Business Information for the definition of the security group owner

(1) DG: CNECT

(2) IS: SITCEN

(3) Environment: Acceptance

(1) + (2) + (3) FMAOwner: CNECT \ SITCEN \ Acceptance

FMAOwner: (ec official - userid):nindl

FMAOwnerContact: (Functional email of service): DIGIT-ISHS-CONTAINER@ec.europa.eu

#DG and Information System allow to consumes the security group

FMAConsumer: # Allow other DGs: Yes/No -> if Yes # **(1) + (2) → DG \ IS**

CNECT \ SITCEN

#Flow direction

From Direction: # Only one direction can be selected per request

from-K8s-namespace

#Decription of the resource(s) of the security group

(4)

Description: mongoDB service

IP: 10.130.181.223

PORT: 27017

Protocol: TCP

(*) if there are additional resource, please duplication the bloc (description, IP, PORT, protocol)



info

Using a Security Group from Another Information System:

Attach approval from the Information System owner to your request.

Requesting the Creation of a Security Group for Another DG's Information System:

Include the Information System owner's approval with your request.

Description of the fields

Path	Description
DG	This field defines the DG name Information visible in JASSPR
IS	This field defines the Information System name Information visible in JASSPR
Environment	This field (String) specifies the following: - The name of the environment where the resource(s) resides. - Environment type, such as Development, Test, Acceptance, Maintenance, or Production. - The environment's connection to your Information System. - Hosting environment details linked to your Information System. - Information visible in JASSPR.
FMAOwner:	This field (String) defines the EC official: (ec official - userid) DG \ IS \ Environment Functional mailbox
FMAConsumer:	This field specifies: FMAConsumer: The authorized consumer of the security group. DG Name: The DG authorized to use the security group. Information System Name: The Information System authorized to use the security group. - If another Information System wants to use the security group, approval from the security group's owner is required. Value (String) - DG \ IS \

From Direction :	The From Direction field defines the flow direction. Select a single value. Values could be • from-K8s-namespace • To-K8s-service
Description	Description describes the purpose of the flow (For example: mongoDB, redis server, subnets for application xxxxx)
IP:	This field defines • IP address of resource (s) • subnets of the resource (s)
PORT:	This field defines • PORT: <port of the resource>
Protocol:	This field defines the protocol. Select a single value. Values could be • TCP • UCP • ICMP