Oracle Utilities Customer Care and Billing v25.10HOT

Product Fix Design

Bug 38746273

Last Modified: January 18, 2026 10:59 PM
Printed On: November 4, 2009

Oracle Utilities Customer Care and Billing Product Fix Design

Copyright 2026 by Oracle. All rights reserved.

The information contained in this document is proprietary and confidential to Oracle and is subject to the non-disclosure obligations described in the license agreement between your company and Oracle. You may not provide this document or any copy of this document to third parties outside your company unless you first obtain the written permission of Oracle.

This document introduces new and changed business and technical features that Oracle has included in the ”Single Fix” described in this document.

The functionality of the Single Fix described in this document may be superseded by functionality included in a future Single Fix, Release or Update. Oracle reserves the right to revise or expand the functionality of any future Single Fix, Release or Update of Oracle Utilities Customer Care and Billing in a manner compatible with Oracle’s business objectives, and the business objectives of each of Oracle’s customers, at the time that Oracle makes the software code generally commercially available.

Oracle will provide you with additional information concerning product Releases or Updates after Oracle finalizes the related specifications and tests the product component(s). Final documentation will be shipped to you with the media containing the Release or Update.

Please contact Oracle Customer Service Group if you have any questions or comments concerning this document, which has been prepared for your benefit as a licensee of Oracle Utilities Customer Care and Billing.

Table of Contents

Reported Issue....4
Description....4
Steps To Recreate....4
Data Setup....4
Reported Issue....4

Solution Design....8
Summary....8
Other Changes....9
Zone....9

Data Clean-Up / Fixes....21

Recommended Test Cases....21
Test Case 1: Reported Issue....21
Test Case 2: Verify that Premise Search displays results based on CIS Division for premise's not linked to Account....22
Test Case 2.1: Premise Search on Case with Premise/SP Search set to Restricted and Premise having same CIS Division as user....22
Test Case 2.2: Premise Search on Case with Premise/SP Search set to Restricted and Premise having different CIS Division other than user....22
Test Case 2.3: Premise Search on Case with Premise/SP Search set to Restricted and Premise having no CIS Division....22
Test Case 3: Verify that Premise Search displays results based on Account access group for premise's linked to Account (via Non-Cancelled SA)....23
Test Case 3.1: Premise search on Case when the User has access to corresponding Account access group and the Premise and user have different CIS division....23
Test Case 3.2: Premise search on Case when the User does not have access to Corresponding Accounts access group and the Premise and user have same CIS division....23
Test Case 3.3: Premise search on Case when User does not have access to Corresponding Account access group and the Premise/SP search is set to "Not Restricted"....24
Test Case 4: Premise search displays results based on CIS Division for Premises linked to only Cancelled SA....24
Test Case 4.1: Premise search on Case when SP/Premise search is "Not Restricted"…24
Test Case 4.2: Premise search on Case when SP/Premise search is "Restricted" and the User CIS division is different from the corresponding Premise....24

Copyright ©2026, Oracle. All rights reserved.

Reported Issue

Description

When attempting to add a Case from the account context menu, Using the Address Search for premise the standalone premises not linked to any Account are not displayed in the search.

Steps To Recreate

Data Setup

- Set the **Premise/SP Search** as ***Not Restricted*** in the Main tab of installation options.

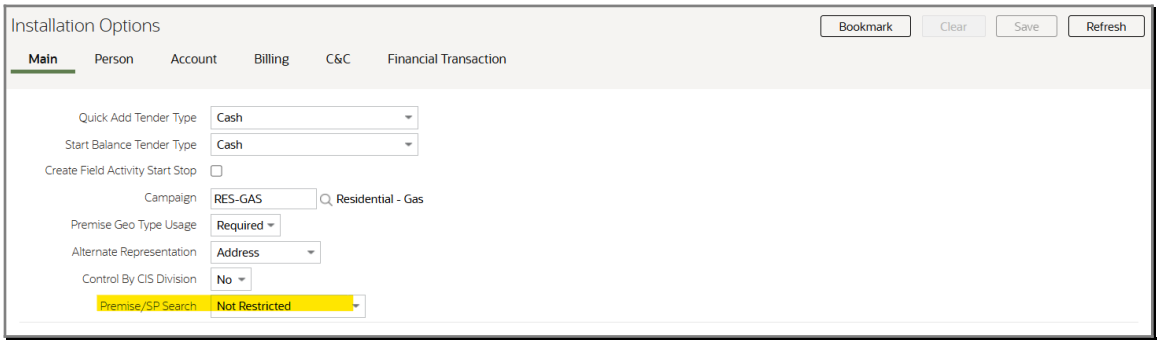

Installation Options

Reported Issue

- Add a person associated with an account and no premise.

Copyright ©2026, Oracle. All rights reserved.

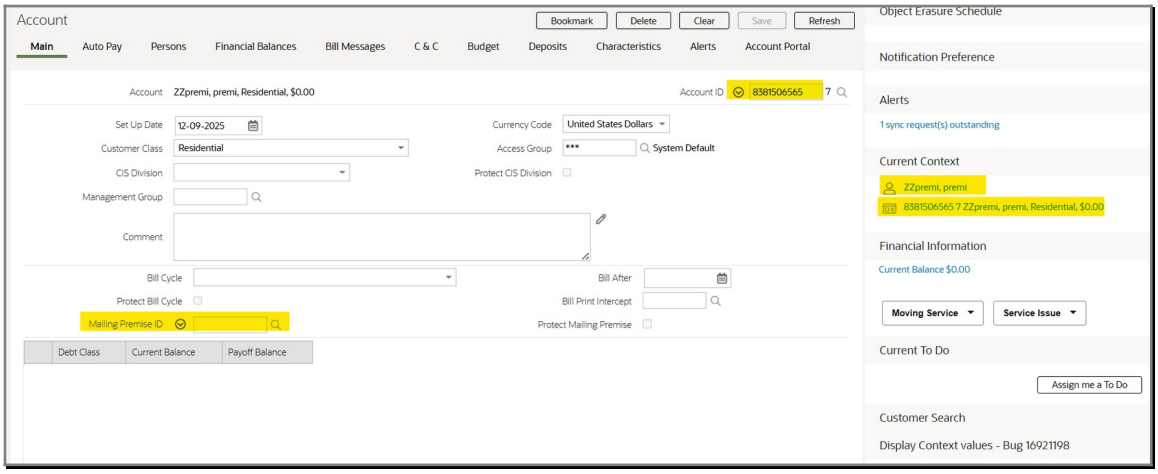

Account

- Add a premise which is not linked to any account.

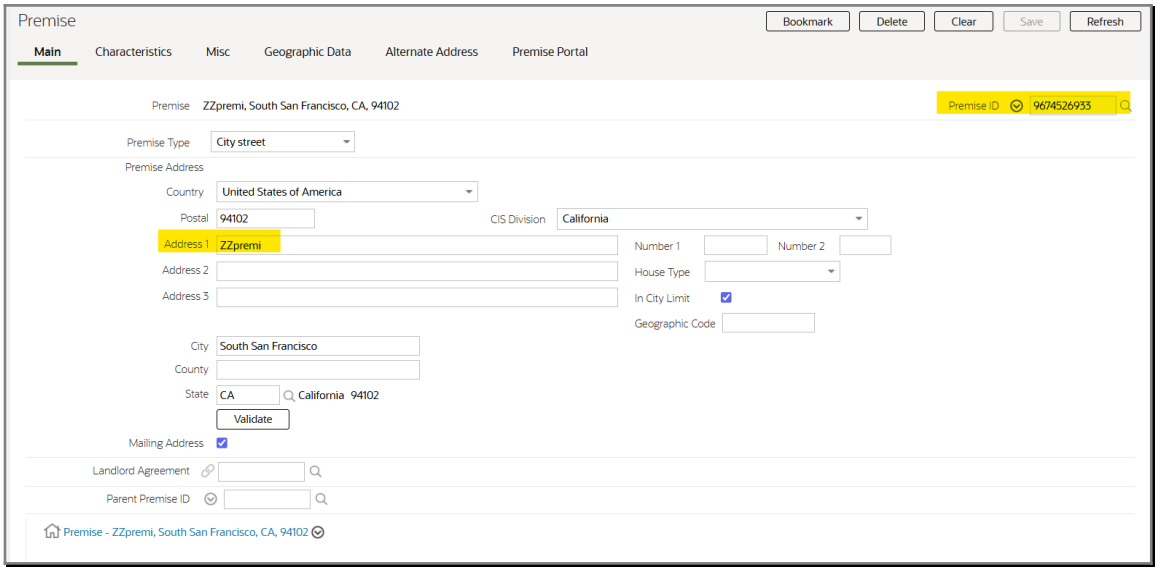

Premise

- Add a case type.

Copyright ©2026, Oracle. All rights reserved.

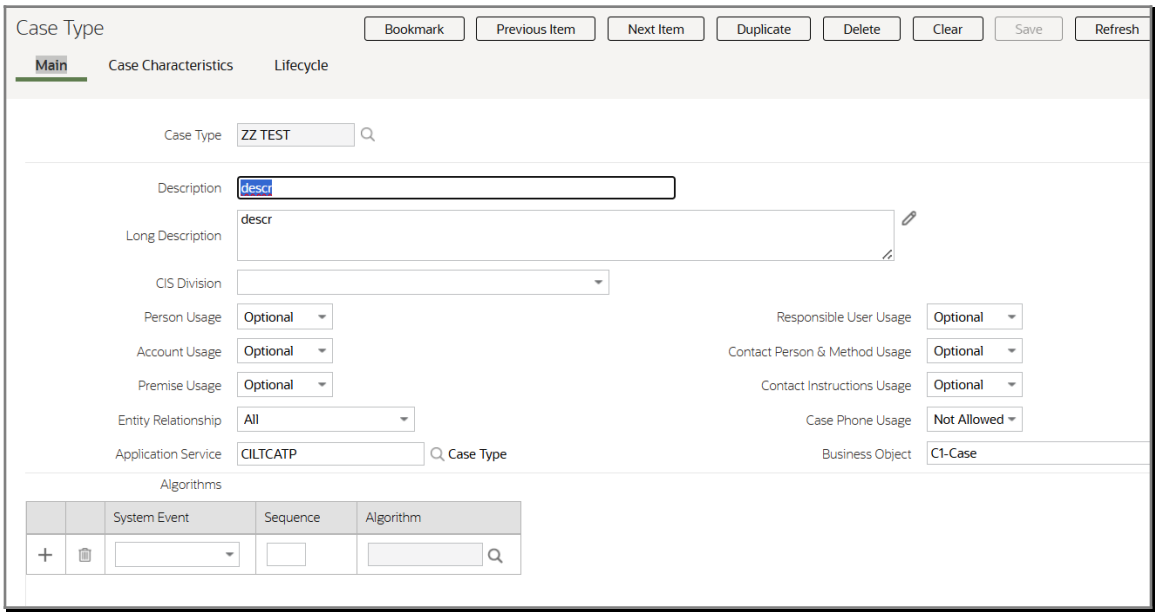

Case Type

- Using the account context menu add a case.

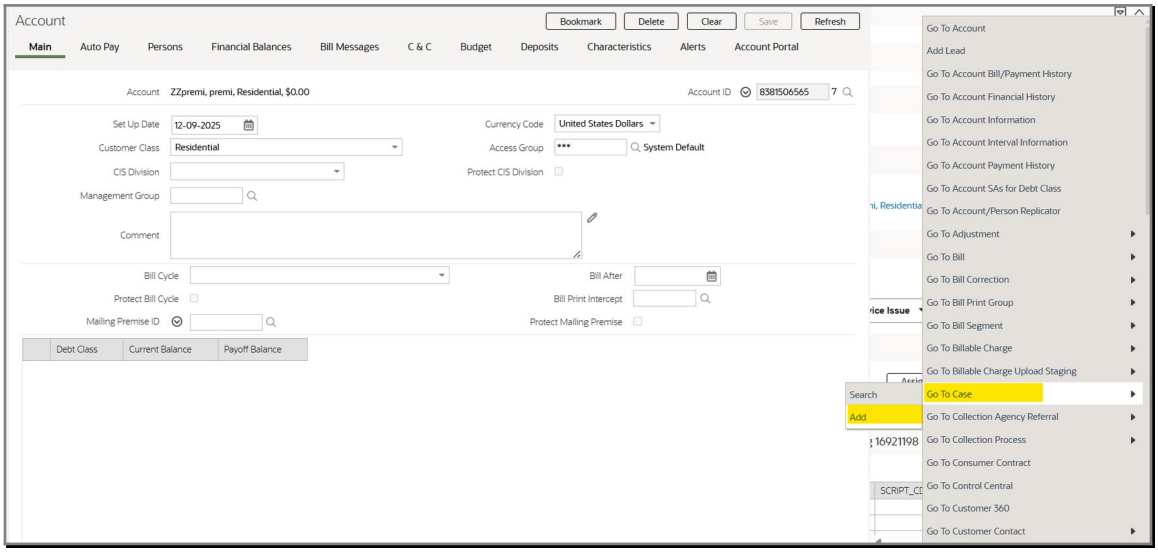

Add Case

- Specify the case type.

Copyright ©2026, Oracle. All rights reserved.

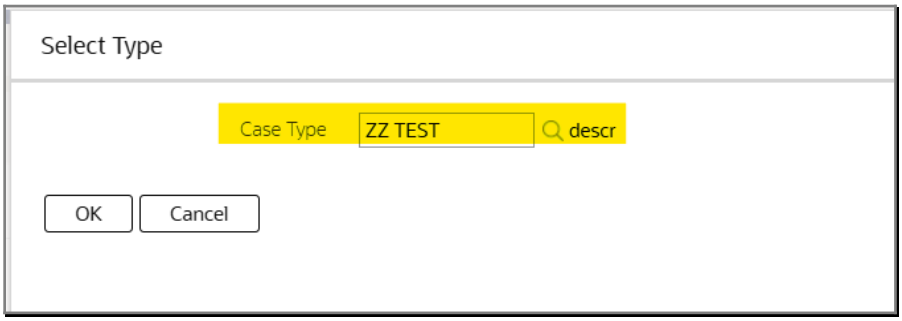

Specify Case Type

- Try to search for the premise using address search.

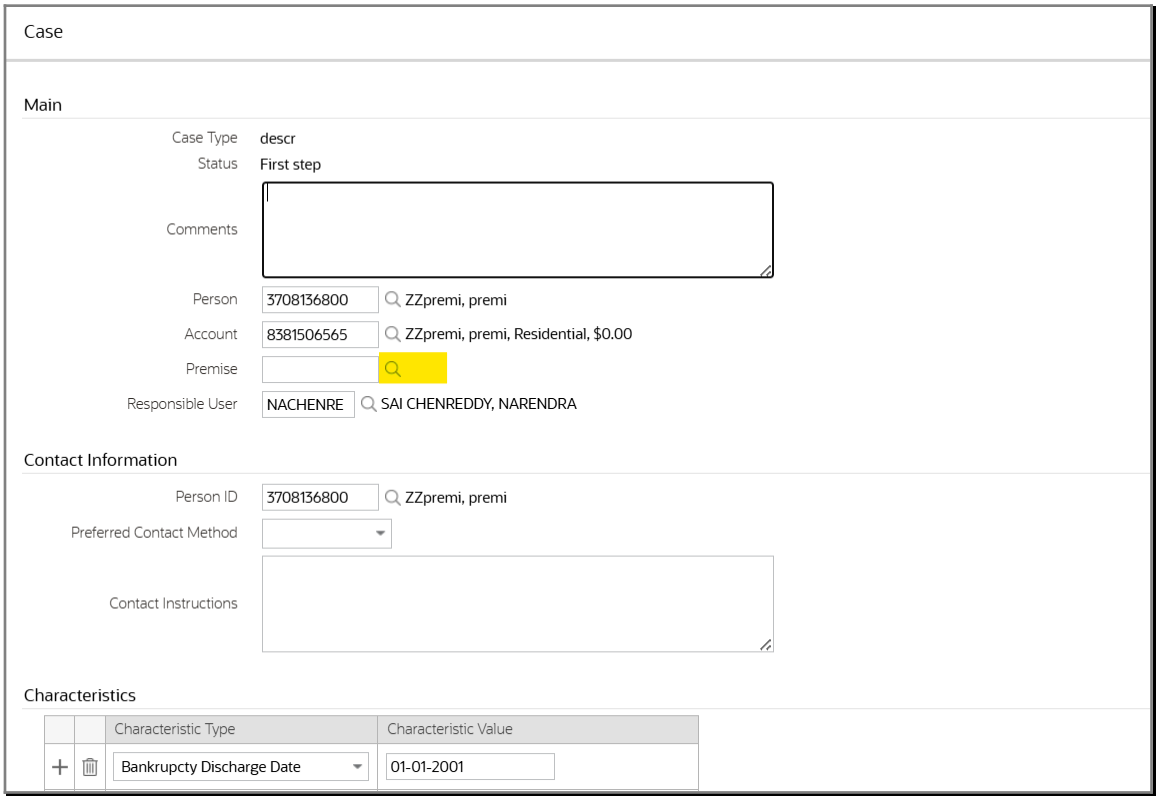

Case

- Input the Address and click on search.

Copyright ©2026, Oracle. All rights reserved.

Premise Search

- **Expected**: The premise should be returned.
- **Actual**: The search doesn't return any results.

Solution Design

- The ***C1-PREMQ1*** Zone SQL will be updated to display premises not linked to an account (via non-cancelled SA) in the Premise Address Search, based on the CIS Division and the **Premise/SP Search** on Installation Options.
  - If set to 'Restricted', premises will be displayed based on the CIS Division check.
  - If set to 'Not Restricted', all premises will be included in the search results, regardless of CIS Division.

Summary

Change Type	Y/N
Does this fix require any Admin (Soft) Table Changes to be made by the client?	N
Does this fix require upgrade data changes to be applied?	N
Does the fix involve DB Changes?	N
Is there an impact on any user interface or any other on-line behavior?	**Y**
Is there an impact on any batch process?	N
Is there an impact on CM – Custom Modification processing?	N
Does this fix require an application viewer update for Algorithm data (run F1-AVALG)?	N
Does this fix require an application viewer update for MO data (run F1-AVMO)?	N
Does this fix require an application viewer update for Table data (run F1-AVTBL)?	N

Copyright ©2026, Oracle. All rights reserved.

Other Changes

Zone

Related Objects (C1-PREMQ1) (Existing)

Business Rules

- Modify the SQL in ***C1-PREMQ1*** Zone with the following.
  - Include CIS Division restriction (Installation Options) in the query to handle standalone Premises that are not linked to any account

SQL Changes:

SQL-SQL Statement 2

SQL (Before Change)

```
SELECT
  /*+ INDEX(PR XM174S1) */
  PR.PREM_ID,
  PR.ADDRESS1_UPR,
  PR.CITY_UPR,
  PR.POSTAL,
  PR.STATE,
  PR.ADDRESS1,
  PR.CITY
 FROM
  CI_PREM PR
 WHERE 1 = 1 /*if F1 has no value*/
  /* All Prem that matches the given Addr fields*/
  [(F1)AND (PR.ADDRESS1_UPR LIKE UPPER(:F1))]
  [(F2)AND (PR.CITY_UPR LIKE UPPER(:F2))]
  [(F3)AND (PR.POSTAL LIKE UPPER(:F3))]
  AND EXISTS (
        SELECT 'X' FROM CI_ACCT AC WHERE AC.ACCT_ID
          IN(
               SELECT ACCT_ID FROM CI_SA SA, CI_SA_SP SASP, CI_SP SP WHERE
SASP.SA_ID = SA.SA_ID AND SASP.SP_ID = SP.SP_ID AND PR.PREM_ID = SP.PREM_ID
AND SA.SA_STATUS_FLG <> 70
          )
        AND AC.ACCESS_GRP_CD IN ( SELECT AG.ACCESS_GRP_CD FROM
CI_USR_ACC_GRP_VW AG WHERE AG.USER_ID = :USERID)
    )

UNION
 SELECT
  /*+ INDEX(PR XM174S1) */
  PR.PREM_ID
 ,PR.ADDRESS1_UPR
 ,PR.CITY_UPR
```

Copyright ©2026, Oracle. All rights reserved.

```
 ,PR.POSTAL
 ,PR.STATE
 ,PR.ADDRESS1
 ,PR.CITY
 FROM
  CI_PREM PR
 WHERE 1 = 1 /*if F1 has no value*/
  /* Matches the given Addr fields & not SP linked OR SP linked but SP not
linked to SA */
  [(F1)AND (PR.ADDRESS1_UPR LIKE UPPER(:F1))]
  [(F2)AND (PR.CITY_UPR LIKE UPPER(:F2))]
  [(F3)AND (PR.POSTAL LIKE UPPER(:F3))]
  AND (NOT EXISTS(SELECT 'X'
                FROM CI_SP SP
                WHERE SP.PREM_ID = PR.PREM_ID)
    OR EXISTS(SELECT 'X'
            FROM CI_SP SP1
            WHERE PR.PREM_ID = SP1.PREM_ID
            AND SP1.SP_ID NOT IN(SELECT SASP.SP_ID
                                 FROM CI_SA_SP SASP
                                 WHERE SP1.SP_ID = SASP.SP_ID))
    )
   AND EXISTS (
        SELECT 'X' FROM CI_ACCT AC WHERE AC.ACCT_ID
          IN(
               SELECT ACCT_ID FROM CI_SA SA, CI_SA_SP SASP,CI_SP SP WHERE
SASP.SA_ID = SA.SA_ID AND SASP.SP_ID = SP.SP_ID AND PR.PREM_ID = SP.PREM_ID
AND SA.SA_STATUS_FLG <> 70
          )
        AND AC.ACCESS_GRP_CD IN ( SELECT AG.ACCESS_GRP_CD FROM
CI_USR_ACC_GRP_VW AG WHERE AG.USER_ID = :USERID)
    )
UNION
 SELECT
  /*+ INDEX(PR XM174S1) */
   APR.PREM_ID
 ,APR.ADDRESS1_UPR
 ,APR.CITY_UPR
 ,APR.POSTAL
 ,APR.STATE
 ,APR.ADDRESS1
 ,APR.CITY
 FROM
  CI_PRM_ALT_ADDR APR,
  CI_PREM PR
 WHERE 1 = 1 /*if F1 has no value*/
  /* Matches the given Address fields & record not linked to main Premise*/
  [(F1)AND APR.ADDRESS1_UPR LIKE UPPER(:F1)]
  [(F2)AND APR.CITY_UPR LIKE UPPER(:F2)]
  [(F3)AND APR.POSTAL LIKE UPPER(:F3)]
  AND
  APR.PREM_ID = PR.PREM_ID
  AND EXISTS (
        SELECT 'X' FROM CI_ACCT AC WHERE AC.ACCT_ID
          IN(
               SELECT ACCT_ID FROM CI_SA SA, CI_SA_SP SASP,CI_SP SP WHERE
SASP.SA_ID = SA.SA_ID AND SASP.SP_ID = SP.SP_ID AND PR.PREM_ID = SP.PREM_ID
AND SA.SA_STATUS_FLG <> 70
          )
        AND AC.ACCESS_GRP_CD IN ( SELECT AG.ACCESS_GRP_CD FROM
CI_USR_ACC_GRP_VW AG WHERE AG.USER_ID = :USERID)
    )
  AND NOT EXISTS(SELECT /*+ INDEX(PR XM174S1) */'X'
```

 Copyright ©2026, Oracle. All rights reserved.

```
                FROM CI_PREM PR
                WHERE 1 = 1 /*if F1 has no value*/
                [(F1)AND (PR.ADDRESS1_UPR LIKE UPPER(:F1))]
                [(F2)AND (PR.CITY_UPR LIKE UPPER(:F2))]
                [(F3)AND (UPPER(PR.POSTAL) LIKE UPPER(:F3))]
                AND APR.PREM_ID = PR.PREM_ID
          AND EXISTS (
        SELECT 'X' FROM CI_ACCT AC WHERE AC.ACCT_ID
          IN(
               SELECT ACCT_ID FROM CI_SA SA, CI_SA_SP SASP,CI_SP SP WHERE
SASP.SA_ID = SA.SA_ID AND SASP.SP_ID = SP.SP_ID AND PR.PREM_ID = SP.PREM_ID
AND SA.SA_STATUS_FLG <> 70
          )
        AND AC.ACCESS_GRP_CD IN ( SELECT AG.ACCESS_GRP_CD FROM
CI_USR_ACC_GRP_VW AG WHERE AG.USER_ID = :USERID)
    )
)
UNION
SELECT
  /*+ INDEX(PR XM174S1) */
   APR.PREM_ID
 ,APR.ADDRESS1_UPR
 ,APR.CITY_UPR
 ,APR.POSTAL
 ,APR.STATE
 ,APR.ADDRESS1
 ,APR.CITY
 FROM
  CI_PRM_ALT_ADDR APR,
  CI_PREM PR
 WHERE 1 = 1 /*if F1 has no value*/
   /* Matches the given Address fields & record is SP inked OR SP linked but
SP is not linked to SA & not linked to main Premise that is either not SP
linked or SP linked but SP is not linked to SA*/
  [(F1)AND (APR.ADDRESS1_UPR LIKE UPPER(:F1))]
  [(F2)AND (APR.CITY_UPR LIKE UPPER(:F2))]
  [(F3)AND (APR.POSTAL LIKE UPPER(:F3))]
  AND
  APR.PREM_ID = PR.PREM_ID
  AND EXISTS (
        SELECT 'X' FROM CI_ACCT AC WHERE AC.ACCT_ID
          IN(
               SELECT ACCT_ID FROM CI_SA SA, CI_SA_SP SASP,CI_SP SP WHERE
SASP.SA_ID = SA.SA_ID AND SASP.SP_ID = SP.SP_ID AND PR.PREM_ID = SP.PREM_ID
AND SA.SA_STATUS_FLG <> 70
          )
        AND AC.ACCESS_GRP_CD IN ( SELECT AG.ACCESS_GRP_CD FROM
CI_USR_ACC_GRP_VW AG WHERE AG.USER_ID = :USERID)
    )
  AND (NOT EXISTS(SELECT 'X'
                  FROM CI_SP SP
                  WHERE SP.PREM_ID = APR.PREM_ID)
    OR EXISTS(SELECT 'X'
              FROM CI_SP SP1
              WHERE APR.PREM_ID = SP1.PREM_ID
              AND SP1.SP_ID NOT IN(SELECT SASP.SP_ID
                                   FROM CI_SA_SP SASP
                                   WHERE SP1.SP_ID = SASP.SP_ID))
    )
```

Copyright ©2026, Oracle. All rights reserved.

```
    AND NOT EXISTS(SELECT /*+ INDEX(PR XM174S1) */
                   'X'
                   FROM CI_PREM PR
                   WHERE
                     1 = 1 /*if F1 has no value*/
                   [(F1)AND (PR.ADDRESS1_UPR LIKE UPPER(:F1))]
                   [(F2)AND (PR.CITY_UPR LIKE UPPER(:F2))]
                   [(F3)AND (PR.POSTAL LIKE UPPER(:F3))]
                   AND APR.PREM_ID = PR.PREM_ID
             AND EXISTS (
                              SELECT 'X' FROM CI_ACCT AC WHERE AC.ACCT_ID
                              IN(
                                       SELECT ACCT_ID FROM CI_SA SA,
CI_SA_SP SASP,CI_SP SP WHERE SASP.SA_ID = SA.SA_ID AND PR.PREM_ID =
SP.PREM_ID AND SASP.SP_ID = SP.SP_ID AND SA.SA_STATUS_FLG <> 70
                              )
                              AND AC.ACCESS_GRP_CD IN ( SELECT
AG.ACCESS_GRP_CD FROM CI_USR_ACC_GRP_VW AG WHERE AG.USER_ID = :USERID)
                        )
                   AND(NOT EXISTS  (SELECT 'X'
                                    FROM CI_SP SP
                                    WHERE SP.PREM_ID = PR.PREM_ID)
                     OR EXISTS(SELECT 'X'
                              FROM CI_SP SP1
                              WHERE PR.PREM_ID = SP1.PREM_ID
                              AND SP1.SP_ID NOT IN(SELECT SASP.SP_ID
                                                   FROM CI_SA_SP SASP
                                                   WHERE SP1.SP_ID =
SASP.SP_ID))
                     ))
ORDER BY
  ADDRESS1_UPR,CITY_UPR,POSTAL,STATE
```

Explain Plan (Before)

OPERATION	OBJECT_NAME	OPTIONS	CARDINALITY	COST
SELECT STATEMENT			4	197380
SORT		UNIQUE	4	197379
UNION-ALL				
HASH JOIN		RIGHT SEMI	1	1446
Access Predicates				
A.DAR_CD=B.DAR_CD				
INDEX	CISADM.XC691S1	RANGE SCAN	1	2
Access Predicates				
A.USER_ID=:USERID				
Filter Predicates				
SYS_EXTRACT_UTC(INTERNAL_FUNCTION(A.EXPIRE_DT))>=SYS_EXTRACT_UTC(CURRENT_TIMESTAMP(6))				
HASH JOIN			88	1444
Access Predicates				
AC.ACCESS_GRP_CD=B.ACCESS_GRP_CD				
INDEX	CISADM.XC692P0	FULL SCAN	10	1
NESTED LOOPS			88	1443
NESTED LOOPS			88	1443
NESTED LOOPS			88	1355
HASH JOIN			93	1262
Access Predicates				
SASP.SP_ID=SP.SP_ID				
HASH JOIN			101	1137
Access Predicates				
PR.PREM_ID=SP.PREM_ID				
NESTED LOC			101	1137
NESTED			101	1137
STA				
CISADM.CI_PREM		BY INDEX ROWID BATCHED	94	860
CISADM.XM174S1		FULL SCAN	94	771

Explain Plan

Copyright ©2026, Oracle. All rights reserved.

OPERATION	OBJECT_NAME	OPTIONS	CARDINALITY	COST
AND				
OR				
:F1 IS NULL				
PR.ADDRESS1_UPR LIKE UPPER(:F1)				
OR				
:F2 IS NULL				
PR.CITY_UPR LIKE UPPER(:F2)				
OR				
:F3 IS NULL				
PR.POSTAL LIKE UPPER(:F3)				
INDE	CISADM.XM226S1	RANGE SCAN	1	1
Access Predicates				
PR.PREM_ID=SP.PREM_ID				
TABLE A	CISADM.CI_SP	BY INDEX ROWID	1	3
TABLE ACCE	CISADM.CI_SP	FULL	1	3
INDEX	CISADM.XM206S5	FAST FULL SCAN	97523	124
TABLE ACCESS	CISADM.CI_SA	BY INDEX ROWID	1	1
INDEX	CISADM.XM148P0	UNIQUE SCAN	1	0
Access Predicates				
AC.ACCT_ID=ACCT_ID				
TABLE ACCESS	CISADM.CI_ACCT	BY INDEX ROWID	1	1
FILTER				
Filter Predicates				
OR				
NOT EXISTS (SELECT 0 FROM CISADM.CI_SP SP WHERE SP.PREM_ID=:B1)				
EXISTS (SELECT 0 FROM CISADM.CI_SP SP1,CISADM.CI_SA_SP SASP WHERE SP1.SP_ID=SASP.SP_ID AND SP1.PREM_ID=:B2)				
HASH JOIN		RIGHT SEMI	1	1446
INDEX	CISADM.XM226S1	RANGE SCAN	1	1
Access Predicates				

Explain Plan

OPERATION	OBJECT_NAME	OPTIONS	CARDINALITY	COST
INDEX	CISADM.XM226S1	RANGE SCAN	1	1
Access Predicates				
SP.PREM_ID=:B1				
NESTED LOOPS		ANTI	1	4
TABLE ACCESS	CISADM.CI_SP	BY INDEX ROWID BATCHED	1	3
INDEX	CISADM.XM226S1	RANGE SCAN	1	1
Access Predicates				
SP1.PREM_ID=:B1				
INDEX	CISADM.XM206S2	RANGE SCAN	97523	1
Access Predicates				
SP1.SP_ID=SASP.SP_ID				
FILTER				
Filter Predicates				
NOT EXISTS (SELECT /*+ INDEX (PR XM174S1) */ 0 FROM CISADM.CI_PREM PR,CISADM.CI_ACCT AC,CISADM.CI_SP SP,CISADM.CI_SA_SP SASP,CISADM.CI_SA SA,CISADM.CI_ACC_GRP_DAR B,C				
NESTED LOOPS		SEMI	1	96374
NESTED LOOPS			1	96373
INDEX	CISADM.XC691S1	RANGE SCAN	1	1
Access Predicates				
AND				
A.USER_ID=:USERID				
A.DAR_CD=B.DAR_CD				
Filter Predicates				
SYS_EXTRACT_UTC(INTERNAL_FUNCTION(A.EXPIRE_DT))>=SYS_EXTRACT_UTC(CURRENT_TIMESTAMP(6))				
NESTED LOOPS		SEMI	1	868
NESTED LOOPS			1	868
INDEX	CISADM.XC692P0	UNIQUE SCAN	10	0
FILTER				
Filter Predicates				
AND				

Explain Plan

Copyright ©2026, Oracle. All rights reserved.

OPERATION	OBJECT_NAME	OPTIONS	CARDINALITY	COST
OR				
NOT EXISTS (SELECT 0 FROM CISADM.CI_SP SP WHERE SP.PREM_ID=:B5)				
EXISTS (SELECT 0 FROM CISADM.CI_SP SP1,CISADM.CI_SA_SP SASP WHERE SP1.SP_ID=SASP.SP_ID AND SP1.PREM_ID=:B6)				
NESTED LOOPS		SEMI	1	96374
NESTED LOOPS			1	96373
NESTED LOOPS			1	96372
NESTED LOOPS			1	96371
NESTED LOOPS			1	96370
HASH JOIN			1	96367
Access Predicates				
PR.PREM_ID=SP.PREM_ID				
NESTED LOC			1	96367
STATIST				
HAS			1	96364
Access Predicates				
APR.PREM_ID=PR.PREM_ID				
	CISADM.CI_PRM_ALT_ADDR	FULL	1	10
Filter Predicates				
AND				
OR				
:F1 IS NULL				
APR.ADDRESS1_UPR LIKE UPPER(:F1)				
OR				
:F3 IS NULL				
APR.POSTAL LIKE UPPER(:F3)				
OR				
:F2 IS NULL				
APR.CITY_UPR LIKE UPPER(:F2)				
	CISADM.CI_PREM	BY INDEX ROWID BATCHED	101658	96353

Explain Plan

OPERATION	OBJECT_NAME	OPTIONS	CARDINALITY	COST
PR.PREM_ID=SP.PREM_ID				
TABLE ACCE	CISADM.CI_SP	FULL	1	3
TABLE ACCESS	CISADM.CI_SA_SP	BY INDEX ROWID BATCHED	1	3
INDEX	CISADM.XM206S2	RANGE SCAN	1	1
Access Predicates				
SASP.SP_ID=SP.SP_ID				
TABLE ACCESS	CISADM.CI_SA	BY INDEX ROWID	1	1
Filter Predicates				
TO_NUMBER(SA.SA_STATUS_FLG)<>70				
INDEX	CISADM.XM199P0	UNIQUE SCAN	1	0
Access Predicates				
SASP.SA_ID=SA.SA_ID				
TABLE ACCESS	CISADM.CI_ACCT	BY INDEX ROWID	1	1
INDEX	CISADM.XM148P0	UNIQUE SCAN	1	0
Access Predicates				
AC.ACCT_ID=ACCT_ID				
INDEX	CISADM.XC692P0	RANGE SCAN	1	1
Access Predicates				
AC.ACCESS_GRP_CD=B.ACCESS_GRP_CD				
INDEX	CISADM.XC691S1	RANGE SCAN	1	1
Access Predicates				
AND				
A.USER_ID=:USERID				
A.DAR_CD=B.DAR_CD				
Filter Predicates				
SYS_EXTRACT_UTC(INTERNAL_FUNCTION(A.EXPIRE_DT))>=SYS_EXTRACT_UTC(CURRENT_TIMESTAMP(6))				
FILTER				
Filter Predicates				
OR				

Explain Plan

Copyright ©2026, Oracle. All rights reserved.

OPERATION	OBJECT_NAME	OPTIONS	CARDINALITY	COST
Filter Predicates				
OR				
NOT EXISTS (SELECT 0 FROM CISADM.CI_SP SP WHERE SP.PREM_ID=:B1)				
EXISTS (SELECT 0 FROM CISADM.CI_SP SP1,CISADM.CI_SA_SP SASP WHERE SP1.SP_ID=SASP.SP_ID AND SP1.PREM_ID=:B2)				
NESTED LOOPS		SEMI	1	868
NESTED LOOPS			1	868
NESTED LOOPS			1	867
NESTED LOOPS			1	866
NESTED LOOPS			1	863
NESTED LOC			1	861
TABLE A	CISADM.CI_PREM	BY INDEX ROWID BATCHED	1	860
Filter Predicates				
PR.PREM_ID=:B1				
INDE	CISADM.XM174S1	FULL SCAN	94	771
Filter Predicates				
AND				
OR				
:F1 IS NULL				
PR.ADDRESS1_UPR LIKE UPPER(:F1)				
OR				
:F2 IS NULL				
PR.CITY_UPR LIKE UPPER(:F2)				
OR				
:F3 IS NULL				
PR.POSTAL LIKE UPPER(:F3)				
INDEX	CISADM.XC691S1	RANGE SCAN	1	1
Access Predicates				
A.USER_ID=:USERID				
Filter Predicates				

Explain Plan

OPERATION	OBJECT_NAME	OPTIONS	CARDINALITY	COST
TABLE ACCE	CISADM.CI_SP	BY INDEX ROWID BATCHED	1	2
INDEX	CISADM.XM226S1	RANGE SCAN	1	1
Access Predicates				
SP.PREM_ID=:B1				
Filter Predicates				
PR.PREM_ID=SP.PREM_ID				
TABLE ACCESS	CISADM.CI_SA_SP	BY INDEX ROWID BATCHED	1	3
INDEX	CISADM.XM206S2	RANGE SCAN	1	1
Access Predicates				
SASP.SP_ID=SP.SP_ID				
TABLE ACCESS	CISADM.CI_SA	BY INDEX ROWID	1	1
Filter Predicates				
TO_NUMBER(SA.SA_STATUS_FLG)<>70				
INDEX	CISADM.XM199P0	UNIQUE SCAN	1	0
Access Predicates				
SASP.SA_ID=SA.SA_ID				
TABLE ACCESS	CISADM.CI_ACCT	BY INDEX ROWID	1	1
INDEX	CISADM.XM148P0	UNIQUE SCAN	1	0
Access Predicates				
AC.ACCT_ID=ACCT_ID				
INDEX	CISADM.XC692P0	UNIQUE SCAN	10	0
Access Predicates				
AND				
AC.ACCESS_GRP_CD=B.ACCESS_GRP_CD				
A.DAR_CD=B.DAR_CD				
INDEX	CISADM.XM226S1	RANGE SCAN	1	1
Access Predicates				
SP.PREM_ID=:B1				
NESTED LOOPS		ANTI	1	4

Explain Plan

Copyright ©2026, Oracle. All rights reserved.

OPERATION	OBJECT_NAME	OPTIONS	CARDINALITY	COST
SP.PREM_ID=:B1				
NESTED LOOPS		ANTI	1	4
TABLE ACCESS	CISADM.CI_SP	BY INDEX ROWID BATCHED	1	3
INDEX	CISADM.XM226S1	RANGE SCAN	1	1
Access Predicates				
SP1.PREM_ID=:B1				
INDEX	CISADM.XM206S2	RANGE SCAN	97523	1
Access Predicates				
SP1.SP_ID=SASP.SP_ID				
INDEX	CISADM.XM226S1	RANGE SCAN	1	1
Access Predicates				
SP.PREM_ID=:B1				
NESTED LOOPS		ANTI	1	4
TABLE ACCESS	CISADM.CI_SP	BY INDEX ROWID BATCHED	1	3
INDEX	CISADM.XM226S1	RANGE SCAN	1	1
Access Predicates				
SP1.PREM_ID=:B1				
INDEX	CISADM.XM206S2	RANGE SCAN	97523	1
Access Predicates				

Explain Plan

SQL (After Change)

```
SELECT
  /*+ INDEX(PR XM174S1) */
  PR.PREM_ID,
  PR.ADDRESS1_UPR,
  PR.CITY_UPR,
  PR.POSTAL,
  PR.STATE,
  PR.ADDRESS1,
  PR.CITY
 FROM
  CI_PREM PR
 WHERE 1 = 1 /*if F1 has no value*/
  /* All Prem that matches the given Addr fields*/
  [(F1)AND (PR.ADDRESS1_UPR LIKE UPPER(:F1))]
  [(F2)AND (PR.CITY_UPR LIKE UPPER(:F2))]
  [(F3)AND (PR.POSTAL LIKE UPPER(:F3))]
  AND EXISTS (
        SELECT 'X' FROM CI_ACCT AC WHERE AC.ACCT_ID
          IN(
               SELECT ACCT_ID FROM CI_SA SA, CI_SA_SP SASP, CI_SP SP WHERE
SASP.SA_ID = SA.SA_ID AND SASP.SP_ID = SP.SP_ID AND PR.PREM_ID = SP.PREM_ID
AND SA.SA_STATUS_FLG <> 70
          )
        AND AC.ACCESS_GRP_CD IN ( SELECT AG.ACCESS_GRP_CD FROM
CI_USR_ACC_GRP_VW AG WHERE AG.USER_ID = :USERID)
    )
UNION
 SELECT
  /*+ INDEX(PR XM174S1) */
  PR.PREM_ID
 ,PR.ADDRESS1_UPR
 ,PR.CITY_UPR
 ,PR.POSTAL
 ,PR.STATE
 ,PR.ADDRESS1
 ,PR.CITY
 FROM
  CI_PREM PR
 WHERE 1 = 1 /*if F1 has no value*/
  /* Matches the given Addr fields & not SP linked OR SP linked but SP not
linked to SA */
  [(F1)AND (PR.ADDRESS1_UPR LIKE UPPER(:F1))]
```

 Copyright ©2026, Oracle. All rights reserved.

```
  [(F2)AND (PR.CITY_UPR LIKE UPPER(:F2))]
  [(F3)AND (PR.POSTAL LIKE UPPER(:F3))]
  AND (NOT EXISTS(SELECT 'X'
                  FROM CI_SP SP
                  WHERE SP.PREM_ID = PR.PREM_ID)
      OR EXISTS(SELECT 'X'
             FROM CI_SP SP1
             WHERE PR.PREM_ID = SP1.PREM_ID
             AND SP1.SP_ID NOT IN(SELECT SASP.SP_ID
                                  FROM CI_SA_SP SASP, CI_SA SA
                                  WHERE SP1.SP_ID = SASP.SP_ID
                                                    AND SASP.SA_ID = SA.SA_ID
                                                    AND SA.SA_STATUS_FLG <>
70))
    )
    AND EXISTS (
        SELECT 'X' FROM CI_ACCT AC WHERE AC.ACCT_ID
          IN(
              SELECT ACCT_ID FROM CI_SA SA, CI_SA_SP SASP,CI_SP SP WHERE
SASP.SA_ID = SA.SA_ID AND SASP.SP_ID = SP.SP_ID AND PR.PREM_ID = SP.PREM_ID
AND SA.SA_STATUS_FLG <> 70
          )
        AND AC.ACCESS_GRP_CD IN ( SELECT AG.ACCESS_GRP_CD FROM
CI_USR_ACC_GRP_VW AG WHERE AG.USER_ID = :USERID)
    )
  AND (
        (SELECT USR_DIV_RESTRICT_FLG FROM CI_INSTALLATION) <> 'C1RS'
        OR (
            (SELECT USR_DIV_RESTRICT_FLG FROM CI_INSTALLATION ) = 'C1RS'
            AND (
                PR.CIS_DIVISION = ' '
                OR PR.CIS_DIVISION IN (
                    SELECT UCD.CIS_DIVISION FROM C1_USER_CIS_DIV UCD WHERE
UCD.USER_ID = :USERID
                )
            )
        )
    )
UNION
 SELECT
  /*+ INDEX(PR XM174S1) */
   APR.PREM_ID
 ,APR.ADDRESS1_UPR
 ,APR.CITY_UPR
 ,APR.POSTAL
 ,APR.STATE
 ,APR.ADDRESS1
 ,APR.CITY
 FROM
  CI_PRM_ALT_ADDR APR,
  CI_PREM PR
 WHERE 1 = 1 /*if F1 has no value*/
  /* Matches the given Address fields & record not linked to main Premise*/
  [(F1)AND (APR.ADDRESS1_UPR LIKE UPPER(:F1))]
  [(F2)AND (APR.CITY_UPR LIKE UPPER(:F2))]
  [(F3)AND (APR.POSTAL LIKE UPPER(:F3))]
  AND
  APR.PREM_ID = PR.PREM_ID
  AND EXISTS (
```

Copyright ©2026, Oracle. All rights reserved.

```
        SELECT 'X' FROM CI_ACCT AC WHERE AC.ACCT_ID
   IN(
               SELECT ACCT_ID FROM CI_SA SA, CI_SA_SP SASP,CI_SP SP WHERE
SASP.SA_ID = SA.SA_ID AND SASP.SP_ID = SP.SP_ID AND PR.PREM_ID = SP.PREM_ID
AND SA.SA_STATUS_FLG <> 70
         )
        AND AC.ACCESS_GRP_CD IN ( SELECT AG.ACCESS_GRP_CD FROM
CI_USR_ACC_GRP_VW AG WHERE AG.USER_ID = :USERID)
    )
  AND NOT EXISTS(SELECT /*+ INDEX(PR XM174S1) */'X'
                FROM CI_PREM PR
                WHERE 1 = 1 /*if F1 has no value*/
                [(F1)AND (PR.ADDRESS1_UPR LIKE UPPER(:F1))]
                [(F2)AND (PR.CITY_UPR LIKE UPPER(:F2))]
                [(F3)AND (UPPER(PR.POSTAL) LIKE UPPER(:F3))]
                AND APR.PREM_ID = PR.PREM_ID
          AND EXISTS (
        SELECT 'X' FROM CI_ACCT AC WHERE AC.ACCT_ID
          IN(
          SELECT ACCT_ID FROM CI_SA SA, CI_SA_SP SASP,CI_SP SP WHERE
SASP.SA_ID = SA.SA_ID AND SASP.SP_ID = SP.SP_ID AND PR.PREM_ID = SP.PREM_ID
AND SA.SA_STATUS_FLG <> 70
         )
        AND AC.ACCESS_GRP_CD IN ( SELECT AG.ACCESS_GRP_CD FROM
CI_USR_ACC_GRP_VW AG WHERE AG.USER_ID = :USERID)
    )
)
UNION
SELECT
  /*+ INDEX(PR XM174S1) */
   APR.PREM_ID
 ,APR.ADDRESS1_UPR
 ,APR.CITY_UPR
 ,APR.POSTAL
 ,APR.STATE
 ,APR.ADDRESS1
 ,APR.CITY
 FROM
  CI_PRM_ALT_ADDR APR,
  CI_PREM PR
 WHERE 1 = 1 /*if F1 has no value*/
   /* Matches the given Address fields & record is SP inked OR SP linked but
SP is not linked to SA(non-cancelled) & not linked to main Premise that is
either not SP linked or SP linked but SP is not linked to SA(non-
cancelled)*/
  [(F1)AND (APR.ADDRESS1_UPR LIKE UPPER(:F1))]
  [(F2)AND (APR.CITY_UPR LIKE UPPER(:F2))]
  [(F3)AND (APR.POSTAL LIKE UPPER(:F3))]
  AND
  APR.PREM_ID = PR.PREM_ID
  AND EXISTS (
        SELECT 'X' FROM CI_ACCT AC WHERE AC.ACCT_ID
          IN(
               SELECT ACCT_ID FROM CI_SA SA, CI_SA_SP SASP,CI_SP SP WHERE
SASP.SA_ID = SA.SA_ID AND SASP.SP_ID = SP.SP_ID AND PR.PREM_ID = SP.PREM_ID
AND SA.SA_STATUS_FLG <> 70
         )
        AND AC.ACCESS_GRP_CD IN ( SELECT AG.ACCESS_GRP_CD FROM
CI_USR_ACC_GRP_VW AG WHERE AG.USER_ID = :USERID)
    )
  AND (NOT EXISTS(SELECT 'X'
                  FROM CI_SP SP
                  WHERE SP.PREM_ID = APR.PREM_ID)
```

 Copyright ©2026, Oracle. All rights reserved.

```
    OR EXISTS(SELECT 'X'
              FROM CI_SP SP1
              WHERE APR.PREM_ID = SP1.PREM_ID
              AND SP1.SP_ID NOT IN(SELECT SASP.SP_ID
                                   FROM CI_SA_SP SASP,CI_SA SA
                                   WHERE SP1.SP_ID = SASP.SP_ID
                                                     AND SA.SA_ID=SASP.SA_ID
AND SA.SA_STATUS_FLG <> 70))
    )
       AND (
        (SELECT USR_DIV_RESTRICT_FLG FROM CI_INSTALLATION) <> 'C1RS'
        OR (
            (SELECT USR_DIV_RESTRICT_FLG FROM CI_INSTALLATION ) = 'C1RS'
            AND (
                PR.CIS_DIVISION = ' '
                OR PR.CIS_DIVISION IN (
                    SELECT UCD.CIS_DIVISION FROM C1_USER_CIS_DIV UCD WHERE
UCD.USER_ID = :USERID
                )
            )
        )
    )
   AND NOT EXISTS(SELECT /*+ INDEX(PR XM174S1) */
                  'X'
                  FROM CI_PREM PR
                  WHERE
                    1 = 1 /*if F1 has no value*/
                  [(F1)AND (PR.ADDRESS1_UPR LIKE UPPER(:F1))]
                  [(F2)AND (PR.CITY_UPR LIKE UPPER(:F2))]
                  [(F3)AND (PR.POSTAL LIKE UPPER(:F3))]
                  AND APR.PREM_ID = PR.PREM_ID
            AND EXISTS (
                              SELECT 'X' FROM CI_ACCT AC WHERE AC.ACCT_ID
                              IN(
                                        SELECT ACCT_ID FROM CI_SA SA,
CI_SA_SP SASP,CI_SP SP WHERE SASP.SA_ID = SA.SA_ID AND PR.PREM_ID =
SP.PREM_ID AND SASP.SP_ID = SP.SP_ID AND SA.SA_STATUS_FLG <> 70
                              )
                              AND AC.ACCESS_GRP_CD IN ( SELECT
AG.ACCESS_GRP_CD FROM CI_USR_ACC_GRP_VW AG WHERE AG.USER_ID = :USERID)
                        )
                  AND(NOT EXISTS  (SELECT 'X'
                                   FROM CI_SP SP
                                   WHERE SP.PREM_ID = PR.PREM_ID)
                    OR EXISTS(SELECT 'X'
                              FROM CI_SP SP1
                              WHERE PR.PREM_ID = SP1.PREM_ID
                              AND SP1.SP_ID NOT IN(SELECT SASP.SP_ID
                                                   FROM CI_SA_SP SASP,CI_SA
SA

          WHERE SP1.SP_ID = SASP.SP_ID

          AND SA.SA_ID=SASP.SA_ID AND

          SA.SA_STATUS_FLG <> 70))
                    ))
ORDER BY
  ADDRESS1_UPR,CITY_UPR,POSTAL,STATE
```

Copyright ©2026, Oracle. All rights reserved.

Explain Plan (After)

OPERATION	OBJECT_NAME	OPTIONS	CARDINALITY	COST
SELECT STATEMENT			97	196825
SORT		UNIQUE	97	196824
UNION-ALL				
HASH JOIN		RIGHT SEMI	1	1446
FILTER				
Filter Predicates				
AND				
OR				
NOT EXISTS (SELECT 0 FROM CISADM.CI_SP SP WHERE SP.PREM_ID=:B1)				
EXISTS (SELECT 0 FROM CISADM.CI_SP SP1, (SELECT SASP.SP_ID SP_ID FROM CISADM.CI_SA SA,CISADM.CI_SA_SP SASP WHERE SP1.SP_ID=SP1.SP_ID AND SASP.SP_ID=SP1.SP_ID AND				
OR				
(SELECT A.USR_DIV_RESTRICT_FLG FROM CISADM.CI_INSTALL_PROD D,CISADM.F1_INSTALLATION B,CISADM.C0_INSTALLATION A WHERE A.INSTALL_OPT_ID=D.INSTALL_OPT_ID AND A				
AND				
(SELECT A.USR_DIV_RESTRICT_FLG FROM CISADM.CI_INSTALL_PROD D,CISADM.F1_INSTALLATION B,CISADM.C0_INSTALLATION A WHERE A.INSTALL_OPT_ID=D.INSTALL_OPT_ID AI				
OR				
PR.CIS_DIVISION=' '				
EXISTS (SELECT 0 FROM CISADM.C1_USER_CIS_DIV UCD WHERE UCD.CIS_DIVISION=:B3 AND UCD.USER_ID=:USERID)				
TABLE ACCESS	CISADM.CI_PREM	BY INDEX ROWID BATCHED	94	860
INDEX	CISADM.XM226S1	RANGE SCAN	1	1
Access Predicates				
SP.PREM_ID=:B1				
NESTED LOOPS		ANTI	1	7
TABLE ACCESS	CISADM.CI_SP	BY INDEX ROWID BATCHED	1	3
INDEX	CISADM.XM226S1	RANGE SCAN	1	1
Access Predicates				
SP1.PREM_ID=:B1				
VIEW PUSHED PREDICATE	SYS.VW_SQ_1		1	4
NESTED LOOPS		SEMI	1	2
NESTED LOOPS		SEMI	1	2
NESTED LOOPS			1	2
INDEX	CISADM.FC001P0	SKIP SCAN	1	1
Access Predicates				

Explain Plan

OPERATION	OBJECT_NAME	OPTIONS	CARDINALITY	COST
INDEX	CISADM.FC001P0	SKIP SCAN	1	1
Access Predicates				
D.OWNER_FLG='CM'				
Filter Predicates				
D.OWNER_FLG='CM'				
TABLE ACCESS	CISADM.C0_INSTALLATION	BY INDEX ROWID	1	1
INDEX	CISADM.XC790P0	UNIQUE SCAN	1	0
Access Predicates				
A.INSTALL_OPT_ID=D.INSTALL_OPT_ID				
INDEX	CISADM.XC283P0	UNIQUE SCAN	1	0
Access Predicates				
A.INSTALL_OPT_ID=B.INSTALL_OPT_ID				
INDEX	CISADM.C1C007P0	UNIQUE SCAN	1	1
FILTER				
FILTER				
Filter Predicates				
AND				
OR				
NOT EXISTS (SELECT 0 FROM CISADM.CI_SP SP WHERE SP.PREM_ID=:B1)				
EXISTS (SELECT 0 FROM CISADM.CI_SP SP1, (SELECT SASP.SP_ID SP_ID FROM CISADM.CI_SA SA,CISADM.CI_SA_SP SASP WHERE SP1.SP_ID=SP1.SP_ID AND SASP.SP_ID=SP1.SP_ID AND				
OR				
(SELECT A.USR_DIV_RESTRICT_FLG FROM CISADM.CI_INSTALL_PROD D,CISADM.F1_INSTALLATION B,CISADM.C0_INSTALLATION A WHERE A.INSTALL_OPT_ID=D.INSTALL_OPT_ID AND A				
AND				
(SELECT A.USR_DIV_RESTRICT_FLG FROM CISADM.CI_INSTALL_PROD D,CISADM.F1_INSTALLATION B,CISADM.C0_INSTALLATION A WHERE A.INSTALL_OPT_ID=D.INSTALL_OPT_ID AI				
OR				
PR.CIS_DIVISION=' '				
EXISTS (SELECT 0 FROM CISADM.C1_USER_CIS_DIV UCD WHERE UCD.CIS_DIVISION=:B3 AND UCD.USER_ID=:USERID)				
HASH JOIN			1	97226
INDEX	CISADM.XM226S1	RANGE SCAN	1	1
Access Predicates				
SP.PREM_ID=:B1				
NESTED LOOPS		ANTI	1	7

Explain Plan

Copyright ©2026, Oracle. All rights reserved.

OPERATION	OBJECT_NAME	OPTIONS	CARDINALITY	COST
INDEX	CISADM.XM226S1	RANGE SCAN	1	1
Access Predicates				
SP1.PREM_ID=:B1				
VIEW PUSHED PREDICATE	SYS.VW_SQ_2		1	4
FILTER				
Filter Predicates				
SP1.SP_ID=SP1.SP_ID				
NESTED LOOPS		SEMI	1	4
TABLE ACCESS	CISADM.CI_SA_SP	BY INDEX ROWID BATCHED	1	3
INDEX	CISADM.XM206S2	RANGE SCAN	1	1
Access Predicates				
SASP.SP_ID=SP1.SP_ID				
TABLE ACCESS	CISADM.CI_SA	BY INDEX ROWID	91353	1
Filter Predicates				
TO_NUMBER(SA.SA_STATUS_FLG)<>70				
INDEX	CISADM.XM199P0	UNIQUE SCAN	1	0
Access Predicates				
SA.SA_ID=SASP.SA_ID				
NESTED LOOPS		SEMI	1	2
NESTED LOOPS		SEMI	1	2
NESTED LOOPS			1	2
INDEX	CISADM.FC001P0	SKIP SCAN	1	1
Access Predicates				
D.OWNER_FLG='CM'				
Filter Predicates				
D.OWNER_FLG='CM'				
TABLE ACCESS	CISADM.C0_INSTALLATION	BY INDEX ROWID	1	1
INDEX	CISADM.XC790P0	UNIQUE SCAN	1	0
Access Predicates				
A.INSTALL_OPT_ID=D.INSTALL_OPT_ID				
INDEX	CISADM.XC283P0	UNIQUE SCAN	1	0
Access Predicates				

Explain Plan

Data Clean-Up / Fixes

- Not Applicable

Recommended Test Cases

Test Case 1: Reported Issue.

- Refer to Steps to Recreate.
- Set the **Premise/SP Search** as ***Not Restricted*** in the Main tab of installation options.
- Add case and search for the premise.
- The premise is returned successfully.

Copyright ©2026, Oracle. All rights reserved.

Test Case 2: Verify that Premise Search displays results based on CIS Division for premise's not linked to Account

Test Case 2.1: Premise Search on Case with Premise/SP Search set to Restricted and Premise having same CIS Division as user

- Create a premise with same cis division as user.
- Set the **Premise/SP Search** as ***Restricted*** by CIS Division in the Main tab of installation options.
- Add case and search for premise.
- Premise is retrieved successfully.

Test Case 2.2: Premise Search on Case with Premise/SP Search set to Restricted and Premise having different CIS Division other than user

- Create a premise with different cis division as user.
- Set the **Premise/SP Search** as ***Restricted*** by CIS Division in the Main tab of installation options.
- Add case and search for premise.
- Premise is not retrieved.

Test Case 2.3: Premise Search on Case with Premise/SP Search set to Restricted and Premise having no CIS Division

- Create a premise with empty same cis division field.
- Set the **Premise/SP Search** as ***Restricted*** by CIS Division in the Main tab of installation options.
- Add case and search for premise.
- Premise is retrieved successfully.

Copyright ©2026, Oracle. All rights reserved.

Test Case 3: Verify that Premise Search displays results based on Account access group for premise's linked to Account (via Non-Cancelled SA)

Test Case 3.1: Premise search on Case when the User has access to corresponding Account access group and the Premise and user have different CIS division

- Add an account which has Access grp present in the user.
- Add premise to the account with CIS division different from user.
- Set the **Premise/SP Search** as ***Restricted*** by CIS Division in the Main tab of installation options.
- Add case and search for the premise.
- Premise is retrieved successfully.

Test Case 3.2: Premise search on Case when the User does not have access to Corresponding Accounts access group and the Premise and user have same CIS division.

- Add an account which has Access grp present in the user.
- Remove the access group ZZJJ from the user.
- Add premise to the account with CIS division same as user.
- Set the **Premise/SP Search** as ***Restricted*** by CIS Division in the Main tab of installation options.
- Add case and search for the premise.
- No results are retrieved.

Copyright ©2026, Oracle. All rights reserved.

Test Case 3.3: Premise search on Case when User does not have access to Corresponding Account access group and the Premise/SP search is set to “Not Restricted”

- Add an account which has Access grp ZZJJ present in the user.
- Remove the access group ZZJJ from the user.
- Add premise to the account with CIS division same as user.
- Set the **Premise/SP Search** as ***Not Restricted*** in the Main tab of installation options.
- Add case and search for the premise.
- No results are retrieved.

Test Case 4: Premise search displays results based on CIS Division for Premises linked to only Cancelled SA

Test Case 4.1: Premise search on Case when SP/Premise search is “Not Restricted”

- Add an account which has Access grp present in the user.
- Add premise to the account with CIS division same as user.
- Set the **Premise/SP Search** as ***Not Restricted*** in the Main tab of installation options.
- Service agreement is Cancelled.
- Add case and search for the premise.
- Relevant Premise is retrieved.

Test Case 4.2: Premise search on Case when SP/Premise search is “Restricted” and the User CIS division is different from the corresponding Premise

- Add an account which has Access grp present in the user.
- Add premise to the account with CIS division same as user.

 Copyright ©2026, Oracle. All rights reserved.

- Set the **Premise/SP Search** as ***Not Restricted*** in the Main tab of installation options.
- Service agreement is Cancelled.
- Add case and search for the premise.
- No results are retrieved.

Copyright ©2026, Oracle. All rights reserved.