

# Clustering

- *Clustering* refers to a very broad set of techniques for finding *subgroups*, or *clusters*, in a data set.
- We seek a partition of the data into distinct groups so that the observations within each group are quite similar to each other,
- It make this concrete, we must define what it means for two or more observations to be *similar* or *different*.
- Indeed, this is often a domain-specific consideration that must be made based on knowledge of the data being studied.


# Clustering for Market Segmentation

- Suppose we have access to a large number of measurements (e.g. median household income, occupation, distance from nearest urban area, and so forth) for a large number of people.
- Our goal is to perform *market segmentation* by identifying subgroups of people who might be more receptive to a particular form of advertising, or more likely to purchase a particular product.
- The task of performing market segmentation amounts to clustering the people in the data set.

## Two clustering methods

- In *K-means clustering*, we seek to partition the observations into a pre-specified number of clusters.
- In *hierarchical clustering*, we do not know in advance how many clusters we want; in fact, we end up with a tree-like visual representation of the observations, called a *dendrogram*, that allows us to view at once the clusterings obtained for each possible number of clusters, from 1 to  $n$ .

## $K$ -means clustering

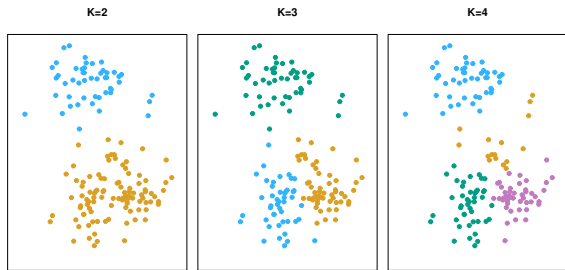

A simulated data set with 150 observations in 2-dimensional space. Panels show the results of applying  $K$ -means clustering with different values of  $K$ , the number of clusters. The color of each observation indicates the cluster to which it was assigned using the  $K$ -means clustering algorithm. Note that there is no ordering of the clusters, so the cluster coloring is arbitrary. These cluster labels were not used in clustering; instead, they are the outputs of the clustering procedure.

## Details of $K$ -means clustering

Let  $C_1, \dots, C_K$  denote sets containing the indices of the observations in each cluster. These sets satisfy two properties:

1.  $C_1 \cup C_2 \cup \dots \cup C_K = \{1, \dots, n\}$ . In other words, each observation belongs to at least one of the  $K$  clusters.
2.  $C_k \cap C_{k'} = \emptyset$  for all  $k \neq k'$ . In other words, the clusters are non-overlapping: no observation belongs to more than one cluster.

For instance, if the  $i$ th observation is in the  $k$ th cluster, then  $i \in C_k$ .

## Details of $K$ -means clustering: continued

- The idea behind  $K$ -means clustering is that a *good* clustering is one for which the *within-cluster variation* is as small as possible.
- The within-cluster variation for cluster  $C_k$  is a measure  $WCV(C_k)$  of the amount by which the observations within a cluster differ from each other.
- Hence we want to solve the problem

$$\underset{C_1, \dots, C_K}{\text{minimize}} \left\{ \sum_{k=1}^K WCV(C_k) \right\}. \quad (2)$$

- In words, this formula says that we want to partition the observations into  $K$  clusters such that the total within-cluster variation, summed over all  $K$  clusters, is as small as possible.

## How to define within-cluster variation?

- Typically we use Euclidean distance

$$\text{WCV}(C_k) = \frac{1}{|C_k|} \sum_{i,i' \in C_k} \sum_{j=1}^p (x_{ij} - x_{i'j})^2, \quad (3)$$

where  $|C_k|$  denotes the number of observations in the  $k$ th cluster.

- Combining (2) and (3) gives the optimization problem that defines  $K$ -means clustering,

$$\underset{C_1, \dots, C_K}{\text{minimize}} \left\{ \sum_{k=1}^K \frac{1}{|C_k|} \sum_{i,i' \in C_k} \sum_{j=1}^p (x_{ij} - x_{i'j})^2 \right\}. \quad (4)$$

# $K$ -Means Clustering Algorithm

1. Randomly assign a number, from 1 to  $K$ , to each of the observations. These serve as initial cluster assignments for the observations.
2. Iterate until the cluster assignments stop changing:
  - 2.1 For each of the  $K$  clusters, compute the cluster *centroid*.  
The  $k$ th cluster centroid is the vector of the  $p$  feature means for the observations in the  $k$ th cluster.
  - 2.2 Assign each observation to the cluster whose centroid is closest (where *closest* is defined using Euclidean distance).



## Properties of the Algorithm

- This algorithm is guaranteed to decrease the value of the objective (4) at each step. *Why?*

## Properties of the Algorithm


- This algorithm is guaranteed to decrease the value of the objective (4) at each step. *Why?* Note that

$$\frac{1}{|C_k|} \sum_{i,i' \in C_k} \sum_{j=1}^p (x_{ij} - x_{i'j})^2 = 2 \sum_{i \in C_k} \sum_{j=1}^p (x_{ij} - \bar{x}_{kj})^2,$$

where  $\bar{x}_{kj} = \frac{1}{|C_k|} \sum_{i \in C_k} x_{ij}$  is the mean for feature  $j$  in cluster  $C_k$ .

- however it is not guaranteed to give the global minimum.  
*Why not?*

# Example

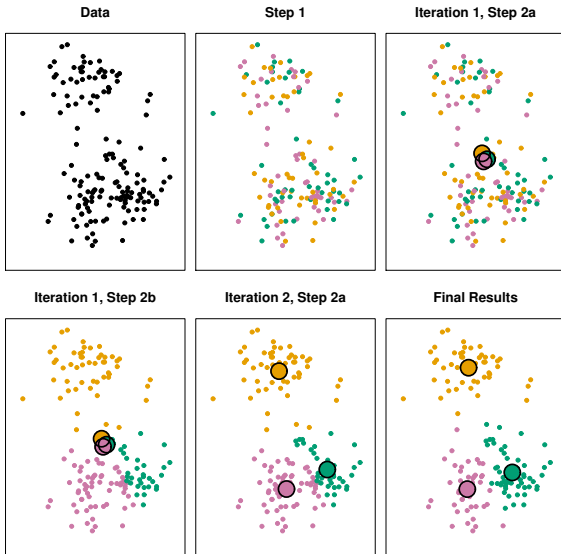

## Details of Previous Figure

The progress of the K-means algorithm with  $K=3$ .

- *Top left:* The observations are shown.
- *Top center:* In Step 1 of the algorithm, each observation is randomly assigned to a cluster.
- *Top right:* In Step 2(a), the cluster centroids are computed. These are shown as large colored disks. Initially the centroids are almost completely overlapping because the initial cluster assignments were chosen at random.
- *Bottom left:* In Step 2(b), each observation is assigned to the nearest centroid.
- *Bottom center:* Step 2(a) is once again performed, leading to new cluster centroids.
- *Bottom right:* The results obtained after 10 iterations.

## Example: different starting values



## Details of Previous Figure

$K$ -means clustering performed six times on the data from previous figure with  $K = 3$ , each time with a different random assignment of the observations in Step 1 of the  $K$ -means algorithm.

Above each plot is the value of the objective (4).

Three different local optima were obtained, one of which resulted in a smaller value of the objective and provides better separation between the clusters.

Those labeled in red all achieved the same best solution, with an objective value of 235.8