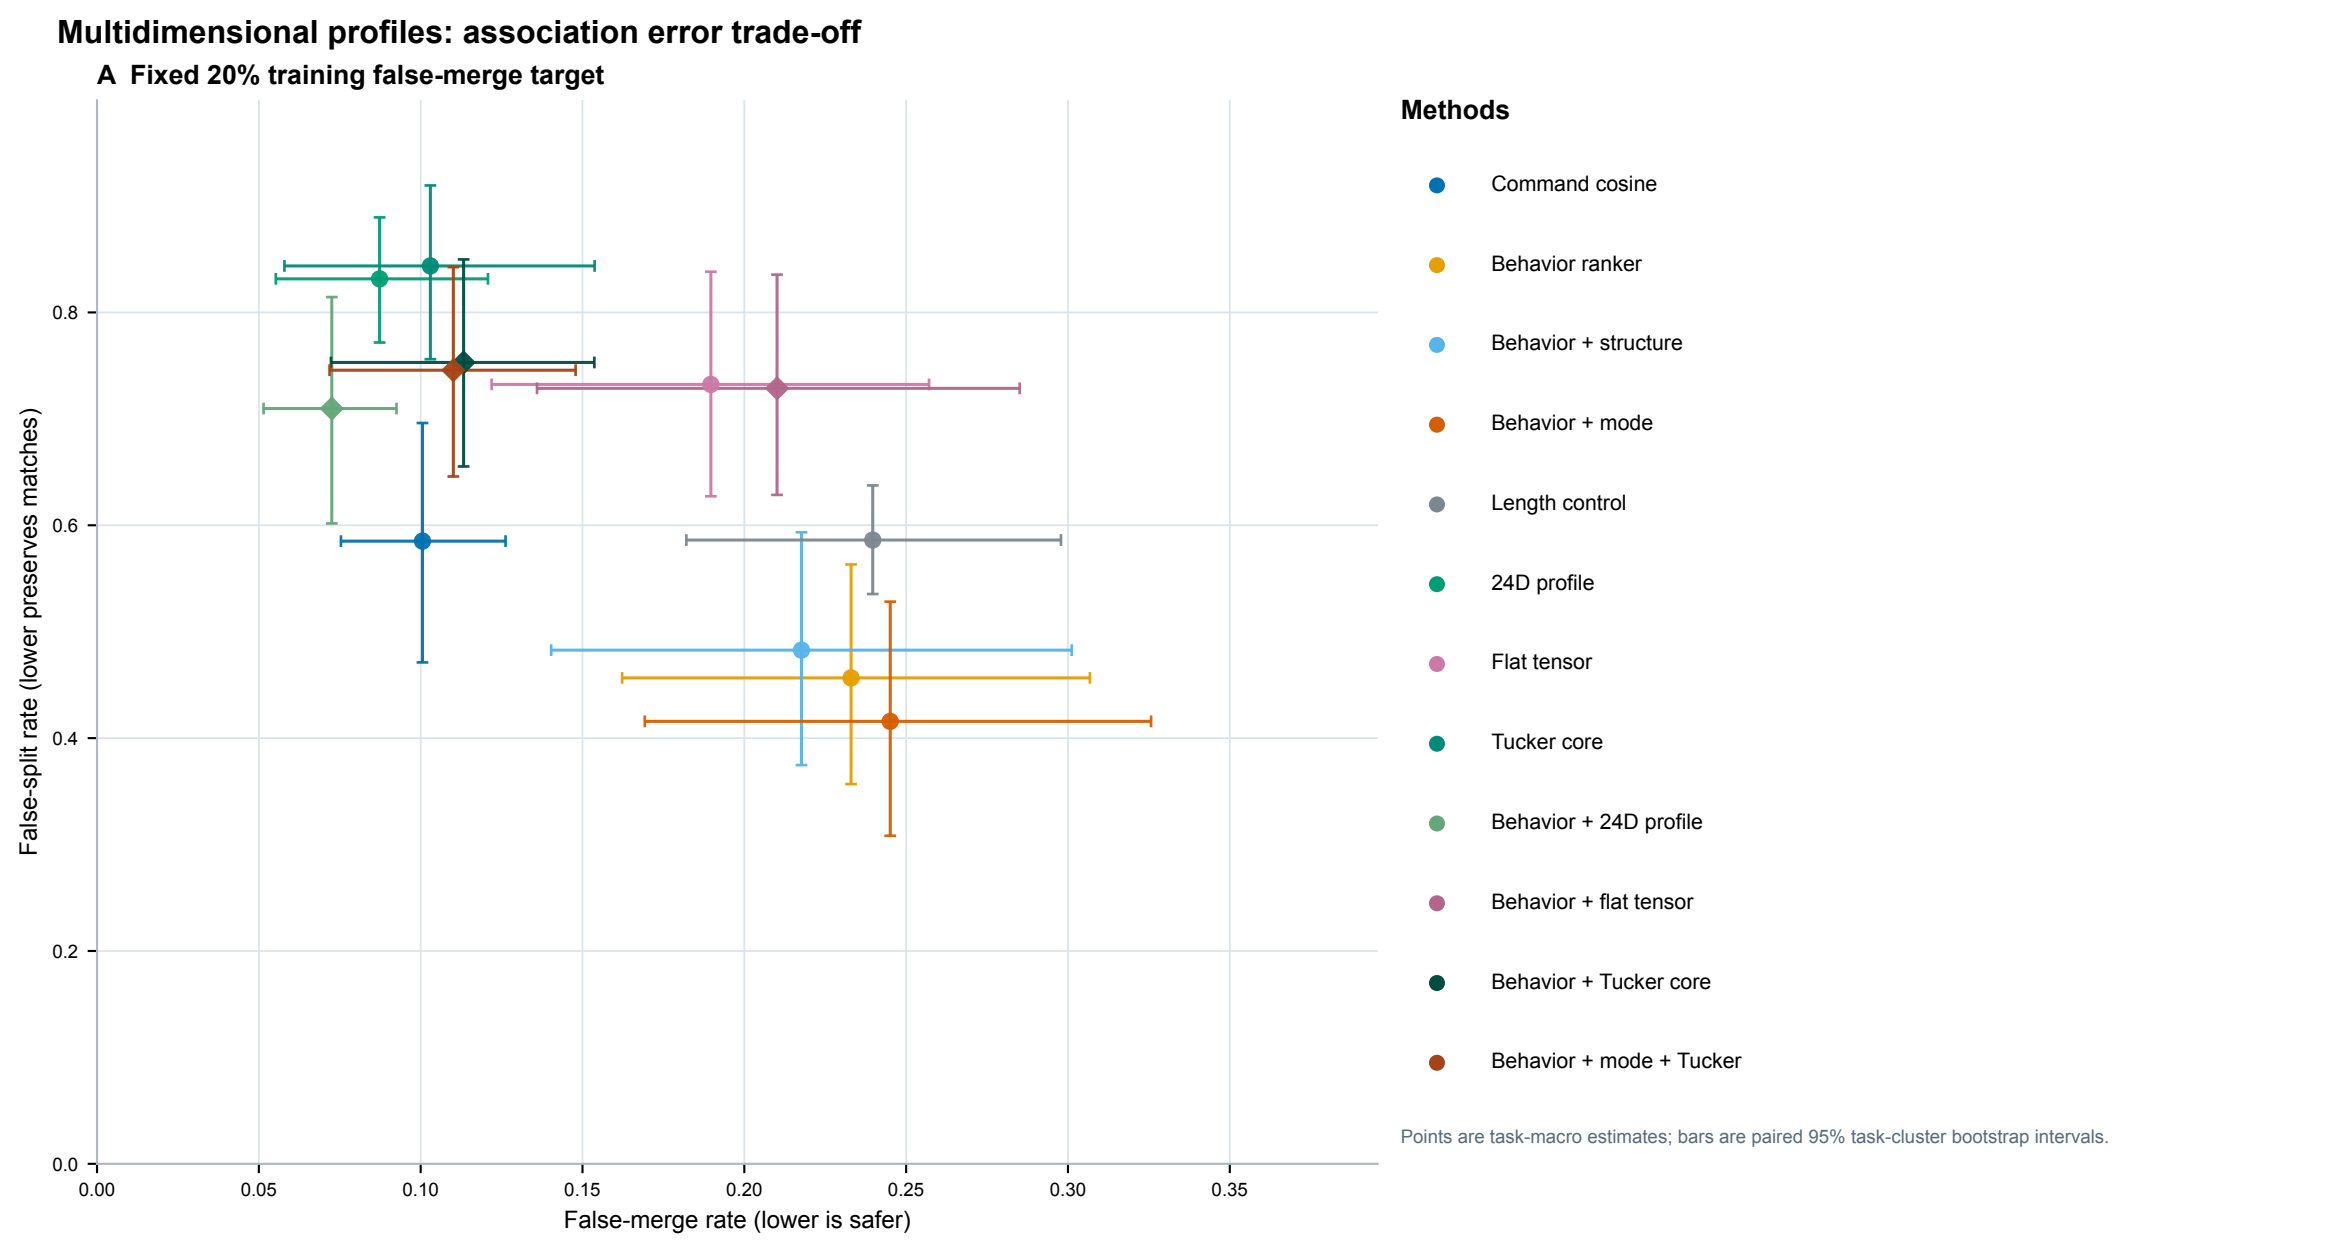
Multidimensional profiles: association error trade-off
A Fixed 20% training false-merge target
False-split rate (lower preserves matches)
False-merge rate (lower is safer)
0.0
0.2
0.4
0.6
0.8
0.00
0.05
0.10
0.15
0.20
0.25
0.30
0.35
Methods
Command cosine
Behavior ranker
Behavior + structure
Behavior + mode
Length control
24D profile
Flat tensor
Tucker core
Behavior + 24D profile
Behavior + flat tensor
Behavior + Tucker core
Behavior + mode + Tucker
Points are task-macro estimates; bars are paired 95% task-cluster bootstrap intervals.