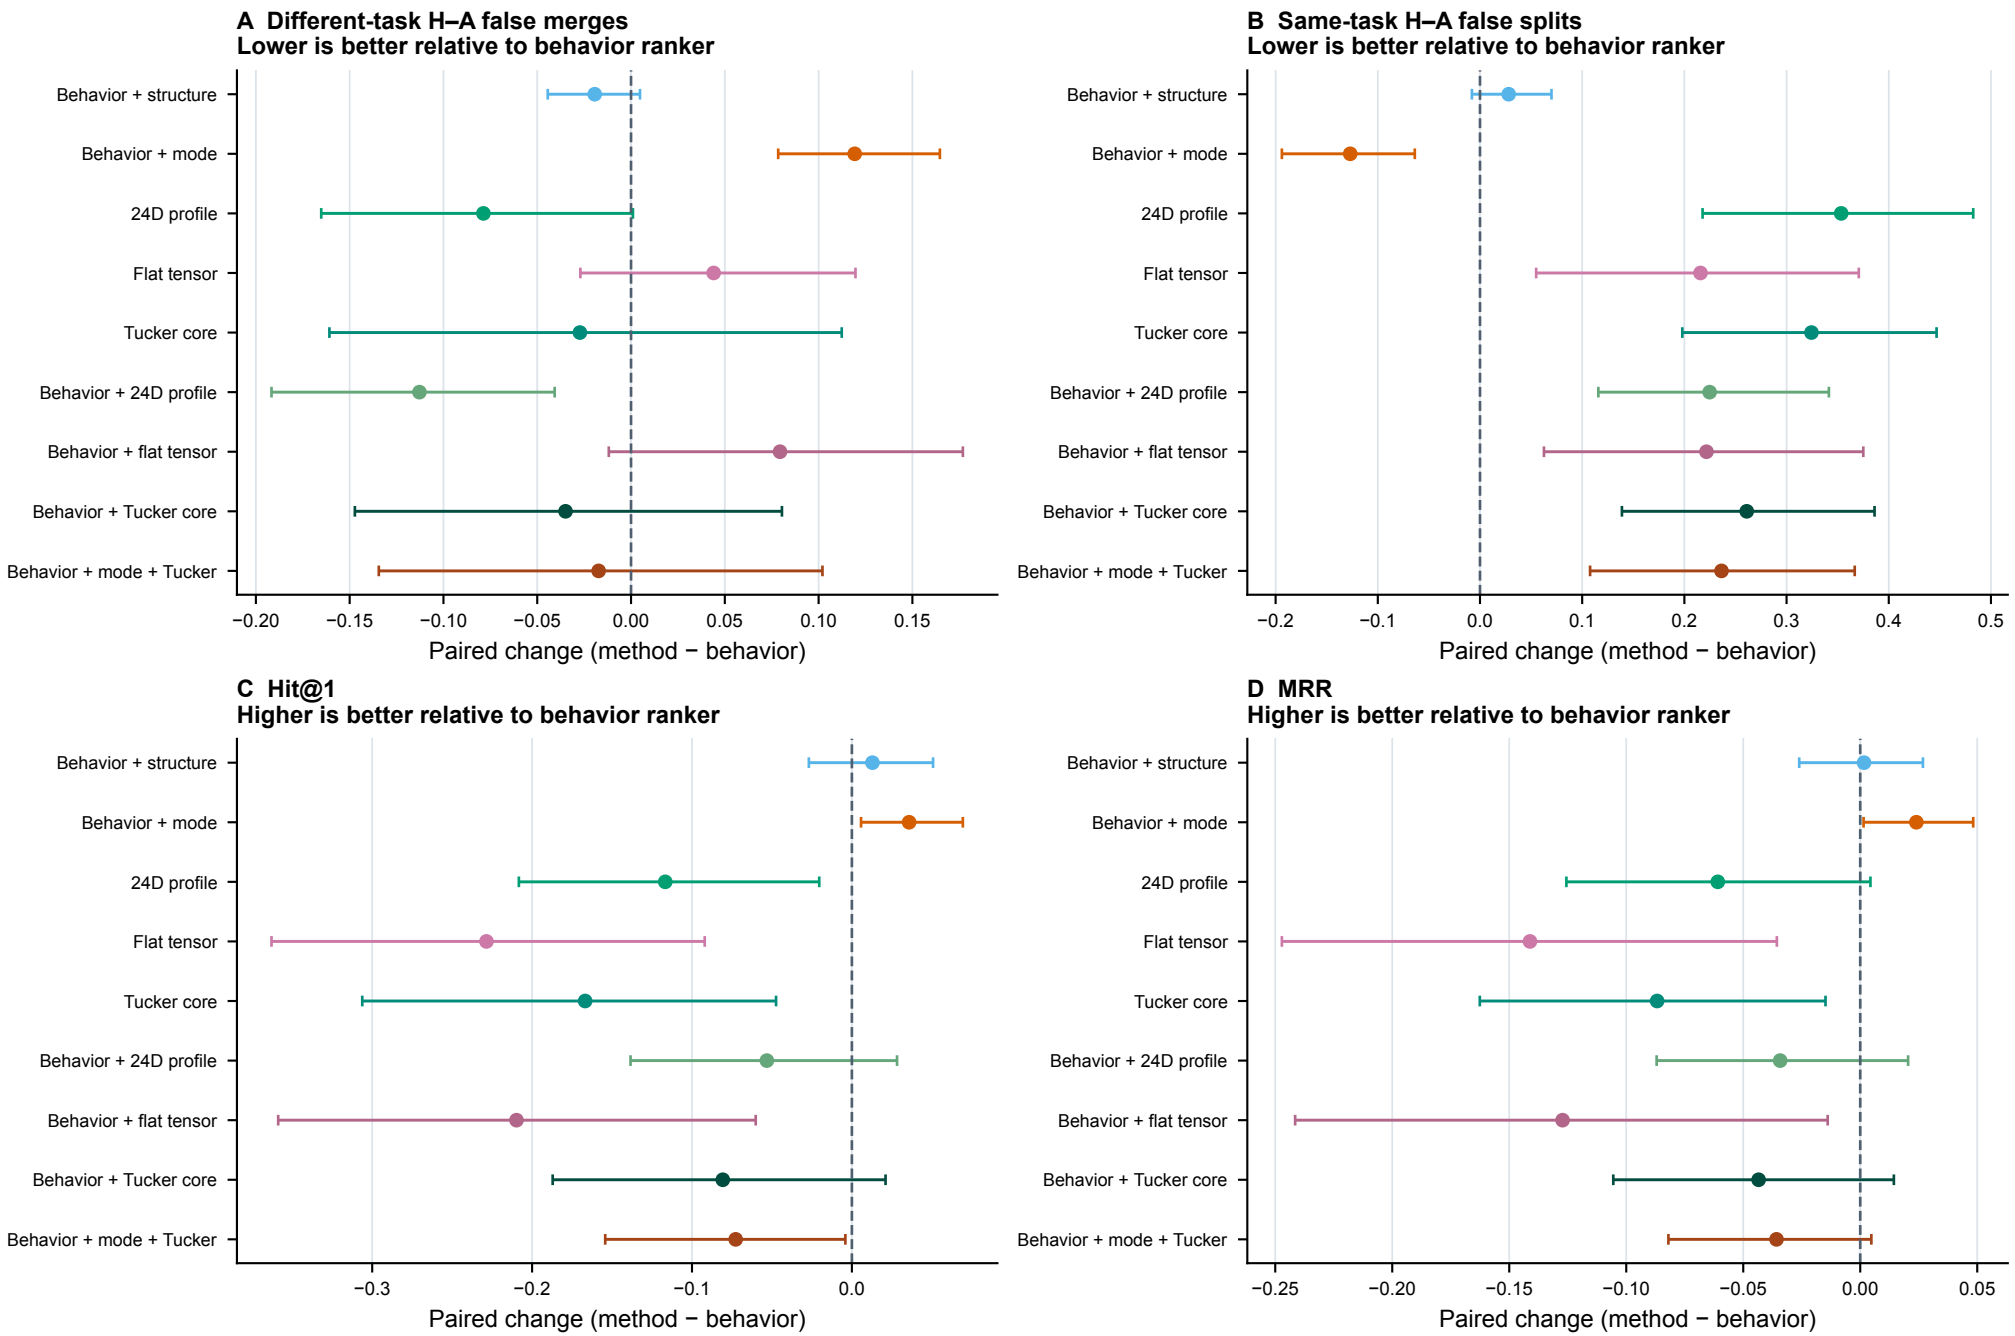
Cross-mode association and retrieval changes at the 20% target
A Different-task H–A false merges
Lower is better relative to behavior ranker
B Same-task H–A false splits
Lower is better relative to behavior ranker
C Hit@1
Higher is better relative to behavior ranker
D MRR
Higher is better relative to behavior ranker
Behavior + structure
Behavior + mode
24D profile
Flat tensor
Tucker core
Behavior + 24D profile
Behavior + flat tensor
Behavior + Tucker core
Behavior + mode + Tucker
Paired change (method − behavior)
Negative values reduce errors in the first two panels; positive values improve ranking in the last two. Intervals do not encode multiplicity-adjusted tests.