Deploy Quizs on cPanel, step by step


By: **Arknox**

Email: info@arknox.in

Contact: +91-8787388949

Deploy the Laravel backend, connect its database, and expose only the public directory. The local diagram explains the setup; it is not a capture of your hosting account. cPanel labels and available tools can vary by host.

Screen / location: Hosting → Database / Files / Domain / Terminal

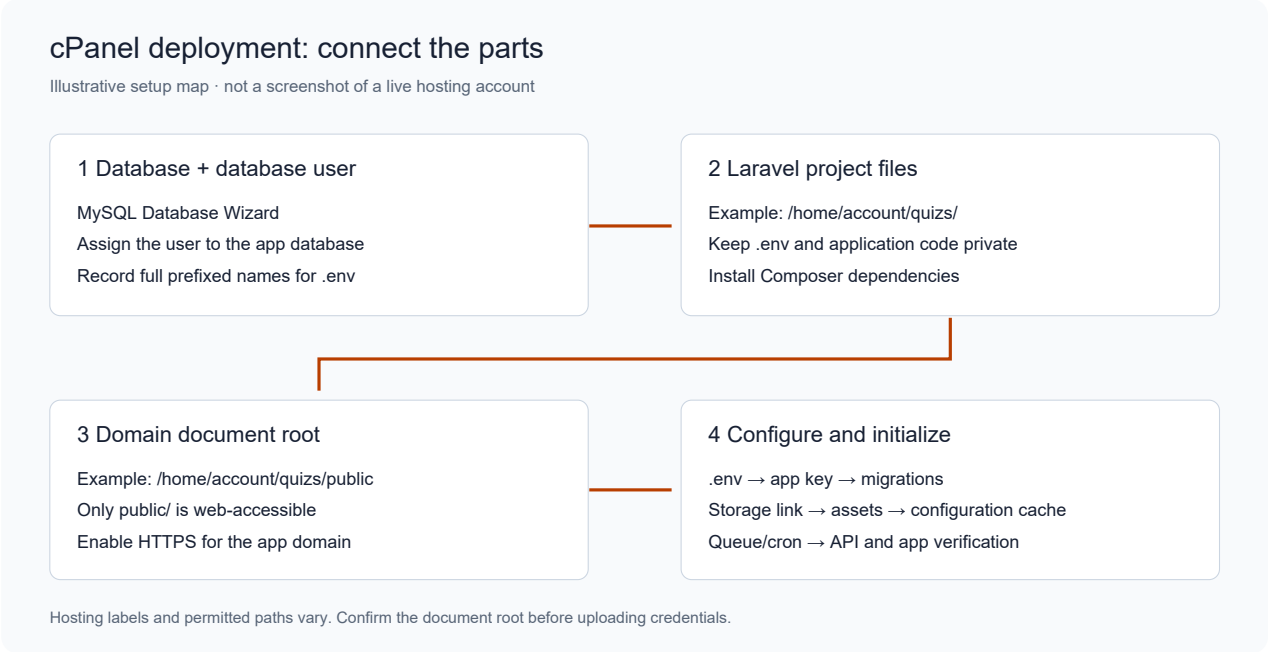

Illustrative setup map - not a live hosting screenshot

Step by step

1. Check that hosting supports the PHP version in composer.json, required extensions, a compatible database, Composer/SSH or a deployment artifact, and a domain document root that can point to the project's public directory.

2. Open MySQL Database Wizard (or the host's database tool). Create the app database and a database user, assign that user privileges on this app database, and record the full account-prefixed names.

3. Use File Manager to upload and extract Quiz Application Admin into a private application directory, for example /home/account/quizs. Keep .env, storage, vendor, and application source outside the public web root.

4. In Domains, set the application domain's document root to /home/account/quizs/public. If the host cannot expose only public/, resolve its supported Laravel deployment arrangement before putting credentials on the server. Enable HTTPS.

5. Create .env from .env.example, then set production environment, HTTPS APP_URL, and the exact database host/name/user/password supplied by the host. Configure SMTP, Firebase, and other integrations through their dedicated chapters.

6. From the Laravel project directory, install production dependencies, generate the application key only for a new installation, and apply migrations. Review seeders before using sample/default data; never run fresh/reset commands against a live database.

7. Create the storage link and deploy built frontend assets. Give storage and bootstrap/cache appropriate write access. Use configuration caching after the environment is complete.

8. Run the configured queue processing method for queued mail, then verify /admin/login, /api/categories, public artwork URLs, and an app quiz attempt against this HTTPS domain.

Field definitions and change impact

Field / Feature	Definition and source	Effect of changes
Database names / user	Full names assigned by the cPanel account, often account-prefixed.	Must match DB_DATABASE and DB_USERNAME exactly.
Document root	The Laravel project's public/ directory only.	Prevents the web server from exposing .env and private application files.
APP_ENV / APP_DEBUG	production / false.	Production behavior without debug error details.
APP_URL	The final HTTPS application domain.	Affects generated public links and storage/image URLs.
DB_HOST / PORT	Values provided by the host; do not assume every host uses 127.0.0.1.	Determines the database connection endpoint.
APP_KEY	Generated for a fresh installation; retained on existing deployments.	Used for encryption. Replacing an existing key can invalidate encrypted data and sessions.
Storage and assets	public/storage link plus compiled public/build files.	Needed for uploaded artwork and the styled admin interface.
Queue processing	Queue worker or the project's configured cron runner.	Required for queued mail; an SMTP test alone does not start the worker.

Current implementation limit

A hosting diagram is not proof of a live deployment. Do not expose the entire Laravel project under a public document root. Do not apply default sample seeders blindly to an existing database.

Data and behavior in detail

Environment template

```
APP_NAME="Quizs"
APP_ENV=production
APP_DEBUG=false
APP_URL=https://your-domain.example
DB_CONNECTION=mysql
DB_HOST=HOST_PROVIDED_DATABASE_HOST
DB_PORT=3306
DB_DATABASE=ACCOUNT_PREFIX_DATABASE
DB_USERNAME=ACCOUNT_PREFIX_USER
DB_PASSWORD=YOUR_PRIVATE_DATABASE_PASSWORD
```

Replace every placeholder privately on the server. Do not include live passwords in screenshots or documentation.

Fresh installation commands

```
composer install --no-dev --optimize-autoloader
php artisan key:generate
php artisan migrate --force
php artisan storage:link
php artisan config:cache
```

Run from the project directory after configuring .env. key:generate is for a new installation, not a routine upgrade. Use reviewed seeders only when their records are actually intended.

Build admin assets

```
npm ci
npm run build
```

If hosting has no Node runtime, build from the matching release on your workstation and upload the resulting public/build directory. Do not leave the production site dependent on a local development server.

Upgrades and background jobs

Back up before release. Preserve existing .env and APP_KEY, deploy the intended code/dependencies/assets, and apply pending migrations. Use the project's configured worker/cron method with the host's supported scheduler and private credentials. With QUEUE_CONNECTION=database, use a supervised php artisan queue:work worker, or the protected GET /api/cron/run-queue endpoint with the private CRON_SECRET configured in .env when persistent workers are unavailable. Keep the secret out of public links and screenshots. Check logs after the first job.

Verification after saving

Check login, API content, artwork, quiz submission, queue-dependent mail, and real-device push. Update ApiClient.baseUrl and build the app for the final backend domain.

Technical sources

Server paths are inside Quiz Application Admin; lib paths are inside Quiz Application.

composer.json

.env.example

public/index.php

routes/web.php

app/Http/Controllers/CronController.php

Conclusion Section

Use this guide to configure Quizs, verify the actual app behavior, and keep administrator content, server configuration, and native app changes in their correct places.

Administrator access

Open your own backend domain followed by /admin/login. Use the credentials created for that deployment. Accounts, passwords, and URLs from unrelated reference projects do not apply to Quizs.

Release verification

Complete a category, quiz, question, attempt, result, target/profile, notification, and attendance test. Confirm native integrations separately on the intended device and provider account.

Contact for support

Email: info@arknox.in
Support Center: +91-8787388949

Arknox