Configure Firebase push credentials


By: **Arknox**

Email: info@arknox.in

Contact: +91-8787388949

The server service account and Flutter Firebase app configuration are separate. Both must use the intended Firebase project.

Screen / location: Settings → Firebase Credentials

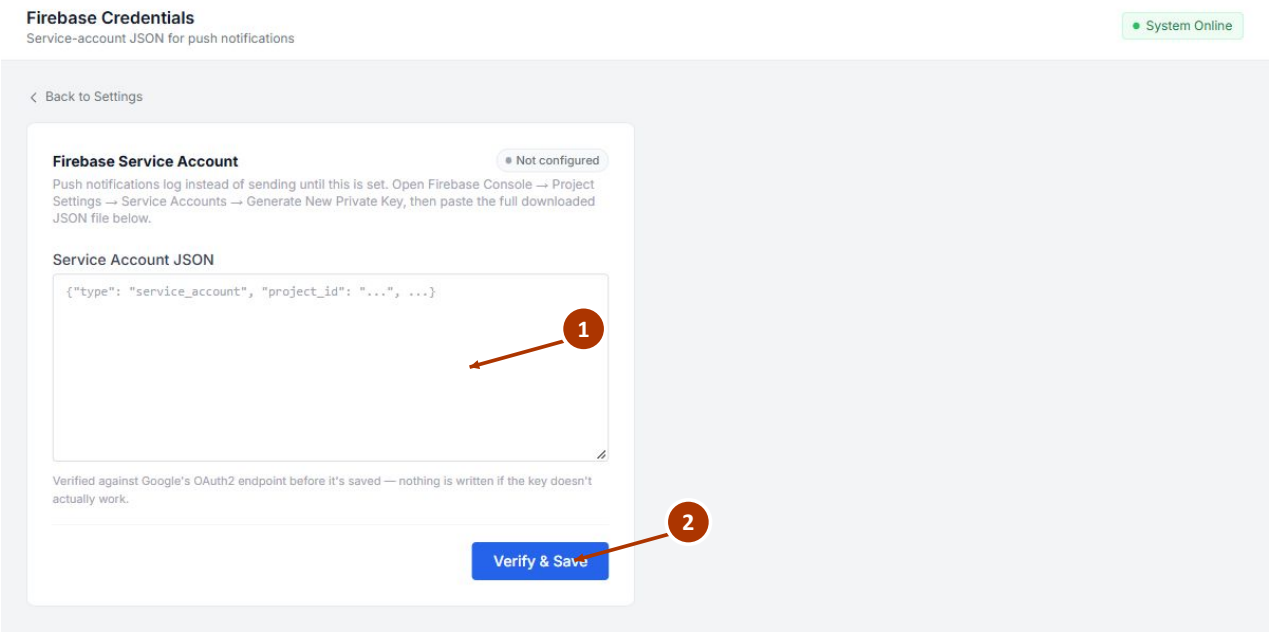

Actual source preview - local demo data - live values may differ

1. Service Account JSON

2. Verify & Save

Step by step

1. Obtain the complete service-account private-key JSON for your Firebase project.

2. Paste it into Service Account JSON. Keep this private credential out of public documentation and mobile assets.

3. Click Verify & Save. The server saves only after JSON validation and Google OAuth verification succeed.

4. Check native app configuration, notification permission, and token registration for the same project.

Field definitions and change impact

Field / Feature	Definition and source	Effect of changes
Service-account JSON	type service_account and required project, private-key, and client fields.	Authorizes server FCM HTTP requests.
Verify & Save	Rejected Google verification prevents saving.	Correct invalid JSON or key errors before retrying.
Device token	Registered by the app through POST /device/fcm-token.	Required to send push to that user's devices.

Data and behavior in detail

Paste, save, and verify credentials

1. Copy the intended Firebase project's service-account JSON into the credentials form; do not paste a web configuration object or only an API key.

2. Submit the form and resolve any verification error before continuing. Successful verification saves the push project and JSON configuration.

3. Confirm the app uses the intended Firebase project and that a test device has registered its token. Send one specific-user notification and test its tap destination.

4. Check delivery independently from the Configured badge. Authentication FIREBASE_API_KEY and push service-account credentials have different purposes.

Verification after saving

Sign in on a native device, grant permission, send a Specific Users message, and check both the system notification and inbox. No private key was entered in the local capture.

Technical sources

Server paths are inside Quiz Application Admin; lib paths are inside Quiz Application.

app/Http/Controllers/Admin/FirebaseSettingsController.php

app/Services/FcmService.php

lib/services/push_notification_service.dart

Conclusion Section

Use this guide to configure Quizs, verify the actual app behavior, and keep administrator content, server configuration, and native app changes in their correct places.

Administrator access

Open your own backend domain followed by /admin/login. Use the credentials created for that deployment. Accounts, passwords, and URLs from unrelated reference projects do not apply to Quizs.

Release verification

Complete a category, quiz, question, attempt, result, target/profile, notification, and attendance test. Confirm native integrations separately on the intended device and provider account.

Contact for support

Email: info@arknox.in
Support Center: +91-8787388949

Arknox