

mostimp\* Ternary operator :-

→ The Name of Ternary operator in python is "if...else" operator.

⇒ syntax :  $\text{Varname} = \text{Expr1 if TestCond else Expr2}$

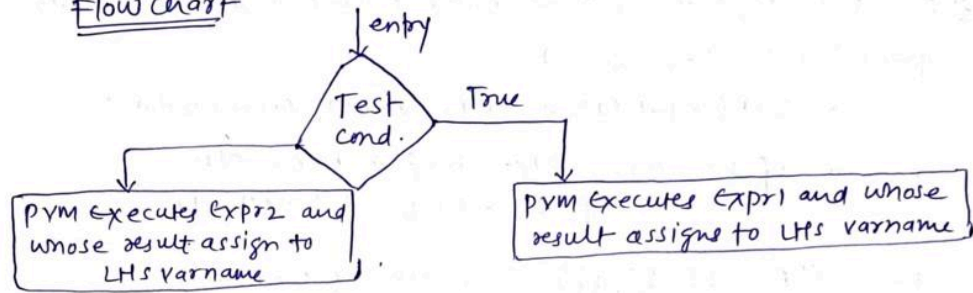
⇒ Here "if" and "else" are the keywords.

⇒ Here Test Cond. represents either Relational (single Test Cond) or Logical Expression (Compound Test Condition) whose result can be either True or False

⇒ if the Test Condition Result is True then PVM executes Expr1 and whose Result placed in Varname.

⇒ if the Test Condition Result is False then PVM executes Expr2 and whose Result placed in Varname.

⇒ Hence in python Ternary operator, PVM executes either Expr1 or Expr2 whose result placed in Varname

Flow chart

# program for deciding whether it is +ve or -ve or zero.

```

n = float(input("Enter any numerical value:")) # n = 0
res = "+ve" if n > 0 else "-ve" if n < 0 else "ZERO"
print("{} is {}".format(n, res))

```

# program for finding Biggest of Two numbers.

```

a = float(input("Enter First value:")) # a = 10
b = float(input("Enter second value:")) # b = 20
big = a if a > b else b
print("Big({}, {}) = {}".format(a, b, big))

```

# Finding Biggest of Two numbers and check for equality.

```

a = float(input("Enter first value:"))
b = float(input("Enter second value:"))
res = a if a > b else b if b > a else "Both values are equal"
print("Big({}, {}) = {}".format(a, b, res))

```

# Deciding Biggest of Three numbers and checks for equality

```

print("Enter three values")
a, b, c = float(input()), float(input()), float(input())
br = a if (a >= b) and (a > c) else b if (b > a) and (b >= c)
    else c if (c >= a) and (c > b) else "All values are equal"
print("Big({}, {}, {}) = {}".format(a, b, c, br))

```

#Deciding Biggest of three numbers and checks for equality.

```

print("Enter three values")
a,b,c = float(input()), float(input()), float(input())
bv = a if b <= a > c else b if a < b > c else c
      if a <= c > b else "All values are equal"

print("Big({},{},{}) = {}".format(a,b,c,bv))

```

## Ternary operator

- syntax:- varname=expr1 if Testcond else Expr2

In [4]: `#program for deciding whether it is +ve or -ve or zero`  
`n=float(input("enter any numerical value:"))`  
`res="+ve" if n>0 else "-ve" if n<0 else "zero"`  
`print("{} is {}".format(n,res))`

4578.0 is +ve

In [6]: `#program for finding Biggest of two numbers`  
`a=float(input("enter first value:"))`  
`b=float(input("enter second value:"))`  
`big=a if a>b else b`  
`print("Big ({},{})={}".format(a,b,big))`

Big (15.0,10.0)=15.0

In [10]: `#program for finding Biggest of two numbers and check for equality`  
`a=float(input("enter first value:"))`  
`b=float(input("enter second value:"))`  
`res=a if a>b else b if b>a else "Both are equal"`  
`print("Big({},{})={}".format(a,b,res))`

Big(45.0,0.0)=45.0

In [11]: `#program for deciding Biggest of three numbers and checks for equality`  
`#1st Logic`  
`print("ENter three values:")`  
`a,b,c=float(input()),float(input()),float(input())`  
`bv=a if (a>=b) and (a>c) else b if (b>a) and (b>=c) else c if (c>=a) and (c>b) else`  
`print("Big({},{},{})={}".format(a,b,c,bv))`

ENter three values:

Big(45.0,87.0,74.0)=87.0

In [16]: `#program for decidiing biggest of three numbers and check for equality`  
`#2nd Logic`  
`print("Enter three values")`  
`a,b,c=float(input()),float(input()),float(input())`  
`bv=a if b<=a>c else b if a<b>=c else c if a<=c>b else "all values are equal"`  
`print("Big({},{},{})={}".format(a,b,c,bv))`

Enter three values

Big(15.0,45.0,58.0)=58.0

In [ ]: