

# Foundations for scalable NLP-assisted formative assessment feedback

Matthew Beckman  
Penn State University

April 3, 2023

# Foundations for scalable NLP-assisted formative assessment feedback

Matthew Beckman  
Penn State University

April 3, 2023

Two question survey before seminar (scan with mobile phone)



Figure 1: (QR Code) <https://forms.gle/hpW72fMYE1SsB19JA>

## Responses to our survey?

- ① Is your lucky number odd or even?
- ② How did you describe the value of formative assessment?

## Motivation


- “Write-to-learn” tasks improve learning outcomes (Graham, et al., 2020)
- Critical for citizen-statisticians to communicate statistical ideas effectively (Gould, 2010)
- Continual practice with communicating improves statistical literacy and promotes retention (Basu, et al., 2013)
- Formative assessment benefits both students & instructors (GAISE, 2016; Pearl, et al., 2012)
- *Logistics* of constructed response tasks jeopardize use in large-enrollment classes

## Goal state

*Computer-assisted formative assessment feedback for short-answer tasks in large-enrollment classes, such that instructor burden is similar to small class (~30 students)*

### Tools

- Natural language processing (NLP) involves how computers can be programmed to analyze language elements (e.g., text or speech)
- Human-machine collaboration is a promising mechanism to assist rapid, individualized feedback at scale (Basu, 2013)
- NLP-assisted feedback has previously been studied for essays or long-answer tasks (see e.g., Attali, et al., 2008; Page, 1994)

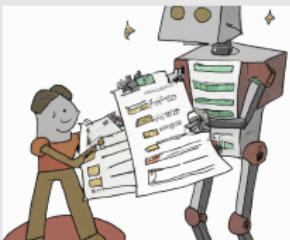

# Project Schematic

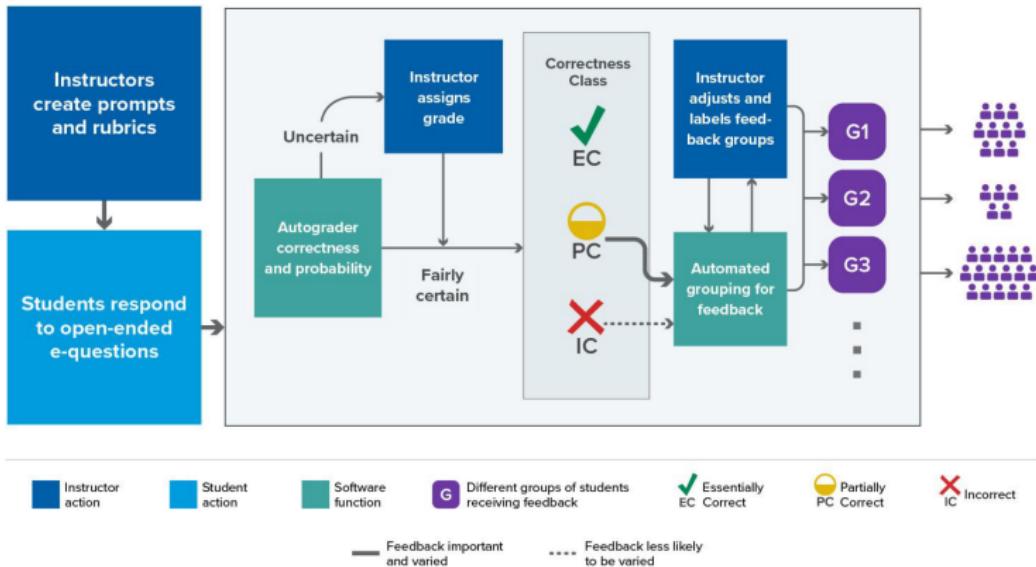


Figure 3: Project CLASSIFIES Schematic (NSF DUE-2236150)

## Research Questions

- **RQ1:** What level of agreement is achieved among trained human raters labeling (i.e., scoring or marking) short-answer tasks?
- **RQ2:** What level of agreement is achieved between human raters and an NLP algorithm?
- **RQ3:** What sort of NLP representation leads to good clustering performance, and how does that interact with the classification algorithm?

### Short Paper (ICOTS)

Lloyd, S. E., Beckman, M., Pearl, D., Passonneau, R., Li, Z., & Wang, Z. (2022). Foundations for AI-Assisted Formative Assessment Feedback for Short-Answer Tasks in Large-Enrollment Classes. In *Proceedings of the eleventh international conference on teaching statistics*. Rosario, Argentina.

## Spoilers?!

- **RQ1:** What level of agreement is achieved among trained human raters labeling (i.e., scoring) short-answer tasks?
- **RQ2:** What level of agreement is achieved between human raters and an NLP algorithm?
- **RQ3:** What sort of NLP representation leads to good clustering performance, and how does that interact with the classification algorithm?

### *Spoilers?!*

- RQ1: substantial inter-rater & intra-rater agreement
- RQ2: substantial agreement among human & NLP labeling
- RQ3: in progress, but promising

## Methods (Sample)

Study utilized de-identified extant data & scoring rubrics  
(Beckman, 2015)

- 6 short-answer tasks
- 1,935 students total
- 29 class sections 15 distinct institutions

Note: this sample is *not* a single large class at some institution; the available data includes introductory statistics students from many class sections at many institutions—some classes were quite small.



Figure 4: image created with assistance of DALL·E 2 by Open AI

## Methods (Short-answer task)

4. Walleye is a popular type of freshwater fish native to Canada and the Northern United States. Walleye fishing takes much more than luck; better fishermen consistently catch larger fish using knowledge about proper bait, water currents, geographic features, feeding patterns of the fish, and more. Mark and his brother Dan went on a two-week fishing trip together to determine who the better Walleye fisherman is. Each brother had his own boat and similar equipment so they could each fish in different locations and move freely throughout the area. They recorded the length of each fish that was caught during the trip, in order to find out which one of them catches larger Walleye on average.

a. Should statistical inference be used to determine whether Mark or Dan is a better Walleye fisherman? Explain why statistical inference should or should not be used in this scenario.

b. Next, explain how you would determine whether Mark or Dan is a better Walleye fisherman using the data from the fishing trip. *(Be sure to give enough detail that a classmate could easily understand your approach, and how he or she would interpret the result in the context of the problem.)*

Figure 5: Sample task including a stem and two short-answer prompts.

## Methods (RQ1)

- 3 human raters typical of large-enrollment instruction team
- 63 student responses in common for each *combination* of raters to quantify agreement (e.g., pairwise, consensus, etc)
- constraint: sufficient data for *intra-rater* analysis for person that had labeled 178 responses 6 years prior

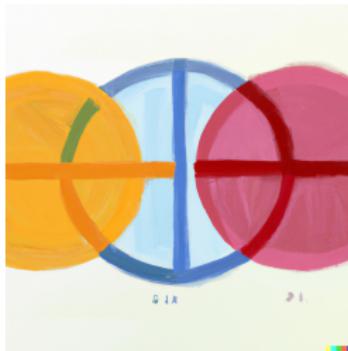


Figure 6: Me: “oil painting of Venn diagram for three intersecting sets”; DALLE . . . swing and a miss

## Results (RQ1)

**RQ1:** What level of agreement is achieved among trained human raters labeling (i.e., scoring) short-answer tasks?

| Comparison           | Reliability |
|----------------------|-------------|
| Rater A & Rater C    | QWK = 0.83  |
| Rater A & Rater D    | QWK = 0.80  |
| Rater C & Rater D    | QWK = 0.79  |
| Rater A: 2015 & 2021 | QWK = 0.88  |
| Raters A, C, & D     | FK = 0.70   |

Reliability interpretation<sup>1</sup>:  $0.6 <$  substantial  $< 0.8 <$  near perfect  $< 1.0$

---

<sup>1</sup>Viera & Garrett (2005)

## Methods (RQ2)

The set of task-responses were randomly split four ways:

- 90% of data for development purposes, were partitioned according to machine-learning best practice:
  - training (72%),
  - development (9%)
  - evaluation (9%)
- 10% of data being held in reserve for more rigorous testing

Two NLP algorithms were compared for accuracy using a subset of student responses (Li et al., 2021).

- LSTM: a logistic regression combined with a Long Short-Term Memory for learning vector representations
- SFRN: Semantic Feature-Wise Transformation Relation Network

## Results (RQ2)

**RQ2:** What level of agreement is achieved between human raters and the machine (an NLP algorithm)?

The SFRN algorithm achieved much higher classification accuracy than LSTM (83% vs. 72%)<sup>2</sup>. Human & SFRN agreement:

| Comparison              | Reliability |
|-------------------------|-------------|
| Rater A & SFRN          | QWK = 0.79  |
| Rater C & SFRN          | QWK = 0.82  |
| Rater D & SFRN          | QWK = 0.74  |
| Raters: A, C, D, & SFRN | FK = 0.68   |

Reliability interpretation<sup>3</sup>:  $0.6 <$  substantial  $< 0.8 <$  near perfect  $< 1.0$

<sup>2</sup>SFRN & LSTM comparison excludes instances when human labels disagree

<sup>3</sup>Viera & Garrett (2005)

## Methods (RQ3)

### Manual pilot of human-generated clustering

- Two reviewers independently evaluated 100 student responses that earned “partial credit” on inference tasks
- Each reviewer provided free-text feedback to each student
- Verbatim feedback captured for each reviewer and cross-tabulated for analysis.

## Results (RQ3 machines)

**RQ3:** What sort of NLP representation leads to good clustering performance, and how does that interact with the classification algorithm?

- SFRN learns a high-dimension ( $D = 512$ ) vector representation on training data.
- Experiments with K-means and K-medoids clustering showed SFRN produce more consistent clusters when retrained (0.62), in comparison to other classifiers.<sup>4</sup>
- Highest consistency (0.88;  $D = 50$ ), however, was achieved using a matrix factorization method that produces static representations (WTMF; Guo & Diab, 2011)

---

<sup>4</sup>Consistency is measured as the ratio of all pairs of responses in a given class per question that are clustered the same way on two runs (in the same cluster, or not in the same cluster).

# Results (RQ3 humans)

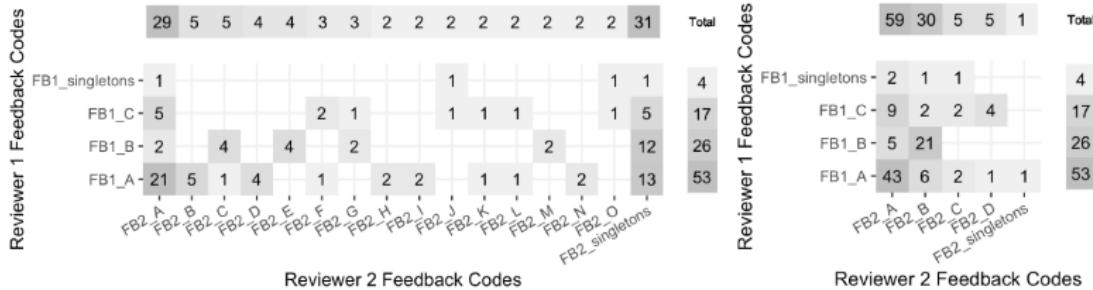


Figure 7: Cross-tabulation of feedback distribution for the two reviewers for the initial feedback (left) compared with the same analysis for the portion of feedback related to the statistical concept at issue (right).

- Reviewer 1 favored feedback on statistical concepts (only).
- Reviewer 2 provided same, plus a quote from the student
- Reviewer 2 parsed her feedback to compare her remarks related to the statistical concepts (only) with the feedback of Reviewer 1.

## Discussion

- **RQ1:** Substantial agreement achieved among trained human raters provides context for further comparisons
- **RQ2:** NLP algorithm produced agreement reasonably aligned to results achieved by pairs/groups of trained human raters
- **RQ3:** Classification and clustering have competing incentives for dimensionality; Low D is better for cluster stability, High D better for classification reliability.

## Limitations

- Study uses extant data from prior study collected from many classes of varying size
  - not a single large class
  - we expect observed results are conservative due to additional variability across institutions and instructors, but will be investigated further
- Dimensionality on the machine learning side
- Clustering performance vs semantic meaning
  - clustering is necessary, but not sufficient, for semantic meaning
  - semantic meaning of NLP clusters not yet rigorously studied

## Future Work<sup>5</sup>

Software development goals:

- reliable labeling (EC/PC/IC “scoring”), across diverse student populations;
- human-in-the-loop system to optimize human input and effort for scoring;
- iterative instructor input to group conceptual representations

Field test expansion:

- field test key aspects of project CLASSIFIES in large classes
  - approx 13,000 students
  - two of the five institutions have HSI designation from US Dept of Education
- diversify item and rubric input to examine system tolerance

---

<sup>5</sup>Adapted from research aims of Project CLASSIFIES (NSF DUE-2236150)

## Implications for Teaching & Research

- open questions for “what works” in formative assessment
- accumulated data made available to broader NLP community
  - this data set would be among the largest open data sources of its kind
  - addresses barriers imposed by proprietary data sources on NLP research

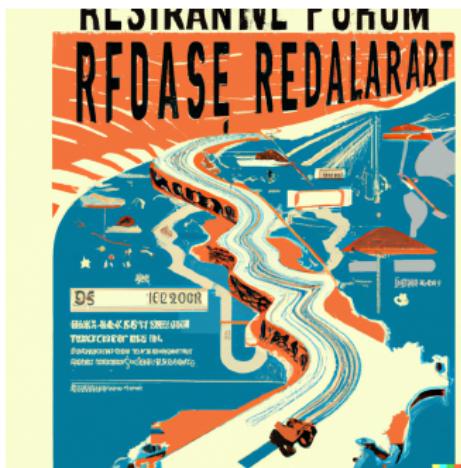


Figure 8: DALLE image given the prompt: “Roadmap for future educational research in the style of a retro travel poster”

## References (1/2)

- ① Attali, Y., Powers, D., Freedman, M., Harrison, M., & Obetz, S. (2008). Automated Scoring of Short-Answer Open-Ended Gre® Subject Test Items. *ETS Research Report Series*, 2008(1), i–22.
- ② Basu, S., Jacobs, C., & Vanderwende, L. (2013). Powergrading: a Clustering Approach to Amplify Human Effort for Short Answer Grading. *Transactions of the Association for Computational Linguistics*, 1, 391–402. [https://doi.org/10.1162/tacl\\_a\\_00236](https://doi.org/10.1162/tacl_a_00236)
- ③ Beckman, M. (2015). Assessment Of Cognitive Transfer Outcomes For Students Of Introductory Statistics.  
<http://conservancy.umn.edu/handle/11299/175709>
- ④ GAISE College Report ASA Revision Committee (2016). Guidelines for Assessment and Instruction in Statistics Education College Report 2016. URL: <http://www.amstat.org/education/gaise>
- ⑤ Gould, R. (2010). Statistics and the Modern Student. *International Statistical Review / Revue Internationale de Statistique*, 78(2), 297–315. <https://www.jstor.org/stable/27919839>
- ⑥ Guo, W., Diab, M. (2012) Modeling Sentences in the Latent Space. In *Proceedings of the 50th Annual Meeting of the Association for Computational Linguistics*, pages 864–872. Association for Computational Linguistics.

## References (2/2)

- 7 Graham, S., Kiuahara, S. A., & MacKay, M. (2020). The Effects of Writing on Learning in Science, Social Studies, and Mathematics: A Meta-Analysis. *Review of Educational Research*, 90(2), 179–226. <https://doi.org/10.3102/0034654320914744>
- 8 Li, Z., Tomar, Y., & Passonneau, R. J. (2021). A Semantic Feature-Wise Transformation Relation Network for Automatic Short Answer Grading. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 6030–6040. Association for Computational Linguistics. <https://aclanthology.org/2021.emnlp-main.487>
- 9 Page, E. B. (1994). Computer Grading of Student Prose, Using Modern Concepts and Software. *The Journal of Experimental Education*, 62(2), 127–142.
- 10 Pearl, D. K., Garfield, J. B., delMas, R., Groth, R. E., Kaplan, J. J., McGowan, H., & Lee, H. S. (2012). Connecting Research to Practice in a Culture of Assessment for Introductory College-level Statistics. URL: [http://www.causeweb.org/research/guidelines/ResearchReport\\_Dec\\_2012.pdf](http://www.causeweb.org/research/guidelines/ResearchReport_Dec_2012.pdf)
- 11 Viera, A. J., & Garrett, J. M. (2005). Understanding interobserver agreement: the kappa statistic. *Family Medicine*, 37(5), 360–363.

Thank You

## Foundations for scalable NLP-assisted formative assessment feedback

Matthew Beckman  
Penn State University

April 3, 2023

Resource Page URL:

<https://mdbeckman.github.io/2023-MSU-Colloq/>