

計算機程式


組員: 41423210 王宥堤
41423214 吳承祐

在app.py裡可知遊戲本體程式在
game.html內

```
app.py  game.html
G: > cp > portable_2026 > portable_2026 > data > tmp > 2 > app.py
162 def logout():
168
169 @app.route('/game')
170 @login_required
171 def game():
172     """遊戲運行頁面"""
173     return render_template('game.html')
174
```



找到game.html

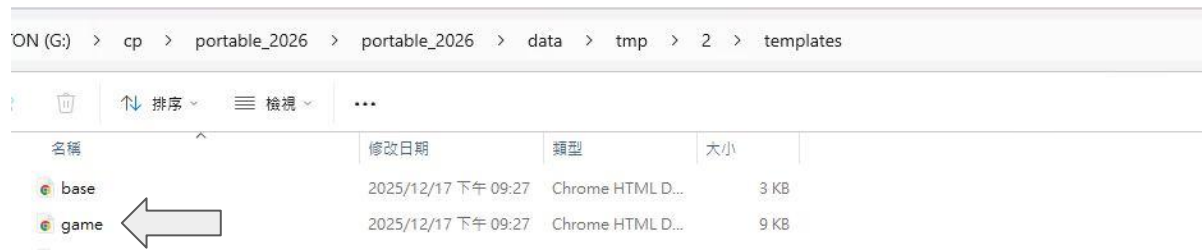

```

y > game.html X
> portable_2026 > portable_2026 > data > tmp > 2 > templates > < game.html > ...
(% block title %)Brython 遊戲(% endblock %)

(% block content %)
<script type="text/javascript" src="https://cdn.jsdelivr.net/npm/brython@3.11.3/brython.min.js"></script>
<script type="text/javascript" src="https://cdn.jsdelivr.net/npm/brython@3.11.3/brython_stdlib.js"></script>

<body onload="brython(1)">

<h2 style="text-align: center;">點擊測試：點擊移動中的圓形！</h2>

<div id="brython_div1" style="width: 600px; height: 400px; margin: 20px auto;">
</div>

{# 使用 (% raw %) 匯入，確保 Jinja2 不會解析 Brython 程式碼中的大括號和 f-string #}
{% raw %}
<script type="text/python">
    from browser import document, timer, window, ajax
    import random
    import time

    # --- 遊戲設定 ---
    GAME_DURATION = 30
    score = 0
    game_active = False

    # --- 獲取 DOM 元素及初始化 ---
    game_area = document["brython_div1"]
    game_area.style.border = "3px solid #333"
    game_area.style.backgroundColor = "#e0e0ff"
    game_area.style.position = "relative"
    game_area.style.overflow = "hidden"
    game_area.style.cursor = "crosshair"

    # 創建分數和時間顯示區
    score_display = document.createElement("div")
    score_display.style.position = "absolute"
    score_display.style.top = "10px"
    score_display.style.left = "10px"
    score_display.style.fontSize = "1.2em"
    score_display.style.fontWeight = "bold"
    score_display.style.backgroundColor = "rgba(255, 255, 255, 0.7)"
    score_display.style.padding = "5px"
    game_area <= score_display

    timer_display = document.createElement("div")
    timer_display.style.position = "absolute"
    timer_display.style.top = "10px"
    timer_display.style.right = "10px"
    timer_display.style.fontSize = "1.2em"
    timer_display.style.fontWeight = "bold"
    timer_display.style.backgroundColor = "rgba(255, 255, 255, 0.7)"
    timer_display.style.padding = "5px"
    game_area <= timer_display

    # 創建目標元素
    target = document.createElement("div")
    target.id = "target"
    target.style.width = "50px"
    target.style.height = "50px"
    target.style.backgroundColor = "#ff4500"
    target.style.position = "absolute"
    target.style.borderRadius = "50%"
    target.style.cursor = "pointer"
    target.style.transition = "background-color 0.1s, top 0.3s, left 0.3s"

```

在game.html

內找到<script type="text/python">

到</script>之間就是遊戲程式

```

< game.html X
table_2026 > portable_2026 > data > tmp > 2 > templates > < game.html > ...
<body onload="brython(1)">
<script type="text/python">

    # 遊戲結束後提交分數
    submit_score_to_server(score)

    # 顯示結束訊息
    game_over_msg.innerHTML = f"遊戲結束！<br>最終分數: {score}"

    restart_btn = document.createElement("button")
    restart_btn.text = "重新開始"
    restart_btn.style.marginTop = "15px"
    restart_btn.style.padding = "10px 20px"
    restart_btn.style.fontSize = "0.7em"
    restart_btn.style.cursor = "pointer"
    restart_btn.bind("click", restart_game)

    game_over_msg <= document.createElement("br")
    game_over_msg <= restart_btn
    game_over_msg.style.display = "block"

    timer.clear_interval(move_interval_handle)

else:
    timer_display.text = f"時間: {remaining}s"
    timer.set_timeout(check_time, 1000)

# --- 遊戲啟動函數 ---
def start_game():
    # ... (啟動邏輯不變)
    global game_active, game_over_time, move_interval_handle, score

    score = 0
    game_active = True
    score_display.text = "分數: 0"
    timer_display.text = f"時間: {GAME_DURATION}s"

    game_over_time = time.time() + GAME_DURATION

    check_time()
    move_target()
    move_interval_handle = timer.set_interval(move_target, 800)

# 啟動遊戲
start_game()

</script>
{% endraw %}

```

我的目標是要改成點到圓後才移動，且連續得分後會加圓的移動速度，以下是有變更的地方

```
# --- 遊戲設定 ---  
GAME_DURATION = 30  
score = 0  
game_active = False  
MOVE_DELAY_START = 800  
MOVE_DELAY_MIN = 150  
MOVE_ACCEL_STEP = 50  
  
current_move_delay = MOVE_DELAY_START
```

```
score_display.text = f"分數: {score}"  
current_move_delay = max(MOVE_DELAY_MIN, current_move_delay - MOVE_ACCEL_STEP)  
timer.set_timeout(move_target, current_move_delay)  
event.stopPropagation()
```

```
# --- 遊戲啟動函數 ---  
def start_game():  
    # ... (啟動邏輯不變)  
    global game_active, game_over_time, move_interval_handle, score, current_move_delay  
  
    score = 0  
    game_active = True  
    current_move_delay = MOVE_DELAY_START  
    score_display.text = "分數: 0"  
    timer_display.text = f"時間: {GAME_DURATION}s"  
  
    game_over_time = time.time() + GAME_DURATION  
  
    check_time()  
    move_target()  
    刪除一段  
  
# 啟動遊戲  
start_game()
```

示範影片 <https://youtu.be/FwAlTrumxrw>