CAP-2012-GROUP-1

LEETCODE QUESTION; 1

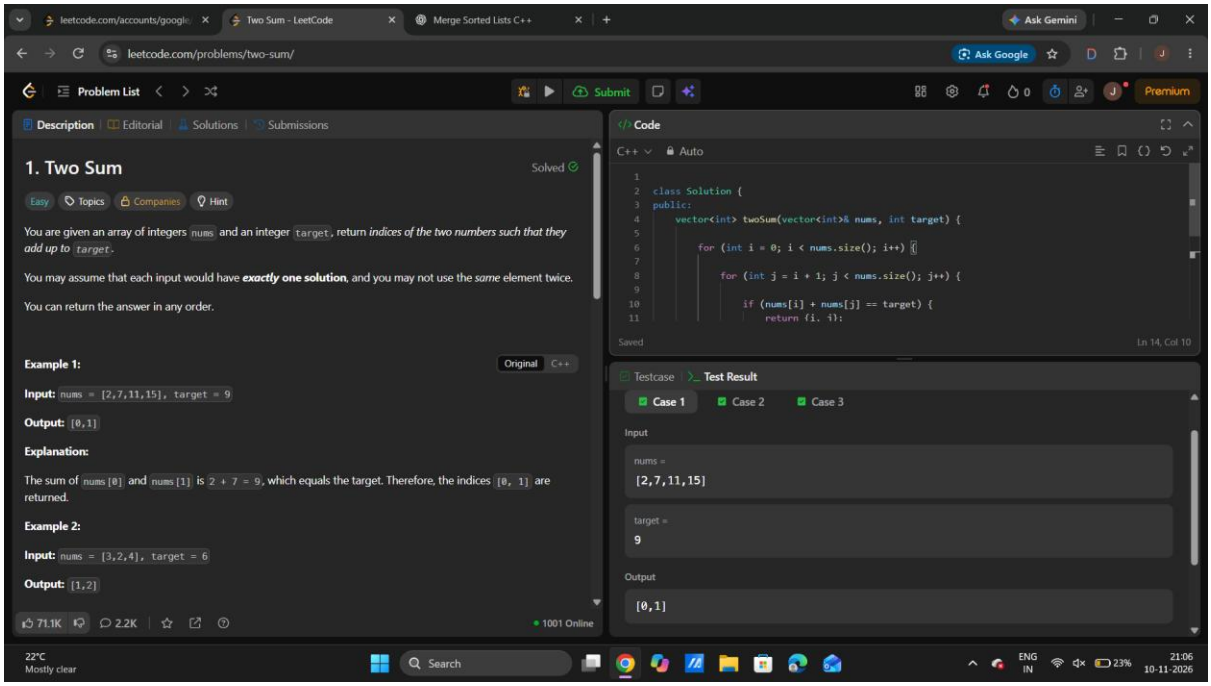
```
class Solution {
public:
    vector<int> twoSum(vector<int>& nums, int target) {

        for (int i = 0; i < nums.size(); i++) {

            for (int j = i + 1; j < nums.size(); j++) {

                if (nums[i] + nums[j] == target) {
                    return {i, j};
                }
            }
        }

        return {};
    }
};
```


leetcode.com/accounts/google
Two Sum - LeetCode
Merge Sorted Lists C++
Ask Gemini
leetcode.com/problems/two-sum/
Ask Google
Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
1. Two Sum
Solved
Easy
Topics
Companies
Hint
You are given an array of integers nums and an integer target, return indices of the two numbers such that they add up to target.
You may assume that each input would have exactly one solution, and you may not use the same element twice.
You can return the answer in any order.
Example 1:
Original
C++
Input: nums = [2,7,11,15], target = 9
Output: [0,1]
Explanation:
The sum of nums[0] and nums[1] is 2 + 7 = 9, which equals the target. Therefore, the indices [0, 1] are returned.
Example 2:
Input: nums = [3,2,4], target = 6
Output: [1,2]
71.1K
2.2K
1001 Online
Code
C++
Auto
class Solution {
public:
vector<int> twoSum(vector<int>& nums, int target) {
for (int i = 0; i < nums.size(); i++) {
for (int j = i + 1; j < nums.size(); j++) {
if (nums[i] + nums[j] == target) {
return {i, j};
Saved
Ln 14, Col 10
Testcase
Test Result
Case 1
Case 2
Case 3
Input
nums =
[2,7,11,15]
target =
9
Output
[0,1]
22°C
Mostly clear
Search
ENG
IN
23%
21:06
10-11-2026