Daffodil International University

Lab Report 01

Course Code: CSE 416

Course Tittle: Web Engineering Lab

Submitted By

Name: Md. Mhamudul Islam Rakib
ID: 222-15-6437
Section: 62_E2
Department of **CSE**, Daffodil International University.

Submitted To

Name: Subarna Akter Liza,

Lecturer

Department of **CSE**, Daffodil International University.

Date of Submission: 26-01-2026

HTML Tags Chart

basic html tag:

```
<!DOCTYPE html>
<html>
<head>
    <title>My Web Page</title>
    <body>
        <!-- this is the best website ever -->
       <h1> this is my website</h1> <!--corrected h1 closing tag-->
       <hr> <!--horizontal line tag-->
       <br> <!--line break tag-->
       <b>Example</b> <!--bold tag-->
       <p> pizza my fevourite</p> <!--peragraph tag-->

    </body>
</head>
</html>
```

Out put:

anchor tag:

```
<!DOCTYPE html>
<html>
<head>
    <title>My Web Page</title>
    <body>
      <a href="http://www.domain.com/">
         Visit Our Site</a>
    </body>
</head>
</html>
```

Out put:

Audio Element:

```
<!DOCTYPE html>
<html>
<head>
    <title>Audio</title>
    <body>
        <audio controls autoplay muted loop>
        <source src="The Grey Room.mp3">
        <source src="The Grey Room.ogg">
        Your browser does not support the audio element.
        </audio>
    </body>
</head>
</html>
```

Out put:

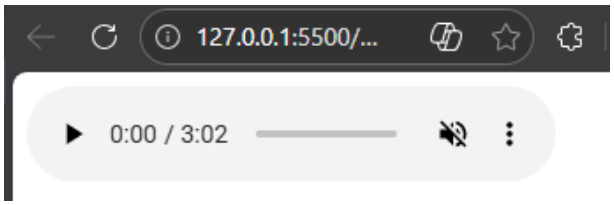

Video Element:

```
<!DOCTYPE html>
<html>
<head>
    <title>video</title>
    <body>
      <video controls autoplay muted src="daffodil.mp4" width="300" >
    </body>
</head>
</html
```

Out put:

Button:

```
<!DOCTYPE html>
<html>
    <head>
        <title>Button Text</title>
    </head>
    <body>
        <a href="https://www.google.com">
        <button style="background-color: red;color: white;border-
radius:5px;">Click Me</button>
        </a>
    </body>
</html>
```

Out put:

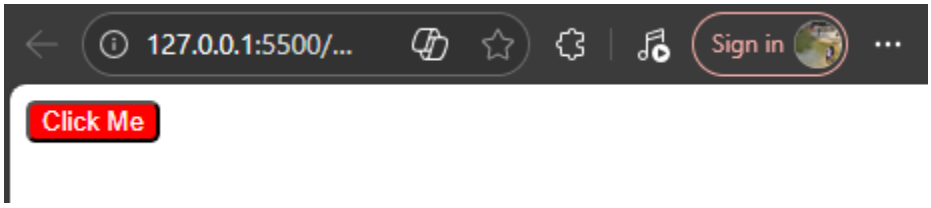

Font:

```
<!DOCTYPE html>
<html>
    <head>
        <title>Font Example</title>
        <style>
            .custom-font {
                font-family: "Times New Roman", Times, serif;
                font-size: 18px;
            }
        </style>
    </head>
    <body>
        <span class="custom-font">Example</span>
    </body>
</html>
```

Out put:

Example

Form:

Example 1

```
<!DOCTYPE html>
<html>
<head>
    <title>Form 1 Example </title>
</head>
<body>
    <form method=post action="/cgibin/example.cgi">
        <input type="text" size="10" maxlength="30">
        <input type="Submit" value="Submit">
    </form>
    </div>
    </form>
</body>
</html
```

Output:



Example :2

```
<!DOCTYPE html>

<html>
<head>
    <title> Form 2 Example</title>
<body>
    <form method=post action="/cgi-bin/example.cgi">
        <input type="text"
            style="color: #ffffff; font-family: Verdana; font-weight: bold; font-
size: 14px; background-color: #72a4d2;"
            size="10" maxlength="30">
        <input type="Submit" value="Submit">
    </form>
</body>
</head>
</html>
```

Output:



Example 3:

```html
<!DOCTYPE html>
<html>
    <head>
        <title> example 3 </title>
    </head>
    <body>
        <form method="post" action="/cgi-bin/example.cgi">
     <!-- <form action="/cgi-bin/example.cgi" method="GET">-->
            <table border="0" cellspacing="0" cellpadding="2">
                <tr>
                    <td bgcolor="#8463ff">
                        <input type="text" size="10" maxlength="30">
                    </td>
                    <td bgcolor="#8463ff" valign="Middle">
                        <input type="image" name="submit" src="yourimage.gif">
                    </td>
                </tr>
            </table>
         </form>
    </body>
</html>
```

Output:

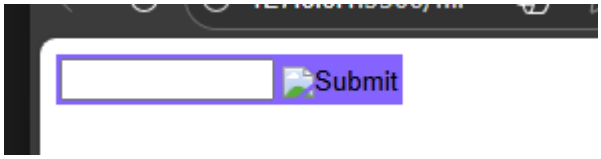

Example 4:

```html
<!DOCTYPE html>
<html>
    <head>
        <title> Form4 Example</title>
        <body>
            <form method="post" action="/cgi-bin/example.cgi">
                Enter your Comment:<br>
```

```
                <textarea wrap="virtual" name="comment" rows="3" cols="20"
maxlength="100"></textarea><br>
                    <input type="Submit" value="Submit">
                    <input type="reset" value="Clear">
            </form>
    </head>
</html>
```

Output:

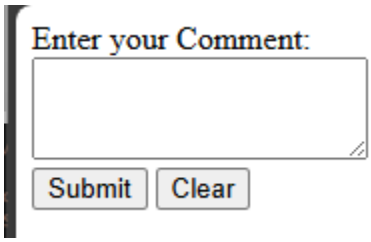

Example 5:

```
<!DOCTYPE html>
<html>
    <head>
        <title> Form Example</title>
    </head>
    <body>
         <form method=post action="/cgi-bin/example.cgi">
                Select an option:
                <select>
                    <option> option1 </option>
                    <option selected> option2</option>
                    <option> option3 </option>
                    <option> option4 </option>
                    <option> option5 </option>
                    <option> option6 </option>
                    </select>
                    <br>
                    <input type="Submit" value="Submit">
    </form>
</body>
</html>
```

Output:

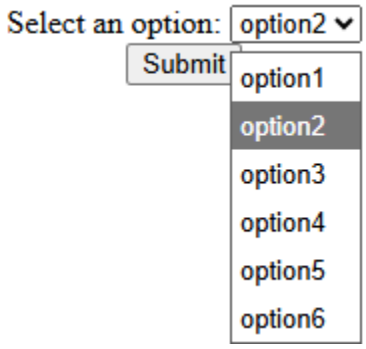

Example 6:

```
<!DOCTYPE html>
<html>
    <head>
        <title> Form Example 6</title>
    </head>
    <body>

<form method=post action="/cgibin/example.cgi">
    Select an option:<br>
      <input type="radio" name="option"> Option 1
    <br>
    <input type="radio" name="option" checked> Option 2
    <br>
    <input type="radio" name="option"> Option 3
    <br>
    <br>

    Select an option:<br>
       <input type="checkbox" name="selection"> Selection 1
    <br>
       <input type="checkbox" name="selection" checked> Selection 2
    <br>
       <input type="checkbox" name="selection"> Selection 3
    <br>
       <input type="Submit" value="Submit">
</form>
    </body>
</html>
```

Output:

Select an option:

- ○ Option 1
- ◉ Option 2
- ○ Option 3

Select an option:

- ☐ Selection 1
- ☑ Selection 2
- ☐ Selection 3

Submit

Image:

```
<!DOCTYPE html>
<html>
<head>
    <title>my name is Shrek </title>
    <body>
        <a href="https://en.wikipedia.org/wiki/Shrek">
        <img src="shrek.png"
        height="300" alt="this is a picture of shrek"
        title="shrek is shrexy">
    </a>
    </body>
</head>
</html>
```

Output:

List:

```html
<!DOCTYPE html>
<html>

<head>
    <title>All Lists</title>

<body>
    <h4>Unordered Lists </h4>
    <ul>
        <li>Item 1 </li>
        <li>Item 2 </li>
        <li>Item 3 </li>
    </ul>
    <h4>Ordered Lists </h4>
    <ol>
        <li>first order</li>
        <li>second order</li>
        <li> third order</li>
    </ol>
    <h4>Numbered </h4>
    <ol>
        <li>List item 1</li>
        <li>List item 2</li>
        <li>List item 3</li>
        <li>List item 4</li>
    </ol>
    <h4>Numbered Special Start</h4>
    <ol start="5">
        <li>List item 1</li>
        <li>List item 2</li>
        <li>List item 3</li>
        <li>List item 4</li>
    </ol>

    <h4>Lowercase Letters</h4>
    <ol type="a">
        <li>List item 1</li>
        <li>List item 2</li>
        <li>List item 3</li>
        <li>List item 4</li>
    </ol>

    <h4>Capital Letters</h4>
```

```html
    <ol type="A">
        <li>List item 1</li>
        <li>List item 2</li>
        <li>List item 3</li>
        <li>List item 4</li>
    </ol>

    <h4>Capital Letters Special Start</h4>
    <ol type="A" start="3">
        <li>List item 1</li>
        <li>List item 2</li>
        <li>List item 3</li>
        <li>List item 4</li>
    </ol>
    <h4>Lowercase Roman Numerals</h4>
    <ol type="i">
        <li>List item 1</li>
        <li>List item 2</li>
        <li>List item 3</li>
        <li>List item 4</li>
    </ol>
    Capital Roman Numerals
    <ol type="I">
        <li>List item 1</li>
        <li>List item 2</li>
        <li>List item 3</li>
        <li>List item 4</li>
    </ol>

    <h4>Capital Roman Numerals Special Start</h4>
    <ol type="I" start="7">
        <li>List item 1</li>
        <li>List item 2</li>
        <li>List item 3</li>
        <li>List item 4</li>
    </ol>
</body>
</head>

</html>
```

Output:

Unordered Lists

- Item 1
- Item 2
- Item 3

Ordered Lists

1. first order
2. second order
3. third order

Numbered

1. List item 1
2. List item 2
3. List item 3
4. List item 4

Numbered Special Start

5. List item 1
6. List item 2
7. List item 3
8. List item 4

Lowercase Letters

a. List item 1
b. List item 2
c. List item 3
d. List item 4

Capital Letters

List box:

```
<!DOCTYPE html>
<html>

<head>
    <title> list and box option </title>

<body>
    <form method=post action="/cgi-bin/example.cgi">

            Select an option:
            <select>
                <option>option 1</option>
                <option selected>option 2</option>
```

```
                <option>option 3</option>
                <option>option 4</option>
                <option>option 5</option>
                <option>option 6</option>
            </select><br>

    </form>
</body>

</html>
```

Output:

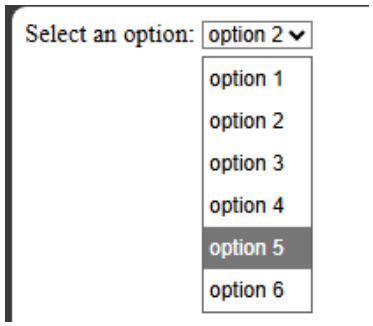

Menu:

```
<!DOCTYPE html>
<html>
<head>
    <title> Form Example</title>
</head>
<body>
    <menu>
        <li type="disc">List item 1</li>
        <li type="circle">List item 2</li>
        <li type="square">List item 3</li>
    </menu>
</body>
```

Output:

- List item 1
- List item 2
- List item 3

Under list:

```
Example 1:<br>
<br>
<ul>
    <li>List item 1</li>
    <li>List item 2</li>
</ul>
<br>
Example 2:<br>
<ul type="disc">
    <li>List item 1</li>
    <li>List item 2</li>
    <ul type="circle">
        <li>List item 3</li>
        <li>List item 4</li>
    </ul>
</ul>
```

Output:

Example 1:

- List item 1
- List item 2

Example 2:

- List item 1
- List item 2
  - List item 3
  - List item 4

meta:

```
<meta http-equiv="Pragma" content="nocache">
```

Scrolling text:

```html
<!DOCTYPE html>
<html>
<head>
    <title>Scrolling Text Example</title>
</head>
<body>
    <marquee bgcolor="#cccccc" loop="-1" scrollamount="2" width="100%">
        This is a scrolling text example</marquee>
</body>
</html>
```

Output:

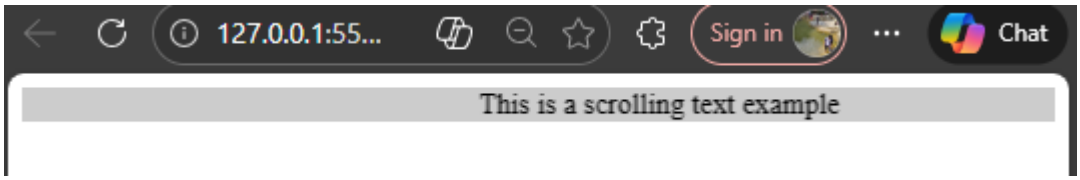

Table:

Example 1

```html
<table border="4" cellpadding="2" cellspacing="2" width="100%">
    <tr>
        <td>Column 1</td>
        <td>Column 2</td>
    </tr>
</table>
```

Output:

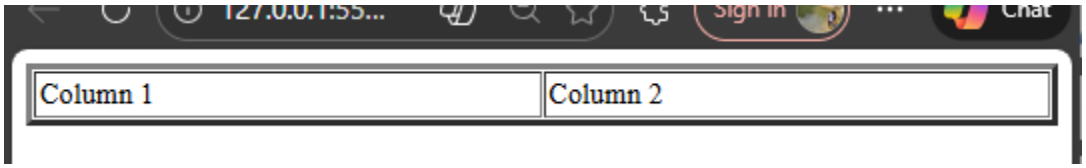

Example:2

```
<table border="2" bordercolor="#336699" cellpadding="2" cellspacing="2"
width="100%">
    <tr>
        <td>Column 1</td>
        <td>Column 2</td>
    </tr>
</table>
```

Output:

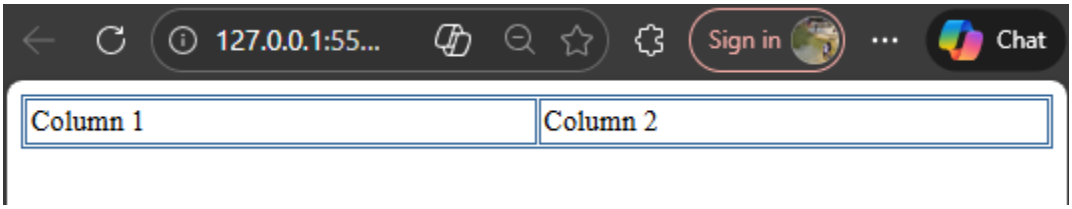

Example 3:

```
<table cellpadding="2" cellspacing="2" width="100%">
    <tr>
        <td bgcolor="#cccccc">Column 1</td>
        <td bgcolor="#cccccc">Column 2</td>
    </tr>
    <tr>
        <td>Row 2</td>
        <td>Row 2</td>
    </tr>
</table>
```

Output:

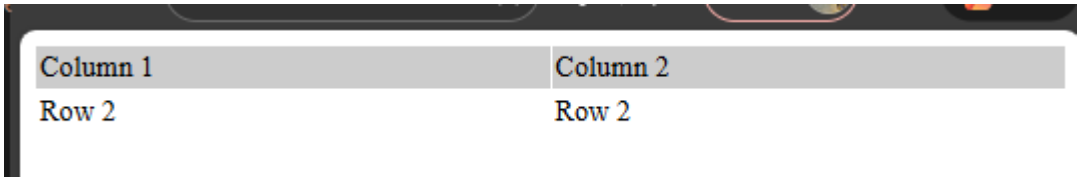

Example 4:

```html
<div align="center">
    <table>
        <tr>
            <th>Column 1</th>
            <th>Column 2</th>
            <th>Column 3</th>
        </tr>
        <tr>
            <td>Row 2</td>
            <td>Row 2</td>
            <td>Row 2</td>
        </tr>
        <tr>
            <td>Row 3</td>
            <td>Row 3</td>
            <td>Row 3</td>
        </tr>
        <tr>
            <td>Row 4</td>
            <td>Row 4</td>
            <td>Row 4</td>
        </tr>
    </table>
</div>
```

Output:

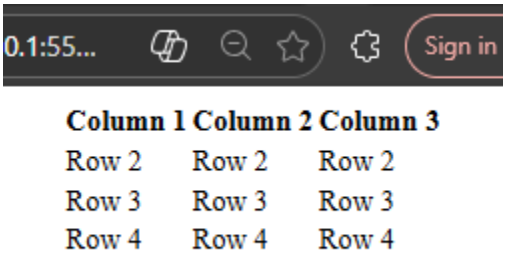

Example Table row:

```html
<table border="2" cellpadding="2" cellspacing="2" width="100%">
    <tr>
        <td>Column 1</td>
        <td>Column 2</td>
        <td>Column 3</td>
    </tr>
</table>
```

Output:

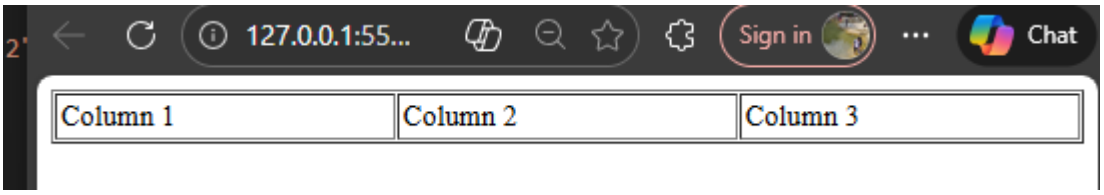

Text formatting:

```html
<!DOCTYPE html>
<html>
    <head>
        <title>Text Formatting</title>
        <body>
            <p> this is normal text </p>
            <p> this is <b>Bold</b> text</p>
            <p> this is  <i>Italic</i>  text</p>
            <p> this is <big>Big</big> text</p>
            <p> this is <small>Small</small> text</p>
            <p> this is <mark>Marked</mark> text </p>
            <p> this is <del>Deleted</del> text</p>
            <p> this is <ins>Inserted</ins> text</p>
            <p> this is <u>Underlined</u> text</p>
            <p> this is <sub>Subscript</sub> text</p>
        </body>
    </head>
</html>
```

Output:

this is normal text

this is **Bold** text

this is *Italic* text

this is Big text

this is Small text

this is Marked text

this is ~~Deleted~~ text

this is Inserted text

this is Underlined text

this is $_{\text{Subscript}}$ text

The End