

# COMPLETE HTML COURSE

The Complete HTML Course

< p > The Best HTML Course in Entire Internet < /p >





# COURSE TOPICS



## BASICS

How Website Works?  
HTML Document Structure  
HTML Tags and Elements  
HTML Headings  
HTML Paragraphs  
HTML Comments  
Text Formatting in HTML  
Links and Anchors  
Images in HTML  
Void Elements in HTML  
Lists in HTML  
Tables in HTML

## ADVANCED

HTML Map & Area Elements  
HTML IFRAMES  
HTML Picture Tag  
HTML Figure Tag  
HTML Audio TAG  
HTML Video TAG  
Forms and Input Elements  
HTML Semantic Elements  
HTML Meta Tags  
HTML SEO  
Website Ranking Score  
Host Website Live For Free & Paid


## PRO LEVEL


40+ Interview Questions  
30+ Tips & Tricks  
Notes + List of Deprecated Tags  
50+ Animated Slides  
PROJECT –  
COMPLETE WEBSITE  
USING HTML ONLY +  
BASIC OF CSS ❤️



# 01 HOW WEBSITE WORKS?



Thapa Technical

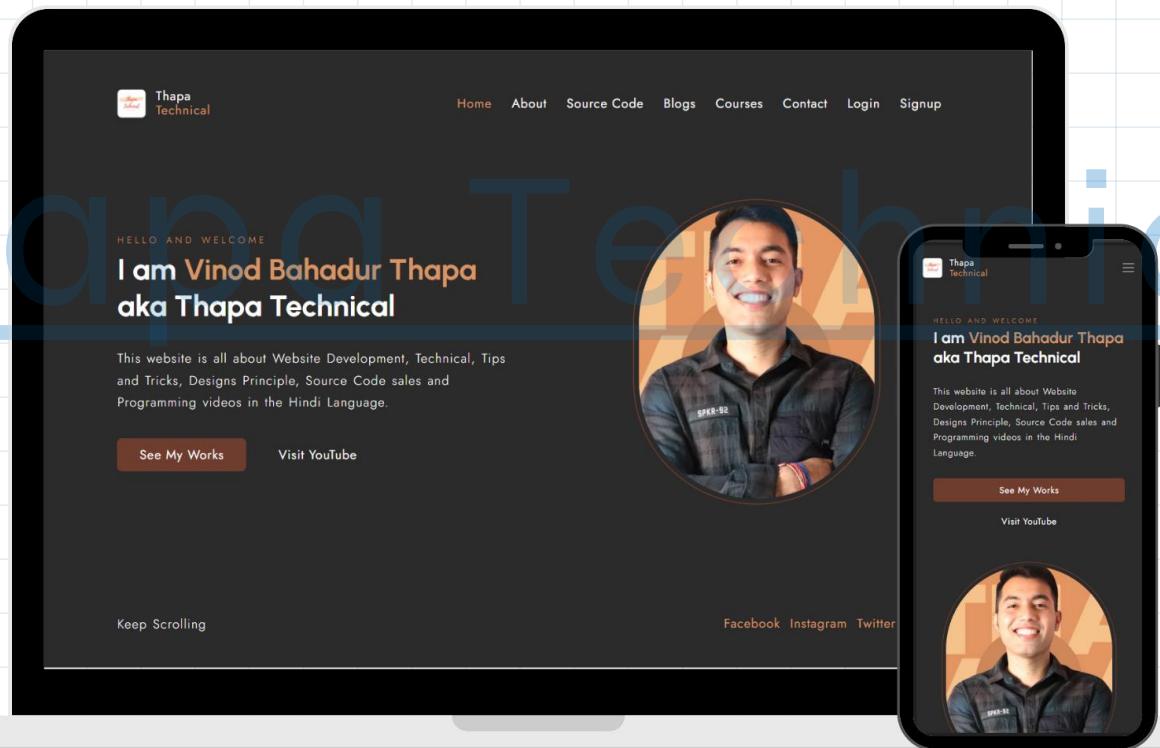

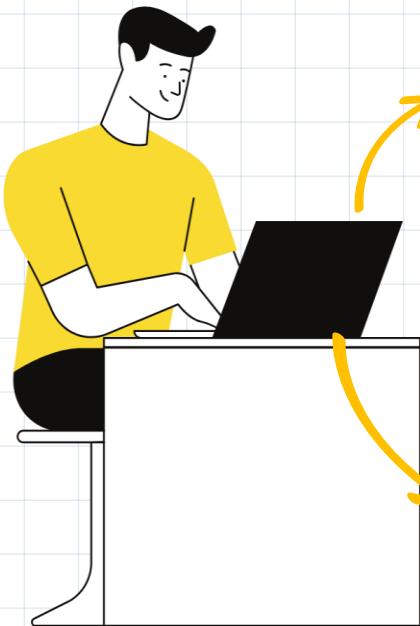

www.thapatechnical.com

Thapa Technical

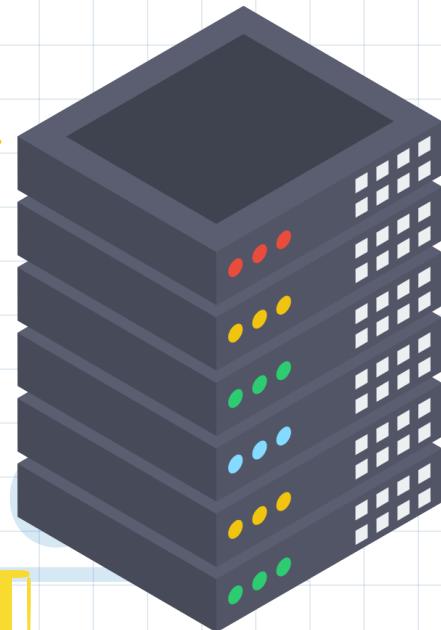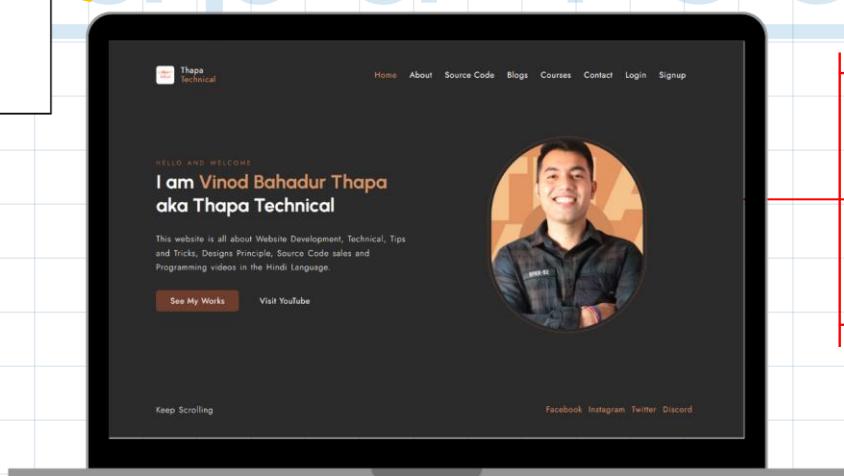

HTML

CSS

JAVASCRIPT

Kodyfier FullStack

Kodyfier FullStack / Thapa Technical



# BUILDING BLOCKS OF WEBSITE

**HTML**

Provides the structure and content of a webpage.

**css**

Styles and designs the appearance of the webpage

**JS**

Adds interactivity and dynamic behavior to the webpage.





Thapa Technical

# REAL LIFE EXAMPLE



# HTML

HyperText Markup Language

< p > Markup Lang. it's a way to give instructions to a computer about how content should be organized and displayed. </ p >

< p > Hypertext is text which contains links to other texts. </ p >

< p > This is a < strong > bold </ strong > text. </ p >



# HISTORY OF HTML

## Early Beginnings (1980s):

The concept of hypertext was proposed by computer scientist **Ted Nelson** in the 1960s. In the 1980s, **Tim Berners-Lee**, a British computer scientist, introduced the World Wide Web (**WWW**) and developed the first HTML

**HTML 2.0 (1995),**

**HTML 3.2 (1997,**


**& HTML 4.0 (1997-1999)**

HTML 4 introduced significant improvements, including better support for forms, scripts, and style sheets. It was a crucial step toward modern web development.


**HTML5 (2014):** HTML5 was a major milestone, with a focus on multimedia, improved **semantics**, and better support for web applications. It introduced new elements like **<video>**, **<audio>**, and **<picture>**.

HTML5 made web development more versatile and capable.

# 01 HTML SYNTAX

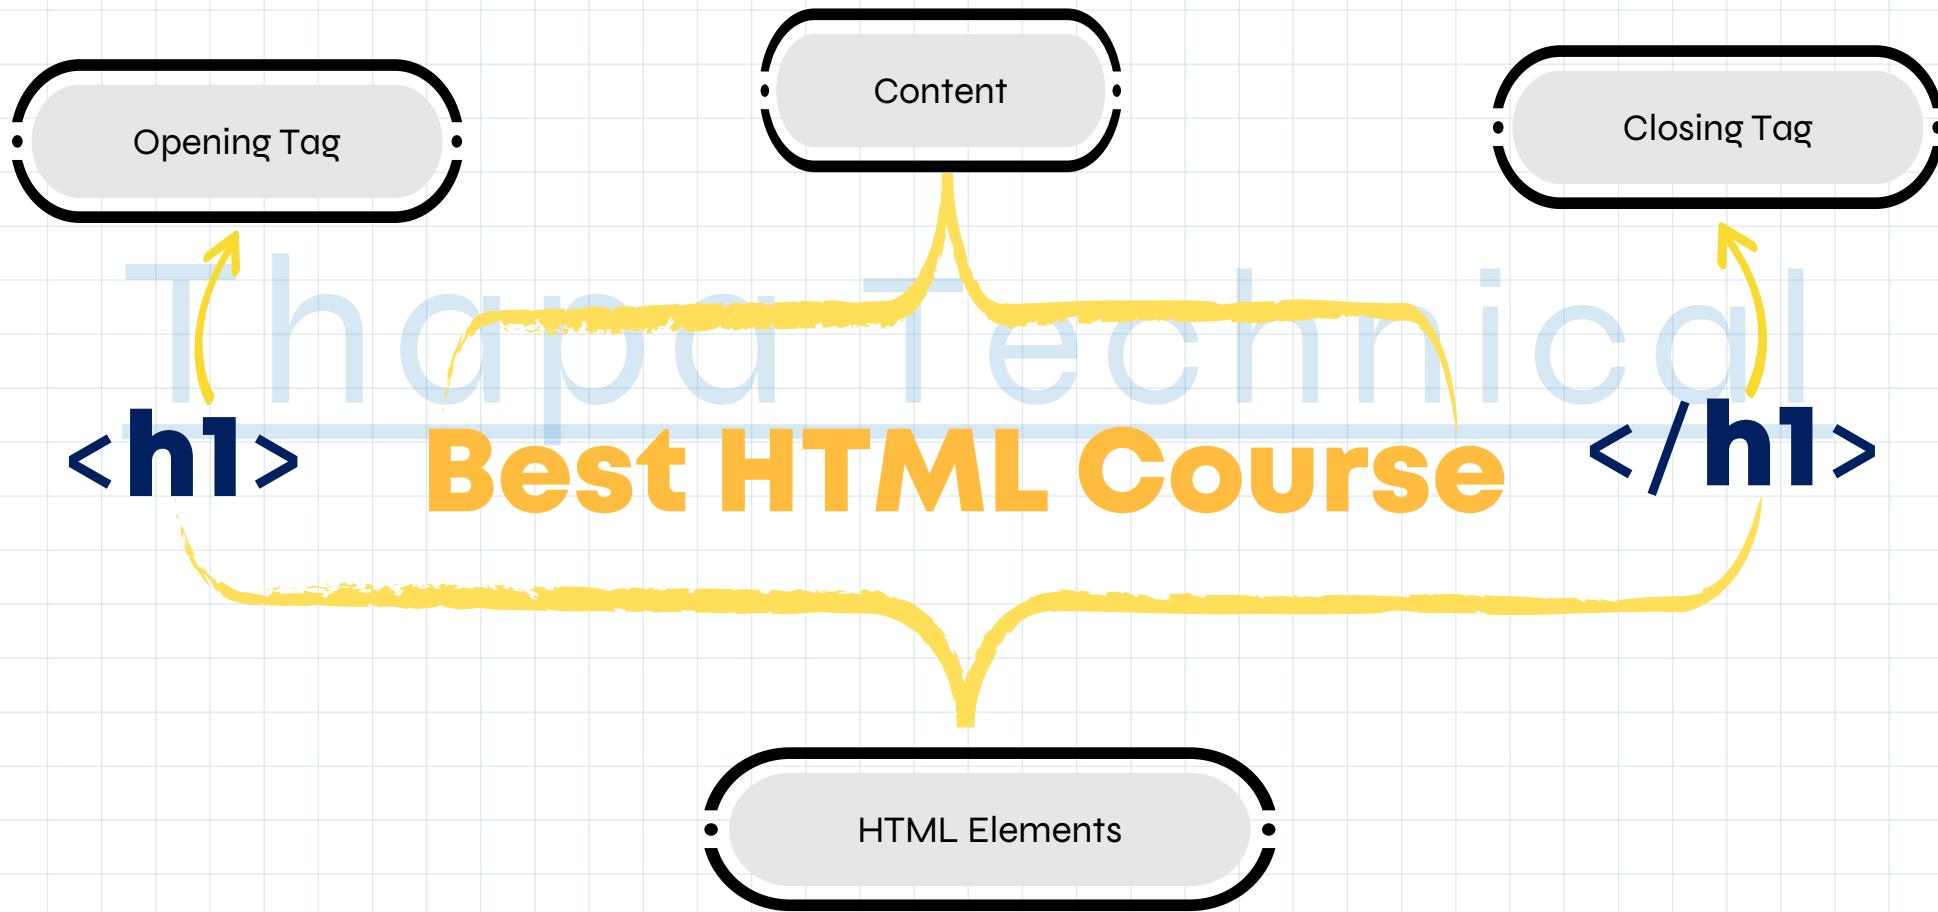

# We need a Code Editor

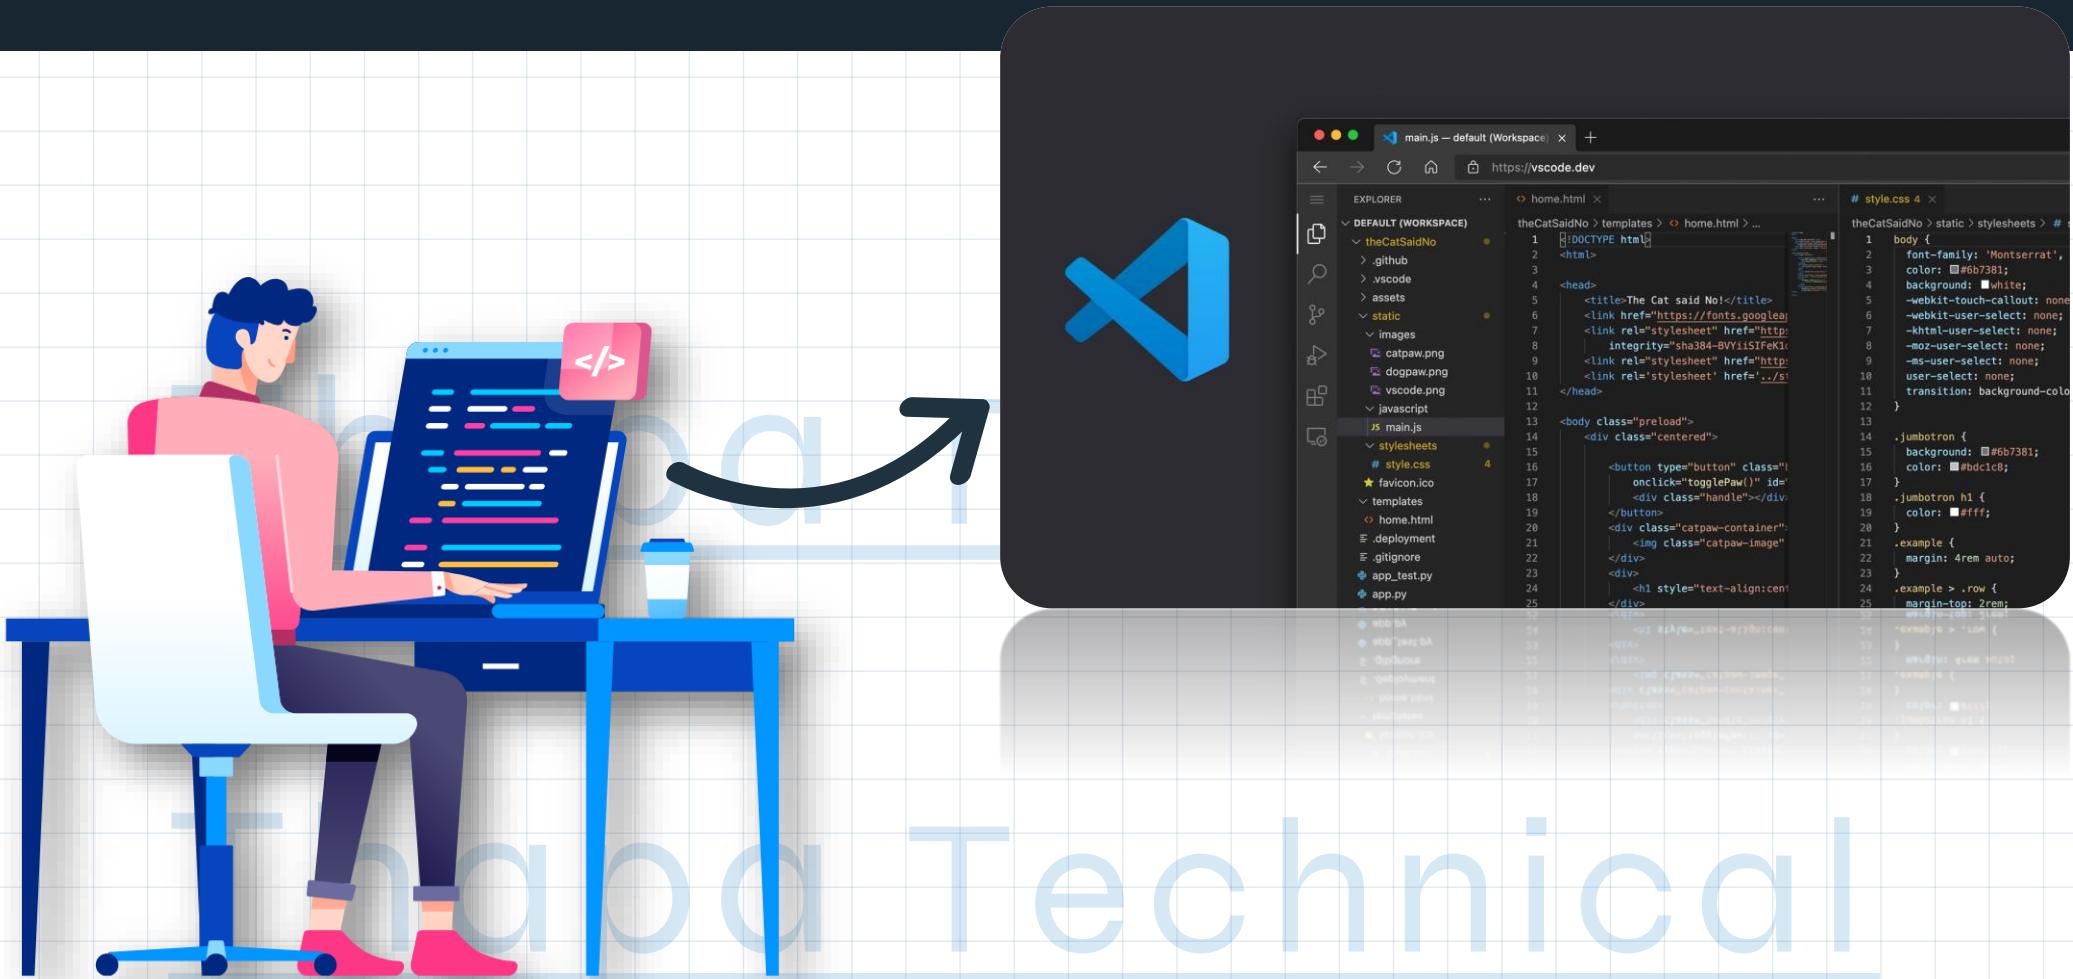

Kodyfier FullStack



# 01 HTML TIPS

## Thapa Technical



< p > The File extension must be .html or .htm </ p >

< p > MS-DOS and Windows 3.1,  
had limitations on the number of characters in a filename. </ p >

.EXE .TXT .DOC .BAT .COM .ZIP



# 02 HTML TIPS



`<p>The file name must be the index.html`  
because it's a default path of our homepage  
or the root of our website. </p>



# HTML DOCUMENTS / STRUCTURE

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
    <title> Home page </title>
```

```
</head>
```

```
<body>
```

```
    <h1> Best HTML Course </h1>
```

```
</body>
```

```
</html>
```

Title for the HTML page

Defines a large heading

Let the browser know it's an HTML5.  
Appear once, at the top of the page

Root of an HTML Document


Contains the information about the  
HTML document

Contains everything you want to display  
on the Web Page.

Thapa Technical



# How **browsers** determine the **language** of an **HTML**

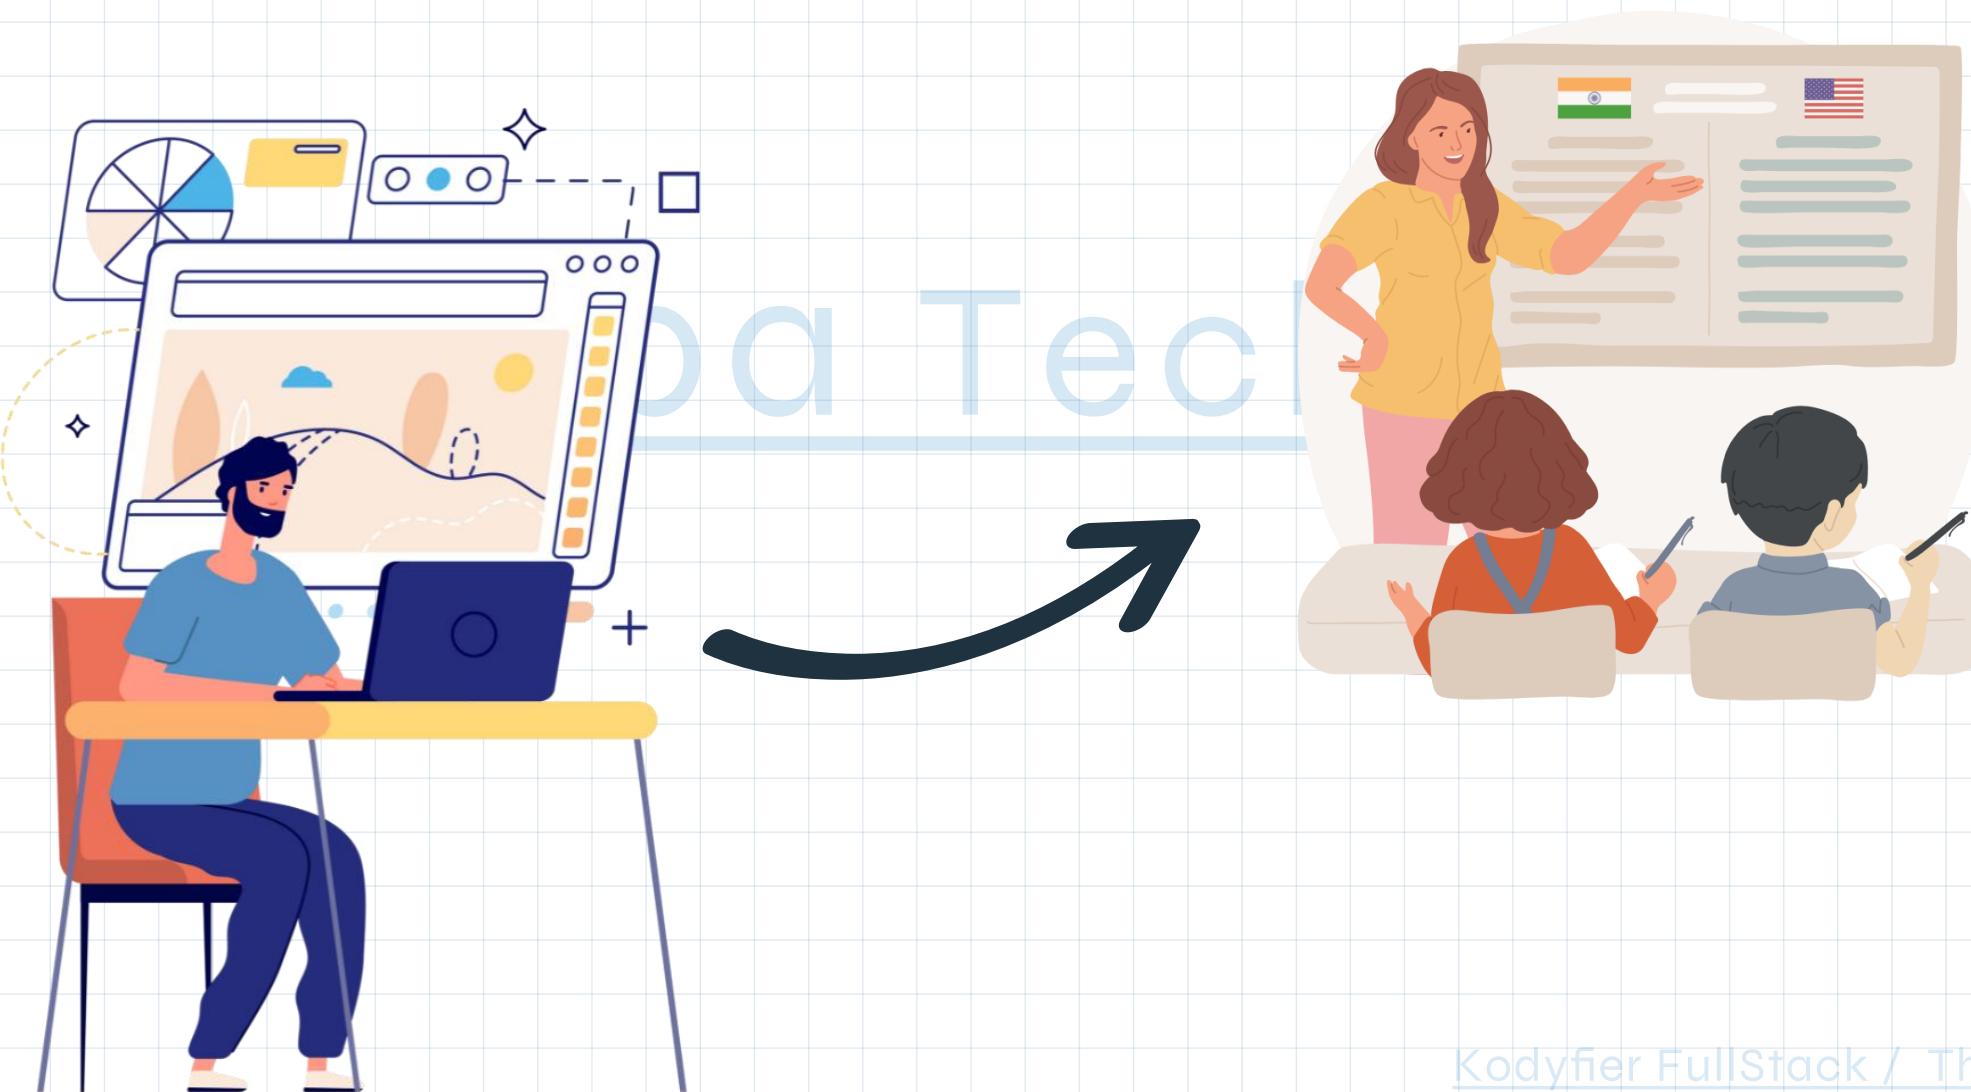



The **lang** attribute specifies the language of the element's content.

<html lang="en">

Specifies the **language** code for the element's content

```
<html lang="hi"> <html lang="ko"> <html lang="fr">
```



02

Thapa Technical

WHAT  
DO YOU  
THINK?



# HTML ATTRIBUTES

ack



The `lang` attribute

<html lang="en">

Specifies the `language` code  
for the element's content

- **Attributes** are used along with the HTML tags to define the characteristics of the element.
- **Attributes** provide additional information about elements



# HTML DOCUMENTS (in Hindi)

```
<!DOCTYPE html>  
<html lang="hi">  
  <head>  
    <meta charset="UTF-8">  
    <title>Hindi Example</title>  
  </head>  
  <body>  
    <p>यह एक उदाहरण है कि हिंदी में कैसे लिखें </p>  
  </body>  
</html>
```

We define the Lang Attribute to set Lang to Hindi

It's simple instead of English write in Hindi





# HTML Heading & Text




Headings (<h1> to <h6>)

Paragraphs (<p>)

Line breaks (<br>)

Horizontal rule (<hr>)

# 01 HTML HEADING

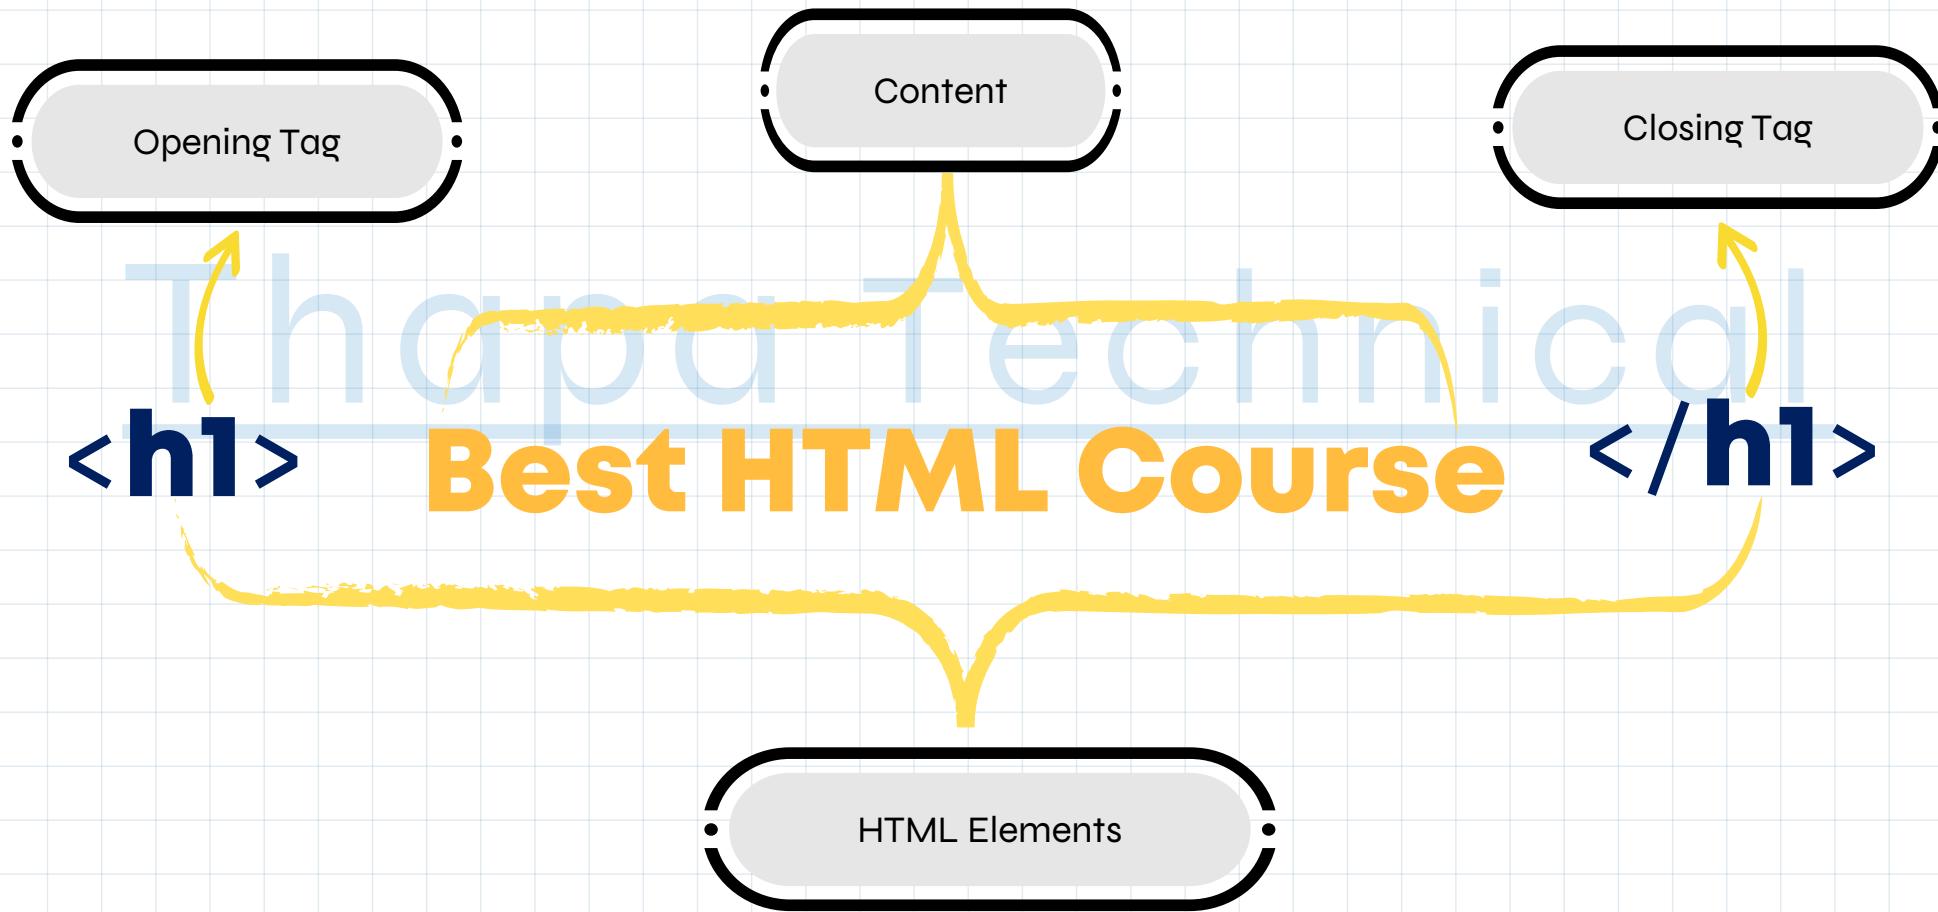



# DID YOU **KNOW?**



**h1**: Typically, larger and bold, around 24px to 36px or even larger.

**h2**: Slightly smaller, around 18px to 30px.

**h3**: Smaller than h2, around 16px to 24px.

**h4**: Generally, around 14px to 20px.

**h5**: Smaller, often around 12px to 18px.

**h6**: The smallest, often around 10px to 16px.





# 01 HTML INTERVIEW



h1: Typically, larger and bold, around 24px to 36px or even larger.

h2: Slightly smaller, around 18px to 30px.

h3: Smaller than h2, around 16px to 24px.

h4: Generally, around 14px to 20px.


h5: Smaller, often around 12px to 18px.

h6: The smallest, often around 10px to 16px.





# 02 HTML PARAGRAPH TAG

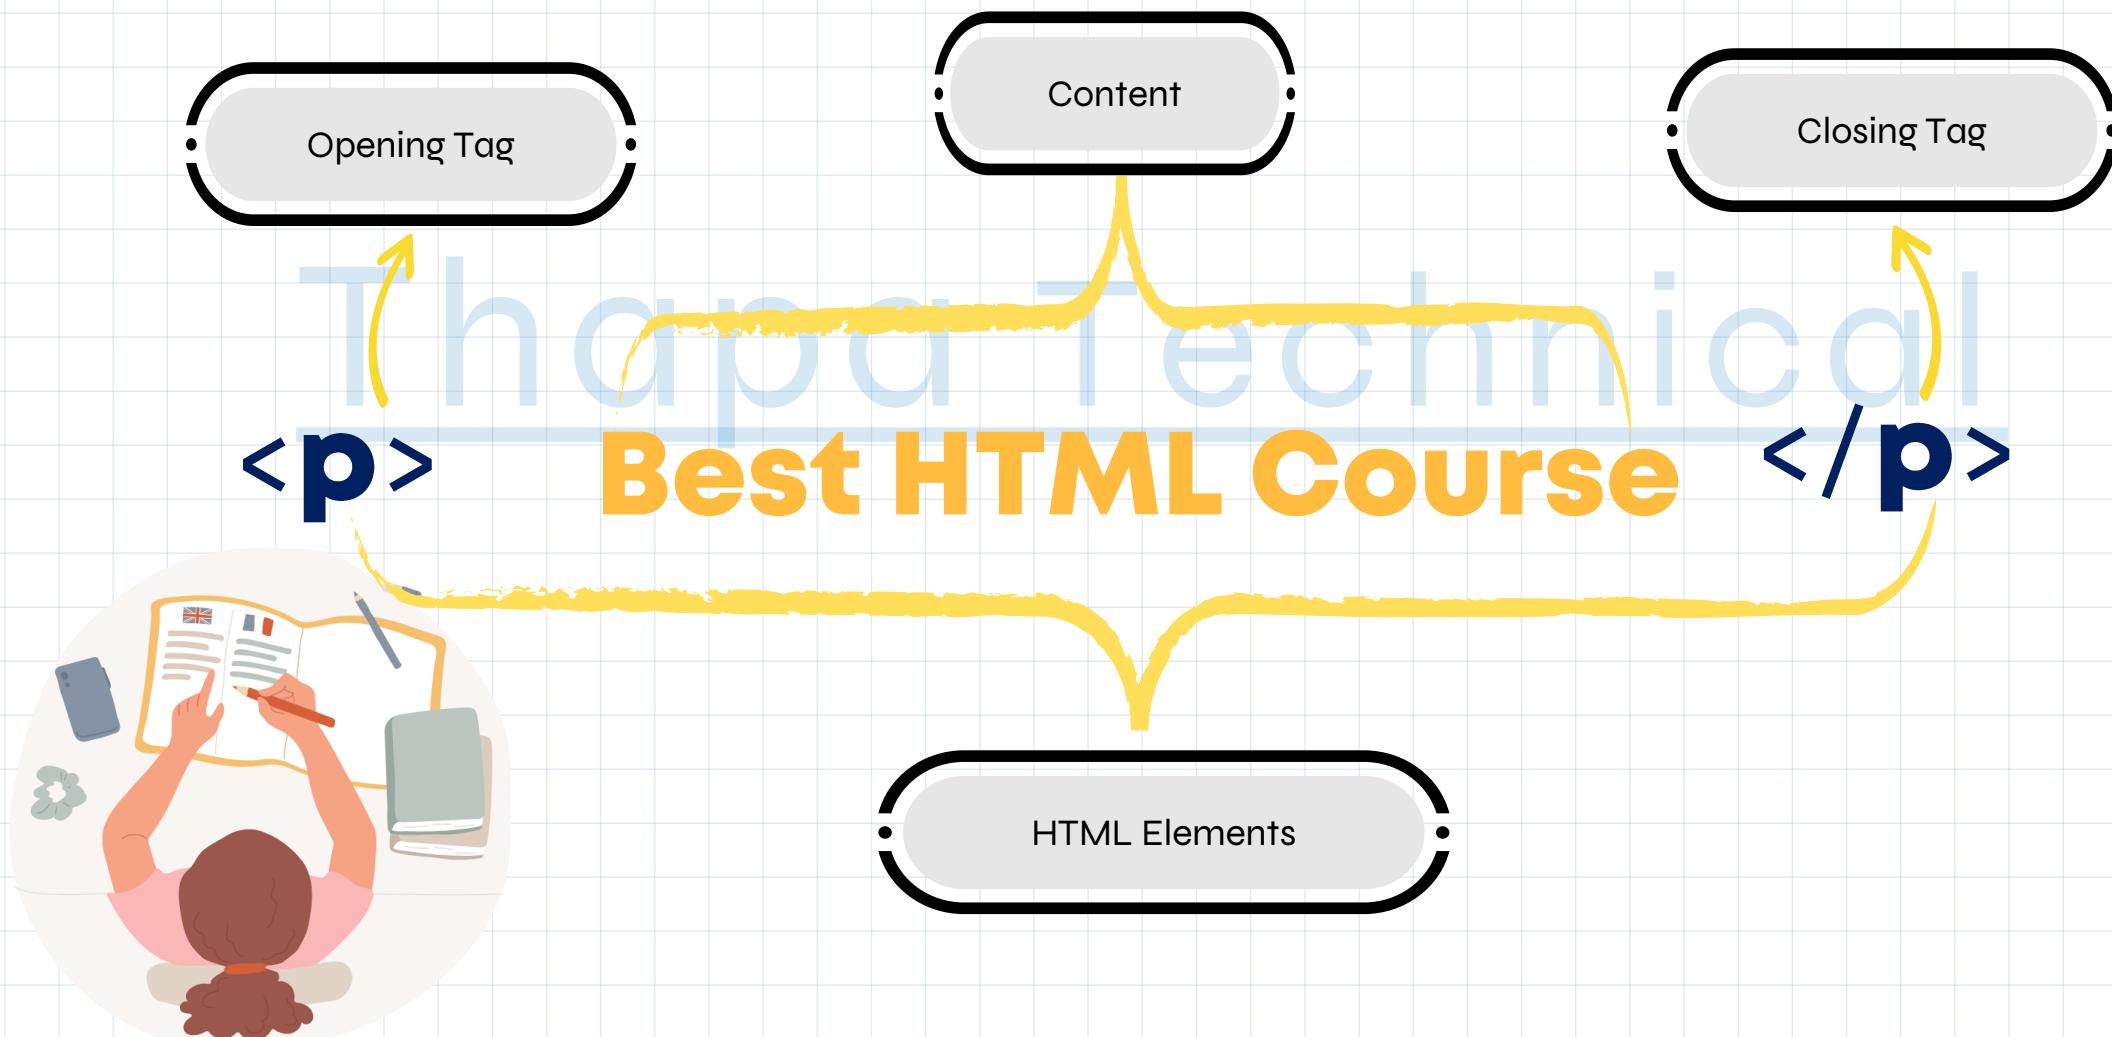



# DID YOU KNOW?

No matter how much whitespace you use inside HTML element content (which can include one or more space characters, but also line breaks), the HTML parser reduces each sequence of whitespace to a single space when rendering the code.






# HTML Comment Tag

<!-- **Comment Here** -->

To comment out in HTML, insert information between <!-- and --> tags (browsers won't show these notes).

Commenting in HTML allows developers to **leave notes** about their code, its functionality or to indicate necessary changes for the future.

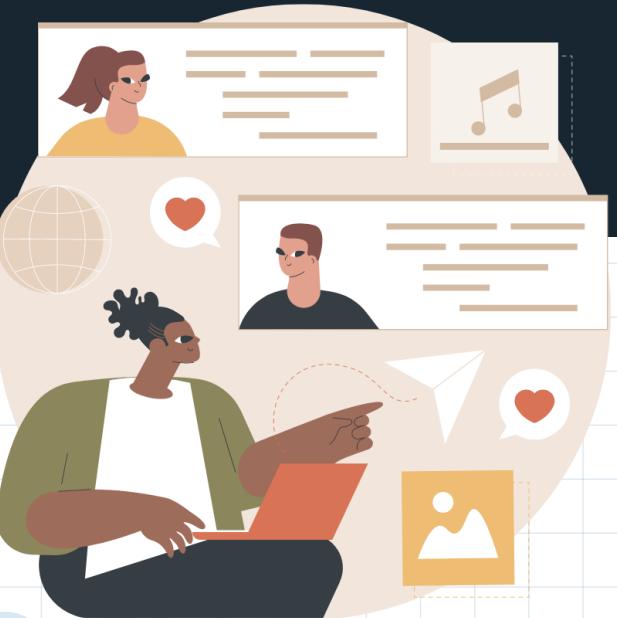

# HTML Text Formatting



01

Bold and Italic:

`<strong>, <em>`

Thapa Technical



02

Underline and  
Strikethrough:

`<u>, <s>`

Thapa Technical



03

Subscript and Superscript:

`<sub>, <sup>`

Thapa Technical



04

Preformatted Text:

`<pre>, <kbd>, <abbr>`



05

Text Highlighting

`<mark>, <small>, <del>`



06

Inline Styles:

`<p style="color:red" > </p>`



# 03 HTML TIPS



While using nested tag in one elements never mismatched the tags

X `<p>My cat is <strong>very  
grumpy.</p> </strong>`

✓ `<p>My cat is <strong>very</strong>  
grumpy.</p>`



# HTML Anchor Tag

The `<a>` tag defines a hyperlink, which is used to link from one page to another.

Hypertext Reference  
visit

`<a href="https://tt.com"> visit </a>`

URL





# HTML Entities

&lt;;: Less than sign (<)

&gt;;: Greater than sign (>)

&amp;;: Ampersand (&amp;)

&quot;;: Double quotation mark ("")

&apos;;: Single quotation mark or apostrophe ('')

&nbsp;;: Non-breaking space ( )

&dollar;;: Dollar Sign (\$)

&copy;;: Copyright symbol (©)

&reg;;: Registered trademark symbol (®)

&trade;;: Trademark symbol (™)

&hearts;;: Heart symbol (♥)





# DID YOU **KNOW?**



*We can represent the dollar sign symbol using 3 different HTML entity methods*

*Using **Named Entity**: &dollar;*

*Using **Hexadecimal Numeric Reference**: #x00024;*

*Using **Decimal Numeric Reference**: &#36;*

**Thapa Technical**





# HTML Image Tag

The `<img>` tag is used to embed(ADD) an image in an HTML page.





# HTML Image Tag

Specifies the path  
to the image

```

```

Relative URL

Specifies an alternate text for the  
image, if the image for some reason  
cannot be displayed




# DID YOU KNOW?

Void Elements / Empty Elements

Thapa Technical

*Not all parts of a web page use the usual pattern of having an opening tag, some content, and then a closing tag. Some parts only need a single tag to work. These are called "void elements" or "Empty Elements".*

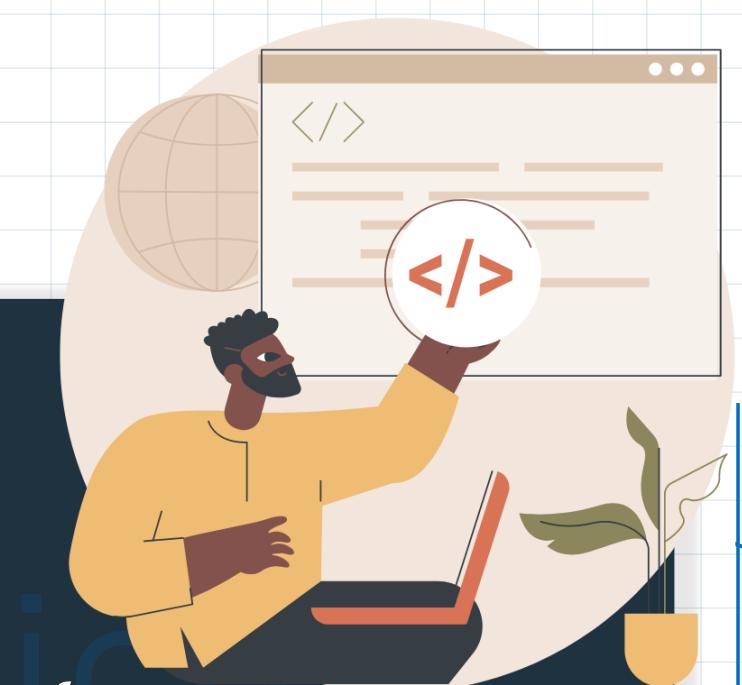



# HTML Empty Elements

- `<area>` : Defines a clickable area within an image map.
- `<br>` : Represents a line break.
- `<col>` : Specifies column properties for a table column group.
- `<embed>` : Embeds external content or plugin content.
- `<hr>` : Represents a thematic break or horizontal rule.
- `<img>` : Embeds an image.
- `<input>` : Represents an input field.
- `<link>` : Specifies relationships between a current document and external resources.
- `<meta>` : Provides metadata about the HTML document.
- `<param>` : Defines parameters for plugins.
- `<source>` : Specifies multiple media resources for media elements like `<audio>` and `<video>`.
- `<track>` : Specifies text tracks for media elements.
- `<wbr>` : Represents a word break opportunity in text.

# HTML Picture Tag



The `<picture>` HTML element contains zero or more `<source>` elements and one `<img>` element to offer alternative versions of an image for different display/device scenarios.

```
<picture>  
  <source srcset="/thapa.webp">  
  <source srcset="/thapa.png">  
    
</picture>
```

# HTML Figure Tag

The `<figure>` HTML element represents self-contained content, potentially with an optional caption, which is specified using the `<figcaption>` element.

```
<figure>  
      
    <figcaption> Best HTML Course </figcaption>  
</figure>
```





# HTML Lists



## Ordered Lists <ol>

An ordered list is used to create a list of items in a specific order, typically indicated by numbers.

```
<ol>
  <li> First item </li>
  <li> Second item </li>
  <li> Third item </li>
</ol>
```

## Unordered Lists <ul>

An unordered list is used to create a list of items that are not in any particular order. Each list item is marked with a bullet point.

```
<ul>
  <li> Apple </li>
  <li> Orange </li>
  <li> Banana </li>
</ul>
```



# DID YOU KNOW?



Unordered List (<ul>) Styles:

Thapa Technical

Disc (`list-style-type: disc;`): Default style - filled circles.

Circle (`list-style-type: circle;`): Hollow circles.

Square (`list-style-type: square;`): Squares.

None (`list-style-type: none;`): No bullet points.





# DID YOU KNOW?



Ordered List (`<ol>`) Styles:

Thapa Technical

Decimal (`list-style-type: decimal;`) : Default style - decimal numbers.

Lowercase Letters (`list-style-type: lower-alpha;`) : Lowercase letters (a, b, c).

Uppercase Letters (`list-style-type: upper-alpha;`) : Uppercase letters (A, B, C).


Lowercase Roman Numerals (`list-style-type: lower-roman;`) : (i, ii, iii).

Uppercase Roman Numerals (`list-style-type: upper-roman;`) : (I, II, III).



# 03 HTML LIST INTERVIEW

*3: Explain the concept of nested lists.*

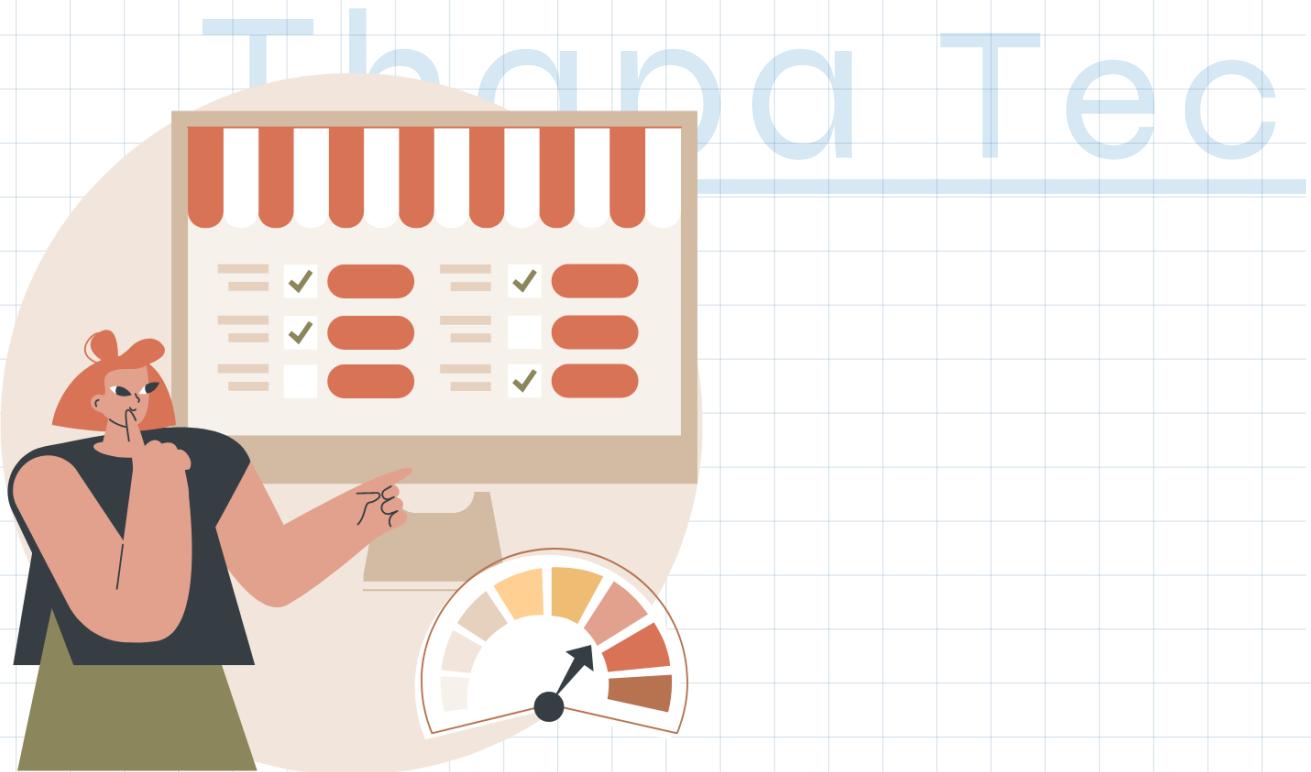

- Fruit
  - 1. Banana
  - 2. Apple
    - Green
    - Red
  - 3. Pears
- Vegetables
- Meat

# HTML Table Tag

HTML **tables** allow web developers to arrange data into rows and columns. We must write everything inside the **table tag**.



**<table> Element:** Defines an HTML table, which is used to organize data into rows and columns.

**<tbody> Element:** Groups the main content (data rows) of an HTML table.

**<thead> Element:** Groups the header content (table headings) of an HTML table.

**<th> Element:** Defines a header cell (table heading) within a table.

**<td> Element:** Represents a data cell within an HTML table.

**<tr> Element:** Defines a row

# 01 HTML TABLE INTERVIEW

Create a School TimeTable.

TIME TABLE						
Hours	Mon	Mon	Mon	Mon	Mon	Mon
	Math	Math	Math	Math	Math	Math
	Science	Science	Science	Science	Science	Science
	Lunch					
	SST	SST	SST	SST	SST	Games
	CS	CS	CS	CS	CS	



# HTML iFrame Tag



The `<iframe>` HTML element represents a nested browsing context, embedding another HTML page into the current one.

The `<iframe>` HTML element represents a nested browsing context, embedding another HTML page into the current one.

The `src` attribute defines the URL of the page to embed

```
<iframe src="url" title="abc"></iframe>
```

For screen readers



# 01 HTML IFRAME INTERVIEW

1: How to create a nested webpage in HTML?

Thapa Technical

The HTML **iframe tag** is used to display a nested webpage. In simple, It represent a webpage within a webpage.

Full Stack



# HTML Audio Tag



**Audio (<audio>):** The <audio> element is used to embed audio content in a webpage. It supports various audio formats and provides controls for playback.

attribute

```
<audio controls>  
  <source src="./audio/audio_thapa.mp3" type="audio/mpeg" />  
  <source src="./audio/audio_thapa.wav" type="audio/wav" />  
Your browser does not support the audio element.  
</audio>
```



# DID YOU KNOW?



## List of Attributes:

**controls**: Adds playback controls (play, pause, volume, etc.).

**autoplay**: Starts playback automatically.

**loop**: Repeats the media indefinitely.

**preload**: Specifies if the media should be loaded when the page loads.

**poster**: Displays an image before the media loads.






# 01

# HTML AUDIO TAG INTERVIEW



1: Which are the attributes supported in audio tag?

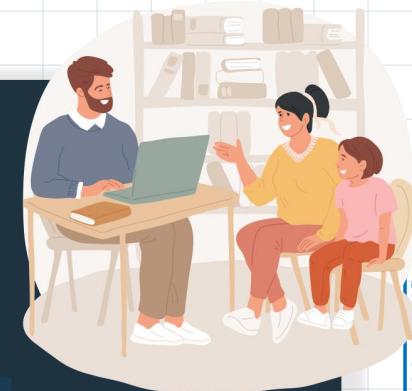

controls: Adds playback controls (play, pause, volume, etc.).

autoplay: Starts playback automatically. loop: Repeats the media indefinitely.

poster: Displays an image before the media loads.

muted: Specifies that the audio output should be muted

loop: Specifies that the audio will start over again, every time it is finished



# HTML Video Tag



The `<video>` HTML element embeds a media player which supports video playback into the document.

Thapa Technical

```
<video controls autoplay loop muted  
poster="./images/html.png">  
    <source src="./video/thapatech.mp4" type="video/mp4" />  
    <source src="./video/thapatech1.webm" type="video/webm" />  
  
    Your browser does not support the video element.  
</video>
```

# HTML Form Tag

The `<form>` tag is used to create an HTML form for user input.

The `<input>` HTML element is used to create **interactive controls** for web-based forms to accept data from the user. We must write inside the `<form>` tag.





# HTML Form Tag

Thapa Technical

attribute  
~~~~~  
**<input type="text" name="username">**


We have multiple values for the Type attribute.



# HTML Semantic Elements


Semantic elements = elements with a meaning.

A **semantic element** clearly describes its meaning to both the browser and the developer.

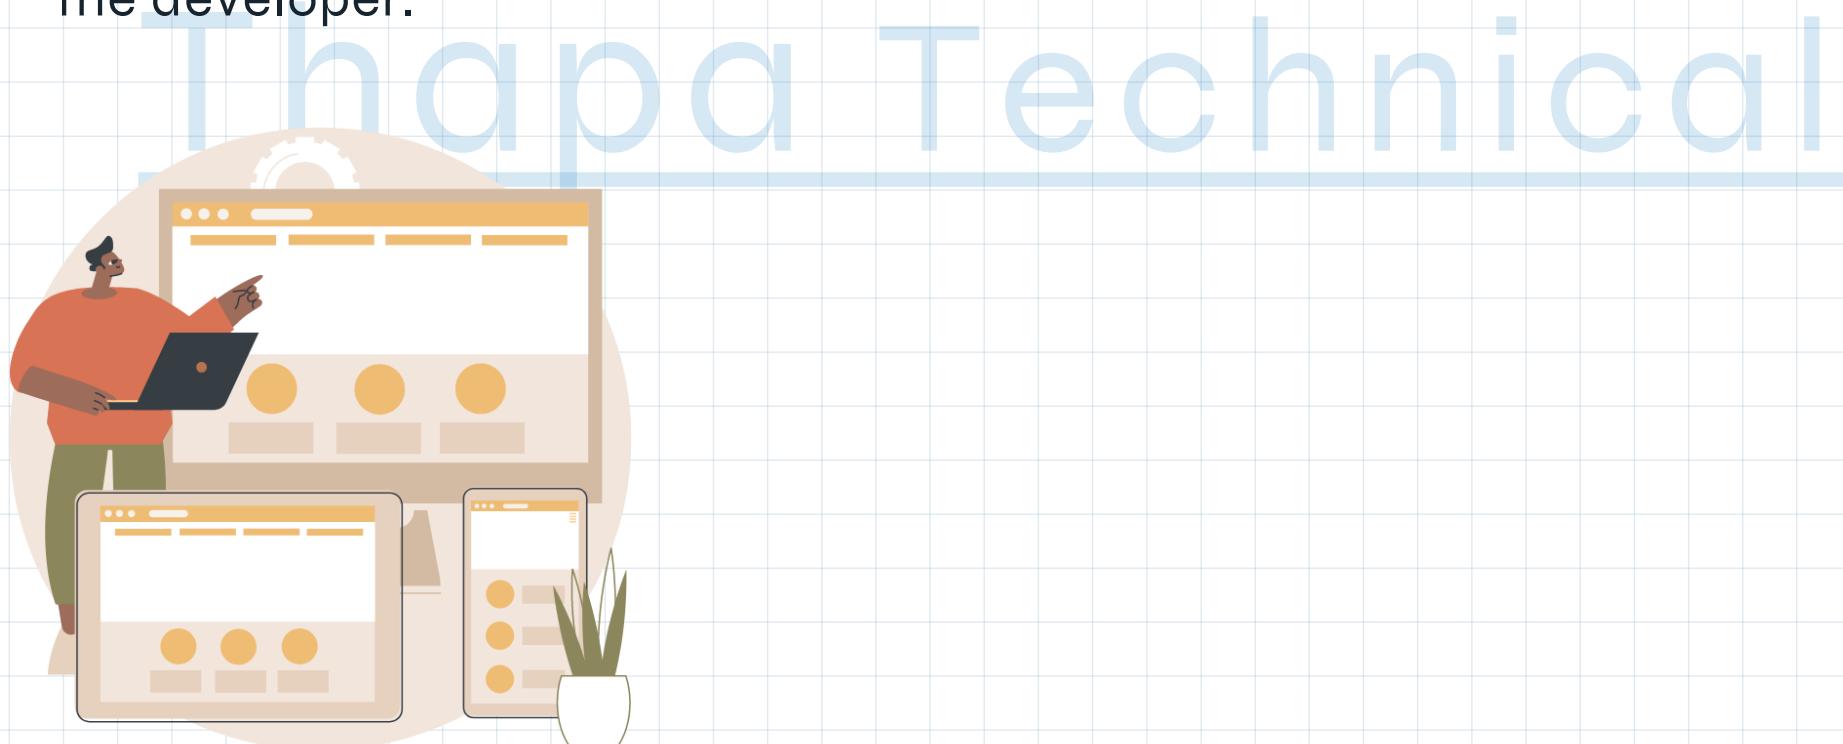



# HTML Semantic Elements

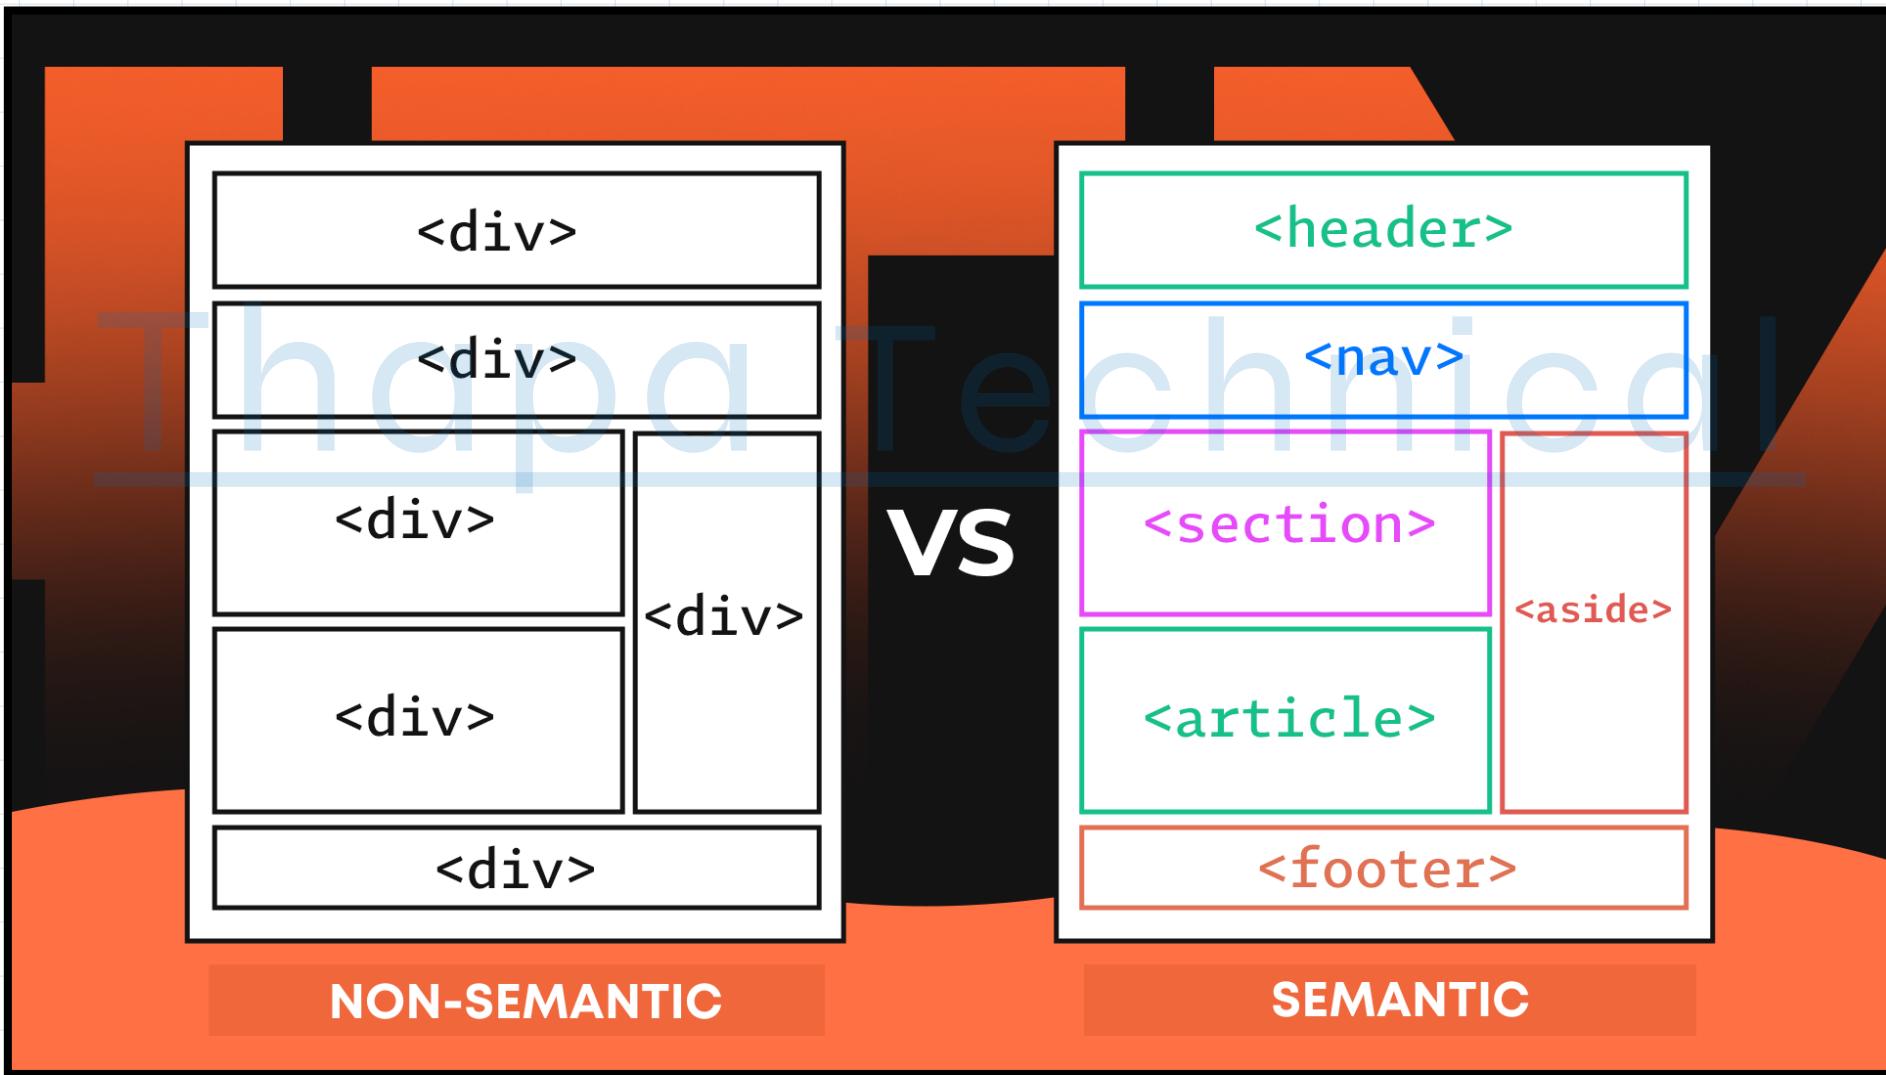



# HTML Semantic Elements

- `<header>` – Represents the introductory content for a section, article, or entire web page. Ex. Contains Logo, site title etc.
- `<nav>` – Navigation menu links would all be placed in a `<nav>` tag.
- `<main>` – The body of a page should go in the `<main>` tag. There should be only one per page.
- `<article>` – Represents an independent article on a web page. For example, a blog post.
- `<section>` – Represent a way of grouping together nearby content of a similar theme.
- `<aside>` – Represents the content that's less important. It's mostly used for sidebars (ads).
- `<footer>` – Represent the base of a page or section. It might include contact information and some site



# DID YOU KNOW?



**Single `main` Tag:** As a best practice, use only one `<main>` tag per HTML page. The `<main>` tag should encapsulate the primary content of your webpage, excluding headers, footers, and sidebars.

**Use Headers Wisely:** While you can use multiple `<header>` tags, make sure they're appropriately placed within semantic elements like `<article>`, `<section>`, or as introductory content for the whole page. Each `<header>` should provide relevant context.

**Avoid Overuse:** Use semantic elements purposefully and avoid overusing them. Choose elements that accurately represent your content's structure and hierarchy. Overusing them may lead to confusion and diluted semantics.



# DID YOU KNOW?



**Understand Nesting:** Understand the hierarchy and nesting rules of semantic elements. For instance, `<article>` and `<section>` can contain `<header>`, `<footer>`, and other content, but nesting them should reflect logical relationships.

**Enhance Accessibility:** Semantic elements greatly improve web accessibility. Use them to create a clear structure for assistive technologies. Ensure that your content remains meaningful even if CSS or other styling is disabled.



# HTML Meta Tags

## Meta Tags for Metadata:


Meta tags are HTML elements that provide metadata about a webpage. They are placed within the <head> section of an HTML document and are not visible to users but are used by browsers, search engines, and other web services to gather information about the page



# HTML Meta Tags

```
<meta name="viewport" content="width=device-width, initial-scale=1.0":
```

Sets the viewport properties for responsive design.

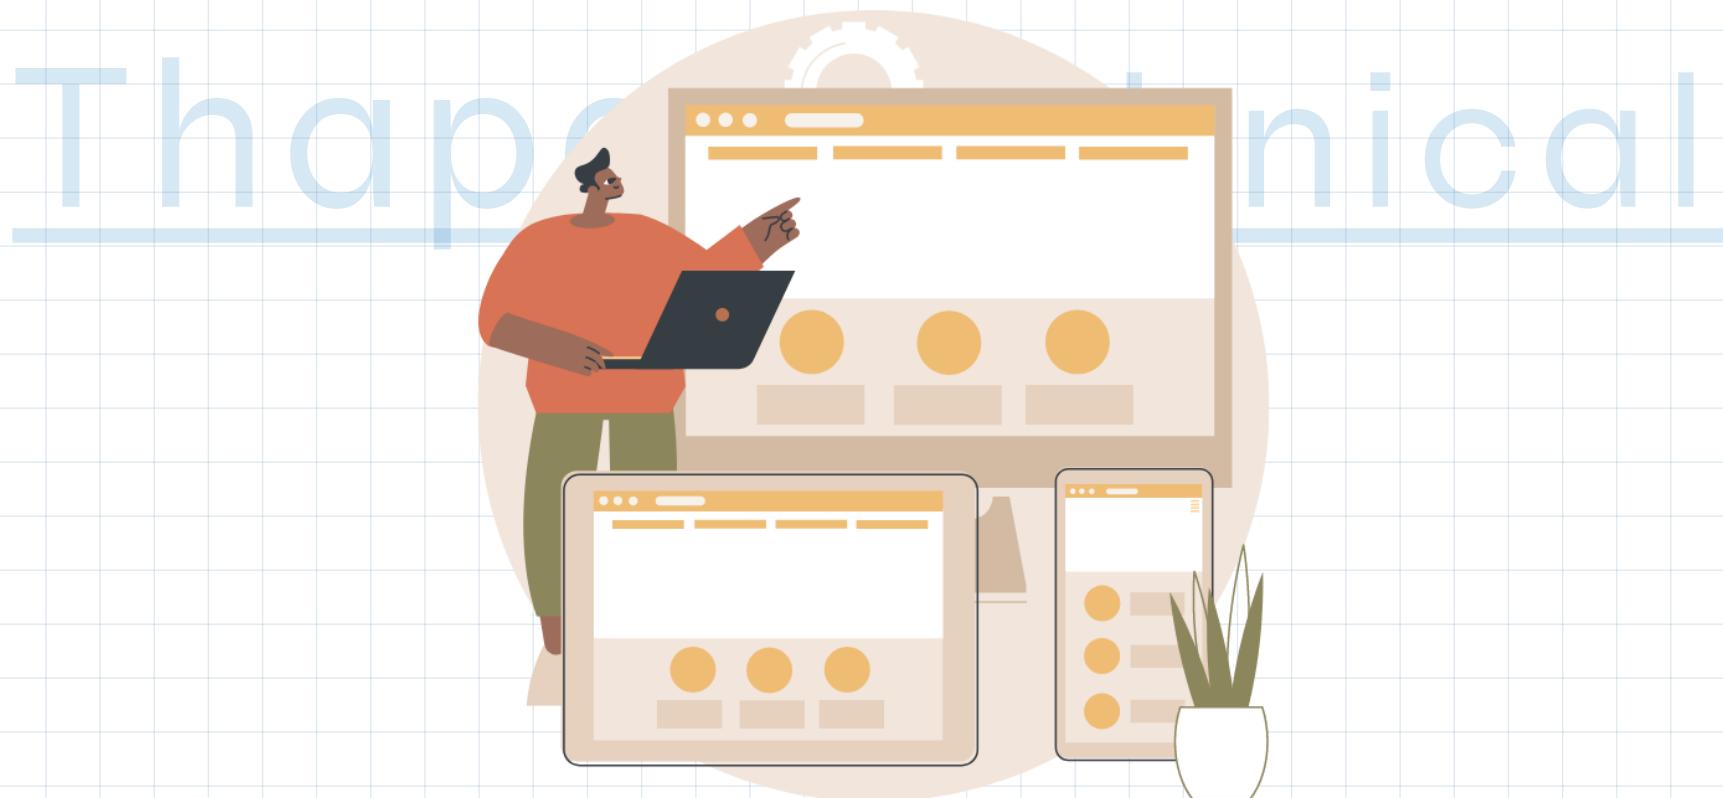



# HTML Meta Tags

`<meta charset="UTF-8">`: Specifies the character encoding for the webpage, ensuring proper rendering of characters.

`<meta name="description" content="A brief description of the webpage">`: Provides a concise description of the page's content.


`<meta name="keywords" content="keyword1, keyword2, keyword3">`: Specifies relevant keywords for search engines (not as impactful as it used to be).

`<meta name="author" content="Author's Name">`: Indicates the author of the webpage.



# HTML Meta Tags

`<meta name="robots" content="index, follow">`: Instructs search engine robots whether to index and follow links on the page.

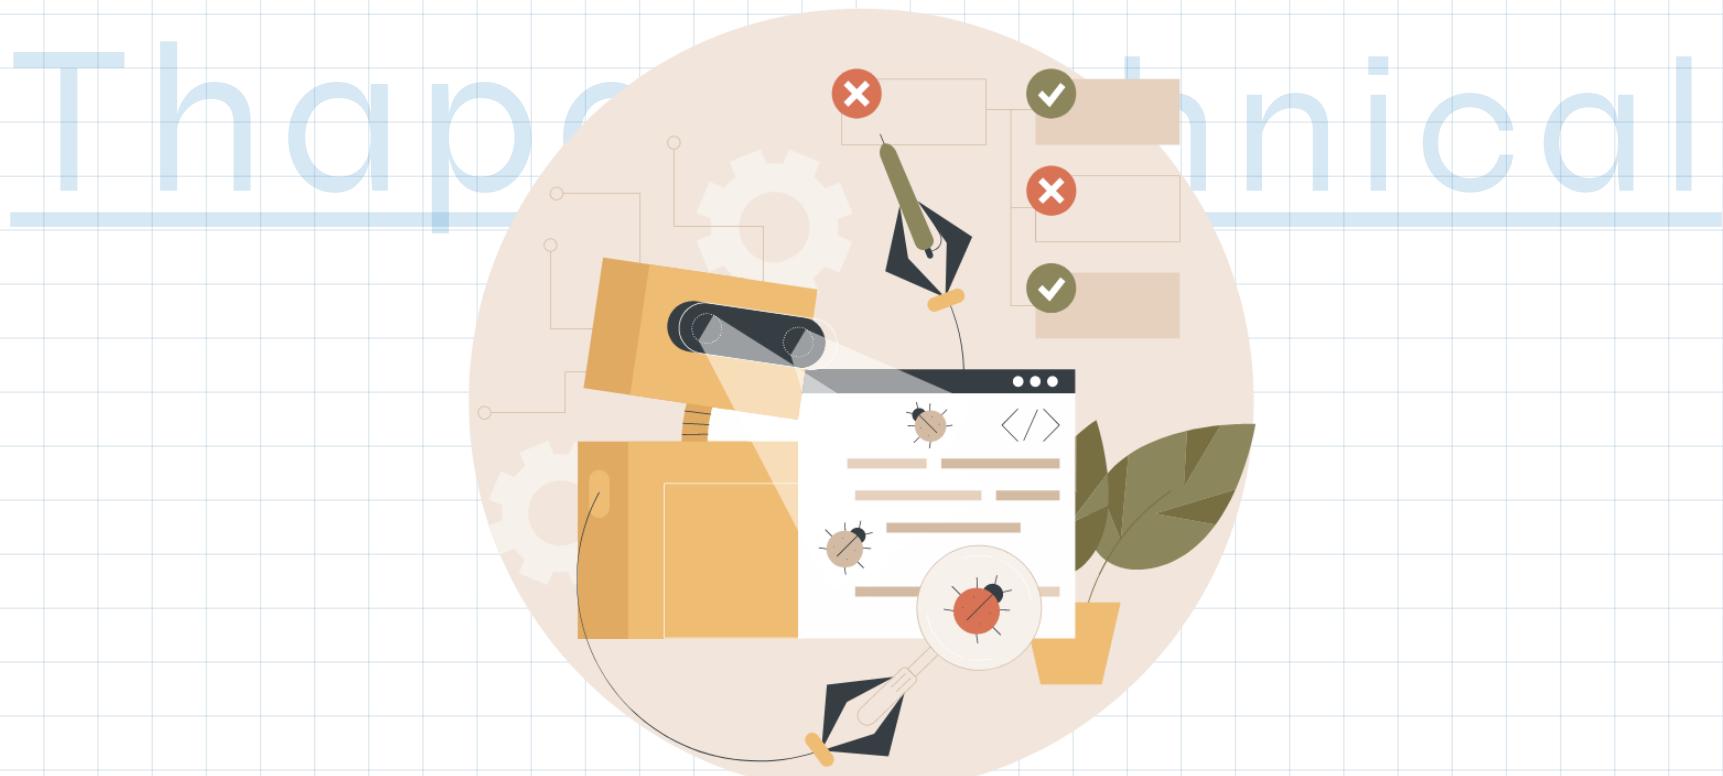



# HTML SEO

**High-Quality Content:** Create valuable and relevant content that addresses users' needs.

**Keyword Research:** Use relevant keywords naturally within your content.

**Descriptive Titles:** Use descriptive and relevant titles for your pages (`<title>` tag).

**Heading Tags:** Use appropriate heading tags (`<h1>`, `<h2>`, etc.) to structure content.

Thapa Technical



# HTML SEO

**Image Alt Text:** Provide descriptive alt text for images.

**Internal Links:** Use internal links to connect related content within your site.

**External Links:** Link to reputable external sources when relevant.

**Mobile-Friendly Design:** Ensure your website is responsive and mobile-friendly.

**Site Speed:** Optimize your website's loading speed for better user experience.





# HTML The FINAL Technical PROJECT



# HOST HTML WEBSITE LIVE

